


Definitions of Work


Bridge Concrete Overlay – scarify existing concrete bridge deck top side and place a new concrete wearing surface

Concrete Pavement Replacement – remove and replace existing concrete pavement

Bridge Painting – fully sand blast existing steel bridge girders to bare metal and repaint with a new coating system

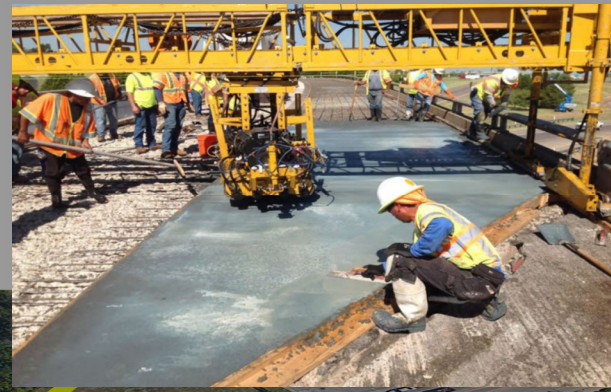

Bearing Replacement – remove all components of the original bearings supporting the bridge girders and replace with new bearings

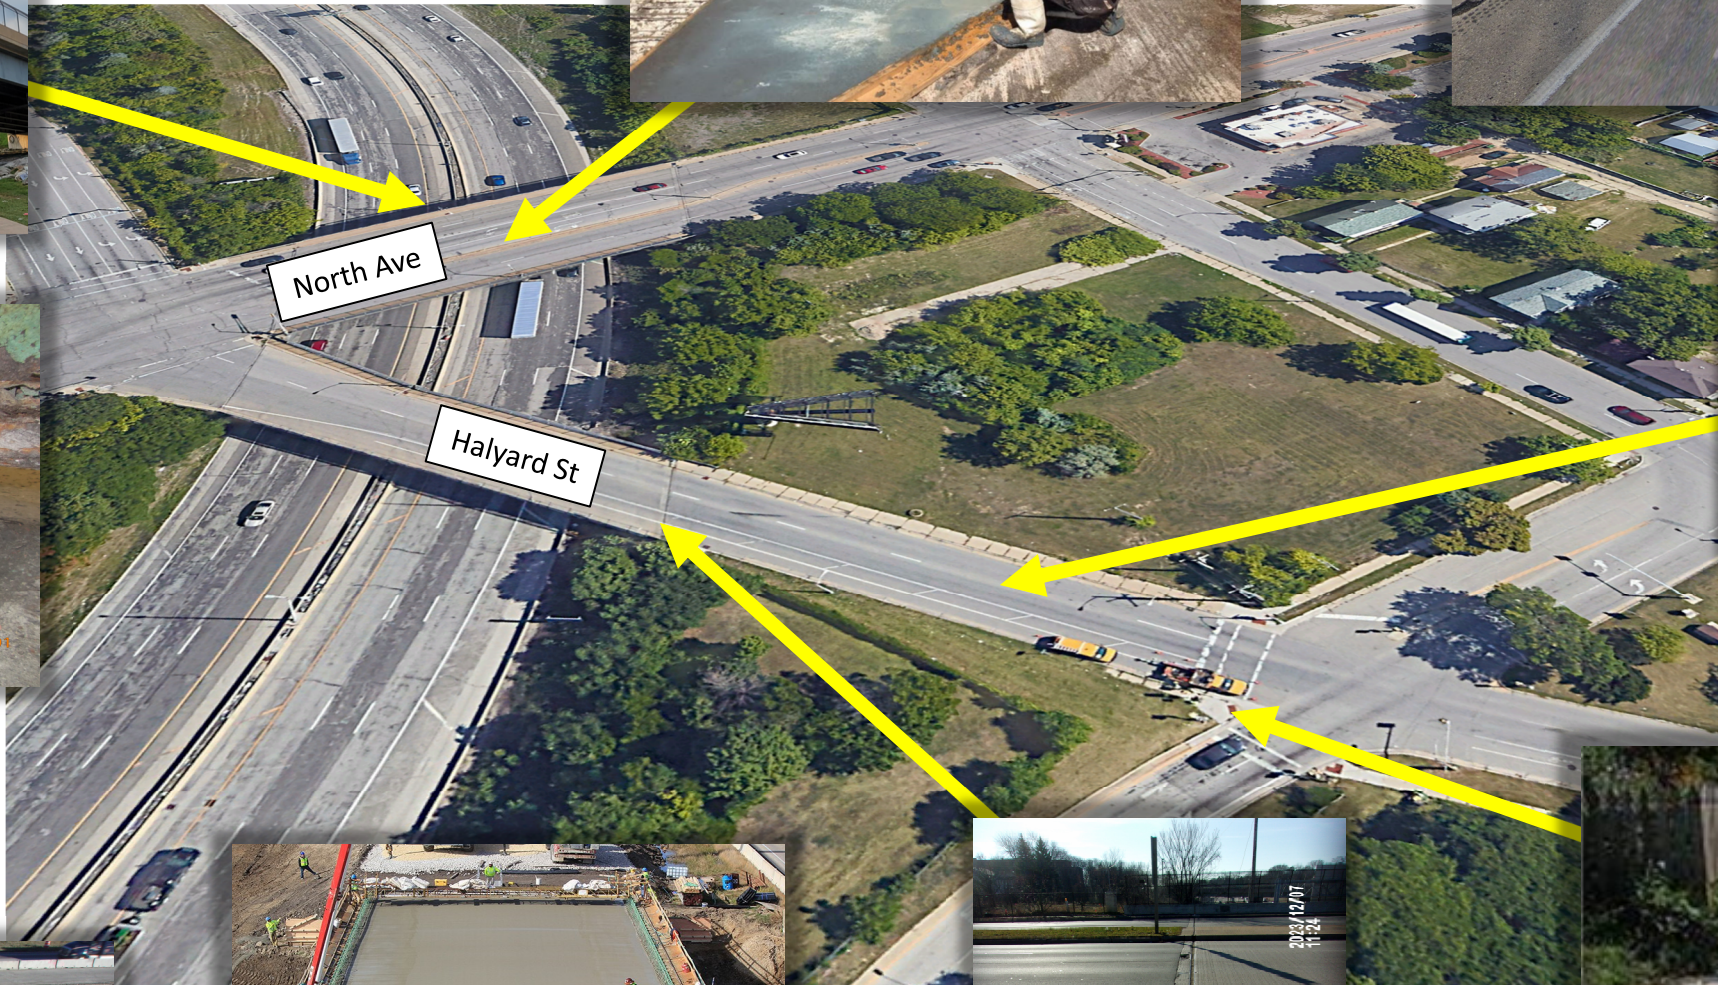

Roadway Mill and Overlay – mill existing asphalt pavement and overlay with new asphalt



Bridge Redeck – fully remove existing concrete bridge deck and replace with new concrete deck with concrete parapets



Expansion Joint Replacement – remove the deteriorated expansion joint hardware and concrete at the ends of the bridge and replace with new joint components



Curb Ramp Replacement – remove and replace curb ramps to comply with ADA standards



Structure Railing Replacement – remove existing steel railing on retaining walls and replace with a concrete parapet

I-43 (Halyard St. to Capitol Dr.) Structure Improvements Milwaukee County, WI

