

Mazomanie – US 12 (WIS 78 to US 12)

WIS 19, Dane County Interim Shoulder Improvement Project 2018 Construction



Project Location

The shoulder improvement project along WIS 19 begins just east of the WIS 78 intersection in the town of Mazomanie and ends just west of the US 12 intersection in the town of Springfield. The total project length is approximately 9.6 miles.

Project Need

The purpose of the project is to improve the outer edges of the deteriorated pavement and improve safety until the roadway is rehabilitated in the future.

Proposed Improvements


The proposed improvement includes milling and overlaying the outer 4 feet of the existing roadway including the gravel shoulders in each direction. Other improvements include the repair or replacement of existing box culvert C-13-2039 near Matz Road, beam guard upgrades, sign replacement, and new pavement markings.

A future rehabilitation project is programmed along this corridor to address existing substandard vertical and horizontal curves and upgrade the shoulders to current WisDOT standards.

Construction Schedule

The project is currently expected to begin construction in 2018, but WisDOT is looking for opportunities to accelerate the project into 2017. During construction, WIS 19 will be detoured and closed to through traffic within the project limits (open to local traffic only).

Detour Route

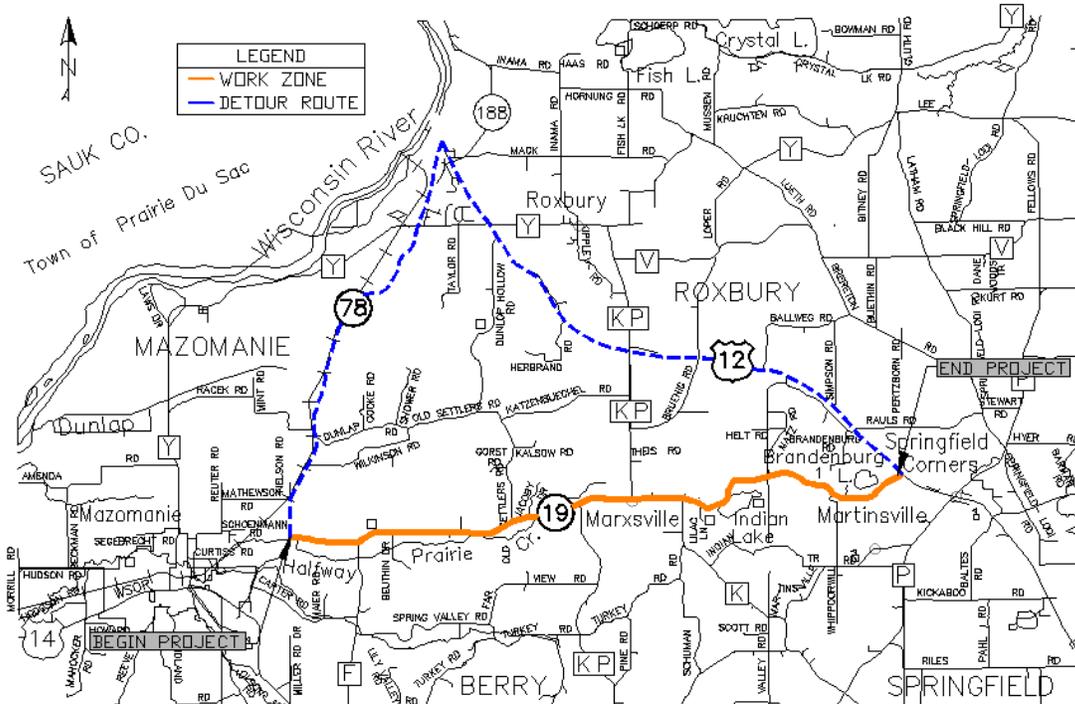

For additional information about the project, contact:

Lalitha Balachandran, P.E.
WisDOT Project Manager
WisDOT, Southwest Region
(608) 243-3382
Lalitha.Balachandran@dot.wi.gov

Brian Rice
WisDOT Project Leader
WisDOT, Southwest Region
(608) 246-3857
Brian.Rice@dot.wi.gov

Mazomanie – US 12 (WIS 78 to US 12)

WIS 19 Typical Sections

