

Project Contacts

- Andy Luedtke
 - WisDOT Project Leader
- Craig Hardy, P.E.
 - WisDOT Project Manager
- Justin Kutschenreuter, P.E.
 - WisDOT Project Supervisor






Presentation overview

- Project limits
- Purpose and need of the project
- Proposed improvements
- Detour & traffic control information
- Schedule
- Questions





Project limits

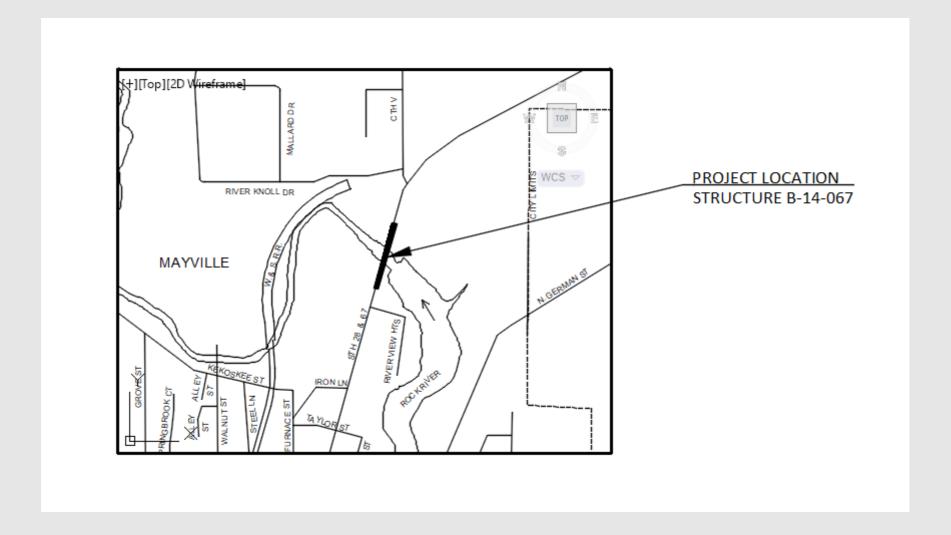


















Project limits

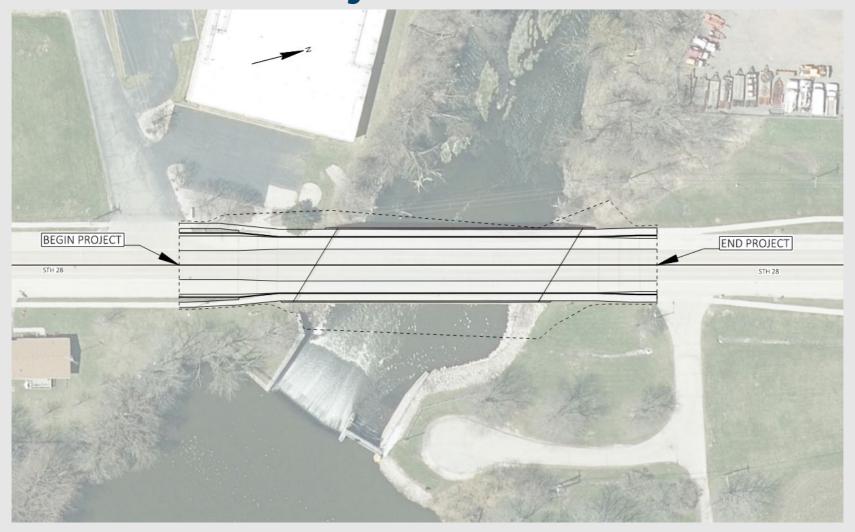
















 The purpose of the project is to address deteriorating concrete and moderate rusting







 The concrete has large spalls with exposed rebar








The steel girders have moderate rust and the paint

is failing at areas of corrosion



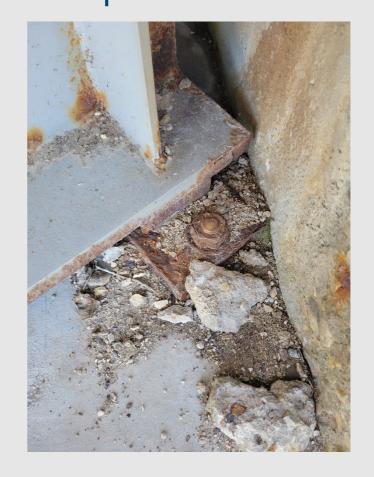





 Corrective action is needed to address the large concrete spalls, rusted steel members, and areas of failing paint







Proposed improvements


- Replace bridge deck
- Repaint girders in areas of rust
- Replace roadway approaches leading up to bridge
- Concrete surface repairs at the abutments
- Additional riprap at abutment slopes
- Widen sidewalk from 5' to 6' on the bridge





Proposed improvements

- Replace bridge deck
- Replace roadway approaches
- Widen sidewalk on bridge from 5' to 6'

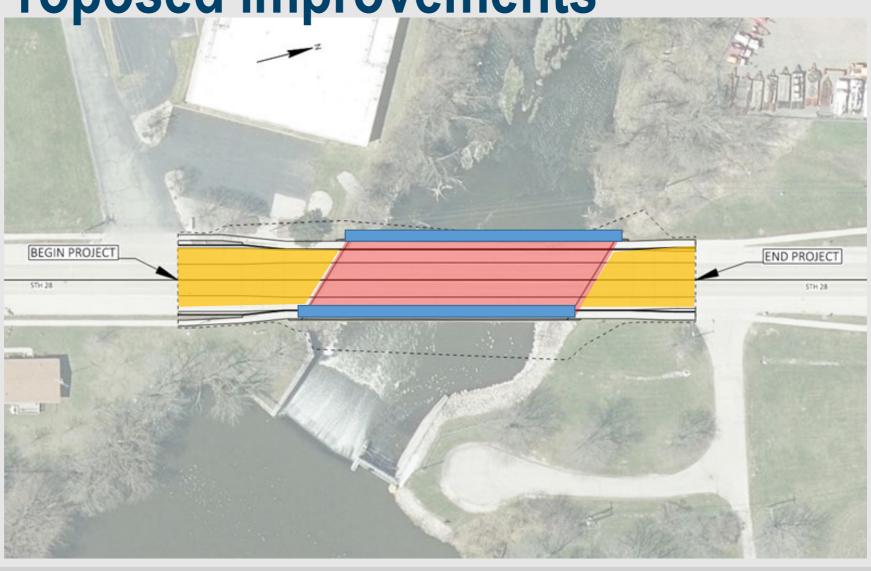

















Proposed improvements

- Example of concrete surface in need of repair
- Example of a potential area for additional riprap








Detour

- WIS 28
 - WIS 67 to WIS 33 to I-41

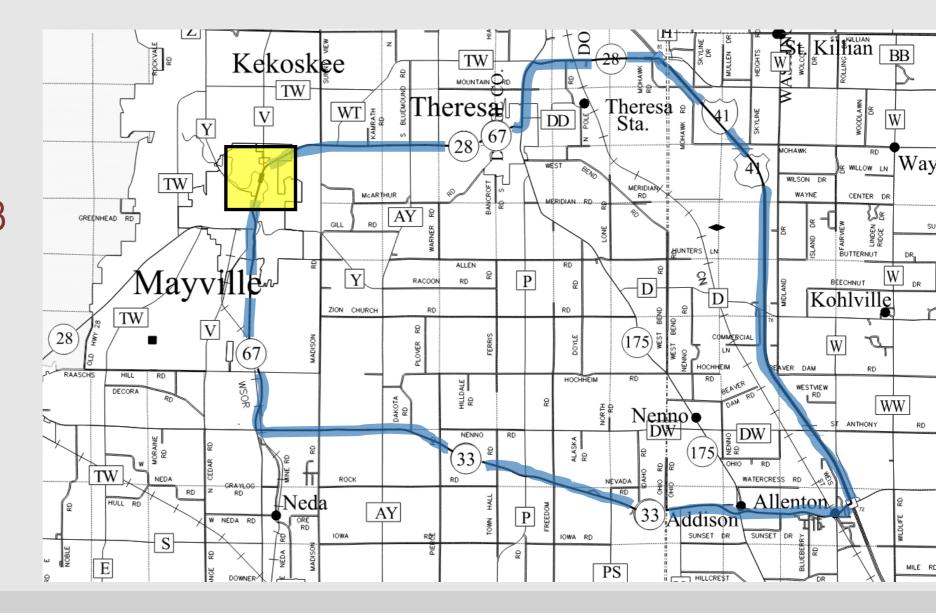

















Schedule

- Environmental document February 2024
- 60% plan June 2024
- Second public involvement meeting May 2025
- 90% plan March 2025
- Final plans due August 2026
- Construction –Summer 2027





Related projects

- WIS 28
 - County V to WIS 175 Anticipated 2025 construction
 - Mill & Overlay
 - Culverts
 - Sidewalk Ramps
- WIS 28
 - Raaschs Hill Rd to County TW Anticipated 2025 construction
 - Mill & Overlay

















Related projects

- WIS 175
 - Dodge County Line (Hochheim Rd) to County DD Anticipated 2027 construction
 - Mill & overlay (rural)
 - Reconstruction (urban)
- WIS 67
 - WIS 60 to County S Anticipated 2026 construction
 - Mill & overlay











Related projects

- I-41
 - WIS28 to North County Line—Anticipated 2027 construction
 - Resurfacing, north and southbound lanes
- WIS 33
 - Horicon to West Bend Anticipated 2029 construction
 - Work TBD









Questions

For more information, please contact:

Andy Luedtke **Project Leader** 608-246-3269 Andrew.Luedtke@dot.wi.gov

Craig Hardy, P.E. **Project Manager** 608-246-5406 Craig.Hardy@dot.wi.gov

Justin Kutschenreuter, P.E. **Project Supervisor** 262-548-6441 Justin.Kutschenreuter@dot.wi.gov













