LEGEND

⚠ SEAL ALL EXPOSED HORIZONTAL AND VERTICAL SURFACES OF ½" FILLER WITH NON-STAINING GRAY NON-BITUMINOUS JOINT SEALER. (1" DEEP AND HOLD ⅛" BELOW SURFACE OF CONCRETE).

✳ PARTIAL PLAN REPRESENTATIVE OF SIMILAR LOCATION AS SHOWN ON STANDARD 12.10 FOR DIFFERENT APPLICATION.

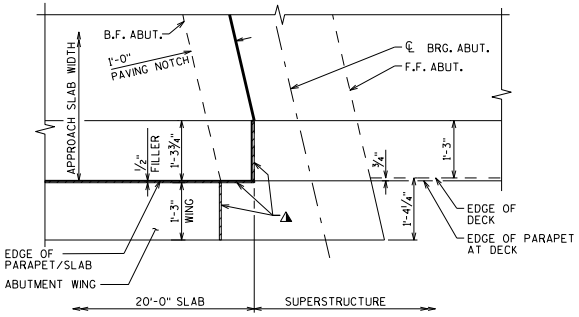

APPROACH SLAB PARTIAL PLAN

(AT WINGWALLS PARALLEL TO BRIDGE - A1 ABUT.)

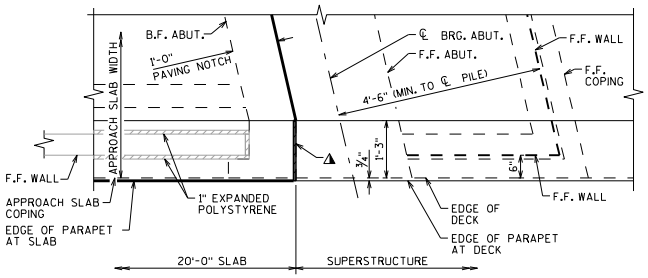

APPROACH SLAB PARTIAL PLAN ✳

(AT WINGWALLS PARALLEL TO BRIDGE - A1 ABUT. AT MSE WINGWALLS)

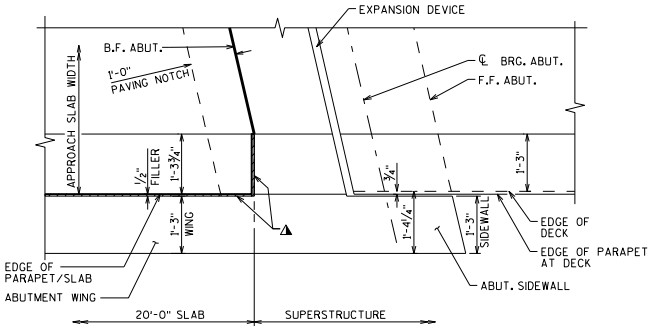

APPROACH SLAB PARTIAL PLAN ✳

(AT WINGWALLS PARALLEL TO BRIDGE - A3 & A4 ABUT.)

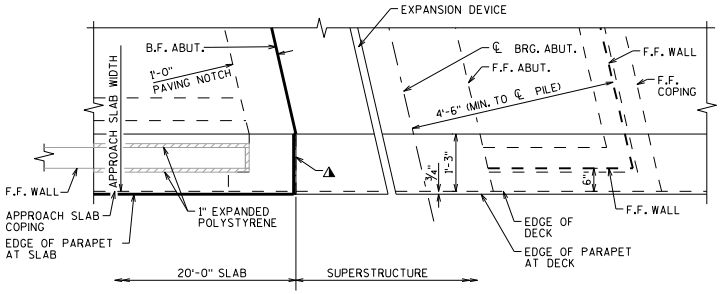

APPROACH SLAB PARTIAL PLAN ✳

(AT WINGWALLS PARALLEL TO BRIDGE - A3 &A4 ABUT. AT MSE WINGWALLS)

PARTIAL PLANS SHOWN HERE ARE FROM STANDARD 12.10

STRUCTURAL APPROACH SLAB DETAILS 3

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION
STRUCTURES DEVELOPMENT SECTION

APPROVED: Bill Oliva

DATE: 1-16

STANDARD 12.13