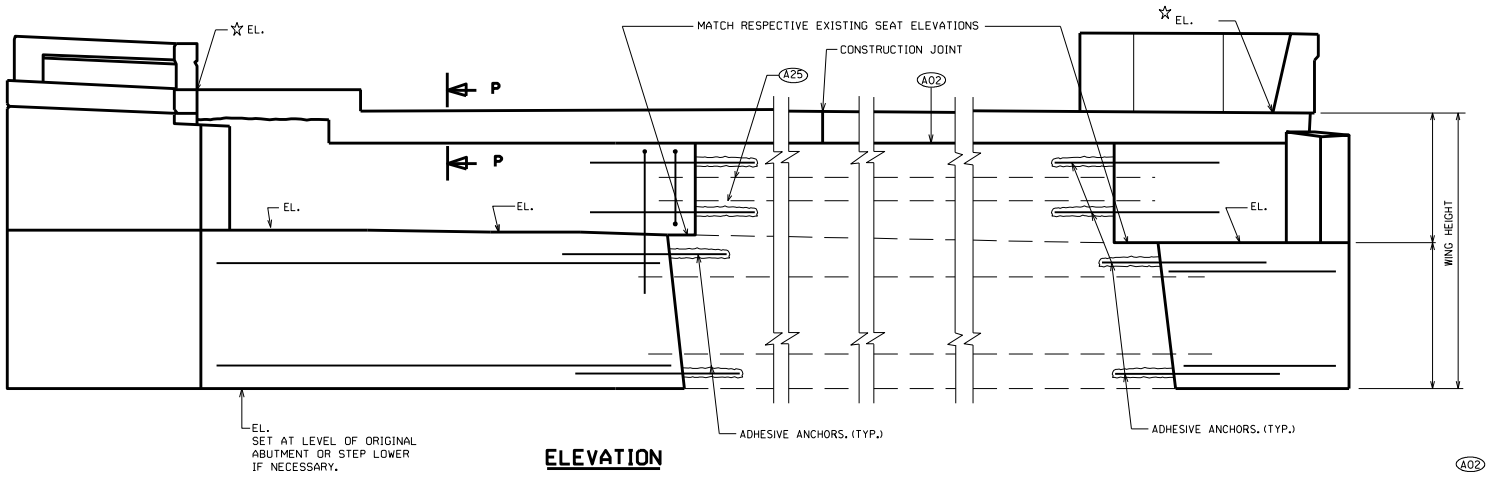

ELEVATION

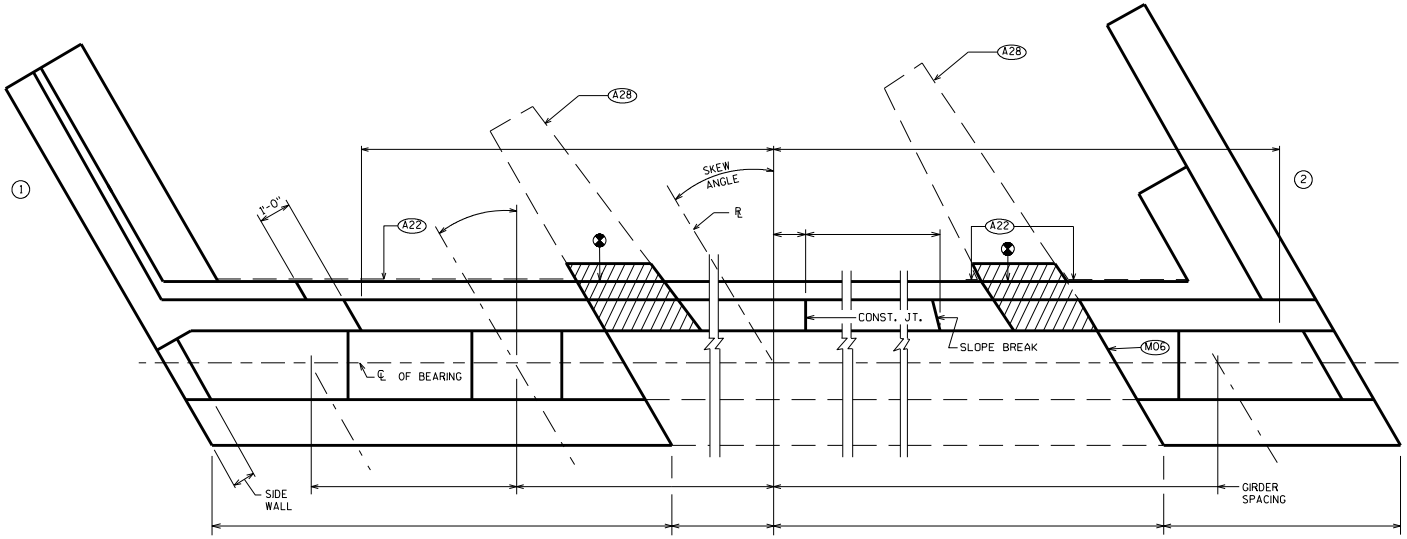

WING WITHOUT PILE

WING WITH PILE

NOTES

A02 CONSTRUCTION JOINT: POUR CONCRETE ABOVE THIS JOINT AFTER SUPERSTRUCTURE CONCRETE IS IN PLACE. STRIKE OFF AND LEAVE ROUGH.

A22 18" (RMW) RUBBERIZED MEMBRANE WATERPROOFING SEAL ALL HORIZ. & VERT. JOINTS AT BACKFACE.

A25 SALVAGE EXIST. REINF. & EXTEND FULL LENGTH INTO NEW WORK.

M06 ROUGHEN SURFACE OF CONCRETE 1/4" DEEP MINIMUM AT ALL AREAS WHERE NEW CONCRETE CONTACTS EXISTING CONCRETE.

A28 EXISTING WINGS. REMOVE A MIN. OF 2'-0" BELOW FINISHED GRADE.

☆ ELEV. @ F.F. ABUT. BACKWALL AND GUTTERLINE.

REMOVE CONC. IN THIS AREA DOWN TO EXIST. BRIDGE SEAT. INCORPORATE EXIST. BAR STEEL INTO NEW WORK.

DESIGNER NOTES

SEE CHAPTER 12 FOR NEW BAR STEEL PLACEMENT, DETAILS, DIMENSIONS, & NOTES.

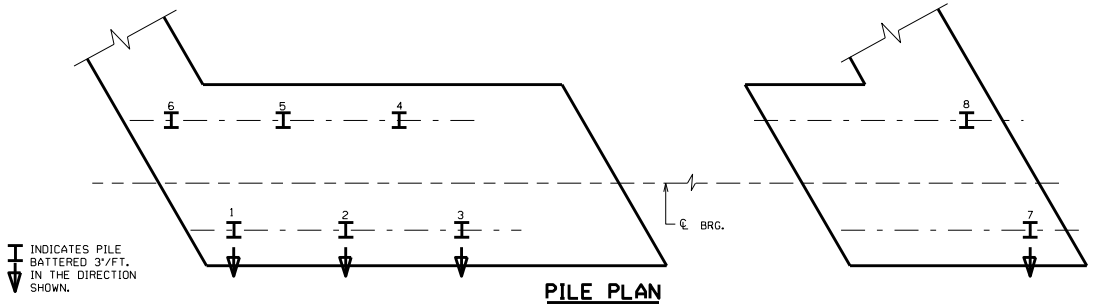

PILE PLAN

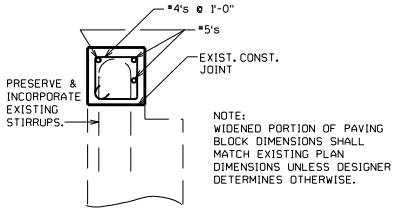

SECTION P

ALSO SEE STANDARD 40.04

ABUTMENT WIDENING

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION
STRUCTURES DEVELOPMENT SECTION

APPROVED: Bill Oliva

DATE: 7-16

STANDARD 40.06