

SECTION A-A

ROUTE CONDUIT WITH APPROPRIATE BENDS AS DIRECTED BY THE ENGINEER TO BURY 36" MIN.

SAND BACKFILL


AGGREGATE #2 COURSE

CONDUIT, EXISTING OR AS SHOWN ON PLANS (4-INCH, 3-INCH, OR 2-INCH)

CABLE SUPPORT BRACKETS, TYP. FOUR PER VAULT

WARNING TAPE

GROUND LINE VARIES

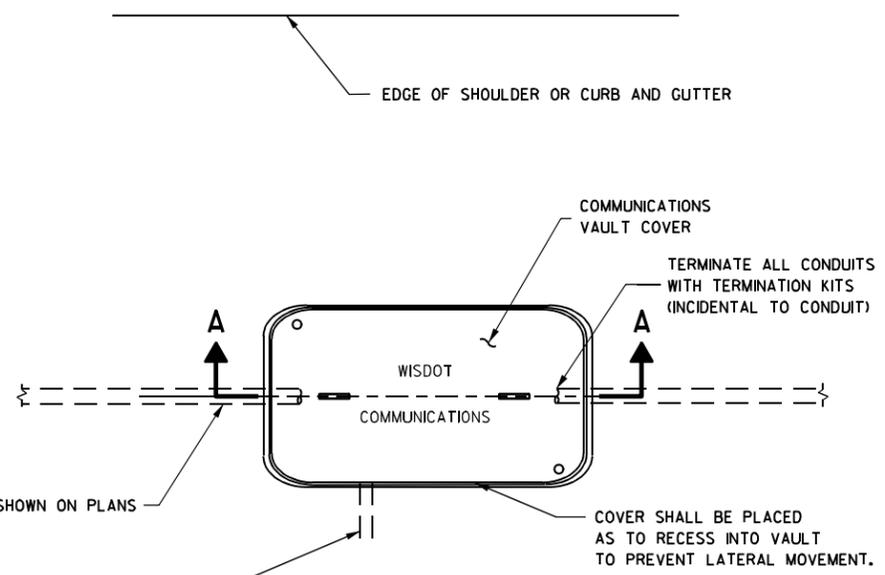


PLAN VIEW

COMMUNICATIONS VAULT

GENERAL NOTES

- BOX SHALL HAVE AN OPEN BASE.
- COVER SHALL HAVE A MINIMUM DESIGN LOAD OF 15,000 LBS AND SHALL LOCK.
- ALL OPENINGS IN STRUCTURE MUST BE MACHINED AT TIME OF FABRICATION, OR PUNCH DRIVEN AT TIME OF PLACEMENT.
- VAULTS SHALL BE OF ONE-PIECE CONSTRUCTION. TWO-PIECE/STACKABLE VAULTS WILL NOT BE PERMITTED.
- FIELD PLACEMENT OF COMMUNICATIONS VAULTS SHALL BE AS DIRECTED BY THE ENGINEER.

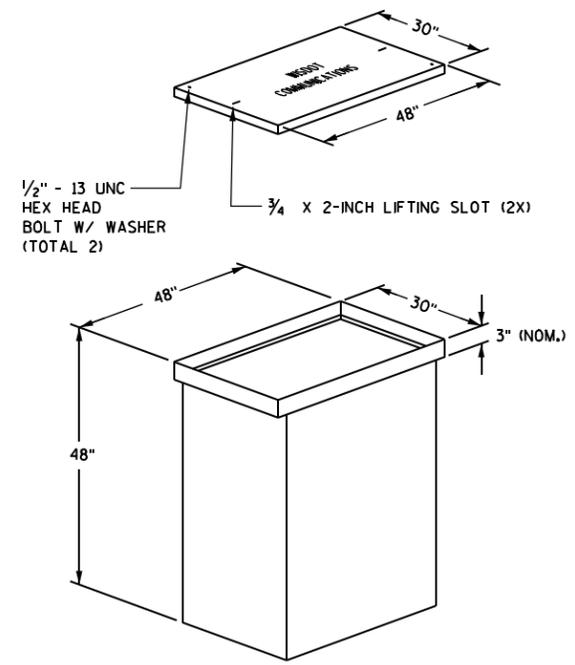

ISOMETRIC VIEW

DRAFT
11-4-08

COMMUNICATIONS VAULT	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED	
DATE _____	STATE TRAFFIC ENGINEER _____
FHWA	

6

6

S.D.D. NUMBER

S.D.D. NUMBER