

SECTION 0-0


HANDHOLE DETAILS

HANDHOLE NOTES

HANDHOLES SHALL BE LOCATED IN ONE COLUMN OF THE SIGN BRIDGE STRUCTURE IF ELECTRICALLY OPERATED DEVICES ARE INSTALLED ON/IN THE STRUCTURE. COLUMNS WITH HANDHOLES SHALL BE NEAR THE ELECTRICAL SERVICE. THE CONTRACTOR SHALL VERIFY THE LOCATION OF THE ELECTRICAL SERVICE ENTRANCE WITH THE REGION TRAFFIC SECTION PRIOR TO FABRICATION OF THE SIGN BRIDGE COLUMNS AND MEMBERS. CONDUIT (AS REQ'D) SHALL BE LOCATED, PLACED AND SIZED AS SHOWN ON THE ELECTRICAL PLAN DETAIL SHEETS.


UNLESS NOTED OTHERWISE, ALL HANDHOLE ELEMENTS TO BE GALVANIZED PER SECTION 641 OF THE WISDOT STANDARD SPECIFICATIONS.

* COLUMN SIZE O.D. X THK.	HANDHOLE PIPE O.D. X MIN. THK.
UP TO AND INCLUDING 16" X 0.375"	5.562" X 0.500"
GREATER THAN 16" X 0.375" TO AND INCLUDING 24" X 0.562"	6.625" X 0.562"

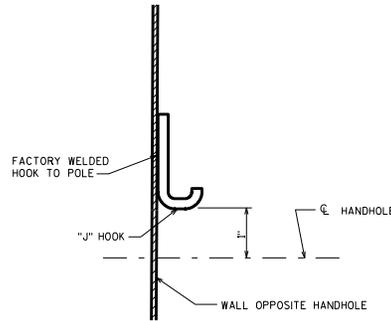


TYPICAL "J" HOOK LOCATION

THE "J" HOOK SHALL BE FACTORY WELDED TO THE INSIDE OF ALL COLUMNS CONTAINING ELECTRICAL WIRING. THE "J" HOOK SHALL BE ATTACHED ABOVE THE CENTERLINE OF THE UPPER HANDHOLE AND MOUNTED DIRECTLY OPPOSITE THE HANDHOLE AS SHOWN IN THE DRAWING.

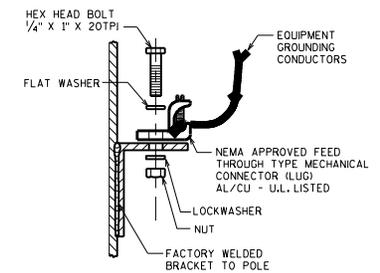

GROUNDING LUG DETAIL

NUT, BOLT AND WASHERS SHALL BE STAINLESS STEEL.

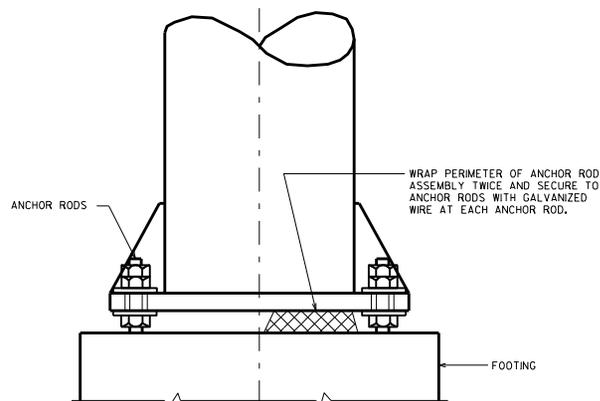

RODENT SCREEN

(ONLY REQ'D WHEN ELECTRICAL DEVICES ARE INSTALLED)

HANDHOLE DETAILS

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION
STRUCTURES DEVELOPMENT SECTION

APPROVED: Bill Oliva

DATE:
7-16