



Wisconsin Department of Transportation

January 7, 2015

Division of Transportation Systems Development

Bureau of Project Development
4802 Sheboygan Avenue, Rm 601
P O Box 7916
Madison, WI 53707-7916

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

Proposal #20: 2200-16-71
Moreland Boulevard
Manhattan Drive to I-94
USH 18
Waukesha County

Letting of January 12, 2016

This is Addendum No. 03, which provides for the following:

Plan Sheets

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
24	Construction Detail – Changed notes to clarify items that are incidental to Adjusting Manhole Covers and Adjusting Inlet Covers

Plan Sheets

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:
Revised: 24


The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman

Proposal Development Specialist
Proposal Management Section


END OF ADDENDUM

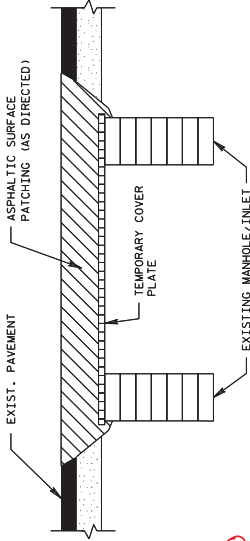

STEP 1
 PRIOR TO REMOVING ASPHALT SURFACE.
 A. REMOVE AND STORE EXISTING ASPHALT SURFACE.
 B. FURNISH AND INSTALL TEMPORARY COVER PLATE.
 C. BACKFILL USING ASPHALT SURFACE PATCHING.

WORK LISTED ABOVE IS INCLUDED OR IS CONSIDERED INCIDENTAL TO PAY ITEMS ADJUSTING MANHOLE COVERS OR ADJUSTING INLET COVERS.

STEP 1A MAY BE DONE BY OTHERS (UTILITY CO. OR MUNICIPALITY) STEP 1B AND 1C BY CONTRACTOR

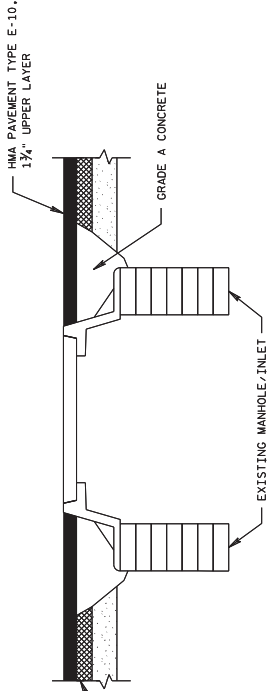

STEP 2
 AFTER PAVING LOWER LAYER
 A. EXCAVATE AND REMOVE EXISTING COVER PLATE AND REINSTALL MANHOLE FRAME AND COVER TO FINISHED GRADE (BACKFILL AND OTHER WORK TO BE DONE IN ACCORDANCE WITH ITEM - ADJUSTING MANHOLE COVERS)
 B. EXCAVATE AND REMOVE EXISTING COVER PLATE AND REINSTALL MANHOLE FRAME AND COVER TO FINISHED GRADE (BACKFILL AND OTHER WORK TO BE DONE IN ACCORDANCE WITH ITEM - ADJUSTING MANHOLE COVERS OR ADJUSTING INLET COVERS)

ALL WORK DONE MAY BE DONE BY OTHERS (UTILITY CO. OR MUNICIPALITY) TEMPORARY COVER PLATES TO BE RETURNED TO CONTRACTOR.

ADJUSTING MANHOLE/INLET COVERS


NOTES:
 ADJUSTING MANHOLE COVERS WILL NOT BE PAID FOR AS A SEPARATE ITEM OF WORK WHEN ADJUSTMENTS ARE MADE BY OTHERS (UTILITY CO. OR MUNICIPALITY).

COVER PLATES-TEMPORARY


A. DESCRIPTION
 THIS WORK CONSISTS OF FURNISHING, INSTALLING AND REMOVING A STEEL PLATE TO COVER AND SUPPORT BACKFILL AND TRAFFIC LOADING AT MANHOLES.

B. MATERIALS
 MATERIAL FURNISHED AND USED IN THE WORK SHALL BE 1/4-INCH MINIMUM THICKNESS STEEL PLATE THAT EXTENDS AT LEAST TO THE OUTSIDE EDGE OF EXISTING MANHOLE MASONRY.

C. METHOD OF MEASUREMENT AND BASIS OF PAYMENT
 TEMPORARY COVER PLATES, WHEN REQUIRED, ARE CONSIDERED INCIDENTAL TO THE WORK OF ADJUSTING MANHOLE COVERS AND ADJUSTING INLET COVERS. THE STEEL PLATES SHALL BECOME THE PROPERTY OF THE CONTRACTOR WHEN NO LONGER NEEDED IN THE CONTRACT WORK.

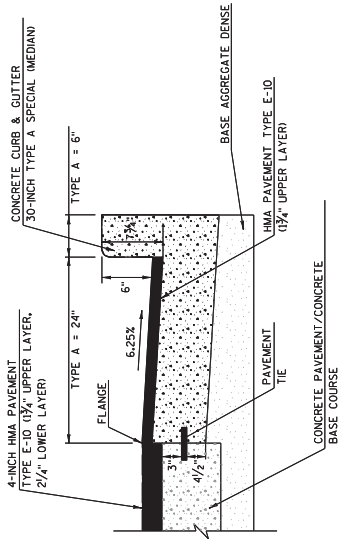

ASPHALT OVERLAY OF NEW CURB & GUTTER
 PROPOSED CONCRETE CURB & GUTTER

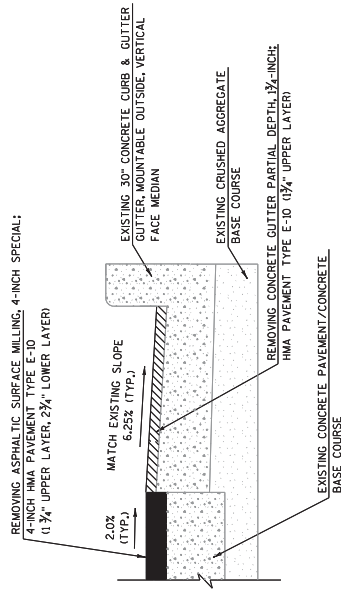

ASPHALT OVERLAY OF EXISTING CURB & GUTTER
 EXISTING OUTSIDE/MEDIAN CONCRETE CURB & GUTTER

Addendum No. 03
 ID 2200-16-71
 Revised Sheet 24
 January 7, 2016