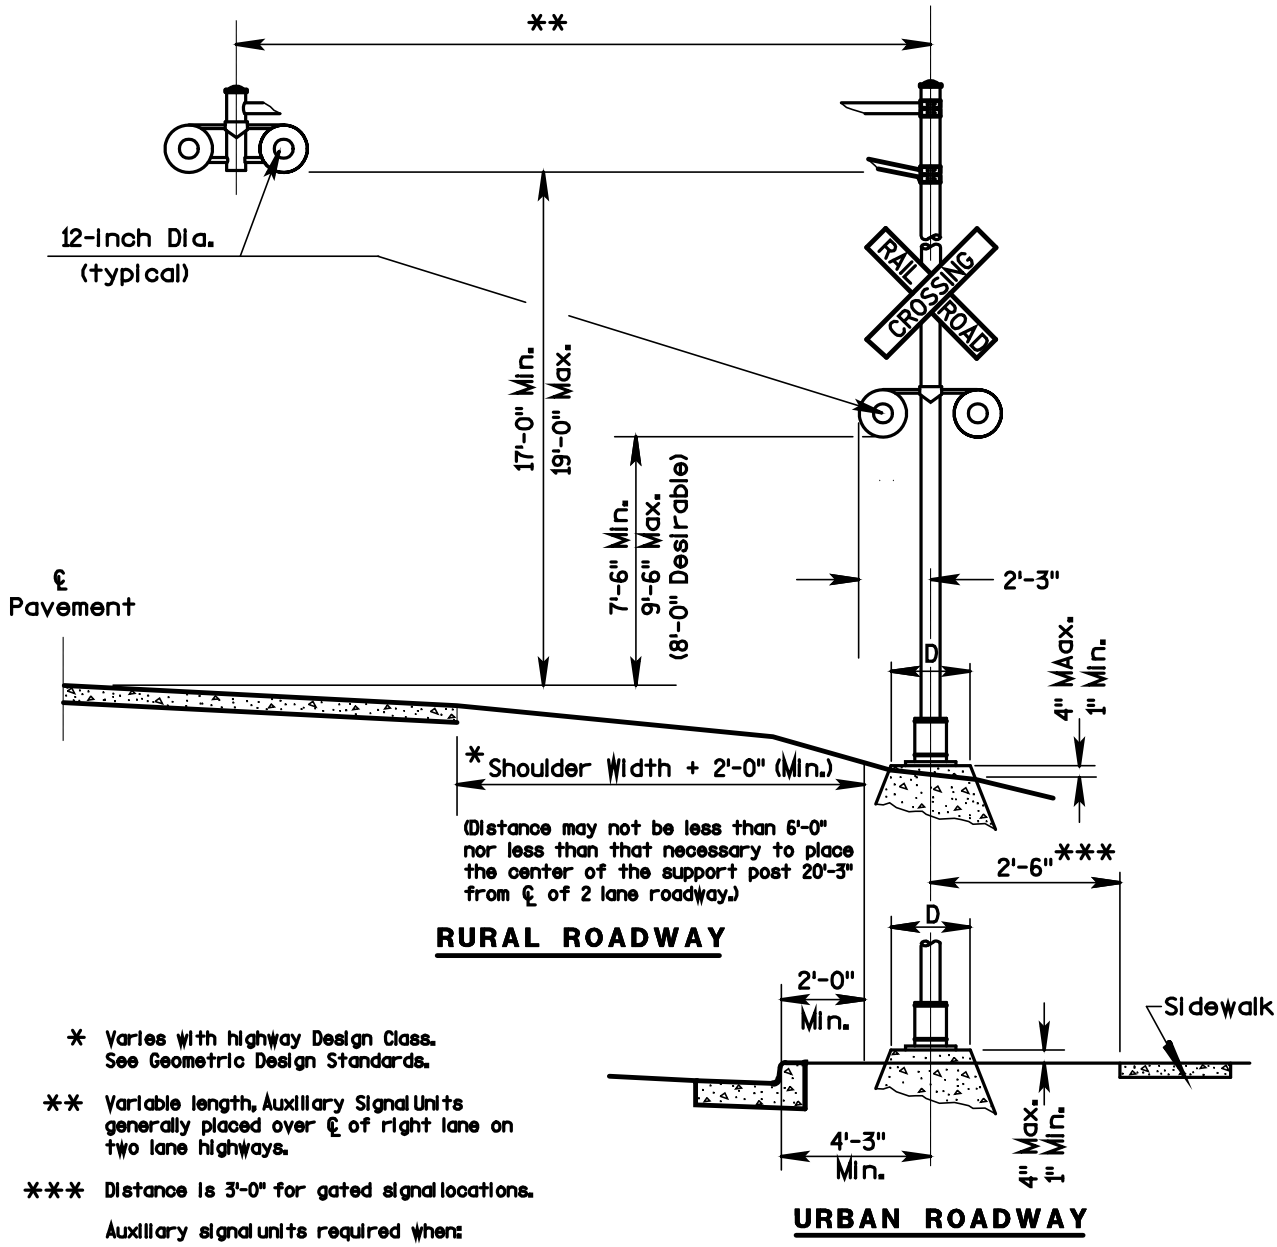


* Varies with highway Design Class. See Geometric Design Standards.

** Variable length, Auxiliary Signal Units generally placed over ℄ of right lane on two lane highways.

*** Distance is 3'-0" for gated signal locations.

Auxiliary signal units required when:

(1) There is more than one traffic lane in the same direction.

(2) Shoulder width is greater than 8 feet.

(3) Unusual conditions exist that affect the motorist's view of the signal.

D = 2-feet square, signal mast
4-feet square, cantilevered auxiliary signal unit