6


Ö

D

 $\infty$ 

П

# SDD 8F2 Apron Endwalls for Pipe Arch and Elliptical Pipe

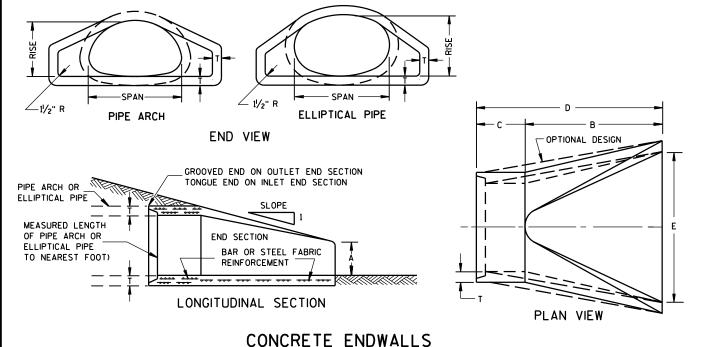

				2-	<sup>2</sup> /3"	X 1/2"	COR	RUGAT	IONS				
EOUIV. DIA.	(Inches)		MIN. THICK. (Inches)			APPROX.							
					A	В	Н	L	L <sub>1</sub>	L2	W	SLOPE	BODY
(Inches)	SPAN	RISE	STEEL	ALUM.	(±]")	(MAX.)	(±]")	(±1 ½")	<u> </u>	<u> </u>	(±2")	JEOI E	
15	1•7	13	.064	.060	٠7	9	6	19	14	16	<del>3</del> 0	21/2+o 1	1Pc.
18	21	15	.064	.060	-7	10	6	2-3	14	193/8	<del>3</del> 6	21/2+o 1	1Pc.
21	24	18	.064	.060	6	12	6	248	18	213/4	42	21/2+o 1	1Pc.
24	2-8	20	.064	.060	9	14	6	3-2	18	271/2	48	21/2+o 1	1Pc.
30	35	24	.079	.075	10	16	6	3-9	18	37%	<del>6</del> 0	21/2+o 1	1Pc.
36	42	2-9	.079	.075	12	18	-8	46	24	453/8	<b>₹</b> 5	21/2 to 1	1Pc.
42	49	3-3	.109	.105	13	21	9	5-3	24	543/4	<del>8</del> 5	21/2+0 1	2 Pc
48	5-7	3-8	.109	.105	18	26	12	6-3	24	68	90	21/2+o 1	3 Pc
54	64	43	.109	.105	18	30	12	70	24	723/4	102	21/4+o 1	3 Pc
60	7-1	47	.109×	.105×	18	3-3	12	7•7	30	821/4	114	21/4+o 1	3 Pc
66	7•7	5-2	.109*	.105 <del>*</del>	18	36	12	7•7	-	•-	126	2 to 1	3 Pc
72	83	5-7	.109×	.105×	18	3-9	12	7•7	-	·	138	2 to 1	3 Pc

				3	3" X 1	l" COR	RUGA	TIONS					
EOUIV. DIA. (Inches)	(Inches)		MIN. THICK. (Inches)					ADDDOV					
					Α	В	Н	L	L <sub>1</sub>	L2	W	APPROX.	BODY
	SPAN	RISE	STEEL	ALUM.	(±]")	(MAX.)	(±]")	(±1½")	0	①	(±2")	SLUPE	
48	53	41	.109	.105	18	26	12	63	24	723/4	90	2½+o 1	2 Pc.
54	60	46	.109	.105	18	30	12	70	30	821/4	102	2 to 1	2 Pc.
60	66	51	.109 <del>*</del>	.105*	18	33	12	77	_	_	114	1/2+0 1	3 Pc.
66	73	55	.109 <del>*</del>	.105 <del>*</del>	18	36	12	77	_	_	126	11/2+0 1	3 Pc.
72	81	59	.109 <del>*</del>	.105*	18	39	12	77	_	_	138	2 to 1	3 Pc.
78	87	63	.109*	<b>.</b> 105*	22	38	12	77	_	_	148	11/2 to 1	3 Pc.
84	95	67	.109*	.105*	22	34	12	77	_	_	162	1½+o 1	3 Pc.
90	103	71	.109*	.105 <del>*</del>	22	38	12	77	_	_	174	1½+o 1	3 Pc.
96	112	75	109*	105*	24	40	12	77	_	_	174	11/2+0_1	3 PC

NOTE: ALL SPLICES TO BE LAP RIVETED OR BOLTED.


\* EXCEPT CENTER PANEL SEE GENERAL NOTES


EQUIV.	DIMENSIONS (Inches)											
DIA. (Inches)	CDAN	** Rise	T	A	В	С	D	E	SLOPE			
24	249	18	3	81/2	39	3-3	7-2	48	3 to 1			
30	36	2-2	31/2	91/2	50	46	96	60	3 to 1			
36	44	2-7	4	111/8	60	36	96	7-2	3 to 1			
42	51	31	41/2	1513/6	60	36	96	7-8	3 to 1			
48	5-8	36	5	21	60	36	96	84	3 to 1			
54	65	40	51/2	251/2	60	36	96	90	3 to 1			
60	7•3	45	6	31	60	36	96	96	3 to 1			
7-2	8-8	54	7	31	60	3-9	9-9	120	2 to 1			
84	102	62	8	281/2	83	19	102	144	2 to 1			


DEINIENDOED CONCDETE DIDE ADOLL

REINFORCED CONCRETE ELLIPTICAL PIPE												
EOUIV.	DIMENSIONS (Inches)											
DIA. (Inches)	** Span	** RISE	T	A	В	С	D	E	APPROX. SLOPE			
24	30	19	31/4	81/2	3-9	3-3	7-2	48	3 to 1			
30	3-8	24	3¾	91/2	54	18	7-2	60	3 to 1			
36	45	2-9	44/2	111/8	60	24	8-4	7-2	21/2+o 1			
42	5-3	34	5	153/4	60	36	96	7-8	21/2+o 1			
48	60	3-8	51/2	21	60	36	96	84	21/2+o 1			
54	6-8	43	6	251/2	60	36	96	90	21/2+0 1			
60	7-6	48	61/2	30	60	36	96	96	21/2+o 1			


\*\*NOMINAL SIZE

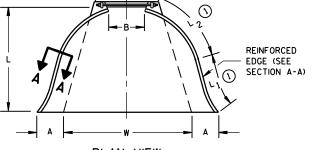

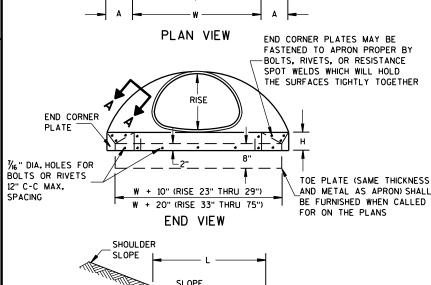

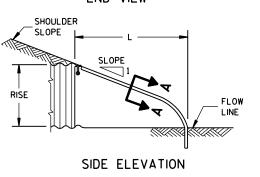


METAL ENDWALLS

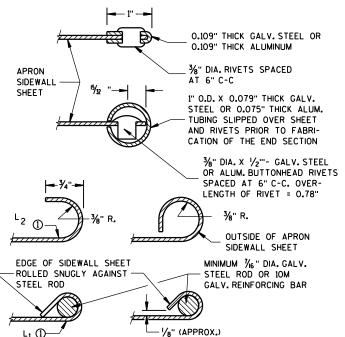

SECTION A-A

THREADED %6" DIA. ROD OVER TOP OF APRON, SIDE ROD HOLDER LUGS TO BE RIVETED TO MEASURED LENGTH OF PIPE ARCH TYPE 2 FOR 17" X 13" THRU 112" X 75" PIPE ARCH COUPLING BAND MEASURED LENGTH REQUIRED OF PIPE ARCH CONNECTOR SECTION CONNECTOR SECTION RIVETED OR TO BE PAID FOR AS BOLTED PART OF END SECTION TYPE 3

FOR 64" X 43" THRU 112" X 75" PIPE ARCH

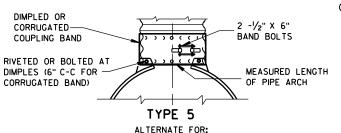

ALL SIZES CORRUGATED PIPE ARCHES

NOTE: DIMPLED BAND FITS OVER OUTSIDE OF ENDWALL. AND CORRUGATED BAND FITS INSIDE ENDWALL.

CONNECTION DETAILS

# GENERAL NOTES

DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND THE APPLICABLE SPECIAL PROVISIONS.

CONCRETE APRON ENDWALLS MAY NOT BE USED WITH GALVANIZED STEEL OR ALUMINUM CULVERT PIPE OR VISE VERSA. GALVANIZED STEEL OR ALUMINUM APRON ENDWALLS SHALL NORMALLY BE INSTALLED ON CULVERT PIPE OF THE

ALL THREE PIECE STEEL APRON ENDWALLS FOR 66" X 51" PIPE ARCH AND LARGER SHALL HAVE 0.109" SIDES AND 0.138" CENTER PANELS. ALL THREE PIECE ALUMINUM APRON ENDWALLS FOR 66" X 51" PIPE ARCH AND LARGER SHALL HAVE 0.105" SIDES AND 0.134" CENTER PANELS. THE WIDTH OF CENTER PANELS SHALL BE GREATER THAN 20 PERCENT OF THE PIPE ARCH

LAP SEAMS SHALL BE TIGHTLY JOINED BY GALVANIZED RIVETS OR BOLTS FOR STEEL UNITS AND ALUMINUM RIVETS AND BOLTS FOR ALUMINUM UNITS. FOR THE 77" X 52" THROUGH 112" X 75" APRON ENDWALL SIZES. THE REINFORCED EDGES AND CENTER PANEL SEAMS SHALL BE FURTHER REINFORCED WITH GALVANIZED STEEL OR ALUMINUM STIFFENER ANGLES. THE ANGLES SHALL BE ATTACHED BY GALVANIZED NUTS AND BOLTS FOR STEEL UNITS AND ALUMINUM NUTS AND BOLTS FOR ALUMINUM UNITS.

WHERE TWO OR MORE PIPES WITH APRON ENDWALLS ARE LAID ADJACENT TO EACH OTHER, THEY SHALL BE SEPARATED BY A DISTANCE SUFFICIENT TO PROVIDE A MINIMUM CLEARANCE OF 6 INCHES BETWEEN APRON ENDWALLS.

① FOR PIPE ARCH SIZES UP TO 73" X 55" A 180° ROLLED EDGE MAY BE USED INSTEAD OF STEEL ROD REINFORCEMENT. SEE SECTION A-A.

# APRON ENDWALLS FOR PIPE ARCH AND **ELLIPTICAL PIPE**

STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION

APPROVED 11-30-94

/S/ Rory L. Rhinesmith CHIEF ROADWAY DEVELOPMENT ENGINEER ထ

# Apron Endwalls for Pipe Arch and Elliptical Pipe

#### References:

FDM 13-1-15 FDM 13-1-17 FDM 13-1-30 FDM 13-15-5

# Bid items associated with this drawing:

ITEM NUMBER	<u>DESCRIPTION</u>	<u>UNIT</u>
521.1200 - 1399	Apron Endwalls for Pipe Arch Steel (size)	EACH
522.2600 - 2699	Apron Endwalls for Culvert Pipe Reinforced Concrete	
	Horizontal Elliptical (size)	EACH

## Standardized Special Provisions associated with this drawing:

STSP NUMBER TITLE

SPV.0060 if non-standard size is specified.

## Other SDDs associated with this drawing:

SDD 8F4 Joint Ties for Concrete Pipe

## **Design Notes:**

A special provision is required when either Corrugated Steel Pipe Arch with 3" x 1" corrugations or Reinforced Concrete Pipe Arch are specified. For pipe arch with 3" x 1" corrugations make reference to AASHTO Materials Specification M 36. For Reinforced Concrete Pipe Arch, make reference to AASHTO Materials Specification M 206.

Joint ties are required for the apron endwall and the last 2 sections of culvert and storm sewer pipe installations. See Standard Specifications.

## **Contact Person:**

Ed Lilla (608) 266-2312