
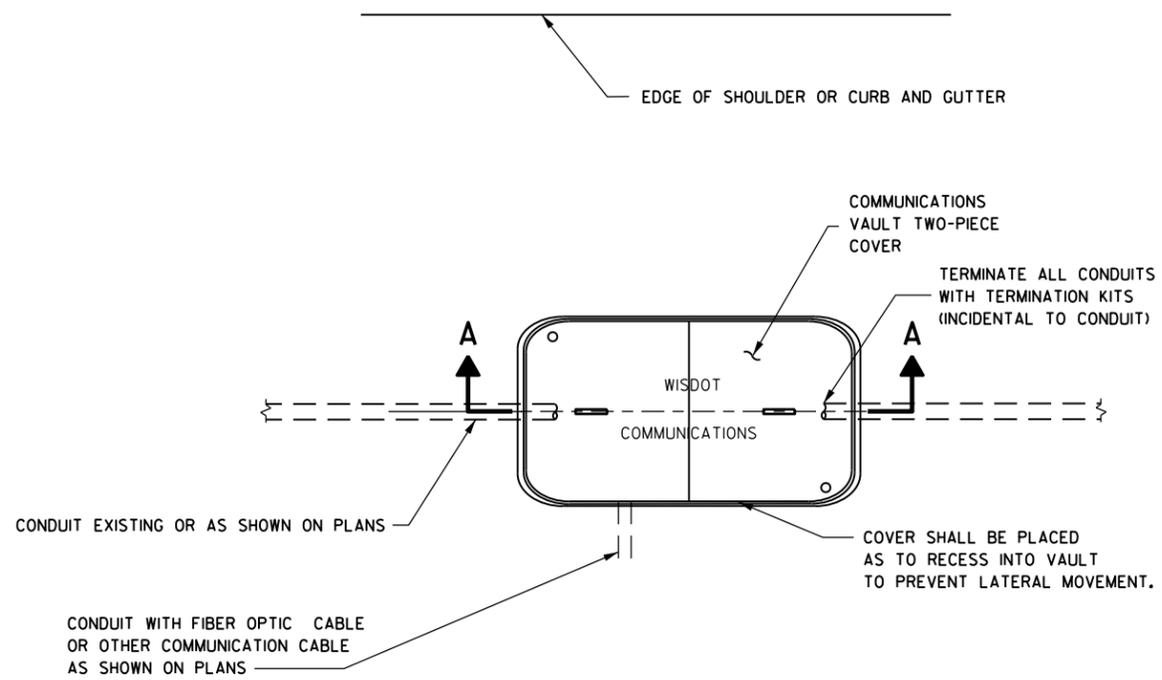
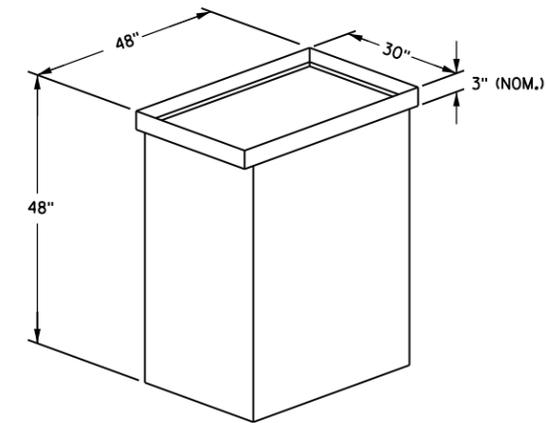
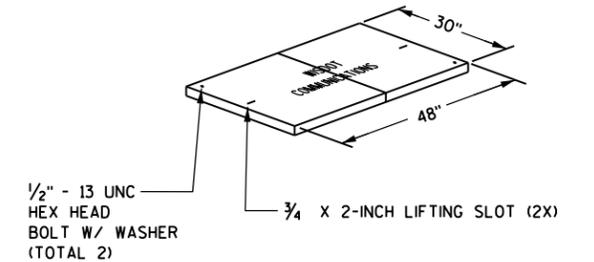


**GENERAL NOTES**

- BOX SHALL HAVE AN OPEN BASE.
- COVER SHALL BE DETECTABLE, AND HAVE A MINIMUM DESIGN LOAD OF 15,000 LBS AND SHALL LOCK.
- ALL OPENINGS IN STRUCTURE MUST BE MACHINED AT TIME OF FABRICATION, OR PUNCH DRIVEN AT TIME OF PLACEMENT.
- VAULTS SHALL BE OF ONE-PIECE CONSTRUCTION. TWO-PIECE/STACKABLE VAULTS WILL NOT BE PERMITTED.
- FIELD PLACEMENT OF COMMUNICATIONS VAULTS SHALL BE AS DIRECTED BY THE ENGINEER.

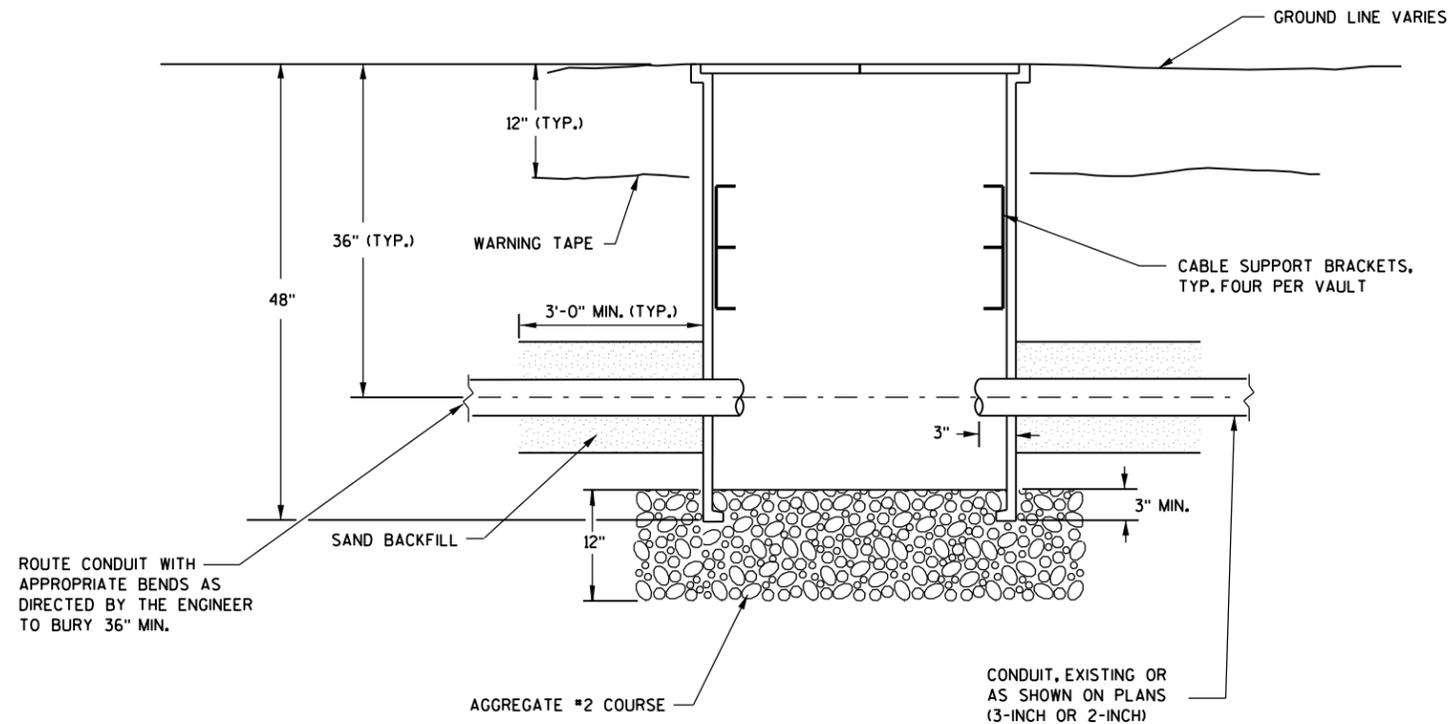

PLAN VIEW

**COMMUNICATIONS VAULT**

**COMMUNICATION VAULT**

STATE OF WISCONSIN  
DEPARTMENT OF TRANSPORTATION

APPROVED  
DATE: Sept. 2014 /S/ Ahmet Demirbilek  
STATE ELECTRICAL ENGINEER  
FHWA

6

6

S.D.D. 9 H 9-1

S.D.D. 9 H 9-1

*Communications Vault*

**References:**

NONE

**Bid items associated with this drawing:**

<u>ITEM NUMBER</u>	<u>DESCRIPTION</u>	<u>UNIT</u>
652.0125	Conduit Rigid Metallic 2-Inch .....	LF
652.0225	Conduit Rigid Nonmetallic Schedule 40 2-Inch .....	LF
652.0235	Conduit Rigid Nonmetallic Schedule 40 3-Inch .....	LF
671.0100	Conduit HDPE 4-Duct 1 1/4-Inch .....	LF

**Standardized Special Provisions associated with this drawing:**

<u>STSP NUMBER</u>	<u>TITLE</u>
NONE	

**Other SDDs associated with this drawing:**

[SDD 9b2](#) Conduit

**Design Notes:**

NONE

**Contact Person:**

Ahmet Demirbilek (414) 220-6801