

# XSP High Output Series

XSP1™ High Output LED Street/Area Luminaire – Single Module

WISDOT LED A  
BXSP1HO9033&  
BXSP1-HO-HT-3ME-100W-40K-UL-SV-Q7-R

## Product Description

Designed from the ground up as a totally optimized LED street and area lighting system, the XSP High Output Series delivers incredible efficiency without sacrificing application performance. Beyond substantial energy savings and reduced maintenance, Cree achieves greater optical control with our NanoOptic® Precision Delivery Grid™ optic when compared to traditional cobra head luminaires. The XSP High Output Series is the better alternative for traditional street and area lighting with quick payback and improved performance.

**Applications:** Roadway, parking lots, walkways and general area spaces

## Performance Summary

NanoOptic® Precision Delivery Grid™ optic

Assembled in the U.S.A. of U.S. and imported parts

**Initial Delivered Lumens:** Up to 10,946

**Efficacy:** Up to 111 LPW

**CRI:** Minimum 70 CRI


**CCT:** 3000K (+/- 300K), 4000K (+/- 300K); 5700K (+/- 500K)

**Limited Warranty\*:** 10 years on luminaire/10 years on Colorfast DeltaGuard® finish

\* See <http://lighting.cree.com/warranty> for warranty terms

## Accessories

Field-Installed	
<b>Backlight Control Shield</b> XA-SP1BLS - Provides 1/2 mounting height cutoff	<b>Bird Spikes</b> XA-SP1BRDSPK

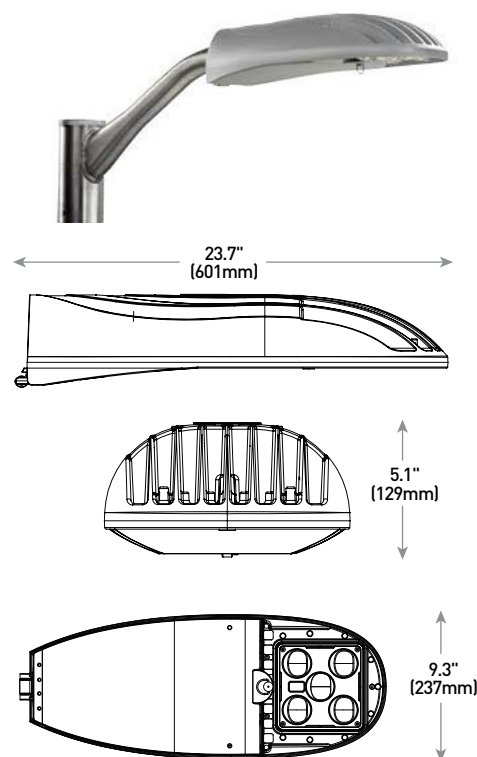

Voltage	Weight
120-277V	14.5 lbs. (6.6kg)
347-480V	18.0 lbs. (8.2kg)

Item number BXSP1HO9033&

indicates with WISDOT A label

## Ordering Information

Example: BXSP1-HO-HT-2ME-100W-30K-UL-SV

BXSP1-HO	HT	3ME	100W	40K	UL	SV	Q7-R
Product	Mounting	Optic	Input Power**	CCT	Voltage	Color Options	Options
<b>BXSP1-HO</b>	<b>HT</b> Horizontal Tenon	<b>2LG*</b> Type II Long <b>2ME*</b> Type II Medium <b>3ME*</b> Type III Medium <b>4ME*</b> Type IV Medium	<b>100W</b>	<b>30K</b> 3000K <b>40K</b> 4000K <b>57K</b> 5700K	<b>UL</b> Universal 120-277V <b>UH***</b> Universal 347-480V	<b>BK</b> Black <b>BZ</b> Bronze <b>SV</b> Silver <b>WH</b> White	<b>N-Q9/Q8/Q7/Q6/Q5/Q4</b> <b>Utility Label, NEMA® 7-Pin Photocell Receptacle &amp; Field Adjustable Output</b> <ul style="list-style-type: none"><li>- Must select Q9, Q8, Q7, Q6, Q5 or Q4</li><li>- Settings Q3-Q1 are not available with N option</li><li>- External wattage label per ANSI C136.15 based on Q setting selected</li><li>- 7-pin receptacle per ANSI C136.41</li><li>- Factory connected 0-10V dim leads</li><li>- Photocell and shorting cap by others</li><li>- Power/lumens may only be adjusted down in the field</li><li>- Refer to page 6 for power and lumen values</li></ul> <b>Q9/Q8/Q7/Q6/Q5/Q4/Q3/Q2/Q1</b> <b>Field Adjustable Output</b> <ul style="list-style-type: none"><li>- Must select Q9, Q8, Q7, Q6, Q5, Q4, Q3, Q2, or Q1</li><li>- Power/lumens are fully adjustable in the field</li><li>- Refer to page 6 for power and lumen values</li></ul> <b>R</b> <b>NEMA® 7-Pin Photocell Receptacle</b> <ul style="list-style-type: none"><li>- 7-pin receptacle per ANSI C136.41</li><li>- Factory connected 0-10V dim leads</li><li>- Photocell and shorting cap by others</li></ul> <b>UTL</b> <b>Utility Label</b> <ul style="list-style-type: none"><li>- Includes exterior wattage label per ANSI C136.15 that indicates the maximum available wattage of the luminaire</li></ul>

\* Available with Backlight Shield when ordered with field-installed accessory (see table above)

\*\* Refer to Electrical Data table for system watts

\*\*\* 347-480V utilizes magnetic step-down transformer. For input power for 347-480V, refer to the Electrical Data table

Rev. Date: V5 10/19/2017



US: [lighting.cree.com](http://lighting.cree.com)

T (800) 236-6800 F (262) 504-5415

Canada: [www.cree.com/canada](http://www.cree.com/canada)

T (800) 473-1234 F (800) 890-7507

## XSP1™ High Output LED Street/Area Luminaire – Single Module

### Product Specifications

#### CONSTRUCTION & MATERIALS

- **Die cast aluminum housing**
- Tool-less entry
- Mounts on 1.25" [32mm] IP, 1.66" [42mm] O.D. or 2" [51mm] IP, 2.375" [60mm] O.D. horizontal tenon (minimum 8" [203mm] in length) and is adjustable +/- 5° to allow for fixture leveling (**includes two axis T-level to aid in leveling**)
- Luminaire secures with two mounting bolts
- Exclusive Colorfast DeltaGuard® finish features an E-Coat epoxy primer with an ultra-durable powder topcoat, providing excellent resistance to corrosion, ultraviolet degradation and abrasion. Black, bronze, silver and white are available
- **Weight: 120-277V: 14.5 lbs. [6.6kg]; 347-480V: 18.0 lbs. [8.2kg]**

#### ELECTRICAL SYSTEM

- **Input Voltage:** 120-277V or 347-480V, 50/60Hz
- **Power Factor:** > 0.9 at full load
- **Total Harmonic Distortion:** < 20% at full load
- Class 1 driver
- **Integral 10kV surge suppression protection standard**
- When code dictates fusing, a slow blow fuse or type C/D breaker should be used to address inrush current
- Designed with 0-10V dimming capabilities. Controls by others
- **10V Source Current:** 0.15mA

#### REGULATORY & VOLUNTARY QUALIFICATIONS

- cULus Listed
- Suitable for wet locations
- **Certified to ANSI C136.31-2001, 3G bridge and overpass vibration standards**
- Meets CALTrans 611 Vibration testing
- 10kV surge suppression protection tested in accordance with IEEE/ANSI C62.41.2
- Meets FCC Part 15, Subpart B, Class A standards for conducted and radiated emissions
- DLC and DLC Premium qualified versions available. Exceptions apply when N-Q9 or Q9 (select adjustments) options are ordered. Please refer to <https://www.designlights.org/search/> for most current information
- Luminaire and finish endurance tested to withstand 5,000 hours of elevated ambient salt fog conditions as defined in ASTM Standard B 117
- Meets Buy American requirements within ARRA
- **RoHS compliant.** Consult factory for additional details
- Dark Sky Friendly, IDA Approved when ordered with 30K CCT. Please refer to <http://darksky.org/fsa/fsa-products/> for most current information

#### Electrical Data\*

Input Power	System Watts		Total Current (A)					
	120-277V	347-480V	120V	208V	240V	277V	347V	480V
100W	99	107	0.86	0.49	0.42	0.37	0.32	0.23

\* Electrical data at 25°C (77°F). Actual wattage may differ by +/- 10% when operating between 120-480V +/- 10%

See final page for watts

#### XSP1™ High Output Series Ambient Adjusted Lumen Maintenance<sup>1</sup>

Ambient	Initial LMF	25K hr Projected <sup>2</sup> LMF	50K hr Projected <sup>2</sup> LMF	<b>75K hr Calculated<sup>3</sup> LMF</b>	100K hr Calculated <sup>3</sup> LMF
5°C (41°F)	1.04	1.02	1.01	1.00	0.99
10°C (50°F)	1.03	1.01	1.00	0.99	0.98
15°C (59°F)	1.02	1.00	0.99	0.98	0.97
20°C (68°F)	1.01	0.99	0.98	0.97	0.96
25°C (77°F)	1.00	0.98	0.97	<b>0.96</b>	0.95

<sup>1</sup> Lumen maintenance values at 25°C (77°F) are calculated per TM-21 based on LM-80 data and in-situ luminaire testing. Luminaire ambient temperature factors (LATF) have been applied to all lumen maintenance factors

<sup>2</sup> In accordance with IESNA TM-21-11, Projected Values represent interpolated value based on time durations that are within six times (6X) the IESNA LM-80-08 total test duration (in hours) for the device under testing (DUT) i.e. the packaged LED chip


<sup>3</sup> In accordance with IESNA TM-21-11, Calculated Values represent time durations that exceed six times (6X) the IESNA LM-80-08 total test duration (in hours) for the device under testing (DUT) i.e. the packaged LED chip

## XSP1™ High Output LED Street/Area Luminaire – Single Module


### Photometry

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory. To obtain an IES file specific to your project consult: <http://lighting.cree.com/products/outdoor/street-and-roadway/xsp-high-output-series-1>

#### 2LG

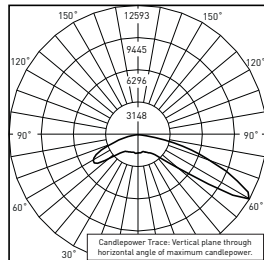


**RESTL Test Report #:** PL07625-001A  
**BXSP1-HO-\*\*-2LG-100W-40K-UL**  
**Initial Delivered Lumens:** 10,905

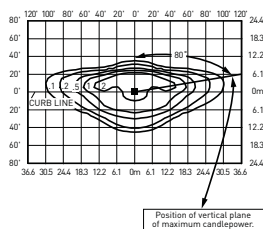


**BXSP1-HO-\*\*-2LG-100W-40K-UL**  
**Mounting Height:** 25' (7.6m) A.F.G.  
**Initial Delivered Lumens:** 10,722  
**Initial FC at grade**

Type II Long Distribution					
3000K		4000K		5700K	
Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11
10,162	B3 U0 G3	10,722	B3 U0 G3	10,946	B3 U0 G3

\* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens  
 \*\* For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: <https://www.ies.org/wp-content/uploads/2017/03/TM-15-11BUGRatingsAddendum.pdf>

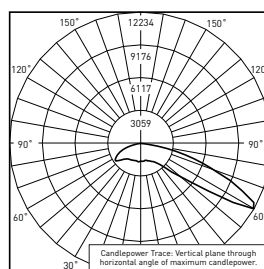

**RESTL Test Report #:** PL08272-001A  
**BXSP1-HO-\*\*-2LG-100W-57K-UL**  
**w/XA-SP1BLS**  
**Initial Delivered Lumens:** 8,239

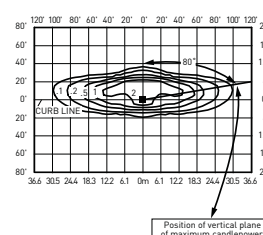


**BXSP1-HO-\*\*-2LG-100W-57K-UL**  
**w/XA-SP1BLS**  
**Mounting Height:** 25' (7.6m) A.F.G.  
**Initial Delivered Lumens:** 8,012  
**Initial FC at grade**


Type II Long w/BLS Distribution					
3000K		4000K		5700K	
Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11
7,593	B2 U0 G1	8,012	B2 U0 G1	8,179	B2 U0 G1

\* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens  
 \*\* For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: <https://www.ies.org/wp-content/uploads/2017/03/TM-15-11BUGRatingsAddendum.pdf>

#### 2ME

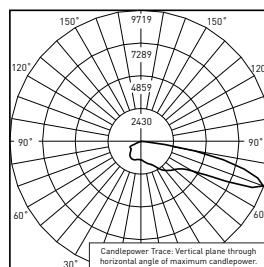


**RESTL Test Report #:** PL10140-001A  
**BXSP1-HO-\*\*-2ME-100W-40K-UL**  
**Initial Delivered Lumens:** 10,702

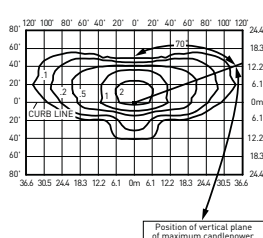


**BXSP1-HO-\*\*-2ME-100W-40K-UL**  
**Mounting Height:** 25' (7.6m) A.F.G.  
**Initial Delivered Lumens:** 10,722  
**Initial FC at grade**

Type II Medium Distribution					
3000K		4000K		5700K	
Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11
10,162	B2 U0 G2	10,722	B2 U0 G2	10,946	B2 U0 G2

\* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens  
 \*\* For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: <https://www.ies.org/wp-content/uploads/2017/03/TM-15-11BUGRatingsAddendum.pdf>

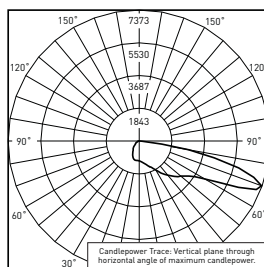

**RESTL Test Report #:** PL10140-002B  
**BXSP1-HO-\*\*-2ME-100W-40K-UL**  
**w/XA-SP1BLS**  
**Initial Delivered Lumens:** 8,283

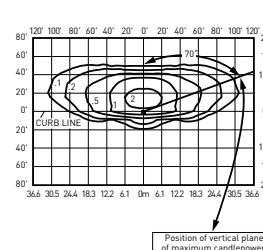

**BXSP1-HO-\*\*-2ME-100W-40K-UL w/XA-SP1BLS**  
**Mounting Height:** 25' (7.6m) A.F.G.  
**Initial Delivered Lumens:** 8,483  
**Initial FC at grade**

Type II Medium w/BLS Distribution					
3000K		4000K		5700K	
Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11
8,040	B1 U0 G2	8,483	B1 U0 G2	8,661	B1 U0 G2

\* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens  
 \*\* For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: <https://www.ies.org/wp-content/uploads/2017/03/TM-15-11BUGRatingsAddendum.pdf>




## XSP1™ High Output LED Street/Area Luminaire – Single Module


### Photometry

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory. To obtain an IES file specific to your project consult: <http://lighting.cree.com/products/outdoor/street-and-roadway/xsp-high-output-series-1>

#### 3ME

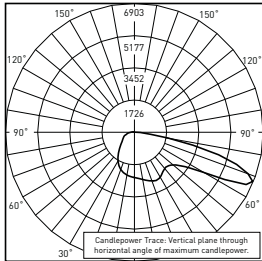

**RESTL Test Report #:** PL10344-001A  
**BXSP1-HO-\*\*-3ME-100W-40K-UL**  
**Initial Delivered Lumens:** 10,661

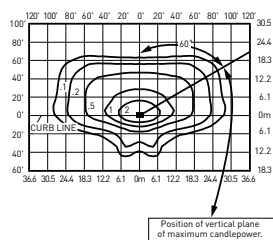


**BXSP1-HO-\*\*-3ME-100W-40K-UL**  
**Mounting Height:** 25' (7.6m) A.F.G.  
**Initial Delivered Lumens:** 10,722  
**Initial FC at grade**

Type III Medium Distribution					
3000K		4000K		5700K	
Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11
10,162	B2 U0 G2	10,722	B2 U0 G2	10,946	B2 U0 G2


\* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens

\*\* For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: <https://www.ies.org/wp-content/uploads/2017/03/TM-15-11BUGRatingsAddendum.pdf>

See final page for lumens

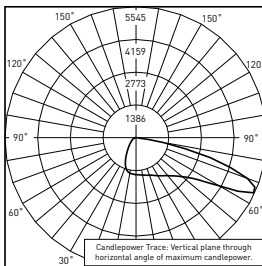

**RESTL Test Report #:** PL10344-002A  
**BXSP1-HO-\*\*-3ME-100W-40K-UL**  
**w/XA-SP1BLS**  
**Initial Delivered Lumens:** 7,540

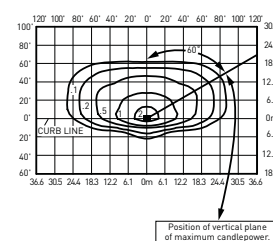


**BXSP1-HO-\*\*-3ME-100W-40K-UL**  
**w/XA-SP1BLS**  
**Mounting Height:** 25' (7.6m) A.F.G.  
**Initial Delivered Lumens:** 7,550  
**Initial FC at grade**

Type III Medium w/BLS Distribution					
3000K		4000K		5700K	
Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11
7,150	B1 U0 G2	7,550	B1 U0 G2	7,700	B1 U0 G2


\* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens

\*\* For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: <https://www.ies.org/wp-content/uploads/2017/03/TM-15-11BUGRatingsAddendum.pdf>

#### 4ME

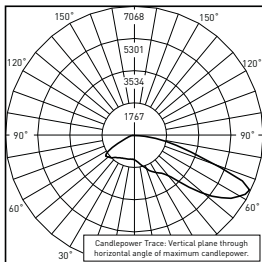

**RESTL Test Report #:** PL07626-001A  
**BXSP1-HO-\*\*-4ME-100W-40K-UL**  
**Initial Delivered Lumens:** 10,983

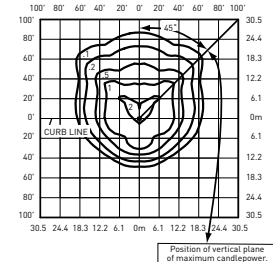


**BXSP1-HO-\*\*-4ME-100W-40K-UL**  
**Mounting Height:** 25' (7.6m) A.F.G.  
**Initial Delivered Lumens:** 10,722  
**Initial FC at grade**


Type IV Medium Distribution					
3000K		4000K		5700K	
Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11
10,162	B2 U0 G2	10,722	B2 U0 G2	10,946	B2 U0 G2

\* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens

\*\* For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: <https://www.ies.org/wp-content/uploads/2017/03/TM-15-11BUGRatingsAddendum.pdf>

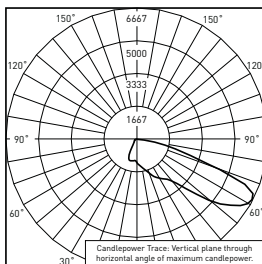

**RESTL Test Report #:** PL08273-001A  
**BXSP1-HO-\*\*-4ME-100W-40K-UL**  
**w/XA-SP1BLS**  
**Initial Delivered Lumens:** 8,463

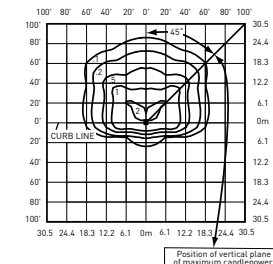

**BXSP1-HO-\*\*-4ME-100W-40K-UL**  
**w/XA-SP1BLS**  
**Mounting Height:** 25' (7.6m) A.F.G.  
**Initial Delivered Lumens:** 8,248  
**Initial FC at grade**






Type IV Medium w/BLS Distribution					
3000K		4000K		5700K	
Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11
7,817	B1 U0 G2	8,248	B1 U0 G2	8,420	B1 U0 G2

\* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens

\*\* For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: <https://www.ies.org/wp-content/uploads/2017/03/TM-15-11BUGRatingsAddendum.pdf>

## XSP1™ High Output LED Street/Area Luminaire – Single Module

### Luminaire **EPA**

Horizontal Tenon Mount – Weight: 120-277V: 14.5 lbs. (6.6kg); 347-480V: 18.0 lbs. (8.2kg)				
Single	2 @ 90°	2 @ 180°	3 @ 90°	4 @ 90°
Tenon Configuration If used with Cree tenons, please add tenon EPA with luminaire EPA				
				
PD-1H4; PT-1H	PD-2H4[90]; PT-2H[90]	PD-2H4[180]; PT-2H[180]	PD-3H4[90]; PT-3H[90]	PD-4H4[90]; PT-4H[90]
0.71	1.02	1.43	1.74	2.04

### Tenon EPA

Part Number	EPA
PD Series Tenons	0.09
PT Series Tenons	0.10
WM-2L	0.13
XA-TMDA8	0.19

Tenons and Brackets* (must specify color)	
<b>Square Internal Mount Horizontal Tenons (Aluminum)</b> - Mounts to 4" (102mm) square aluminum or steel poles PD-1H4 – Single      PD-3H4[90] – 90° Triple PD-2H4[90] – 90° Twin      PD-4H4[90] – 90° Quad PD-2H4[180] – 180° Twin	<b>Round External Mount Horizontal Tenons (Aluminum)</b> - Mounts to 2.375"-3" (60-76mm) O.D. round aluminum or steel poles or tenons - Mounts to 3" (76mm), 5" (127mm), or 6" (152mm) square pole with PB-1A* tenon PT-1H – Single      PT-3H[90] – 90° Triple PT-2H[90] – 90° Twin      PT-4H[90] – 90° Quad PT-2H[180] – 180° Twin
<b>Wall Mount Brackets</b> - Mounts to wall or roof WM-2L – Extended Horizontal	<b>Direct Arm Pole Adaptor Bracket</b> - Mounts to 3-6" (76-152mm) round or square aluminum or steel poles XA-TMDA8

\* Refer to the [Bracket and Tenons spec sheet](#) for more details

\* Specify pole size: 3 {3"}, 5 {5"}, or 6 {6"} for single, double or triple luminaire orientation or 5 {5"} or 6 {6"} for quad luminaire orientation

**Field Adjustable Output (Q9/Q8/Q7/Q6/Q5/Q4/Q3/Q2/Q1) Option Description:**

The Field Adjustable Output option enables luminaires within the XSP Series on this page to be tuned to the exact needs of a particular application through multiple levels of adjustment. When a setting other than Q9 is specified with the N option, that setting becomes the maximum wattage of the luminaire, and a NEMA label reflecting this wattage is affixed to the luminaire. Lumen output and power consumption can only be adjusted downward from the maximum wattage.

**Q Option Power & Lumen Data**

Q Option Setting	CCT	System Watts†		Lumen Values					Optics Qualified on DLC QPL	
		120-277V	347-480V	2LG/2ME/3ME/4ME	2LG w/BLS	2ME w/BLS	3ME w/BLS	4ME w/BLS	DLC Standard	DLC Premium
9	30K	99	107	10,162	7,593	8,040	7,150	7,817	2LG, 2ME, 3ME, 4ME	N/A
	40K			10,722	8,012	8,483	7,550	8,248	2LG, 2ME, 3ME, 4ME	
	57K			10,946	8,179	8,661	7,700	8,420	2LG, 2ME, 3ME, 4ME	
8	30K	88	95	9,349	6,986	7,397	6,578	7,192	2LG, 2ME, 3ME, 4ME	N/A
	40K			9,864	7,371	7,804	6,946	7,588	2LG, 2ME, 3ME, 4ME	
	57K			10,070	7,525	7,968	7,084	7,746	N/A	2LG, 2ME, 3ME, 4ME
7	30K	79	86	8,841	6,606	6,995	6,221	6,801	2LG, 2ME, 3ME, 4ME	N/A
	40K			9,328	6,970	7,380	6,569	7,176	2LG	2ME, 3ME, 4ME
	57K			9,523	7,116	7,535	6,699	7,325	N/A	2LG, 2ME, 3ME, 4ME
6	30K	69	75	7,926	5,923	6,271	5,577	6,097	2LG, 2ME, 3ME, 4ME	N/A
	40K			8,363	6,249	6,617	5,889	6,433	N/A	2LG, 2ME, 3ME, 4ME
	57K			8,538	6,380	6,756	6,006	6,568		2LG, 2ME, 3ME, 4ME
5	30K	61	66	7,215	5,391	5,708	5,077	5,550	2LG, 2ME, 3ME, 4ME	N/A
	40K			7,613	5,689	6,023	5,361	5,856	N/A	2LG, 2ME, 3ME, 4ME
	57K			7,772	5,807	6,149	5,467	5,978		2LG, 2ME, 3ME, 4ME
4	30K	52	56	6,504	4,860	5,146	4,576	5,003	N/A	N/A
	40K			6,862	5,128	5,429	4,832	5,279		
	57K			7,005	5,235	5,543	4,928	5,389		
3*	30K	43	46	5,081	3,797	4,020	3,575	3,909	N/A	N/A
	40K			5,361	4,006	4,242	3,775	4,124		
	57K			5,473	4,090	4,331	3,850	4,210		
2*	30K	34	37	4,573	3,417	3,618	3,218	3,518	N/A	N/A
	40K			4,825	3,605	3,817	3,398	3,712		
	57K			4,926	3,681	3,897	3,465	3,789		
1*	30K	25	27	3,557	2,658	2,814	2,503	2,736	N/A	N/A
	40K			3,753	2,804	2,969	2,643	2,887		
	57K			3,831	2,863	3,031	2,695	2,947		

\* Not available with N option

† Electrical and lumen data at 25°C (77°F). Actual wattage and lumen output may differ by +/-10% when operating between 120-277V +/-10%