



# Project Information

## WIS 35 (W Junction WIS 133 to US 18)



Wisconsin Department of Transportation

### EXISTING CONDITIONS


The project is located on WIS 35 beginning at the west junction of WIS 133 in Bloomington and ending approximately 150 feet south of the US 18 intersection. WIS 35 was last reconditioned in 1995. The pavement is in poor condition with severe cracking along the centerline and edges. Additionally, the existing guardrail end terminals and railing type do not meet current standards. Many of the curb ramps located in urban sections of the project do not meet current standards. Some culverts located throughout the project are showing signs of deterioration in the form of rust, damaged endwalls, and erosion.

### PROPOSED IMPROVEMENTS

The proposed work consists of a pavement resurface. The project will remove 2 inches of existing asphalt and then pave 4 inches of new hot mix asphalt (HMA) pavement in the rural sections. The urban sections will consist of removing 4.5 inches of existing asphalt and then paving 4.5 inches of new HMA pavement. The roadway will have an 8 foot wide shoulder with 5 feet being paved and 3 feet consisting of aggregate, widening the paved shoulder by 2 feet. The project will replace guardrail, replace three culvert pipes, replace and add curb ramps/sidewalk, replace concrete curb and gutter, and replace some inlets.

### PROJECT LOCATION

Project ID: 5580-04-00

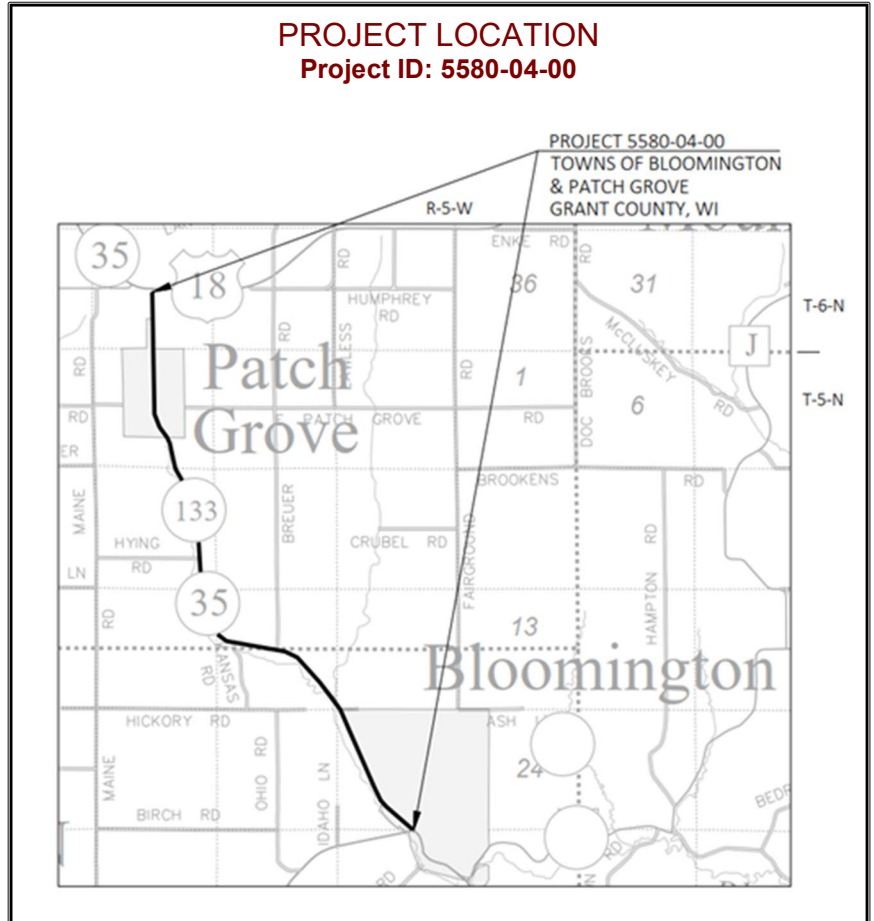

If at any time during the project you have any questions or would like more information about this project, please contact:

**Bobbi Maxwell, P.E.**

**MSA Project Engineer**  
MSA Professional Services, Inc.  
1230 South Boulevard  
Baraboo, WI 53913  
(608) 355-8861

[bmaxwell@msa-ps.com](mailto:bmaxwell@msa-ps.com)

**Valerie Guider, P.E.**

**WisDOT Project Manager**  
WisDOT-Southwest Region  
3550 Mormon Coulee Road  
La Crosse, WI 54601  
(608) 797-1635

[Valerie.Guider@dot.wi.gov](mailto:Valerie.Guider@dot.wi.gov)

**Thank you for reviewing this informational regarding the proposed improvements to WIS 35.**

**See the attached documents for more project information.**

**Your comments are important to us. Comments can be made by completing the attached comment form.**

## REAL ESTATE

A small amount of additional right of way will be required for this project to construct curb ramps and sidewalk in urban locations. WisDOT anticipates beginning real estate acquisition as early as the winter of 2021-2022.

## DEVELOP FINAL PLANS

It is anticipated that final plans will be completed in 2023. The bid letting is anticipated for November 2024 with construction currently scheduled for 2025.

## TEMPORARY TRAFFIC IMPACTS

WIS 35 will remain open during construction. Temporary daytime single lane closures will be necessary utilizing flagging operations during construction. Access to adjacent properties will be maintained during construction.

### Project ID 5580-04-00 – Timeline

| WISCONSIN | Project Activities   | 2021    |   |   |   | 2022    |   |   |   | 2023    |   |   |   | 2024    |   |   |   | 2025    |   |   |   |
|-----------|----------------------|---------|---|---|---|---------|---|---|---|---------|---|---|---|---------|---|---|---|---------|---|---|---|
|           |                      | Quarter |   |   |   | Quarter |   |   |   | Quarter |   |   |   | Quarter |   |   |   | Quarter |   |   |   |
|           |                      | 1       | 2 | 3 | 4 | 1       | 2 | 3 | 4 | 1       | 2 | 3 | 4 | 1       | 2 | 3 | 4 | 1       | 2 | 3 | 4 |
|           | Design               |         | ● |   |   |         |   |   |   |         |   |   |   |         |   |   |   |         |   |   |   |
|           | Purchase Real Estate |         |   |   |   |         |   |   |   |         |   |   |   |         |   |   |   |         |   |   |   |
|           | Utility relocations  |         |   |   |   |         |   |   |   |         |   |   |   |         |   |   |   |         |   |   |   |
|           | Construction         |         |   |   |   |         |   |   |   |         |   |   |   |         |   |   |   |         |   |   |   |

- Public Involvement Notification

## PUBLIC INPUT/COMMENTS

This is the one public involvement notification for this project. The purpose of this notification is to provide information on project concepts and to receive input from the public. Continued public involvement is essential throughout the development of these projects. Any known archaeological or environmental concerns should be brought to the attention of the project staff. Please mail or email comments about the project before **May 17, 2021**. Your input is welcome and appreciated throughout the design process.

## WEBSITE INFORMATION

Information for this notification and any future public meetings/notifications will placed on the WisDOT website at the following location:

<https://wisconsindot.gov/Pages/projects/by-region/sw/wis35-bloomington/default.aspx>