



Wisconsin Department of Transportation

Division of Transportation Systems Development

Bureau of Project Development
4802 Sheboygan Avenue, Rm 601
P O Box 7916
Madison, WI 53707-7916

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

June 8, 2017

NOTICE TO ALL CONTRACTORS:

**Proposal #21: 1204-02-76, WISC 2017 337
Dodgeville – Mt Horeb
CTH ID Interchange/ B-25-173, 174, 175
USH 18
Iowa County**

Letting of June 13, 2017

This is Addendum No. 01, which provides for the following:

Plan Sheets:

Added Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of why sheet was added)
53A	Plan Detail – Left out of plan
70A	Storm Sewer Detail – Left out of plan

Plan Sheets

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:
Added: 53A and 70A

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman


Proposal Development Specialist
Proposal Management Section

END OF ADDENDUM



Addendum No. 02
ID 1204-02-76
Added Sheet 53A
June 8, 2017

POINT NO.	STATION	OFFSET	ELEV.	Y	X	REMARKS
100	77+09.19 PR	0.00 RT	1176.24	161,006.38	411,899.58	CENTERLINE
101	77+44.96 PR	0.75 LT	1176.13	161,017.31	411,865.50	R=1000'
102	80+35.08 PR	982.19 RT	---	161,269.58	412,170.73	FLAG LINE
103	81+54.70 B	0.00 RT	1177.68	161,099.98	411,676.98	EDGE OF ASPHALT
104	81+54.44 PR	23.03 LT	1180.68	161,176.53	411,532.01	R=1000'
105	81+58.22 PR	1028.07 LT	---	160,332.95	410,995.01	EDGE OF AGGREGATE
106	78+82.28 PR	21.22 LT	1177.05	161,057.09	411,730.81	EDGE OF ASPHALT
107	79+15.63 PR	20.52 LT	1177.39	161,054.89	411,728.79	EDGE OF PAVED SHOULDER
108	79+42.92 PR	26.23 LT	1177.87	161,095.37	411,675.06	EDGE OF ASPHALT
109	79+98.44 PR	33.63 LT	1178.67	161,111.71	411,624.53	EDGE OF ASPHALT
110	79+98.61 PR	28.63 LT	1178.67	161,115.88	411,627.29	EDGE OF ASPHALT
111	78+94.11 PR	10.00 RT	1176.53	161,090.10	411,736.02	EDGE OF AGGREGATE
112	78+94.11 PR	13.00 RT	1176.41	161,092.69	411,737.53	EDGE OF ASPHALT
113	79+44.71 PR	12.00 RT	1177.12	161,116.21	411,694.70	EDGE OF PAVED SHOULDER
114	79+44.71 PR	17.00 RT	1176.92	161,122.38	411,697.47	EDGE OF AGGREGATE
115	79+44.71 PR	20.00 RT	1176.80	161,124.87	411,699.14	EDGE OF AGGREGATE
116	80+91.38 PR	20.00 RT	1179.61	161,207.48	411,576.47	EDGE OF AGGREGATE

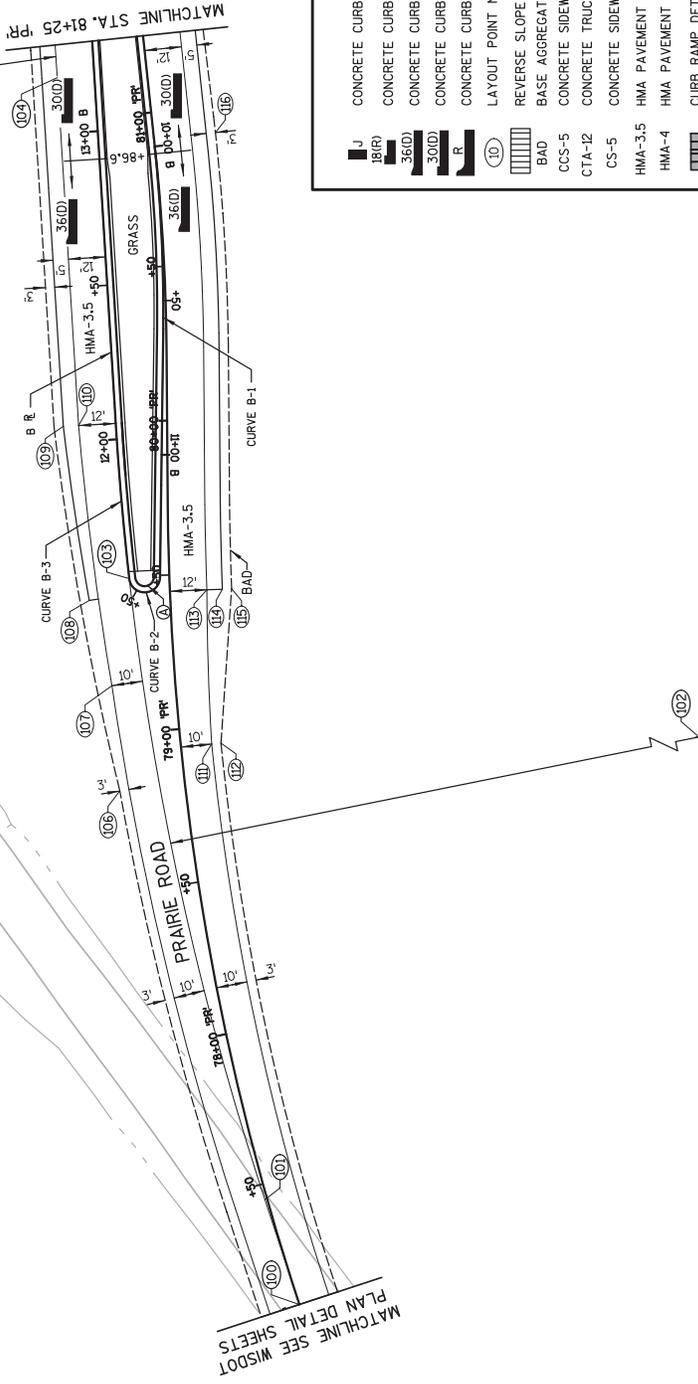


- LEGEND**
- J CONCRETE CURB TYPE J
 - 18(R) CONCRETE CURB AND GUTTER 18-INCH TYPE A (REJECT)
 - 36(D) CONCRETE CURB AND GUTTER 4-INCH SLOPED 36-INCH TYPE D
 - 30(D) CONCRETE CURB AND GUTTER 30-INCH TYPE D
 - R CONCRETE CURB AND GUTTER 4-INCH SLOPED 36-INCH TYPE R
 - (10) LAYOUT POINT NUMBER
 - Reverse Slope Gutter
 - Base Aggregate Dense
 - CCS-5 CONCRETE SIDEWALK 5-INCH, COLORING CONCRETE WISDOT RED
 - CS-5 CONCRETE TRUCK APRON 12-INCH, COLORING CONCRETE WISDOT RED
 - HMA-3.5 CONCRETE SIDEWALK 5-INCH
 - HMA-4 HMA PAVEMENT 4 LT 58-28 S, 3.5-INCH
 - HMA-4 HMA PAVEMENT 4 LT 58-28 S, 4-INCH
 - Yellow Curbs
 - (A) CURB RAMP DETECTABLE WARNING FIELD YELLOW
 - (B) CONCRETE MEDIAN
 - (C) SLOPE NOSE TYPE 1

PROJECT NO: 1204-02-76 HWY: USH 18 COUNTY: IOWA PLAN DETAILS SHEET 53A E

FILE NAME : S:\NMD\1000--1099\1089\174\N\cross\PLAN\021201-1204.dgn PLOT DATE : 1/13/2017 PLOT BY : _username_ PLOT SCALE : ##.....plotscale.....** WISDOT/CADD SHEET 42



Addendum No. 02
 ID 1204-02-76
 Added Sheet 70A
 June 8, 2017

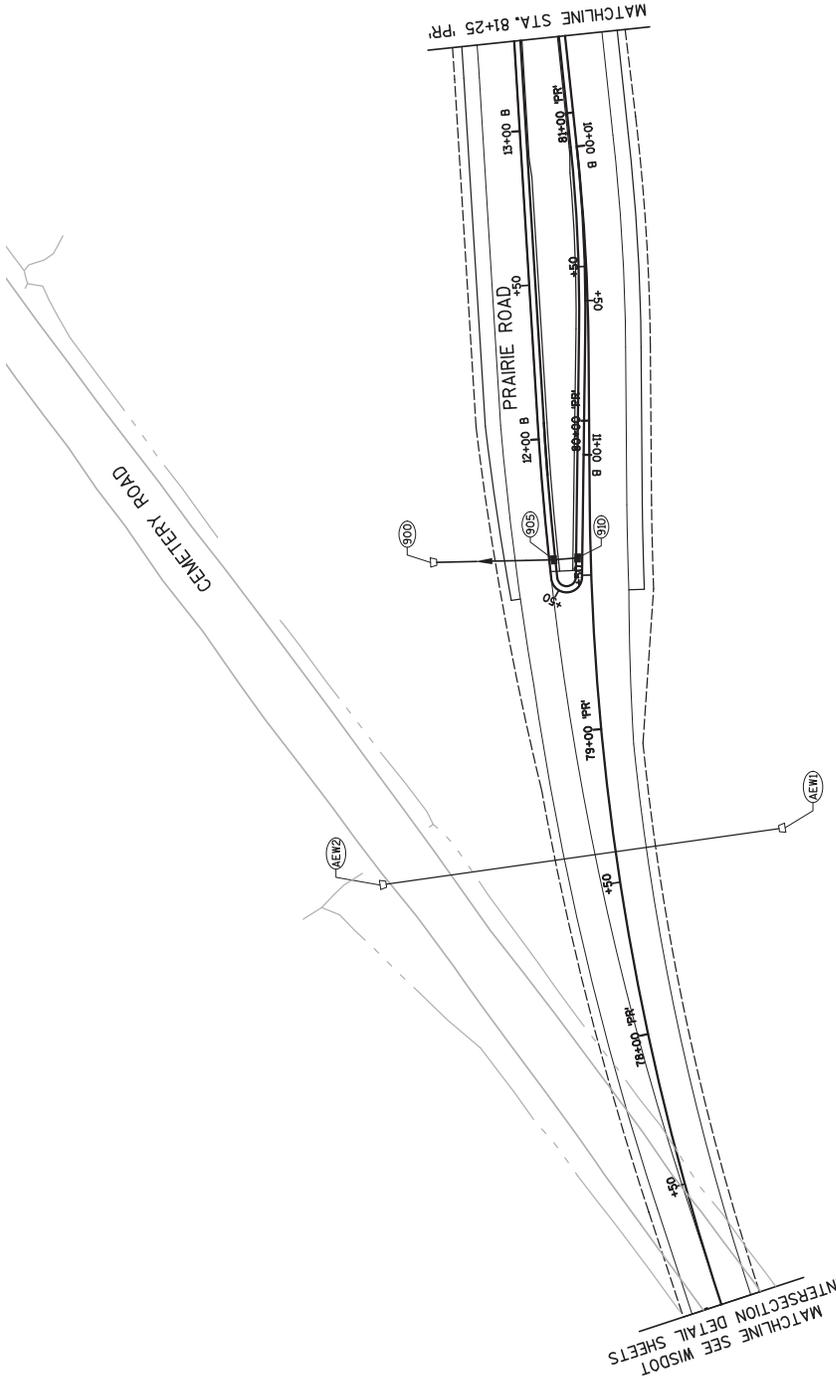

STRUCT	STATION	OFFSET	C-C	TO	INLET	COVER	MH	COVER	RIM/	T.O.S.	DEPTH	SIZE	INLET	DISCHARGE	PIPE	REMARKS
			(FT)	STRUCT	TYPE	TYPE	TYPE	TYPE	ELEV.	ELEV.	(FT)	(IN)	ELEV.	ELEV.	(IN)	
900	79+55.51	PR1 51.9	1.1	300	2X3 FT	HM			117.50	117.60	3.85	12	117.50	117.50	34	12-INCH AEW CP RC
905	79+55.28	PR1 12.0	1.1	300	2X3 FT	HM			117.50	117.60	3.85	12	117.50	117.50	34	12-INCH AEW CP RC
910	79+55.65	PR1 4.3	1.1	305	2X3 FT	HM			117.37	117.54	3.54	12	117.50	117.92	8	12-INCH AEW FOR CP RC
AEW2	78+50.00	PR1 55.8	1.1	117.0	AEW2				117.77	117.77	0.00	36	117.77	117.77	117	36-INCH AEW FOR CP RC
AEW2	78+50.00	PR1 17.0	1.1						117.77	117.77	0.00	36	117.77	117.77	117	36-INCH AEW FOR CP RC

