

Wisconsin Department of Transportation

January 7, 2021

Division of Transportation Systems Development

Bureau of Project Development 4822 Madison Yards Way, 4th Floor South Madison, WI 53705

Telephone: (608) 266-1631 Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

Proposal #35: 1198-03-78, WISC 2021 105

C Superior East Second Street

29th Avenue East – 53rd Avenue East

USH 2

Douglas County

Letting of January 12, 2021

This is Addendum No. 02, which provides for the following:

Special Provisions:

Revised Special Provisions					
Article No.	Description				
34	Adjusting Manhole Covers				

Schedule of Items:

Revised Bid Item Quantities									
Bid Item	Item Description	Unit	Old Quantity	Revised Quantity	Proposal Total				
649.0150	Temporary Marking Line Removable Tape 4-Inch	LF	32,324	1200	33,524				

Plan Sheets:

Revised Plan Sheets					
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)				
153	Miscellaneous Quantities (Revised TC Marking Table)				

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman

Proposal Development Specialist Proposal Management Section

ADDENDUM NO. 02 1198-03-78 January 7, 2021

Special Provisions

34. Adjusting Manhole Covers.

Replace paragraph two with the following:

Adjust manhole covers located in overlay areas after initial partial depth removal of concrete surface is done surrounding the casting. Once concrete surface has been removed, saw cut a square shape within the remaining concrete pavement around the manhole for removal of casting and surrounding pavement. Adjust the casting to finished grade, after the surface is completed. Utilize forms to create a square segment of concrete pavement, surrounding the manhole casting, filling in the void in underlying concrete pavement, and up to the level of the finished paving grade. Final asphalt paving shall be installed up to and around these raised concrete pads at each manhole. The department will measure and pay for the items of asphaltic pavement mixture, temporary cover plate, milling, and concrete pavement as Concrete Pavement Repair separately. Remove and replace all loose or deteriorated brick and mortar joints, mortar pipe connections that are not flush with the manhole, clean out the manhole, and apply a 1-inch mortar back plaster to the entire interior of the manhole at locations the plans show or as the engineer directs. Payment for cleaning, mortar, and replacing damaged rings or adding adjustment rings is incidental to the adjusting manhole cover.


Schedule of Items

Attached, dated January 7, 2021, are the revised Schedule of Items Page 6.

Plan Sheets

The following $8\frac{1}{2}$ x 11-inch sheets are attached and made part of the plans for this proposal: Revised: 153.

END OF ADDENDUM

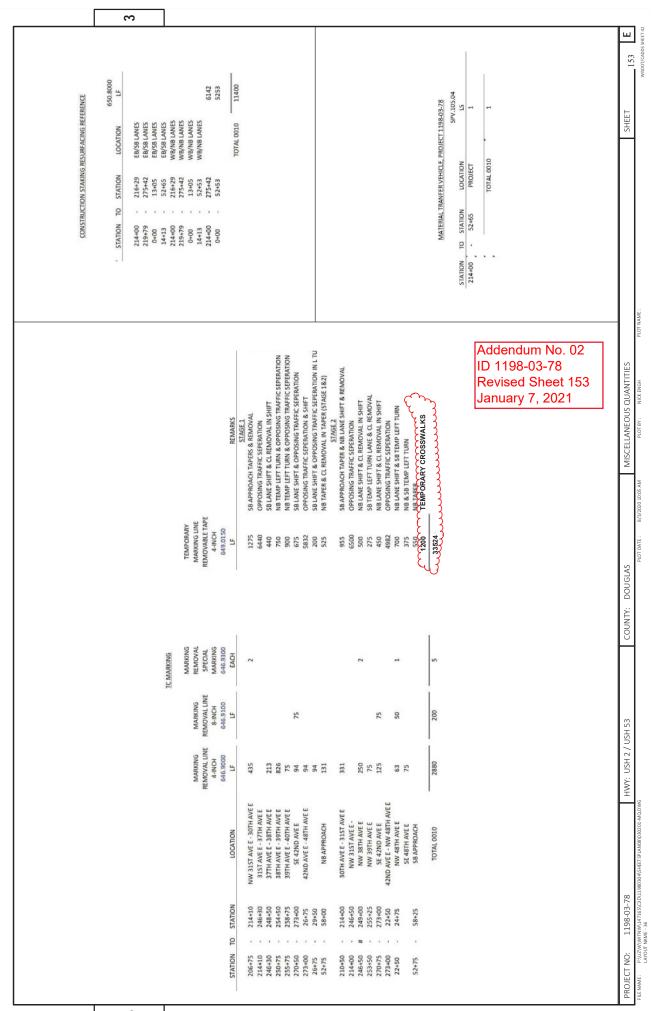





Proposal Schedule of Items

Page 6 of 10

Proposal ID: 20210112035 **Project(s):** 1198-03-78

Federal ID(s): WISC 2021105

SECTION: 0001 Roadway Construction

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0164	646.1020 Marking Line Epoxy 4-Inch	57,125.000 LF		
0166	646.3020 Marking Line Epoxy 8-Inch	554.000 LF		
0168	646.5020 Marking Arrow Epoxy	19.000 EACH		
0170	646.6120 Marking Stop Line Epoxy 18-Inch	130.000 LF		
0172	646.7420 Marking Crosswalk Epoxy Transverse Line 6-Inch	1,306.000 LF		·
0174	646.8020 Marking Corrugated Median Epoxy	120.000 SF		
0176	646.8220 Marking Island Nose Epoxy	7.000 EACH		
0178	646.9000 Marking Removal Line 4-Inch	2,880.000 LF		
0180	646.9100 Marking Removal Line 8-Inch	200.000 LF	·	
0182	646.9300 Marking Removal Special Marking	5.000 EACH	·	
0184	649.0150 Temporary Marking Line Removable Tape 4-Inch	33,524.000 LF		·
0186	650.5500 Construction Staking Curb Gutter and Curb & Gutter	2,028.000 LF		
0188	650.8000 Construction Staking Resurfacing Reference	11,400.000 LF		·
0190	650.9000 Construction Staking Curb Ramps	50.000 EACH	·	
0192	650.9910 Construction Staking Supplemental Control (project) 01. 1198-03-78	LS	LUMP SUM	