


STANDARD ARRANGEMENTS TO RAISE CENTER OF GRAVITY TO AVOID DRAPING OF 0.6" DIA. STRANDS

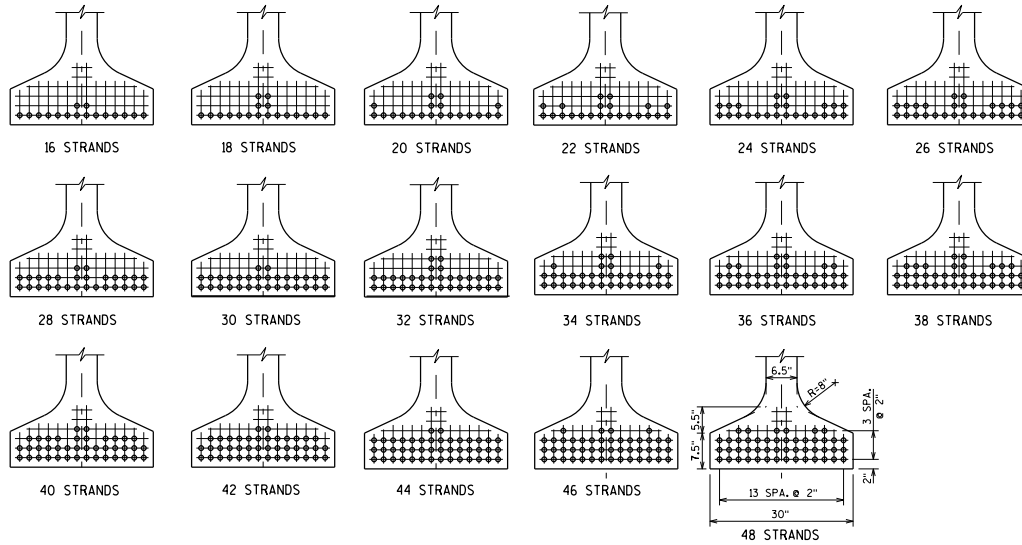

ARRANGEMENT AT $\frac{1}{4}$ SPAN - FOR GIRDERS WITH DRAPED 0.6" DIA. STRANDS

72W GIRDER

A = 915 SQ. IN.
 $r^2 = 717.5 \text{ IN.}^2$
 $y_T = 37.13 \text{ IN.}$
 $y_B = -34.87 \text{ IN.}$
 $I = 656,426 \text{ IN.}^4$
 $S_T = 17,680 \text{ IN.}^3$
 $S_B = -18,825 \text{ IN.}^3$
 WT. = 953 #/FT.

PRE-TENSION

$f'_s = 270,000 \text{ P.S.I.}$
 $f_s = 0.75 \times 270,000 = 202,500 \text{ P.S.I.}$
 for low relaxation strands

Pi PER 0.6" DIA. STRAND = $0.217 \times 202,500 = 43.94 \text{ KIPS}$

$$\frac{y_B}{r^2} = \frac{-34.87}{717.50} = -0.0486 \text{ in/in}^2$$

$$f_B (\text{init.}) = \frac{A_s f_s (1 + e_s y_B)}{A r^2}$$

(COMPRESSION IS POSITIVE)			
NO. STRANDS	e_s (inches)	$P(\text{init.}) = A_s f_s$ (KIPS)	$f_B (\text{init.})$ (K/sq.in.)
STANDARD STRAND PATTERNS FOR UNDRAPED STRANDS			
16	-30.37	703	1.902
18	-29.98	791	2.124
20	-29.27	879	2.328
STANDARD STRAND PATTERNS FOR DRAPED STRANDS			
16	-32.62	703	1.986
18	-32.20	791	2.217
20	-32.07	879	2.458
22	-31.96	967	2.698
24	-31.87	1055	2.939
26	-31.79	1143	3.179
28	-31.73	1230	3.417
30	-31.67	1318	3.657
32	-31.37	1406	3.880
34	-31.22	1494	4.110
36	-31.09	1582	4.341
38	-30.98	1670	4.574
40	-30.87	1758	4.803
42	-30.77	1846	5.034
44	-30.69	1933	5.265
46	-30.52	2021	5.484
48	-30.37	2109	5.707

DESIGNER NOTES

ON THE STRAND PATTERN SHEET, PLACE A BOX AROUND EACH STRAND PATTERN THAT APPLIES TO THE DESIGNED STRUCTURE AND LABEL THE SPAN IT IS USED IN.

72W" PRESTRESSED GIRDER DESIGN DATA

WISCONSIN
DEPARTMENT OF
TRANSPORTATION

BUREAU OF
STRUCTURES

DATE: _____

APPROVED: Bill Oliva