



Wisconsin Department of Transportation

April 2, 2021

Division of Transportation Systems Development

Bureau of Project Development
4822 Madison Yards Way, 4th Floor South
Madison, WI 53705

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

Proposal #08: 2978-02-70, WISC 2021 261
Silver Spring Drive
N Long Island Dr to N Lydell Ave
Local Street
Milwaukee County

Letting of April 13, 2021

This is Addendum No. 02, which provides for the following:

Special Provisions:

Revised Special Provisions	
Article No.	Description
34.	Concrete Bases Type B, Item SPV.0060.03

Added Special Provisions	
Article No.	Description
50.	Field Facilities Office Space, Item SPV.0060.11

Schedule of Items:

Added Bid Item Quantities					
Bid Item	Item Description	Unit	Old Quantity	Revised Quantity	Proposal Total
SPV.0060.11	Field Facilities Office Space	EACH	0	1	1

Deleted Bid Item Quantities					
Bid Item	Item Description	Unit	Old Quantity	Revised Quantity	Proposal Total
642.5201	Field Office Type C	EACH	1	-1	0

Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
5	Construction Details – corrected detail notes
13	Traffic Control Notes – corrected Stage 1A note
145	Miscellaneous Quantities – removed and replaced Field Office quantity for corrected type
172	Plan – revised plan note.
173	Plan – revised plan note.
174	Plan – revised plan note.

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman

Proposal Development Specialist
Proposal Management Section

ADDENDUM NO. 02

2978-02-70

April 2, 2021

Special Provisions

34. Concrete Bases Type B, Item SPV.0060.03.

Replace sections A Description, B Materials, & C Construction with the following:

A Description

This specification describes furnishing and installing Concrete Bases Type B, in accordance with the applicable provisions of section 654 of the standard specifications and the construction detail provided in the plans.

B Materials

Furnish materials in accordance with the applicable provisions of section 654.2 of the standard specifications and the construction detail provided in the plans.

C Construction

Construct Concrete Bases Type B in accordance with the construction details as shown on the plans and in a manner similar to WisDOT Type 2 concrete bases.

50. Field Facilities Office Space, Item SPV.0060.11.

A Description

This special provision describes furnishing, equipping, and maintaining a field office as required in the contract at engineer-approved locations conforming to standard spec 642 and as hereinafter provided.

B Materials

Provide Field Facilities Office Space conforming to standard spec 642.2.1 except revise by deleting paragraphs (1), (7), and (9).

Replace standard spec 642.2.1(4) with the following:

Provide and maintain suitable interior sanitary facilities conforming to State and local health requirements, in clean and good working condition, and stock with sanitary supplies for the duration of the contract. Furnish office space in an existing office building or existing building converted to office space with a minimum of 600 square feet. The facility shall have no fee parking with a minimum parking for 10 cars. The space shall include a meeting room with a minimum of 150 square feet. The exterior door(s) shall have locks in good working order and keys provided for all field staff. The office space shall be located within 2 miles of the construction project.

Equip the office as specified in standard spec 642.2.2.1 except delete paragraph (1) and (4) and add the following:

1. Three suitable office desks with drawers and locks.
2. Three ergonomically correct office chairs in working condition with at a minimum:
5- legged base with casters, seat adjustable from 15 to 22 inches from the floor with a seamless waterfall, rounded, front edge, and high backrest with no arms or adjustable arms.
3. Four 6-foot folding tables.
4. One 10-foot folding table.

5. Three 2-drawer file cabinets.
6. Three 4-shelf bookcases.
7. Ten folding chairs.

Provide for the professional cleaning of the field office during regular business hours twice monthly. Provide clearly marked recycling and waste receptacles within the field office, and separate recycling and waste dumpsters near the field office. Cover outdoor containers to keep out rain, snow, and wind-driven debris. Provide regularly scheduled recycling and waste pick-up.

C Construction

Conform to standard spec 642.3 except delete paragraph (2).

D Measurement

The department will measure the Field Facilities Office Space as each office, acceptably completed.

E Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBER	DESCRIPTION	UNIT
SPV.0060.11	Field Facilities Office Space	EACH

Payment is full compensation for providing, equipping, securing, and maintaining the facility; for parking, for telecommunications equipment, installation, and service fees; and for providing bottled water, utilities, fuel, ventilation, and toilet facilities as required, either independently or jointly with the field laboratory, for the time specified in standard spec 642.3.

The department will pay for the cost of telecommunications usage fees incurred by department staff.


Schedule of Items

Attached, dated March 31, 2021, are the revised Schedule of Items Pages 3-10.


Plan Sheets

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:
Revised: 5, 13, 145, 172, 173, 174

END OF ADDENDUM

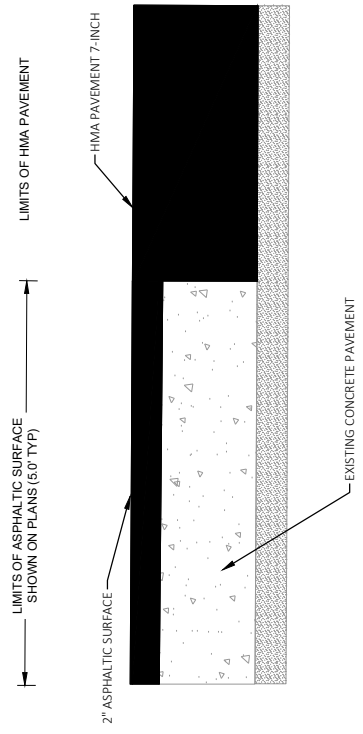


BUTT JOINT DETAIL - ASPHALTIC SURFACE TO HMA PAVEMENT

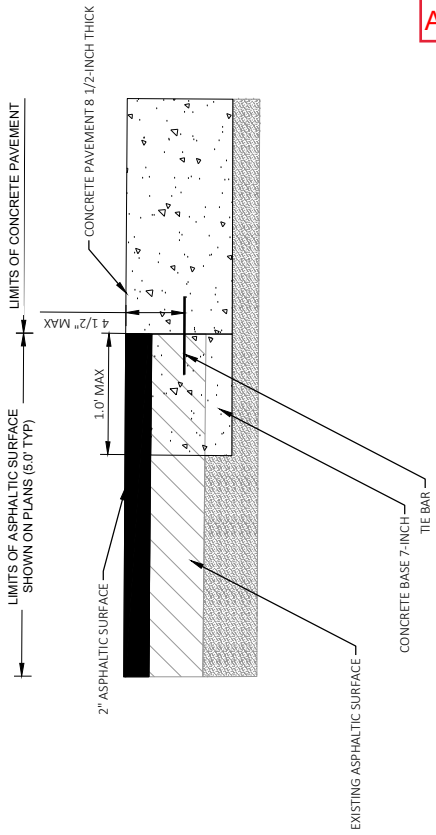

MATCH DETAIL - ASPHALTIC SURFACE TO CONCRETE PAVEMENT


Addendum No. 02
ID 2978-02-70
Revised Sheet 5
April 2, 2021

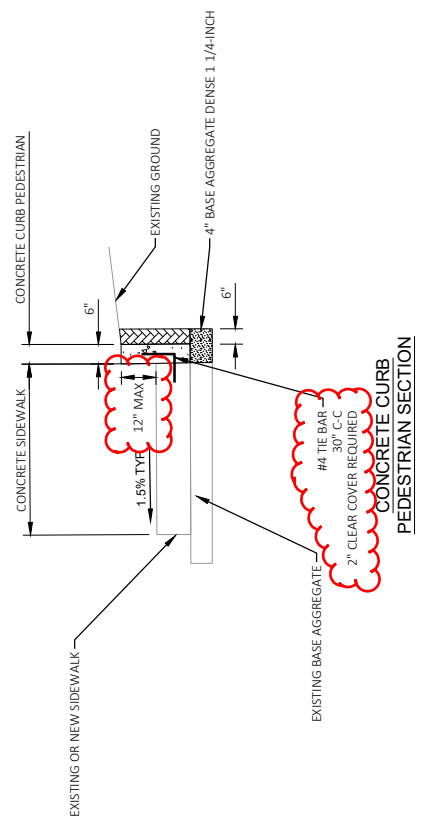

CONCRETE CURB PEDESTRIAN SECTION

NOTES:
 1. PAYMENT FOR ALL EXCAVATION, EMBANKMENT, EARTH BACKFILL, TOPSOIL, FERTILIZER, AND SOD SHALL BE PAID FOR USING THE BID ITEMS GRADING SHAPING & FINISHING CURB RAMP ONE RAMP OR GRADING SHAPING & FINISHING CURB RAMP TWO RAMPS.
 2. PAYMENT FOR CONCRETE SIDEWALK AND BASE AGGREGATE SHALL BE PAID FOR USING STANDARD BID ITEMS.

TYPICAL SIDEWALK SECTION

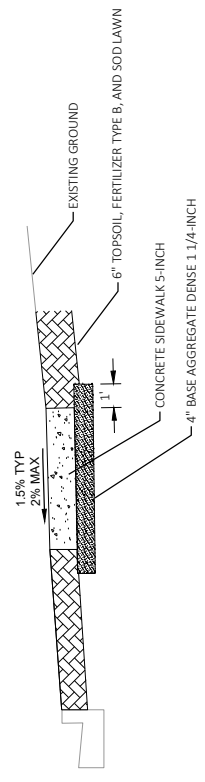

TRAFFIC CONTROL NOTES

ALL SIGN LOCATIONS ARE APPROXIMATE. THE ACTUAL LOCATION WILL BE DETERMINED IN THE FIELD BY THE ENGINEER. DRAWINGS SHOW TRAFFIC CONTROL FOR A TYPICAL SITUATION. ADDITIONAL TRAFFIC CONTROL DEVICES MAY BE REQUIRED AND/OR LAYOUT DETAILS MODIFIED DEPENDING ON CONTRACTORS METHODS OR SEQUENCES OF OPERATION.

ROAD MACHINERY, TRUCK ENTRANCE, FLAGMEN AHEAD, ETC., SIGNS SHALL BE USED AS NEEDED & SHALL BE REMOVED OR COVERED WHEN THE ACTIVITY OR CONDITION DOES NOT EXIST. NO WARNING LIGHT SHALL BE USED WITH A COVERED SIGN.

"WO" SERIES SIGNS ARE "W" SERIES EXCEPT THE BACKGROUND IS ORANGE.

ACCESS TO BUSINESSES & PROPERTIES SHALL BE MAINTAINED AT ALL TIMES.

TYPE III BARRICADES OR TEMPORARY SIGN SUPPORTS MAY BE SUBSTITUTED FOR POST MOUNTED SIGNS IN SITUATIONS WHERE SIGN LOCATIONS ARE CONTINUALLY MOVING.

DETAIL OF TRAFFIC CONTROL NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS, APPLICABLE SPECIAL PROVISIONS & THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES.

ALL PAVEMENT MARKING REMOVALS SHALL BE BY WATER BLASTING ONLY (NO GRINDING ALLOWED)

STAGE 1A NOTES

N. LONG ISLAND DRIVE:

- 1. LEFT LANE CLOSURES FOR MEDIAN WORK
- 2. CONSTRUCT MEDIAN RFB, RFB CONDUIT & TYPE 5 CURB RAMP
- 3. PEDESTRIANS & BICYCLISTS DETOURED TO N. CRESTWOOD BLVD.
- 4. BUS STOP LOCATED AT SE CORNER TO REMAIN OPEN

PICK 'N SAVE & HEISER FORD DRIVEWAYS:

- 1. LEFT LANE CLOSURES FOR MEDIAN WORK
- 2. CONSTRUCT PORTION ASPHALT PAVEMENT (BINDER ONLY) & MEDIAN SIGNAL EQUIPMENT
- 3. PEDESTRIANS & BICYCLISTS CROSS SILVER SPRING DRIVE UTILIZING EAST CROSSWALK
- 4. BUS STOPS LOCATED AT SW & NE CORNERS TO REMAIN OPEN
- 5. RAMP UP BINDER MATERIAL @10H:1V TO MATCH APPROACHES

N. BRIDGEWOOD LANE:

- 1. LEFT LANE CLOSURES FOR MEDIAN WORK
- 2. CONSTRUCT PORTION OF ASPHALT PAVEMENT (BINDER ONLY) & MEDIAN SIGNAL EQUIPMENT
- 3. PEDESTRIANS & BICYCLISTS CROSS SILVER SPRING DRIVE UTILIZING EAST CROSSWALK
- 4. BUS STOPS LOCATED AT SW & NE CORNERS TO REMAIN OPEN
- 5. RAMP UP BINDER MATERIAL @10H:1V TO MATCH APPROACHES

N. BAYSHORE DRIVE/N. MOHAWK AVENUE INTERSECTION:

- 1. LEFT LANE CLOSURES FOR MEDIAN WORK
- 2. CONSTRUCT PORTION OF CONCRETE PAVEMENT & MEDIAN SIGNAL EQUIPMENT
- 3. PEDESTRIANS & BICYCLISTS CROSS SILVER SPRING DRIVE UTILIZING EAST CROSSWALK
- 4. BUS STOPS LOCATED AT NE & SE CORNERS TO REMAIN OPEN

STAGE 1B NOTES

PICK 'N SAVE & HEISER FORD DRIVEWAYS:

- 1. LEFT LANE CLOSURES FOR MEDIAN WORK
- 2. CONSTRUCT EAST CROSSWALK (BINDER ONLY)
- 3. PEDESTRIANS & BICYCLISTS CROSSING SILVER SPRING DRIVE DETOURED TO WEST CROSSWALK
- 4. BUS STOPS LOCATED AT SW & NE CORNERS TO REMAIN OPEN
- 5. RAMP UP BINDER MATERIAL @10H:1V TO MATCH APPROACHES

N. BRIDGEWOOD LANE:

- 1. LEFT LANE CLOSURES FOR MEDIAN WORK
- 2. CONSTRUCT EAST CROSSWALK (BINDER ONLY)
- 3. PEDESTRIANS & BICYCLISTS CROSSING SILVER SPRING DRIVE DETOURED TO WEST CROSSWALK
- 4. BUS STOPS LOCATED AT SW & NE CORNERS TO REMAIN OPEN
- 5. RAMP UP BINDER MATERIAL @10H:1V TO MATCH APPROACHES

N. BAYSHORE DRIVE/N. MOHAWK AVENUE INTERSECTION:

- 1. LEFT LANE CLOSURES FOR MEDIAN WORK
- 2. CONSTRUCT EAST CROSSWALK
- 3. PEDESTRIANS & BICYCLISTS CROSSING SILVER SPRING DRIVE DETOURED TO WEST CROSSWALK
- 4. BUS STOPS LOCATED AT NE & SE CORNERS TO REMAIN OPEN

N. LYDELL AVENUE INTERSECTION:

- 1. LEFT LANE CLOSURES FOR MEDIAN WORK
- 2. CONSTRUCT PORTION WEST CROSSWALK & MEDIAN SIGNAL EQUIPMENT
- 3. PEDESTRIANS & BICYCLISTS CROSS SILVER SPRING DRIVE UTILIZING EAST SIDE N. LYDELL AVENUE

Addendum No. 02
ID 2978-02-70
Revised Sheet 13
April 2, 2021

PROJECT NO: 2978-02-70

HWY: SILVER SPRING DRIVE

COUNTY: MILWAUKEE

TRAFFIC CONTROL NOTES

SHEET: 13

E

FINISHING ROADWAY

213.0100
FINISHING
ROADWAY
(2978-02-70)
EACH
1
1

LOCATION
CATEGORY CODE 0010
PROJECT
TOTAL

ALL ITEMS CATEGORY 0010

HAUL ROADS

618.0100
MAINTENANCE
AND REPAIR OF
HAUL ROADS
(2978-02-70)
EACH
1
1

LOCATION
PROJECT
TOTAL

ALL ITEMS CATEGORY 0010

STORM SEWER ITEMS

611.8115
ADJUSTING
INLET
COVERS
EACH
10
10

LOCATION
UNDISTRIBUTED
TOTALS

ALL ITEMS CATEGORY 0010

MOBILIZATION

619.1000
MOBILIZATION
EACH
1
1

LOCATION
CATEGORY CODE 0010
PROJECT
TOTAL

ALL ITEMS CATEGORY 0010

FIELD OFFICE

SPV.0060.11
FIELD
FACILITIES
OFFICE SPACE
EACH
1
1

LOCATION
PROJECT
TOTAL

ALL ITEMS CATEGORY 0010

CONSTRUCTION STAKING

SPV.0105.09
SURVEY PROJECT
2978-02-70
LS
1
1

LOCATION
PROJECT
TOTALS

ALL ITEMS CATEGORY 0010

EROSION CONTROL MOBILIZATION

628.1905
MOBILIZATIONS
EROSION
CONTROL
EACH
1
1

628.1910
MOBILIZATIONS
EMERGENCY
EROSION
CONTROL
EACH
3
3

LOCATION
PROJECT
TOTALS

ALL ITEMS CATEGORY 0010

EROSION CONTROL ITEMS

628.7010
INLET
PROTECTION
TYPE B
EACH
2
2

628.7015
INLET
PROTECTION
TYPE C
EACH
2
2

LOCATION
PROJECT
TOTALS

ALL ITEMS CATEGORY 0010

EROSION CONTROL ITEMS

628.7010
INLET
PROTECTION
TYPE B
EACH
2
2

628.7015
INLET
PROTECTION
TYPE C
EACH
2
2


LOCATION
PROJECT
TOTALS

ALL ITEMS CATEGORY 0010

Addendum No. 02
ID 2978-02-70
Revised Sheet 145
April 2, 2021

Addendum No. 02
ID 2978-02-70
Revised Sheet 5
April 2, 2021


Addendum No. 02
 ID 2978-02-70
 Revised Sheet 172
 April 2, 2021

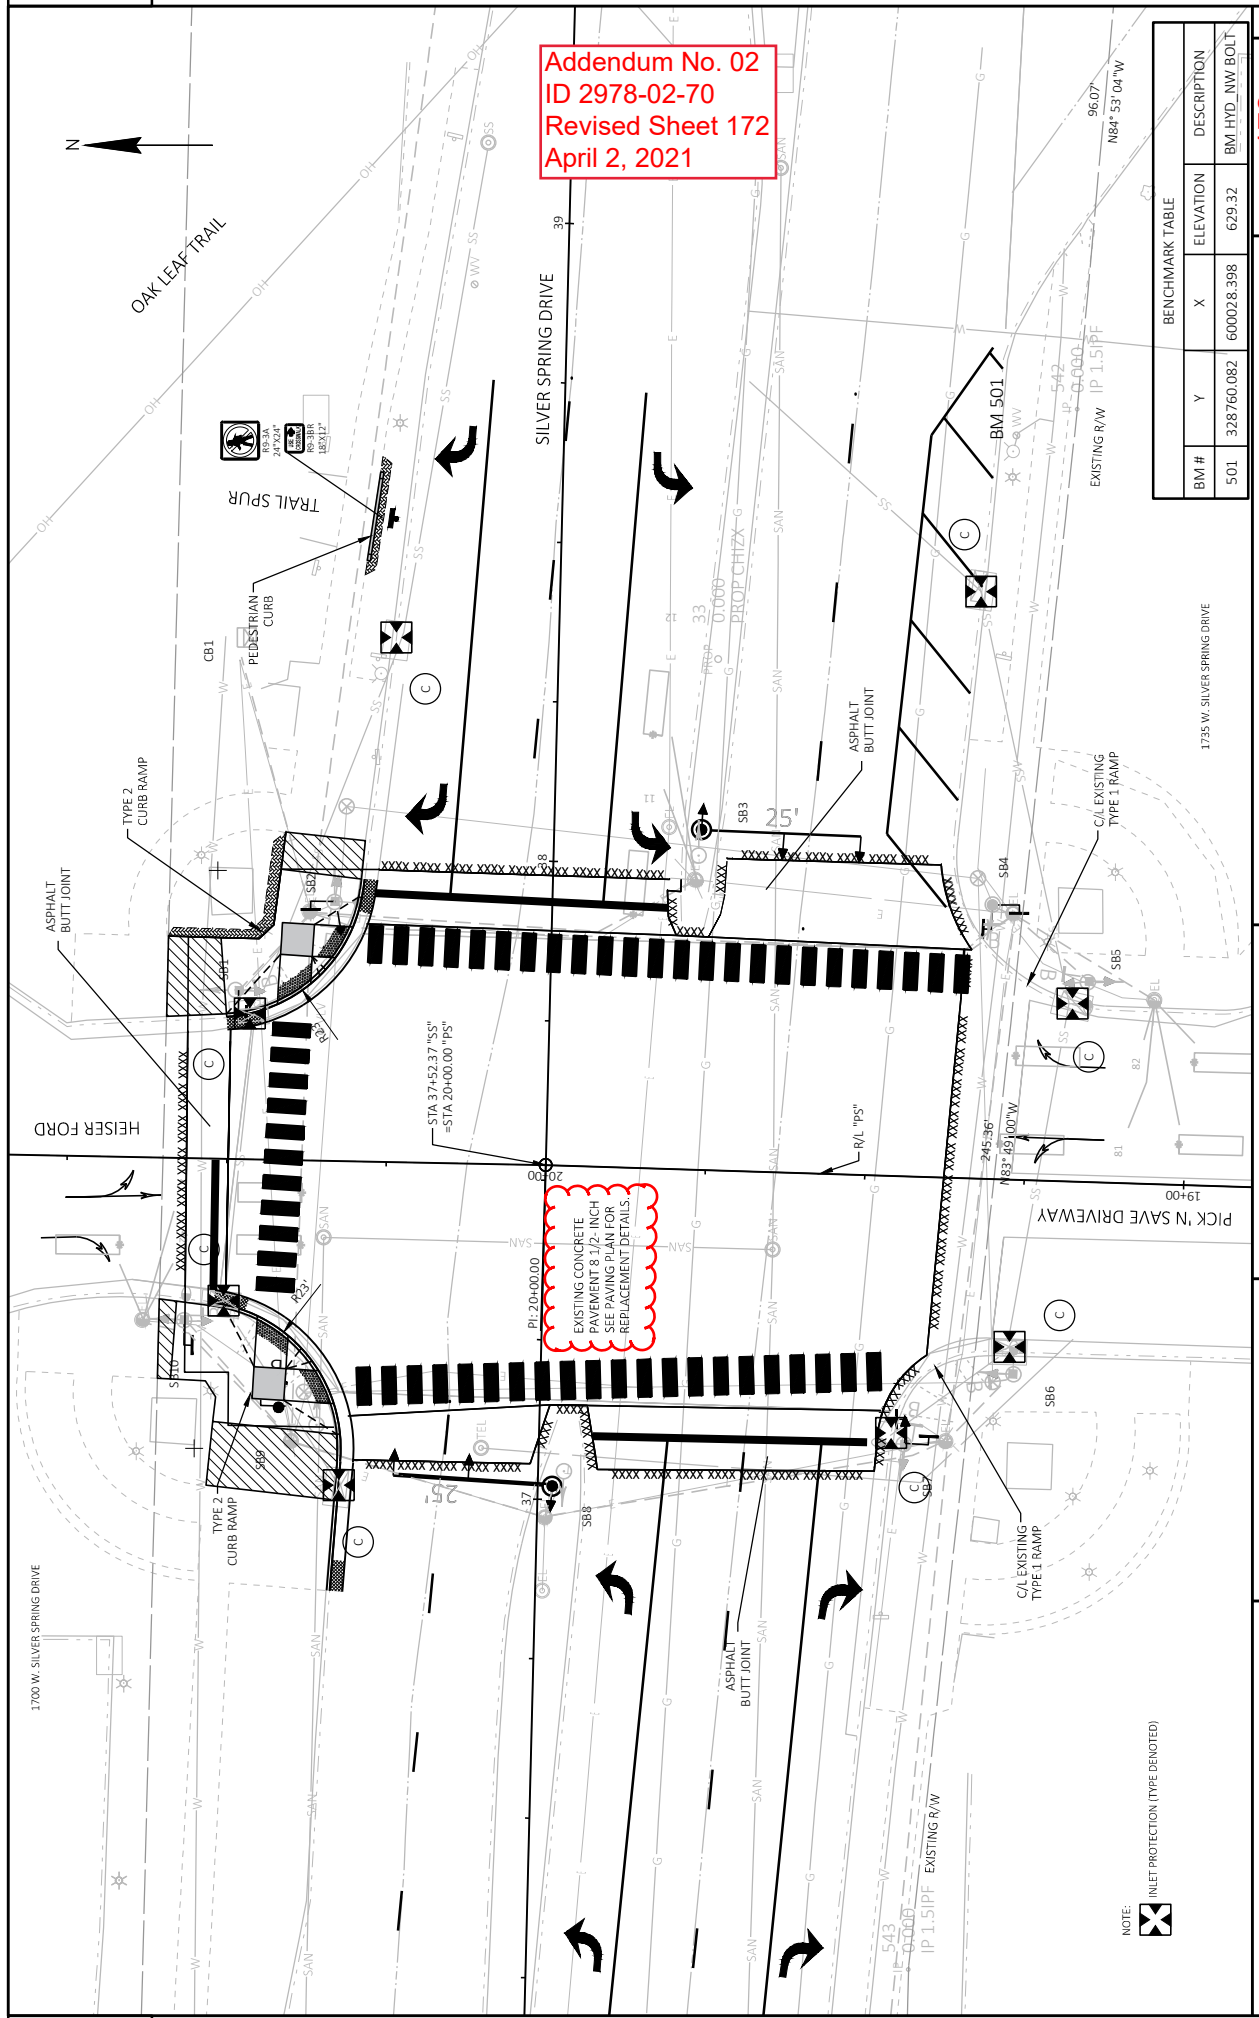


BENCHMARK TABLE

BM #	Y	X	ELEVATION	DESCRIPTION
501	328760.082	600028.398	629.32	BM HYD. NW BOLT

BENCHMARK TABLE				
BM #	Y	X	ELEVATION	DESCRIPTION
502	328857.947	600922.508	630.78	BM HYD_NW BOLT




Addendum No. 02
 ID 2978-02-70
 Revised Sheet 173
 April 2, 2021

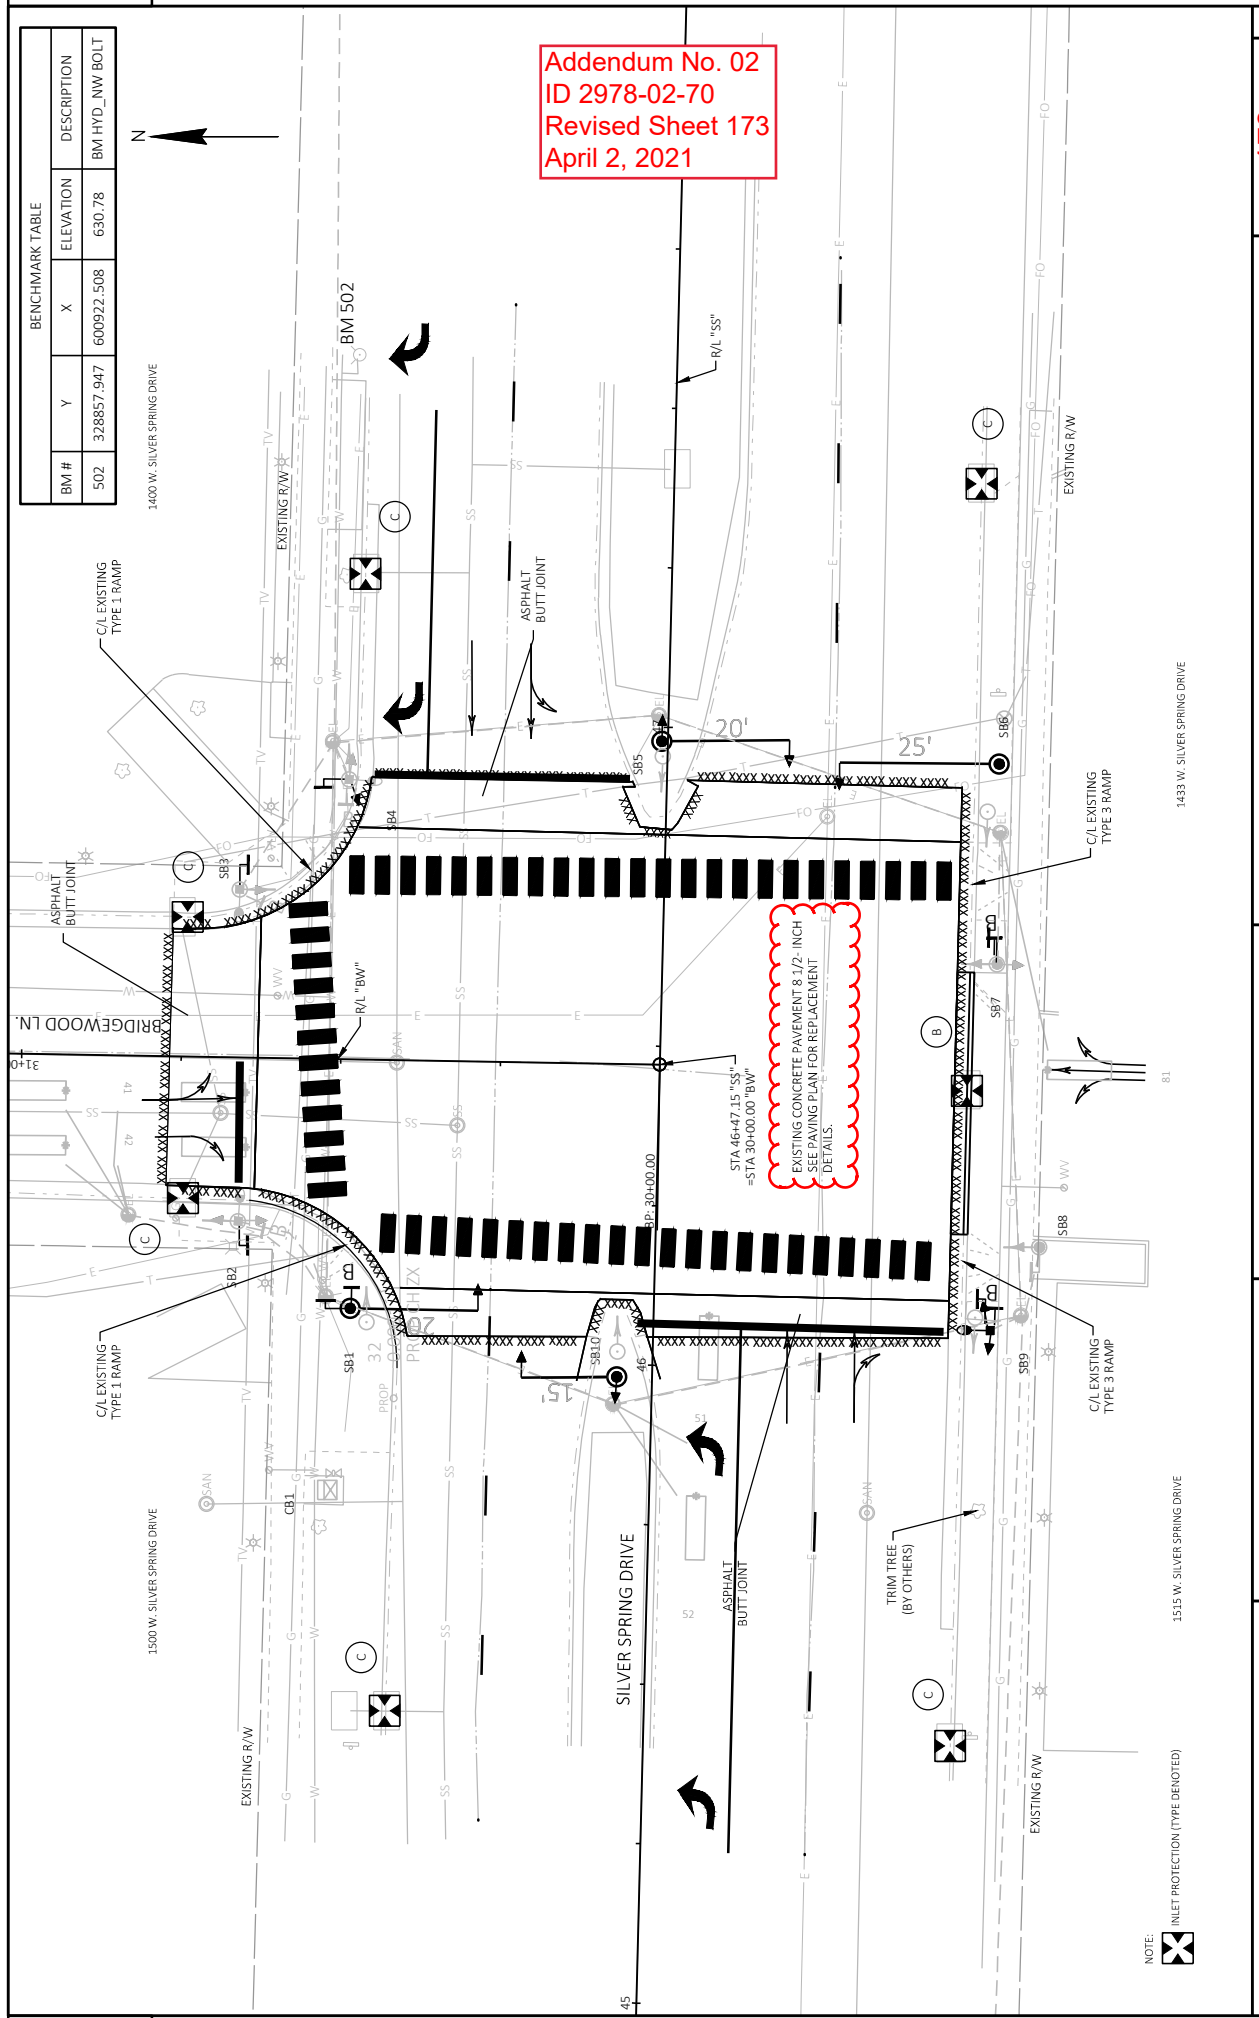

NOTE: INLET PROTECTION (TYPE DENOTED)

BENCHMARK TABLE				
BM #	Y	X	ELEVATION	DESCRIPTION
503	328772.355	604851.283	644.25	BM HYD_NW_BOLT

Addendum No. 02
 ID 2978-02-70
 Revised Sheet 174
 April 2, 2021

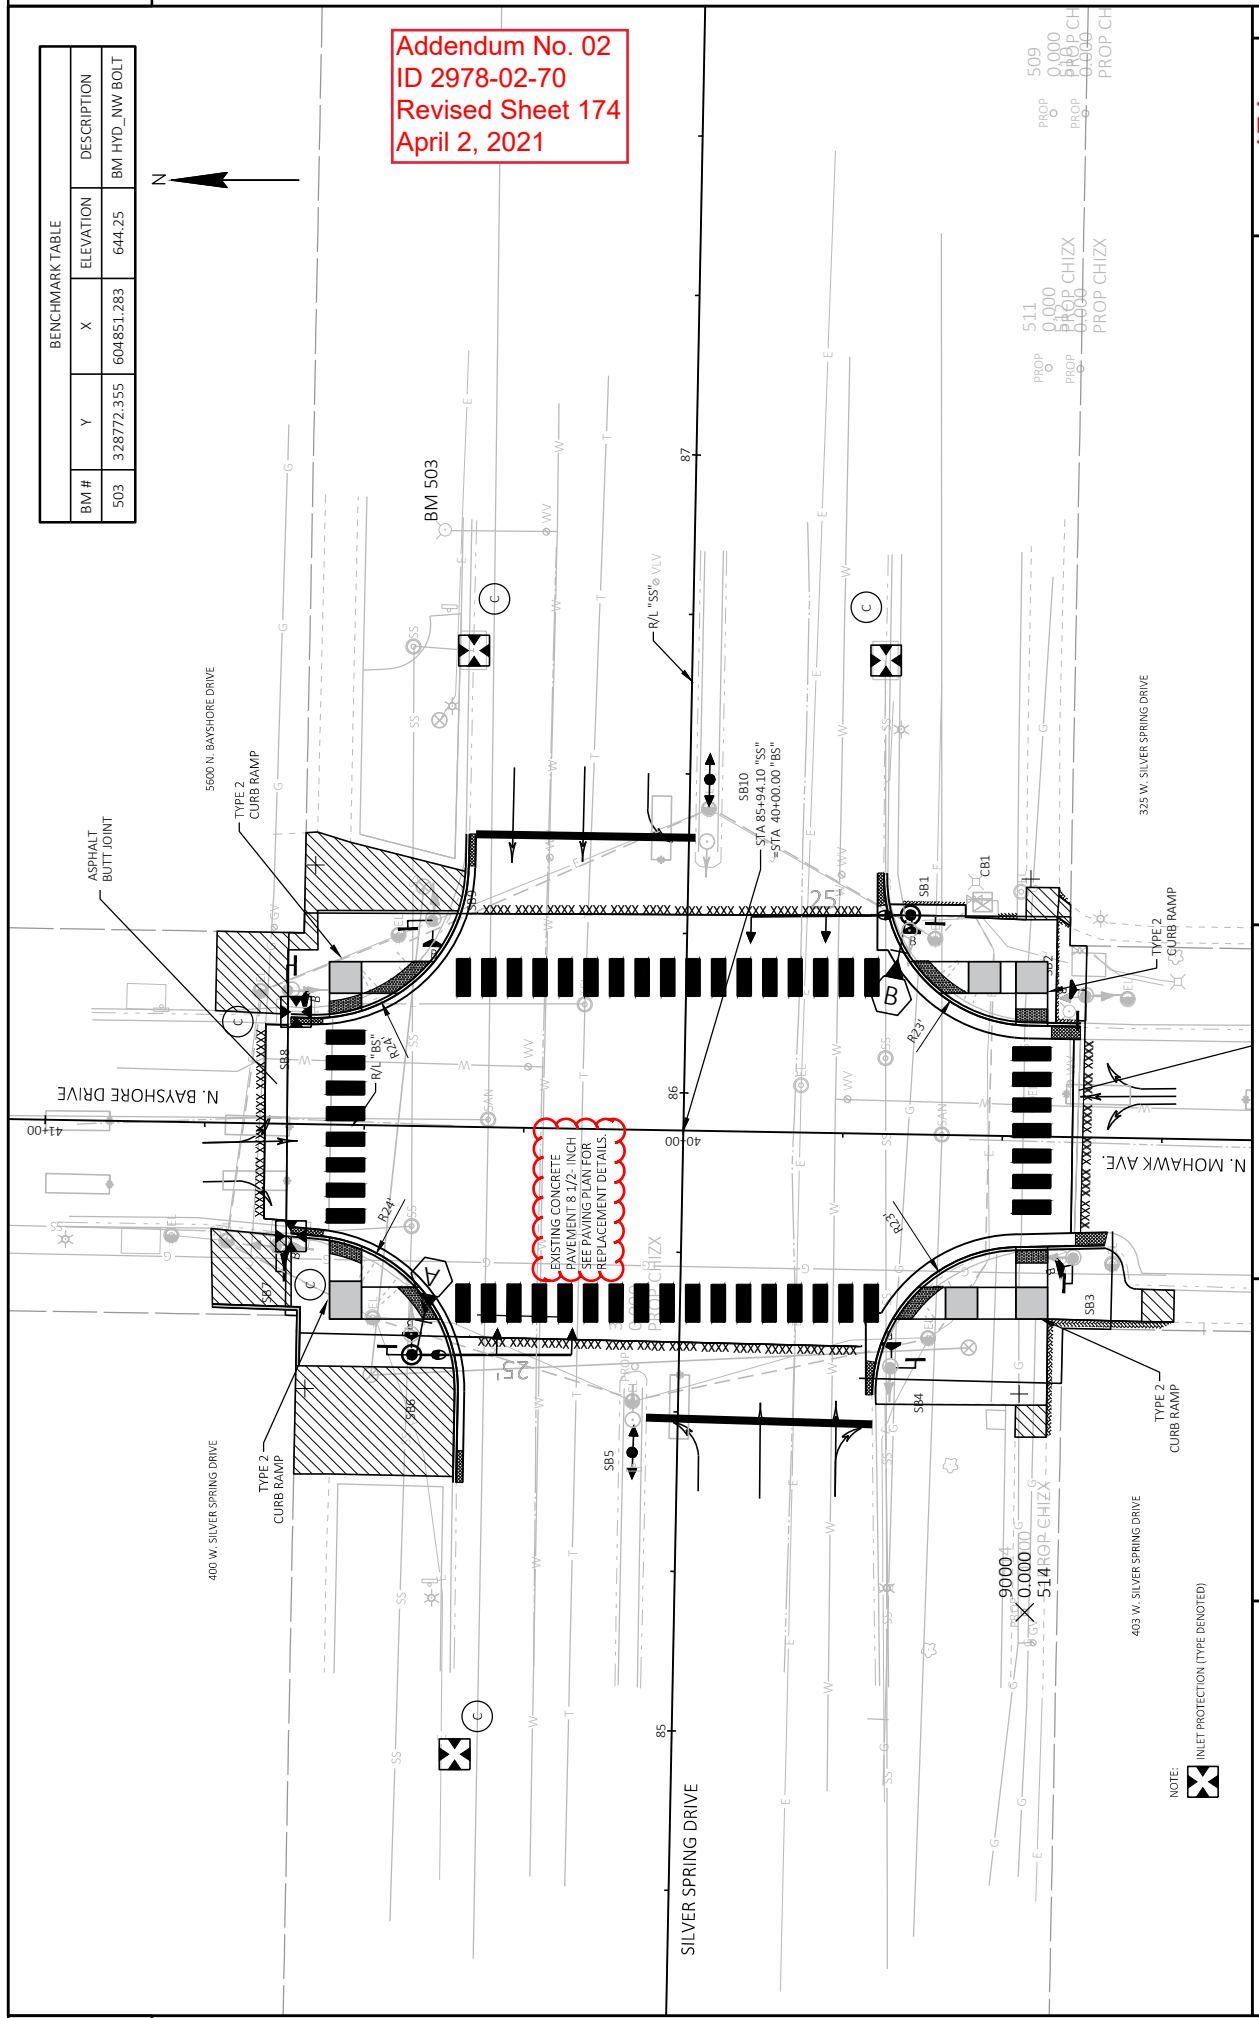



Proposal Schedule of Items

Proposal ID: 20210413008 Project(s): 2978-02-70

Federal ID(s): WISC 2021261

SECTION: 0001 Roadway Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0002	204.0100 Removing Concrete Pavement	2,550.000 SY	_____.	_____.
0004	204.0110 Removing Asphaltic Surface	198.000 SY	_____.	_____.
0006	204.0115 Removing Asphaltic Surface Butt Joints	450.000 SY	_____.	_____.
0008	204.0150 Removing Curb & Gutter	695.000 LF	_____.	_____.
0010	204.0155 Removing Concrete Sidewalk	850.000 SY	_____.	_____.
0012	204.0195 Removing Concrete Bases	21.000 EACH	_____.	_____.
0014	204.9105.S Removing (item description) 01. Traffic Signals Silver Spring Drive & Pick N Save Driveway	LS	LUMP SUM	_____.
0016	204.9105.S Removing (item description) 02. Traffic Signals Silver Spring Drive & Bridgewood Lane	LS	LUMP SUM	_____.
0018	204.9105.S Removing (item description) 03. Traffic Signals Silver Spring Drive & Mohawk Avenue	LS	LUMP SUM	_____.
0020	204.9105.S Removing (item description) 04. Traffic Signals Silver Spring Drive & Lydell Avenue	LS	LUMP SUM	_____.
0022	205.0100 Excavation Common	400.000 CY	_____.	_____.
0024	205.0501.S Excavation, Hauling, and Disposal of Petroleum Contaminated Soil 01. Intersection of W Silver Spring Dr. and Lydell Avenue	5.900 TON	_____.	_____.
0026	211.0100 Prepare Foundation for Asphaltic Paving (project) 01. 2978-02-70	LS	LUMP SUM	_____.



Proposal Schedule of Items

Proposal ID: 20210413008 Project(s): 2978-02-70

Federal ID(s): WISC 2021261

SECTION: 0001 Roadway Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0028	211.0200 Prepare Foundation for Concrete Pavement (project) 01. 2978-02-70	LS	LUMP SUM	_____.
0030	213.0100 Finishing Roadway (project) 01. 2978-02-70	1.000 EACH	_____.	_____.
0032	305.0120 Base Aggregate Dense 1 1/4-Inch	743.000 TON	_____.	_____.
0034	320.0135 Concrete Base 7-Inch	31.000 SY	_____.	_____.
0036	415.0085 Concrete Pavement 8 1/2-Inch	814.000 SY	_____.	_____.
0038	416.0610 Drilled Tie Bars	87.000 EACH	_____.	_____.
0040	416.0620 Drilled Dowel Bars	331.000 EACH	_____.	_____.
0042	455.0605 Tack Coat	266.000 GAL	_____.	_____.
0044	460.7223 HMA Pavement 3 HT 58-28 S	540.000 TON	_____.	_____.
0046	460.7224 HMA Pavement 4 HT 58-28 S	225.000 TON	_____.	_____.
0048	465.0105 Asphaltic Surface	82.000 TON	_____.	_____.
0050	601.0411 Concrete Curb & Gutter 30-Inch Type D	827.000 LF	_____.	_____.
0052	601.0600 Concrete Curb Pedestrian	86.000 LF	_____.	_____.
0054	602.0410 Concrete Sidewalk 5-Inch	7,534.000 SF	_____.	_____.
0056	602.0505 Curb Ramp Detectable Warning Field Yellow	100.000 SF	_____.	_____.
0058	602.0605 Curb Ramp Detectable Warning Field Radial Yellow	126.000 SF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20210413008 Project(s): 2978-02-70

Federal ID(s): WISC 2021261

SECTION: 0001 Roadway Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0060	611.8110 Adjusting Manhole Covers	15.000 EACH	_____.	_____.
0062	611.8115 Adjusting Inlet Covers	10.000 EACH	_____.	_____.
0064	618.0100 Maintenance And Repair of Haul Roads (project) 01. 2978-02-70	1.000 EACH	_____.	_____.
0066	619.1000 Mobilization	1.000 EACH	_____.	_____.
0068	628.1905 Mobilizations Erosion Control	1.000 EACH	_____.	_____.
0070	628.1910 Mobilizations Emergency Erosion Control	3.000 EACH	_____.	_____.
0072	628.7010 Inlet Protection Type B	5.000 EACH	_____.	_____.
0074	628.7015 Inlet Protection Type C	38.000 EACH	_____.	_____.
0076	634.0816 Posts Tubular Steel 2x2-Inch X 16-FT	4.000 EACH	_____.	_____.
0078	637.2210 Signs Type II Reflective H	91.220 SF	_____.	_____.
0080	638.2102 Moving Signs Type II	13.000 EACH	_____.	_____.
0082	638.2602 Removing Signs Type II	2.000 EACH	_____.	_____.
0084	638.3000 Removing Small Sign Supports	4.000 EACH	_____.	_____.
0088	643.0300 Traffic Control Drums	23,752.000 DAY	_____.	_____.
0090	643.0410 Traffic Control Barricades Type II	1,687.000 DAY	_____.	_____.
0092	643.0420 Traffic Control Barricades Type III	4,646.000 DAY	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20210413008 Project(s): 2978-02-70

Federal ID(s): WISC 2021261

SECTION: 0001 Roadway Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0094	643.0500 Traffic Control Flexible Tubular Marker Posts	64.000 EACH	_____.	_____.
0096	643.0600 Traffic Control Flexible Tubular Marker Bases	64.000 EACH	_____.	_____.
0098	643.0715 Traffic Control Warning Lights Type C	2,090.000 DAY	_____.	_____.
0100	643.0800 Traffic Control Arrow Boards	170.000 DAY	_____.	_____.
0102	643.0900 Traffic Control Signs	10,140.000 DAY	_____.	_____.
0104	643.0910 Traffic Control Covering Signs Type I	1.000 EACH	_____.	_____.
0106	643.0920 Traffic Control Covering Signs Type II	8.000 EACH	_____.	_____.
0108	643.5000 Traffic Control	1.000 EACH	_____.	_____.
0110	646.1020 Marking Line Epoxy 4-Inch	1,211.000 LF	_____.	_____.
0112	646.3020 Marking Line Epoxy 8-Inch	1,052.000 LF	_____.	_____.
0114	646.5020 Marking Arrow Epoxy	12.000 EACH	_____.	_____.
0116	646.6120 Marking Stop Line Epoxy 18-Inch	286.000 LF	_____.	_____.
0118	646.6220 Marking Yield Line Epoxy 18-Inch	39.000 EACH	_____.	_____.
0120	646.7520 Marking Crosswalk Epoxy Block Style 24-Inch	1,452.000 LF	_____.	_____.
0122	646.8220 Marking Island Nose Epoxy	1.000 EACH	_____.	_____.
0124	646.9010 Marking Removal Line Water Blasting 4-Inch	1,315.000 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20210413008 Project(s): 2978-02-70

Federal ID(s): WISC 2021261

SECTION: 0001 Roadway Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0126	649.0150 Temporary Marking Line Removable Tape 4-Inch	2,940.000 LF	_____.	_____.
0128	649.0250 Temporary Marking Line Removable Tape 8-Inch	450.000 LF	_____.	_____.
0130	652.0225 Conduit Rigid Nonmetallic Schedule 40 2-Inch	221.000 LF	_____.	_____.
0132	652.0235 Conduit Rigid Nonmetallic Schedule 40 3-Inch	33.000 LF	_____.	_____.
0134	652.0605 Conduit Special 2-Inch	157.000 LF	_____.	_____.
0136	652.0700.S Install Conduit into Existing Item	22.000 EACH	_____.	_____.
0138	653.0140 Pull Boxes Steel 24x42-Inch	4.000 EACH	_____.	_____.
0140	654.0101 Concrete Bases Type 1	5.000 EACH	_____.	_____.
0142	654.0102 Concrete Bases Type 2	13.000 EACH	_____.	_____.
0144	654.0205 Concrete Control Cabinet Bases Type 7	1.000 EACH	_____.	_____.
0146	655.0230 Cable Traffic Signal 5-14 AWG	1,491.000 LF	_____.	_____.
0148	655.0240 Cable Traffic Signal 7-14 AWG	617.000 LF	_____.	_____.
0150	655.0260 Cable Traffic Signal 12-14 AWG	2,612.000 LF	_____.	_____.
0152	655.0270 Cable Traffic Signal 15-14 AWG	683.000 LF	_____.	_____.
0154	655.0320 Cable Type UF 2-10 AWG Grounded	805.000 LF	_____.	_____.
0156	655.0515 Electrical Wire Traffic Signals 10 AWG	3,366.000 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20210413008 Project(s): 2978-02-70

Federal ID(s): WISC 2021261

SECTION: 0001 Roadway Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0158	655.0610 Electrical Wire Lighting 12 AWG	819.000 LF	_____.	_____.
0160	656.0200 Electrical Service Meter Breaker Pedestal (location) 01. Silver Spring Dr & Lydell Ave	LS	LUMP SUM	_____.
0162	657.0100 Pedestal Bases	8.000 EACH	_____.	_____.
0164	657.0255 Transformer Bases Breakaway 11 1/2-Inch Bolt Circle	13.000 EACH	_____.	_____.
0166	657.0305 Poles Type 2	8.000 EACH	_____.	_____.
0168	657.0310 Poles Type 3	5.000 EACH	_____.	_____.
0170	657.0405 Traffic Signal Standards Aluminum 3.5-FT	1.000 EACH	_____.	_____.
0172	657.0420 Traffic Signal Standards Aluminum 13-FT	5.000 EACH	_____.	_____.
0174	657.0425 Traffic Signal Standards Aluminum 15-FT	2.000 EACH	_____.	_____.
0176	657.0585 Trombone Arms 15-FT	2.000 EACH	_____.	_____.
0178	657.0590 Trombone Arms 20-FT	4.000 EACH	_____.	_____.
0180	657.0595 Trombone Arms 25-FT	6.000 EACH	_____.	_____.
0182	657.0609 Luminaire Arms Single Member 4-Inch Clamp 6-FT	5.000 EACH	_____.	_____.
0184	658.0173 Traffic Signal Face 3S 12-Inch	50.000 EACH	_____.	_____.
0186	658.0174 Traffic Signal Face 4S 12-Inch	4.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20210413008 Project(s): 2978-02-70

Federal ID(s): WISC 2021261

SECTION: 0001 Roadway Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0188	658.0175 Traffic Signal Face 5S 12-Inch	8.000 EACH	_____.	_____.
0190	658.0416 Pedestrian Signal Face 16-Inch	30.000 EACH	_____.	_____.
0192	658.0500 Pedestrian Push Buttons	14.000 EACH	_____.	_____.
0194	658.5069 Signal Mounting Hardware (location) 01. Silver Spring Drive & Pick N Save Driveway	LS	LUMP SUM	_____.
0196	658.5069 Signal Mounting Hardware (location) 02. Silver Spring Drive & Bridgewood Ln	LS	LUMP SUM	_____.
0198	658.5069 Signal Mounting Hardware (location) 03. Silver Spring Drive & Mohawk Ave	LS	LUMP SUM	_____.
0200	658.5069 Signal Mounting Hardware (location) 04. Silver Spring Drive & Lydell Ave	LS	LUMP SUM	_____.
0202	659.1125 Luminaires Utility LED C	1.000 EACH	_____.	_____.
0204	661.0200 Temporary Traffic Signals for Intersections (location) 01. Silver Spring Drive & Lydell Avenue	LS	LUMP SUM	_____.
0206	690.0150 Sawing Asphalt	1,199.000 LF	_____.	_____.
0208	690.0250 Sawing Concrete	977.000 LF	_____.	_____.
0210	ASP.1T0A On-the-Job Training Apprentice at \$5.00/HR	550.000 HRS	5.00000	2,750.00
0212	ASP.1T0G On-the-Job Training Graduate at \$5.00/HR	600.000 HRS	5.00000	3,000.00
0214	SPV.0060 Special 01. Removing, Salvaging, and Reinstalling Light Poles, Luminaires, and Arms	2.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20210413008 Project(s): 2978-02-70

Federal ID(s): WISC 2021261

SECTION: 0001 Roadway Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0216	SPV.0060 Special 02. Traffic Signal Controller And Cabinet	1.000 EACH	_____.	_____.
0218	SPV.0060 Special 03. Concrete Bases Type B	4.000 EACH	_____.	_____.
0220	SPV.0060 Special 04. Traffic Signal Controller	1.000 EACH	_____.	_____.
0222	SPV.0060 Special 05. Traffic Signal Conflict Monitor	1.000 EACH	_____.	_____.
0224	SPV.0060 Special 06. Expose Existing Utility	2.000 EACH	_____.	_____.
0226	SPV.0060 Special 07. Curb Ramp Grading, Shaping and Finishing	20.000 EACH	_____.	_____.
0228	SPV.0060 Special 08. Decorative Traffic Signal Pole & Concrete Bases Type 5 Modified	2.000 EACH	_____.	_____.
0230	SPV.0060 Special 09. City Of Glendale Twin Luminaire Decorative Street Lighting Assembly	2.000 EACH	_____.	_____.
0232	SPV.0060 Special 10. Adjusting Water Valve Covers	14.000 EACH	_____.	_____.
0234	SPV.0105 Special 01. Video Vehicle Detection System Silver Spring Drive & Lydell Avenue	LS	LUMP SUM	_____.
0236	SPV.0105 Special 02. Emergency Vehicle Preemption System Silver Spring Drive & Mohawk Avenue	LS	LUMP SUM	_____.
0238	SPV.0105 Special 03. Emergency Vehicle Preemption System Silver Spring Drive & Lydell Avenue	LS	LUMP SUM	_____.
0240	SPV.0105 Special 04. Emergency Vehicle Preemption System at Silver Spring Drive & Bridgewood Lane	LS	LUMP SUM	_____.



Proposal Schedule of Items

Proposal ID: 20210413008 Project(s): 2978-02-70

Federal ID(s): WISC 2021261

SECTION: 0001 Roadway Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0242	SPV.0105 Special 05. Emergency Vehicle Preemption System at Silver Spring Dr & Pick N Save Dr	LS	LUMP SUM	_____.
0244	SPV.0105 Special 06. Traffic Signal Cabinet Modifications Silver Spring Drive & Mohawk Avenue	LS	LUMP SUM	_____.
0246	SPV.0105 Special 07. Accessible Pedestrian Push Button System Silver Spring Drive & Mohawk Avenue	LS	LUMP SUM	_____.
0248	SPV.0105 Special 08. Accessible Pedestrian Push Button System Silver Spring Drive & Lydell Avenue	LS	LUMP SUM	_____.
0250	SPV.0105 Special 09. Remove, Salvage, and Reinstall Traffic Signal Interconnect	LS	LUMP SUM	_____.
0252	SPV.0105 Special 10. Rectangular Rapid Flashing Beacon System Silver Spring Drive & Long Island D	LS	LUMP SUM	_____.
0254	SPV.0105 Special 11. Survey Project 2978-02-70	LS	LUMP SUM	_____.
0256	SPV.0195 Special 01. Management of Solid Waste at Pick 'N Save Driveway / Heiser Ford	1.560 TON	_____.	_____.
0258	SPV.0195 Special 02. Management of Solid Waste at Bridgewood Lane	3.430 TON	_____.	_____.
0260	SPV.0060 Special 11. Field Facilities Office Space	1.000 EACH	_____.	_____.
Section: 0001			Total:	_____.
			Total Bid:	_____.

