



Wisconsin Department of Transportation

January 28, 2022

Division of Transportation Systems Development

Bureau of Project Development
4822 Madison Yards Way, 4th Floor South
Madison, WI 53705

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

Proposal #017: 2722-07-71, WISC 2022168
Moorland Road
I 94 to W Bluemound Road
CTH O
Waukesha County

3700-00-70
CTH O Signals & Fiber Rehab
USH 18 to IH 94 WB Ramps
CTH O
Waukesha County

Letting of February 8, 2022

This is Addendum No. 01, which provides for the following:

Schedule of Items:

Revised Bid Item Quantities					
Bid Item	Item Description	Unit	Old Quantity	Revised Quantity	Proposal Total
SPV.0060.03	Expose Existing Utility	Each	4	16	20

Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
220	Miscellaneous Quantities (Plan Sheet Revised)

Added Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
70A	Traffic Control Detail Adjusting Pull Boxes (Plan Sheet Added to traffic signal plans)

Schedule of Items

Attached, dated January 28, 2022, are the revised Schedule of Items Page 16.

Plan Sheets

The following 11 x 17-inch sheets are attached and made part of the plans for this proposal:

Revised: 220

Added: 70A


The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman

Proposal Development Specialist
Proposal Management Section

END OF ADDENDUM

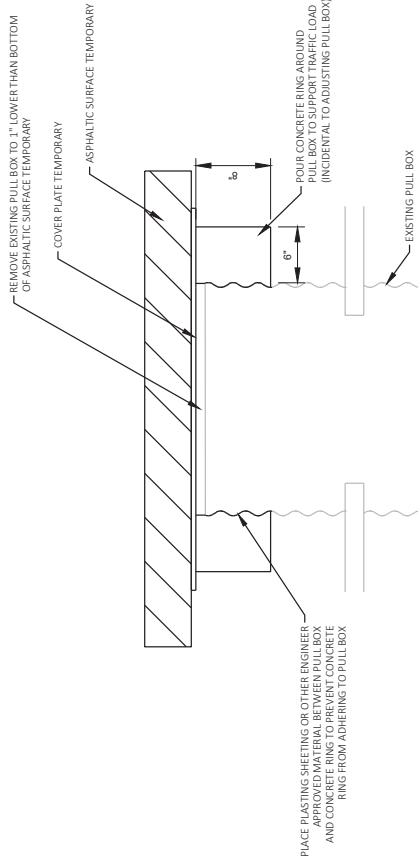


ELEVATION VIEW

ADJUSTING PULL BOXES

TO BE USED FOR PULL BOXES LOCATED UNDER ASPHALTIC SURFACE TEMPORARY PAVEMENT
SEE SIGNAL PLANS FOR LOCATIONS

- NOTES:
1. CUT AND REMOVE EXISTING PULL BOX TO AN ELEVATION THAT IS AT LEAST ONE INCH LOWER THAN THE BOTTOM OF ASPHALTIC SURFACE TEMPORARY PAVEMENT. SALVAGE PULL BOX COVER FOR USE WHEN TEMPORARY PAVEMENT IS NO LONGER NEEDED.
 2. REMOVE EXISTING PULL BOX TO A MINIMUM OF 6" BELOW THE TOP OF THE PULL BOX. ALL MATERIALS AND LABOR REQUIRED TO CONSTRUCT CONCRETE RINGS ARE INCIDENTAL TO ADJUSTING PULL BOXES.
 3. CONCRETE RINGS SHALL USE CONCRETE IN ACCORDANCE WITH SECTION 611 OF THE STANDARD SPECS.
 4. PLACE COVER PLATE TEMPORARY ON TOP OF ADJUSTED PULL BOX.
 5. WHEN TEMPORARY PAVEMENT IS REMOVED ADJUST THE PULL BOX TO FINAL GRADE IN ACCORDANCE WITH 5DD "PULL BOX" CORRUGATED PIPE EXTENDER CONTRACTOR TO BE PAID FOR ADJUSTING PULL BOX ONCE WHEN THE PULL BOX IS LOWERED TO THE BOTTOM OF THE TEMPORARY PAVEMENT AND ONCE WHEN THE PULL BOX IS RAISED TO FINAL GRADE.



Andrew J. Utic
1/21/22

Addendum No. 01
ID 2722-07-71
Added Sheet 70A
January 28, 2022

CONSTRUCTION STAKING ITEMS

ITEM	QUANTITY	UNIT	DESCRIPTION	CATEGORY
650.4000	40	EACH	CONSTRUCTION STAKING STORM SEWER	0010
650.4500	6,992	LF	CONSTRUCTION STAKING SUBGRADE	0010
650.6500	1	LS	CONSTRUCTION STAKING STRUCTURE LAYOUT (R-67-155)	0010
650.6500	1	LS	CONSTRUCTION STAKING STRUCTURE LAYOUT (R-67-156)	0010
650.6500	1	LS	CONSTRUCTION STAKING STRUCTURE LAYOUT (S-67-618)	0010
650.7000	6,992	LF	CONSTRUCTION STAKING CONCRETE PAVEMENT	0010
650.8500	1	LS	CONSTRUCTION STAKING ELECTRICAL INSTALLATIONS (ID 2722-07-71)	0010
650.9000	11	EACH	CONSTRUCTION STAKING CURB RAMPS	0010
650.9910	1	LS	CONSTRUCTION STAKING SUPPLEMENTAL CONTROL (ID 2722-07-71)	0010
650.9920	6,922	LF	CONSTRUCTION STAKING SLOPE STAKES	0010

SAWCUTTING

STREET	STATION	TO	STATION	SAWING ASPHALT	SAWING CONCRETE
				690.0150	690.0250
				LF	LF
CTH 0	36+51	-	52+00	34	1,035
CTH 0	52+00	-	67+00	140	798
CTH 0	67+00	-	78+59	210	1,061
			UNDISTRIBUTED	96	724
			PROJECT TOTAL	481	3,618

Addendum No. 01
 ID 2722-07-71
 Revised Sheet 220
 January 28, 2022

EXPOSE EXISTING UTILITY

*
 SPV.0060.03
 EXPOSE EXISTING
 UTILITY

STREET	LOCATION	EACH
CTH 0	UNDISTRIBUTED	16
	TOTAL	16

*ADDITIONAL QUANTITY SHOWN ELSEWHERE ON PLAN

SECTION CORNER MONUMENTS

STREET	STA	OFFSET	SECTION CORNER MONUMENTS EACH
CTH 0	63+35.67	0.53' RT	1
		PROJECT TOTAL	1

SPV.0060.63

SECTION CORNER MONUMENTS

EACH

1

PROJECT TOTAL

1

MODULAR BLOCK RETAINING WALLS

STREET	STATION	TO	STATION	WALL MODULAR BLOCK	SPV.0165.02
				GRAVITY LANDSCAPE	
				SF	
CTH 0	55+40	-	56+77	LT	820
CTH 0	71+10	-	76+94	LT	314
CTH 0	73+40	-	75+45	LT	741
CTH 0	76+00	-	76+63	LT	227
			PROJECT TOTAL		2,103

ALL ITEMS CATEGORY 0010 UNLESS OTHERWISE NOTED



Proposal Schedule of Items

Proposal ID: 20220208017 Project(s): 2722-07-71, 3700-00-70

Federal ID(s): WISC 2022168, N/A

SECTION: 0001 Roadway Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0460	678.0036 Install Fiber Optic Cable Outdoor Plant 36-CT	1,720.000 LF	_____.	_____.
0462	678.0300 Fiber Optic Splice	80.000 EACH	_____.	_____.
0464	678.0500 Communication System Testing	LS	LUMP SUM	_____.
0466	690.0150 Sawing Asphalt	481.000 LF	_____.	_____.
0468	690.0250 Sawing Concrete	3,618.000 LF	_____.	_____.
0470	715.0720 Incentive Compressive Strength Concrete Pavement	9,788.000 DOL	1.00000	9,788.00
0472	740.0440 Incentive IRI Ride	7,872.000 DOL	1.00000	7,872.00
0474	ASP.1T0A On-the-Job Training Apprentice at \$5.00/HR	2,400.000 HRS	5.00000	12,000.00
0476	ASP.1T0G On-the-Job Training Graduate at \$5.00/HR	4,320.000 HRS	5.00000	21,600.00
0478	SPV.0060 Special 01. Traffic Signal Controller & Cabinet CTH O & Brookfield Square Dr	1.000 EACH	_____.	_____.
0480	SPV.0060 Special 02. Traffic Signal Controller & Cabinet CTH O & Brookfield Sq Mall North Dwy	1.000 EACH	_____.	_____.
0482	SPV.0060 Special 03. Expose Existing Utility	20.000 EACH	_____.	_____.
0484	SPV.0060 Special 05. Removing, Salvaging, & Reinstalling Light Poles, Luminaires, and Arms	17.000 EACH	_____.	_____.
0486	SPV.0060 Special 10. Removing, Salvaging, & Reinstalling Electrical Service Meter Breaker Pedestal	1.000 EACH	_____.	_____.

