


CURVED GIRDER LAYOUT

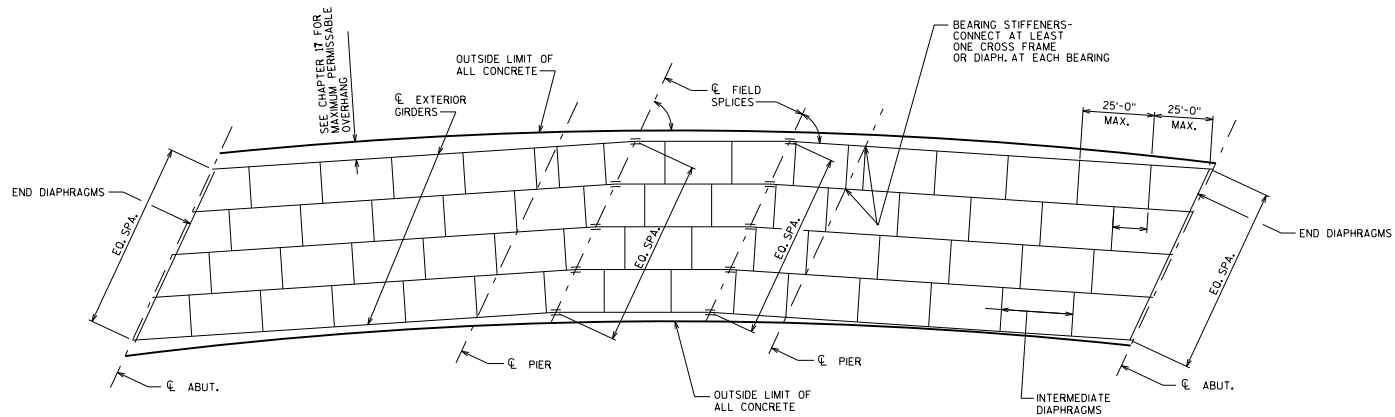

KINKED GIRDER LAYOUT

GENERAL NOTES

SKETCHES AND NOTES APPLY TO ANY NUMBER OF SPANS.

NUMBER AND SIZE OF GIRDERS AND LOCATION OF FIELD SPLICES TO BE DETERMINED BY DESIGN.

FOR HORIZONTAL CURVES WITH A RADIUS OF LESS THAN 1400 FT., THE GIRDERS SHALL BE FABRICATED ALONG THE CURVE. FOR A RADIUS GREATER THAN 1400 FT., CONSIDERATION SHALL BE GIVEN TO KINKING GIRDERS AT FIELD SPLICE LOCATIONS.

FOR KINKED GIRDER LAYOUT:
HOLD ϕ OF SUBSTRUCTURE UNITS AND ϕ OF SPLICES PARALLEL TO EACH OTHER WHEN POSSIBLE.

GIRDERS ARE TO BE HELD PARALLEL TO EACH OTHER BETWEEN FIELD SPLICES.

FOR CURVED GIRDER LAYOUT:
PLACE SUBSTRUCTURE UNITS ON RADIAL LINES WHEN POSSIBLE.

*TIGHTER SPACING MAY BE RECD. FOR MORE SEVERE CURVATURES

GIRDER LAYOUT ON CURVE



BUREAU OF STRUCTURES

APPROVED: Scot Becker

DATE:
7-10