



# Wisconsin Department of Transportation

## Division of Transportation Systems Development

Bureau of Project Development  
4822 Madison Yards Way, 4<sup>th</sup> Floor South  
Madison, WI 53705

January 31, 2023

Telephone: (608) 266-1631  
Facsimile (FAX): (608) 266-8459

### NOTICE TO ALL CONTRACTORS:

**Proposal #36: 6370-01-77**  
**STH 13 - Stratford**  
**STH 13 – Stainless Avenue**  
**STH 153**  
**Marathon County**

### Letting of February 14, 2023

This is Addendum No. 01, which provides for the following:

#### Schedule of Items:

Revised Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Proposal Quantity Change (-)	Proposal Total After Addendum
645.0120	Geotextile Type HR	SY	30	40	70

Added Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Quantity Added	Proposal Total After Addendum
606.0300	Riprap Heavy	CY	0	30	30

#### Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
5	Construction Detail, Riprap Treatment at Culverts was updated to show medium riprap
31	Miscellaneous Quantity Sheet. Added items to the Culvert Endwall Repairs table

**Schedule of Items**

Attached, dated January 31, 2023, are the revised Schedule of Items Pages 5 and 7.

**Plan Sheets**

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:

Revised: 5 and 31


The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

*Mike Coleman*

Proposal Development Specialist  
Proposal Management Section

END OF ADDENDUM

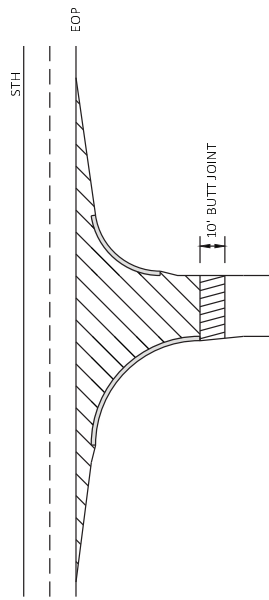


- REMOVING ASPHALTIC SURFACE MILLING
- REMOVING ASPHALTIC SURFACE BUTT JOINTS SEE BUTT JOINT DETAIL

NOTE: WHEN MATCHING TO AN UNPAVED SURFACE BUTT JOINTS IS NOT REQUIRED

### SIDE ROAD BUTT JOINT

WITH CURB AND GUTTER

LOYALTY AVE  
CONNER AVE

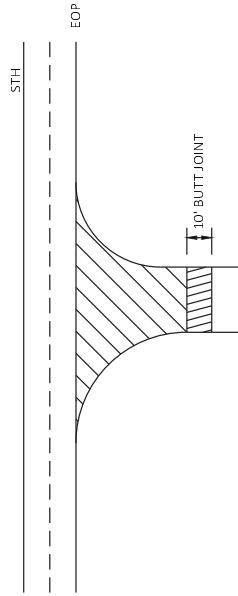


- REMOVING ASPHALTIC SURFACE MILLING
- REMOVING ASPHALTIC SURFACE BUTT JOINTS SEE BUTT JOINT DETAIL

NOTE: WHEN MATCHING TO AN UNPAVED SURFACE BUTT JOINTS IS NOT REQUIRED

### SIDE ROAD BUTT JOINT

WITHOUT CURB AND GUTTER


CTH F  
CTH E




- HMA PAVEMENT
- REMOVING ASPHALTIC SURFACE MILLING
- REMOVING ASPHALTIC SURFACE BUTT JOINTS

### BUTT JOINT

MAINLINE AND SIDE ROADS

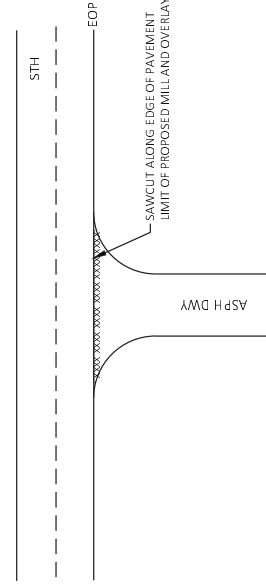

Addendum No. 01  
ID 6370-01-77  
Revised Sheet 5  
January 31, 2023

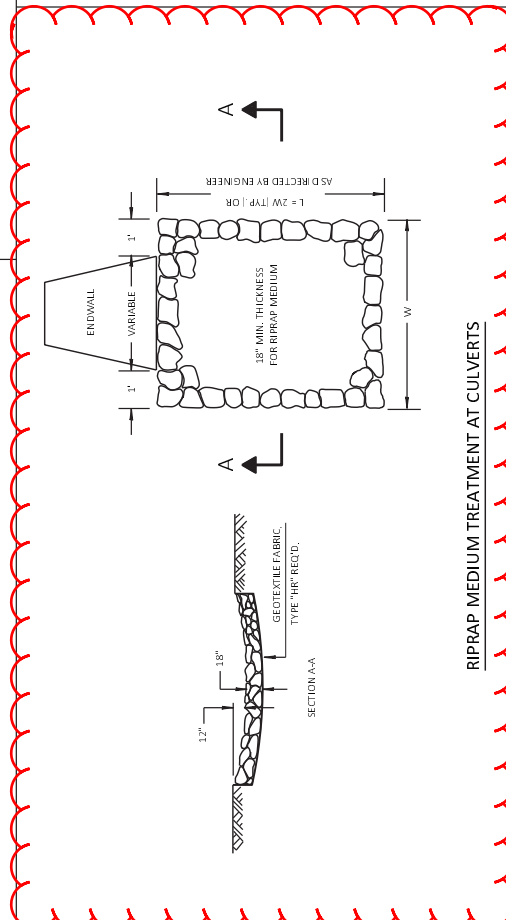

### RIPRAP MEDIUM TREATMENT AT CULVERTS

HWY: STH 153

COUNTY: MARATHON

### ASPHALTIC DRIVEWAY TREATMENT

CONSTRUCTION DETAILS

SHEET 5

E

**HMA MIXTURE ACCEPTANCE**

STATION TO STATION	ROADWAY	LOCATION	UNDERLAYING SURFACE	MIXTURE USE	BID ITEM	LAYER DEPTH (IN)	TONNAGE	QMP TO BE USED FOR:	
								MIXTURE ACCEPTANCE	DENSITY ACCEPTANCE
PROJECT 6370-01-77									
CATEGORY 0010									
10+70 - 587+03	STH 153	DRIVING LANE	3 MT 58-28 S	UPPER	4 MT 58-28 S	1.75	14,140	INCENTIVE DENSITY PWL HMA PAVEMENT 460.2005	
			3 MT 58-28 S	UPPER	4 MT 58-28 S	1.75	5,395	ACCEPTANCE TESTING BY DEPARTMENT NOT ELIGIBLE FOR INCENTIVE	
			MILLED HMA	LOWER	3 MT 58-28 S	2.25	18,180	INCENTIVE DENSITY PWL HMA PAVEMENT 460.2005	
			MILLED HMA	LOWER	3 MT 58-28 S	2.25	5,905	ACCEPTANCE TESTING BY DEPARTMENT NOT ELIGIBLE FOR INCENTIVE	
VARIOUS	STH 153	CULVERT REPLACEMENTS	BASE AGG	UPPER/LOWER	ASPH SURF	8.00	1,360	ACCEPTANCE BY ORDINARY COMPACTION	

**ASPHALTIC SURFACE PATCHING**

STATION	TO STATION	ROADWAY	465.0110 TON	COMMENT
PROJECT 6370-01-77				
CATEGORY 0010				
UNDISTRIBUTED	STH 153	60		TEMP RAMPING
UNDISTRIBUTED	STH 153	200		MINOR REPAIRS

PROJECT TOTAL 260

**CULVERT ENDWALL REPAIRS**

STATION	ROADWAY	203.0220	REMOVING STRUCTURE	210.2500	BACKFILL STRUCTURE TYPE B	504.0900	CONCRETE MASONRY ENDWALLS	645.0105	GEOTEXTILE TYPE C	645.0120*	GEOTEXTILE TYPE HR	606.0300	REPRAP HEAVY
02. STA 286+80	EA	03. STA 496+50	EA	04. STA 504+00	EA	05. STA 512+00	EA	06. STA 520+00	EA	07. STA 528+00	EA	08. STA 536+00	EA
2	---	2	---	2	---	2	---	2	---	2	---	2	---
496+50	STH 153	2	---	127	---	23	---	40	---	20	---	15	---
STH 153	2	---	127	---	23	---	40	---	20	---	15	---	---
PROJECT TOTALS		2	2	254	46	80	40*	30					

\*ADDITIONAL QUANTITY SHOWN IN CULVERT ITEMS TABLE

Addendum No. 01  
ID 6370-01-77  
Revised Sheet 31  
January 31, 2023



Proposal Schedule of Items

Proposal ID: 20230214036 Project(s): 6370-01-77

Federal ID(s): N/A

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0120	634.0618 Posts Wood 4x6-Inch X 18-FT	2.000 EACH	_____	_____
0122	637.2210 Signs Type II Reflective H	10.000 SF	_____	_____
0124	637.2230 Signs Type II Reflective F	76.070 SF	_____	_____
0126	638.2102 Moving Signs Type II	8.000 EACH	_____	_____
0128	642.5201 Field Office Type C	1.000 EACH	_____	_____
0130	643.0300 Traffic Control Drums	2,108.000 DAY	_____	_____
0132	643.0420 Traffic Control Barricades Type III	1,940.000 DAY	_____	_____
0134	643.0705 Traffic Control Warning Lights Type A	3,881.000 DAY	_____	_____
0136	643.0715 Traffic Control Warning Lights Type C	462.000 DAY	_____	_____
0138	643.0800 Traffic Control Arrow Boards	92.000 DAY	_____	_____
0140	643.0900 Traffic Control Signs	17,975.000 DAY	_____	_____
0142	643.0920 Traffic Control Covering Signs Type II	6.000 EACH	_____	_____
0144	643.1000 Traffic Control Signs Fixed Message	39.600 SF	_____	_____
0146	643.3105 Temporary Marking Line Paint 4-Inch	106,126.000 LF	_____	_____
0148	643.5000 Traffic Control	1.000 EACH	_____	_____
0150	645.0105 Geotextile Type C	80.000 SY	_____	_____
0152	645.0120 Geotextile Type HR	70.000 SY	_____	_____



Proposal Schedule of Items

Proposal ID: 20230214036 Project(s): 6370-01-77

Federal ID(s): N/A

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0184	650.6501 Construction Staking Structure Layout (structure) 01. 37153002865	1.000 EACH	_____.	_____.
0186	650.6501 Construction Staking Structure Layout (structure) 02. 37153002879	1.000 EACH	_____.	_____.
0188	650.8000 Construction Staking Resurfacing Reference	57,498.000 LF	_____.	_____.
0190	650.9911 Construction Staking Supplemental Control (project) 01. 6370-01-77	1.000 EACH	_____.	_____.
0192	650.9920 Construction Staking Slope Stakes	685.000 LF	_____.	_____.
0194	690.0150 Sawing Asphalt	804.000 LF	_____.	_____.
0196	740.0440 Incentive IRI Ride	43,558.000 DOL	1.00000	43,558.00
0198	999.2000.S Installing and Maintaining Bird Deterrent System (station) 01. Station 286+80	1.000 EACH	_____.	_____.
0200	999.2000.S Installing and Maintaining Bird Deterrent System (station) 01. Station 496+50	1.000 EACH	_____.	_____.
0202	SPV.0060 Special 01. Reestablish Section Corner Monuments	22.000 EACH	_____.	_____.
0204	SPV.0090 Special 01. Marking Stop Line Epoxy 24-Inch Special	24.000 LF	_____.	_____.
0206	606.0300 Riprap Heavy	30.000 CY	_____.	_____.
Section: 0001			Total:	_____.
			Total Bid:	_____.