



Wisconsin Department of Transportation

November 9, 2023

Division of Transportation Systems Development

Bureau of Project Development
4822 Madison Yards Way, 4th Floor South
Madison, WI 53705

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

<p>Proposal #21: 1120-57-60, WISC 2024010 Neenah - Appleton Breezewood - STH 15 IH 41 Winnebago and Outagamie County</p>	<p>1517-14-71, WISC 2024013 V Fox Crossing, USH 10 Cold Spring Rd N-70-0009 USH 10 Winnebago County</p>
---	--

Letting of November 14, 2023

This is Addendum No. 01, which provides for the following:

Schedule of Items:

Revised Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Proposal Quantity Change (-)	Proposal Total After Addendum
SPV.0090.03	Bridge Deck Crack Sealing	LF	2150	-250	1900

Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
20	Construction Details: Added table to provide pavement depths for ramps.
137	Traffic Control - Construction Details: Added a note to clarify that Asphaltic Surface Temporary is incidental to bid item Concrete Pavement HES 11-inch.
557 & 559	B-70-129 130 Quantity change
586 & 587	B-70-132 Superstructure Details

Schedule of Items

Attached, dated November 9, 2023, are the revised Schedule of Items Pages 1 – 17.

Plan Sheets

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:
Revised: 20 and 137.

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,


Mike Coleman

Proposal Development Specialist
Proposal Management Section

END OF ADDENDUM


Addendum No. 01
ID 1120-57-60
Revised Sheet 20
November 9, 2023

RAMP	(1)	(2)	(3)	(4)	(5)
J1-A	12"	4"	6"	3.5"	8.5"
J1-B	12"	4"	6"	3.5"	8.5"
J1-C	12"	4"	6"	3.5"	8.5"
J1-D	12"	4"	6"	3.5"	8.5"
MS-A	10"	4"	6"	3.5"	6.5"
MS-B	10"	4"	6"	3.5"	6.5"
II-A	12"	4"	6"	3.5"	8.5"
II-B	10"	4"	6"	3.5"	6.5"
II-C	12"	4"	6"	3.5"	8.5"
II-D	12"	4"	6"	3.5"	8.5"
BB-A	10"	4"	6"	3.5"	6.5"
BB-B	10"	4"	6"	3.5"	6.5"
BB-C	10"	4"	6"	3.5"	6.5"
BB-D	10"	4"	6"	3.5"	6.5"
CA-A	10"	4"	6"	3.5"	6.5"
CA-B	10"	4"	6"	3.5"	6.5"
CA-C	10"	4"	6"	3.5"	6.5"
CA-D	10"	4"	6"	3.5"	6.5"
WI-A	10"	4"	6"	3.5"	6.5"
WI-B	10"	4"	6"	3.5"	6.5"

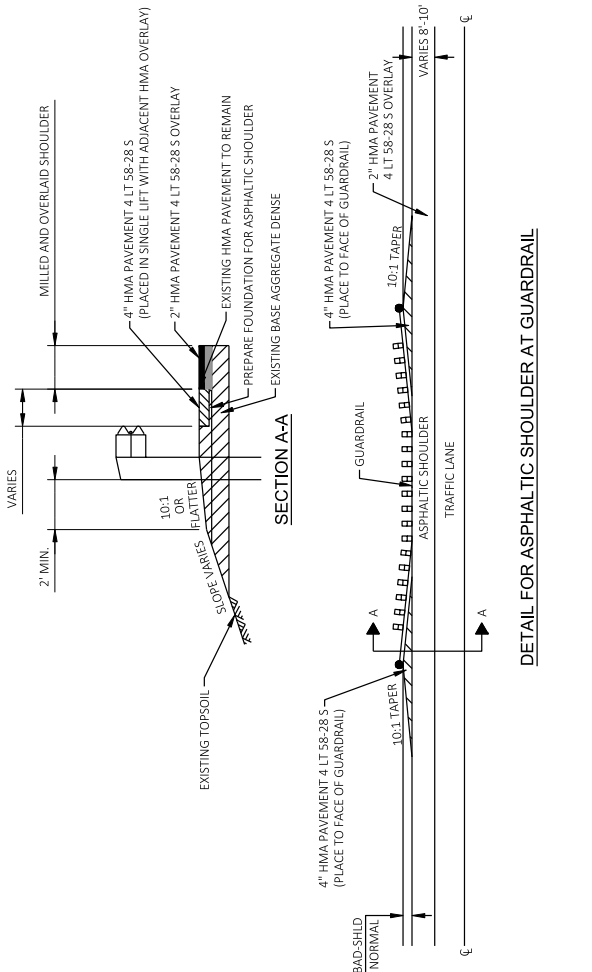


DETAIL FOR ASPHALTIC SHOULDER AT GUARDRAIL

CONTINUOUS DIAMOND GRINDING CONCRETE PAVEMENT

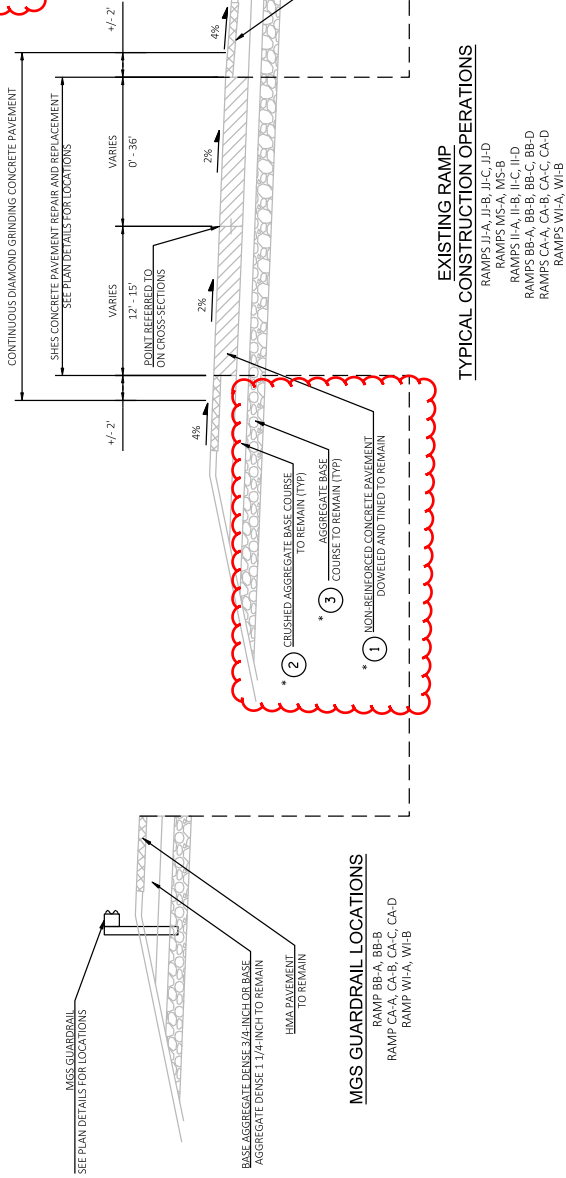


TYPICAL CONSTRUCTION OPERATIONS

- RAMPS J1-A, J1-B, J1-C, J1-D
- RAMPS MS-A, MS-B
- RAMPS II-A, II-B, II-C, II-D
- RAMPS BB-A, BB-B, BB-C, BB-D
- RAMPS CA-A, CA-B, CA-C, CA-D
- RAMPS WI-A, WI-B

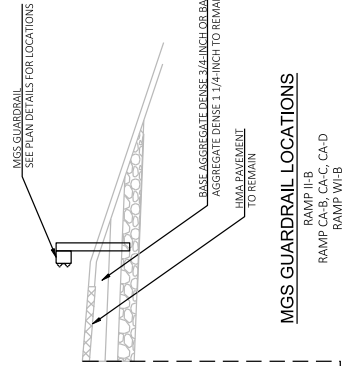


MGS GUARDRAIL LOCATIONS

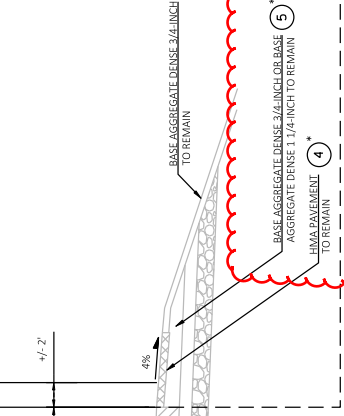

MGS GUARDRAIL LOCATIONS

* THICKNESS PROVIDED IN TABLE ABOVE.

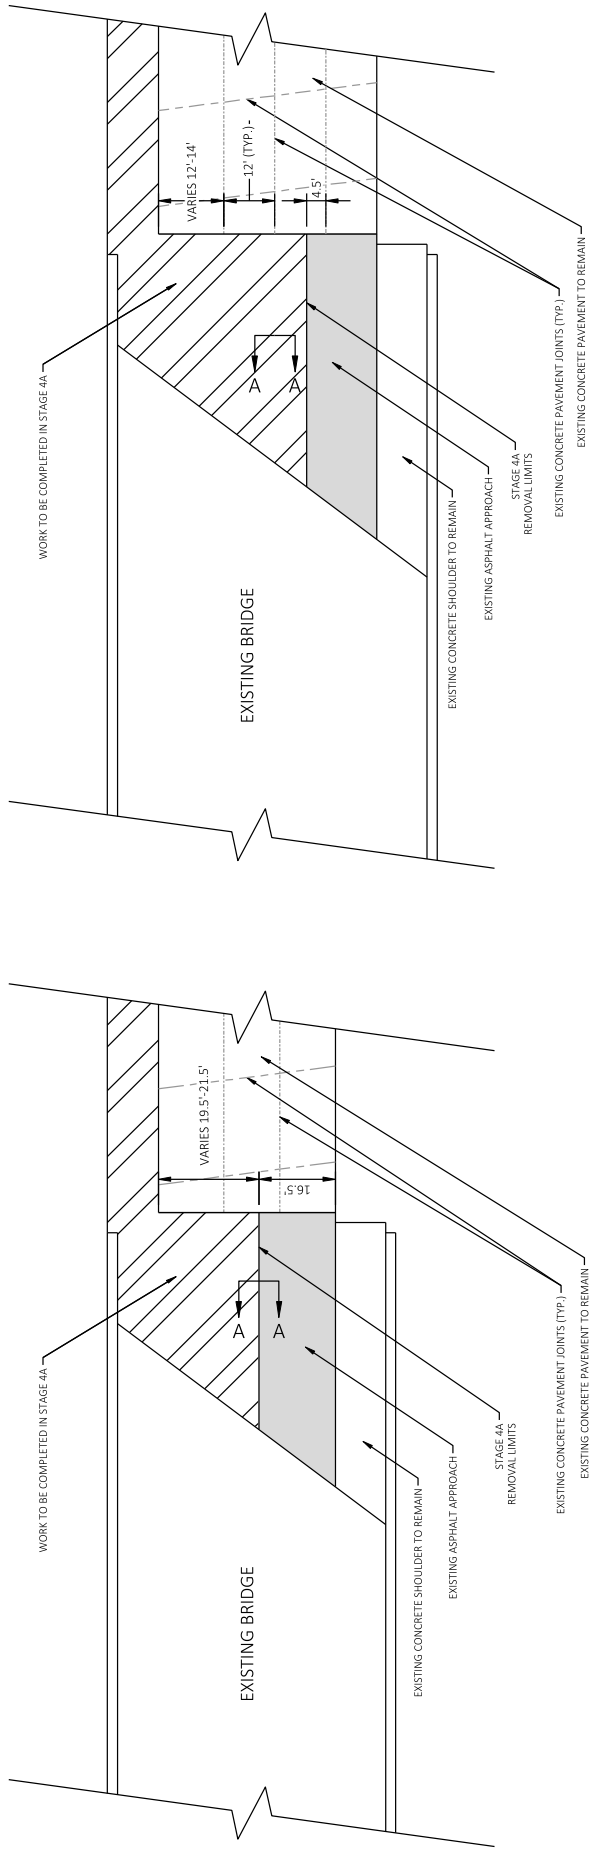


3-LANE CONCRETE APPROACH DETAIL

B-70-124
B-70-125
B-70-128
B-70-130

4-LANE CONCRETE APPROACH DETAIL

B-70-050

Addendum No. 01
ID 1120-57-60
Revised Sheet 137
November 9, 2023

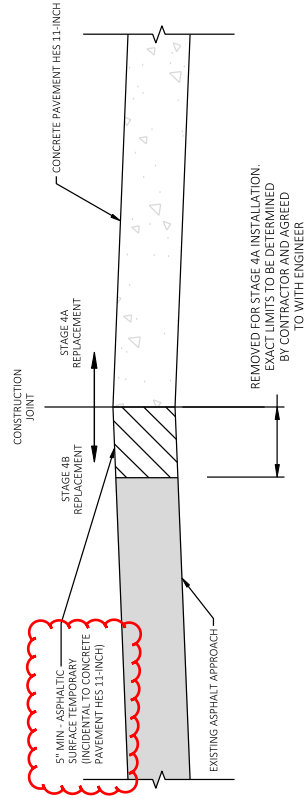

SECTION A - A

STAGED ASPHALT APPROACH SLAB REPLACEMENT

"METHACRYLATE FLOOD SEAL" SHALL NOT BE PLACED ON DECK PATCHES RECEIVING "CONCRETE MASONRY DECK REPAIR". CORRESPONDING PATCHES SHOULD BE ISOLATED DURING PLACEMENT OF "METHACRYLATE FLOOD SEAL" WITH A SYSTEM APPROVED BY THE FIELD ENGINEER.

TOTAL ESTIMATED QUANTITIES

BID ITEM NUMBER	DESCRIPTION	UNIT	B-44-155	B-44-156	B-44-163	B-44-164	B-70-049	B-70-050	B-70-123	B-70-124	B-70-125	B-70-126	B-70-127	B-70-128	B-70-129	B-70-130	B-70-133	B-70-134	B-70-135	B-70-146	B-70-210	B-70-400	B-70-401	B-70-402	B-70-405	B-70-407	B-70-409	TOTALS
500.3005	PIGMENTED SURFACE SEALER RESEAL	SY	157	157	91	91	110	110	161	161	120	120	110	110	168	168	34	34	146	146	315	826	1,107	404	1,884	362	444	7,456
500.0301	PREPARATION DECKS TYPE 1	SY	--	--	5	5	10	--	5	5	--	--	--	--	--	--	5	5	--	--	--	--	--	--	--	--	25	
500.0302	PREPARATION DECKS TYPE 2	SY	--	--	2	4	--	--	2	2	--	--	--	--	--	--	--	2	--	--	--	--	--	--	--	--	10	
500.0310.5	SAVING PAVEMENT DECK PREPARATION AREAS	LF	--	--	50	100	--	--	50	50	--	--	--	--	--	--	--	50	--	--	--	--	--	--	--	--	250	
500.1500	CONCRETE SURFACE REPAIR	SF	6	4	15	5	2	2	4	3	3	--	4	1	--	1	1	--	2	--	--	--	--	--	--	--	53	
500.2100.5	CONCRETE MASONRY DECK REPAIR	CY	--	--	1	2	--	--	1	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	4	
500.5100.5	POLYMER OVERLAY	SY	--	--	--	--	--	--	--	--	--	--	--	--	28	--	--	--	--	--	--	--	--	--	--	--	28	
500.9015.5	REMOVING POLYMER OVERLAY B-70-130	SY	--	--	--	--	--	--	--	--	--	--	--	--	28	--	--	--	--	--	--	--	--	--	--	--	28	
SPV.0085	RAPID SET DECK REPAIR	CY	--	--	--	--	--	--	--	--	--	--	--	--	1	--	--	--	--	--	--	--	--	--	--	--	1	
SPV.0090	BRIDGE DECK CRACK SEALING	LF	--	--	--	--	--	--	--	--	--	--	--	--	900	--	--	--	--	--	--	--	--	--	--	--	900	
SPV.0090	JOINT SEALING	LF	120	120	169	147	142	142	118	119	169	119	143	119	146	118	144	164	120	120	120	120	120	120	120	120	2,439	
SPV.0180	METHACRYLATE FLOOD SEAL	SY	1,288	1,288	985	943	1,039	1,080	1,246	1,246	986	986	1,037	855	855	320	320	--	1,151	1,151	1,998	--	--	--	--	--	17,469	

SUMMARY OF LOCATIONS

STRUCTURE ID	MUNICIPALITY	LOCATION
B-44-155	GRAND CHUTE	IH-41 SB OVER STH-125
B-44-156	GRAND CHUTE	USH 10 WB/IH-41 NB OVER STH-125
B-44-163	GRAND CHUTE	IH-41 SB OVER SPENCER ST
B-44-164	GRAND CHUTE	USH 10 WB/IH-41 NB OVER SPENCER ST
B-70-049	NEENAH	IH-41 SB OVER CECIL ST
B-70-050	NEENAH	IH-41 NB OVER CECIL ST
B-70-123	NEENAH	IH-41 SB OVER STH-114
B-70-124	NEENAH	IH-41 NB OVER STH-114
B-70-125	NEENAH	IH-41 SB OVER MAIN ST
B-70-126	NEENAH	IH-41 NB OVER MAIN ST
B-70-127	NEENAH	IH-41 SB OVER NORTH ST
B-70-128	NEENAH	IH-41 NB OVER NORTH ST
B-70-129	MENASHA	IH-41 SB OVER CTH II
B-70-130	MENASHA	IH-41 NB OVER CTH II
B-70-133	MENASHA	IH-41 SB OVER MENASHA CREEK
B-70-134	MENASHA	IH-41 NB OVER MENASHA CREEK
B-70-135	MENASHA	IH-41 SB OVER CTH BB
B-70-136	MENASHA	USH 10 WB/IH-41 NB OVER CTH BB
B-70-210	MENASHA	IH-41 OVER JACOBSEN RD
B-70-400	MENASHA	USH-10 EB OVER IH-41 NB & SB & WCL RR
B-70-401	MENASHA	USH-10 WB OVER IH-41 NB & SB & WCL RR
B-70-402	MENASHA	USH-10 NB OFFRAMP TO STH-401 NB/USH-10 EB OVER USH-10 EB TO IH-41 NB RAMP
B-70-405	MENASHA	USH 10 WB RAMP TO IH-41 SB OVER IH-41
B-70-407	MENASHA	IH-41 NB OFFRAMP TO USH-10 WB OVER IH-41
B-70-409	MENASHA	USH-10 EB OFFRAMP TO IH-41 NB OVER IH-41

GENERAL NOTES

DRAWINGS SHALL NOT BE SCALED.
 DIMENSIONS SHOWN ARE BASED ON THE ORIGINAL STRUCTURE PLANS.
 PIGMENTED SURFACE SEALER TO BE APPLIED TO THE TOP AND FRONT OF PARAPETS.
 SURFACE PREPARATION IS INCLUDED IN THE ITEM "PIGMENTED SURFACE SEALER RESEAL".
 LOCATIONS OF EXISTING UTILITY INSTALLATIONS ARE NOT SHOWN.
 PREPARATION DECKS TYPES 1 & 2 AND CONCRETE SURFACE REPAIR AREAS ARE BASED ON THE PLANS AND AS DETERMINED BY THE ENGINEER. DECK REPAIRS SHALL BE FILLED WITH "CONCRETE MASONRY DECK REPAIR" OR "RAPID SET DECK REPAIR" AS DEFINED IN THE TOTAL ESTIMATED QUANTITIES.

GENERAL NOTES CONT.

JOINT SEALING ITEM TO BE APPLIED AT THE INTERFACE BETWEEN THE APPROACH SLAB AND STRUCTURE PAVING NOTCHES. DO NOT APPLY THE JOINT SEALANT AT MECHANICAL JOINTS OR STRIP SEAL JOINTS. DO NOT APPLY UNTIL AFTER INSTALLATION OF CONCRETE PAVEMENT APPROACH SLABS.
 AREAS OF "PREPARATION DECK TYPE 1" SHALL BE DEFINED BY A SAW CUT.
 SEE ROADWAY PLANS FOR TRAFFIC STAGING DETAILS.
 LOCATIONS OF EXISTING UTILITY INSTALLATIONS ARE NOT SHOWN.

DESIGN DATA

MATERIAL PROPERTIES:
 CONCRETE MASONRY: f'c = 4,000 PSI
 SUPERSTRUCTURE & STRUCTURAL APPROACH SLAB: f'c = 3,000 PSI
 RAPID SET DECK REPAIR: f'c = 3,000 PSI (AT 3 HOURS)

TRAFFIC DATA


IH-41 NB (STH 114)
 ADT = 57,088 (2023)
 R.D.S. = 70 MPH
 IH-41 SB (STH 114)
 ADT = 57,088 (2023)
 R.D.S. = 70 MPH
 STH 125 (IH-41)
 ADT = 36,320 (2023)
 SPENCER ST (IH-41)
 ADT = 7,300 (2019)
 CECIL ST (IH-41)
 ADT = 10,956 (2023)
 STH 114 (IH-41)
 ADT = 26,790 (2023)
 MAIN ST (IH-41)
 ADT = 10,593 (2023)
 NORTH ST (IH-41)
 ADT = 4,015 (2023)
 CTH II (IH-41)
 ADT = 10,956 (2023)
 CTH BB (IH-41)
 ADT = 55,710 (2023)
 JACOBSEN RD (IH-41)
 ADT = 1,310 (2020)
 USH 10 EB (IH-41)
 ADT = 88,000 (2038)
 USH 10 WB (IH-41)
 ADT = 31,590 (2038)
 IH-41 NB RAMP TO STH 441 NB/USH 10 EB
 ADT = 19,000 (2038)
 USH 10 EB RAMP TO IH-41 NB
 ADT = 3,380 (2038)
 USH 10 WB RAMP TO IH-41 SB
 ADT = 3,640 (2038)
 USH 10 WB/STH 441 SB RAMP TO IH-41 NB
 ADT = 19,000 (2038)
 IH-41 NB RAMP TO USH 10 WB
 ADT = 1,700 (2038)

LIST OF DRAWINGS:

- BRIDGE REPAIR SUMMARY
- B-44-155/156/163/164 & B-70-409/50/123/124/125/126/127/128/129 REPAIRS
- B-70-130/133/134/135/136/137/140/401/402/403/407/409 REPAIRS

Addendum No. 01
 ID 1120-57-60
 Revised Sheet 557
 November 9, 2023

LOCATION MAP

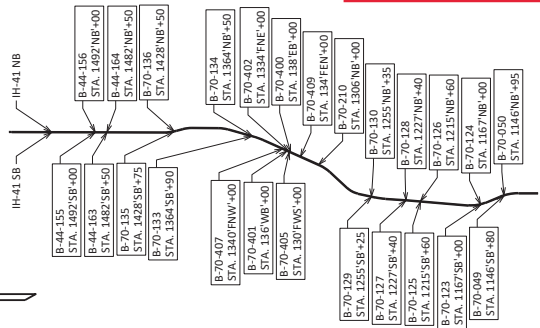

STATE PROJECT NUMBER
1120-57-60

STRUCTURE DESIGN CONTACTS:
 RYAN R. HARRIS (608) 266-2963
 KYLE H. BUSCH (608) 267-0465

NO. DATE REVISION BY
 11/09/23 B-70-129/130 QTY. CHANGE RRR
 BUREAU OF STRUCTURES

ACCEPTED: CHIEF STRUCTURES DESIGN ENGINEER DATE
 STRUCTURE B-44/70-VARIES
 OUTAGAMIE/WINNEBAGO COUNTY IH-41 BRIDGE REPAIRS
 COULAGAMIE/WINNEBAGO TOWN/CITY/TIDGEE VARIES
 DESIGNER: REHABILITATION N/A
 RESIGNED: REHAB/RESIGNED
 BY: RRH LKCD RRH LKCD RRH LKCD

11/9/23

Plan Sheet
 Accepted by
WISDOT
 BUREAU OF STRUCTURES

BRIDGE REPAIR SUMMARY
 SHEET 1 OF 3
557

ID: 1120-57-30
 DATE: NOV. 2023

STATE PROJECT NUMBER
1120-57-60

- ▲ SEE B-70-130 POLYMER OVERLAY PLAN ON THIS SHEET FOR DETAILS
- "METHACRYLATE FLOOD SEAL" SHALL NOT BE USED FOR DECK SEALING
- "CONCRETE MASONRY DECK REPAIR"

Addendum No. 01
ID 1120-57-60
Revised Sheet 559
November 9, 2023



11/9/23

NO.	DATE	REVISION	BY
1	11/09/23	B-70-130 QTY. CHANGE	RRH
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION STRUCTURES DESIGN SECTION			
STRUCTURE B-44/70-VARIES		DRAWN BY RRH	CHECKED BY DLM
B-70-130/133/134/135/ 136/210/400/401/402/ 405/407/409 REPAIRS		SHEET 3	559

B-70-400

BID ITEM	DESCRIPTION	COMMENTS
502.3205	PIGMENTED SURFACE SEALER RESEAL	APPLY TO FRONT FACE AND TOP FACE FOR FULL LENGTH OF BOTH PARAPETS

B-70-401

BID ITEM	DESCRIPTION	COMMENTS
502.3205	PIGMENTED SURFACE SEALER RESEAL	APPLY TO FRONT FACE AND TOP FACE FOR FULL LENGTH OF BOTH PARAPETS

B-70-402

BID ITEM	DESCRIPTION	COMMENTS
502.3205	PIGMENTED SURFACE SEALER RESEAL	APPLY TO FRONT FACE AND TOP FACE FOR FULL LENGTH OF BOTH PARAPETS

B-70-403

BID ITEM	DESCRIPTION	COMMENTS
502.3205	PIGMENTED SURFACE SEALER RESEAL	APPLY TO FRONT FACE AND TOP FACE FOR FULL LENGTH OF BOTH PARAPETS

B-70-407

BID ITEM	DESCRIPTION	COMMENTS
502.3205	PIGMENTED SURFACE SEALER RESEAL	APPLY TO FRONT FACE AND TOP FACE FOR FULL LENGTH OF BOTH PARAPETS

B-70-409

BID ITEM	DESCRIPTION	COMMENTS
502.3205	PIGMENTED SURFACE SEALER RESEAL	APPLY TO FRONT FACE AND TOP FACE FOR FULL LENGTH OF BOTH PARAPETS

B-70-130

BID ITEM	DESCRIPTION	COMMENTS
502.3205	PIGMENTED SURFACE SEALER RESEAL	APPLY TO FRONT FACE AND TOP FACE FOR FULL LENGTH OF BOTH PARAPETS
509.1500	CONCRETE SURFACE REPAIR	REPAIR SPALLING AT NE CORNER ABUT.
509.1500.5	POLYMER OVERLAY	REPLACE POLYMER OVERLAY AT S END OF DECK
509.9015.5	REMOVING POLYMER OVERLAY AT S END OF DECK	REMOVING POLYMER OVERLAY AT S END OF DECK
SPV.0090	JOINT SEALING	DECK SEALING - NOT USED
SPV.0180	METHACRYLATE FLOOD SEAL	DECK SEALING

B-70-133

BID ITEM	DESCRIPTION	COMMENTS
502.3205	PIGMENTED SURFACE SEALER RESEAL	APPLY TO FRONT FACE AND TOP FACE FOR FULL LENGTH OF BOTH PARAPETS
509.1500	CONCRETE SURFACE REPAIR	REPAIR SPALLING AT NW CORNER ABUT.
SPV.0090	JOINT SEALING	DECK SEALING
SPV.0180	METHACRYLATE FLOOD SEAL	DECK SEALING

B-70-134

BID ITEM	DESCRIPTION	COMMENTS
502.3205	PIGMENTED SURFACE SEALER RESEAL	APPLY TO FRONT FACE AND TOP FACE FOR FULL LENGTH OF BOTH PARAPETS
509.0301	PREPARATION DECKS TYPE 1	DECK PATCHING
509.0302	PREPARATION DECKS TYPE 2	DECK PATCHING
509.0310.5	SAWING PAVEMENT DECK PREPARATION AREAS	---
509.0310.5	SAWING PAVEMENT DECK PREPARATION AREAS	DECK PATCHING IN IN & S PAVING NOTCH
SPV.0090	RAPID SET DECK REPAIR	DECK SEALING
SPV.0090	BRIDGE DECK CRACK SEALING	DECK SEALING
SPV.0090	JOINT SEALING	---

B-70-135


BID ITEM	DESCRIPTION	COMMENTS
502.3205	PIGMENTED SURFACE SEALER RESEAL	APPLY TO FRONT FACE AND TOP FACE FOR FULL LENGTH OF BOTH PARAPETS
509.1500	CONCRETE SURFACE REPAIR	REPAIR SPALLING AT SW ABUT. CORNER AND N ABUT. BODY
SPV.0090	JOINT SEALING	---
SPV.0180	METHACRYLATE FLOOD SEAL	DECK SEALING


B-70-136

BID ITEM	DESCRIPTION	COMMENTS
502.3205	PIGMENTED SURFACE SEALER RESEAL	APPLY TO FRONT FACE AND TOP FACE FOR FULL LENGTH OF BOTH PARAPETS
SPV.0090	JOINT SEALING	---
SPV.0180	METHACRYLATE FLOOD SEAL	DECK SEALING


B-70-210

BID ITEM	DESCRIPTION	COMMENTS
502.3205	PIGMENTED SURFACE SEALER RESEAL	APPLY TO FRONT FACE AND TOP FACE FOR FULL LENGTH OF BOTH PARAPETS
SPV.0180	METHACRYLATE FLOOD SEAL	DECK SEALING

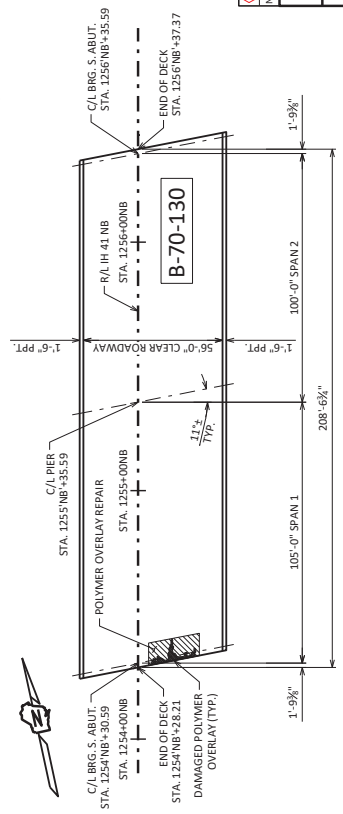

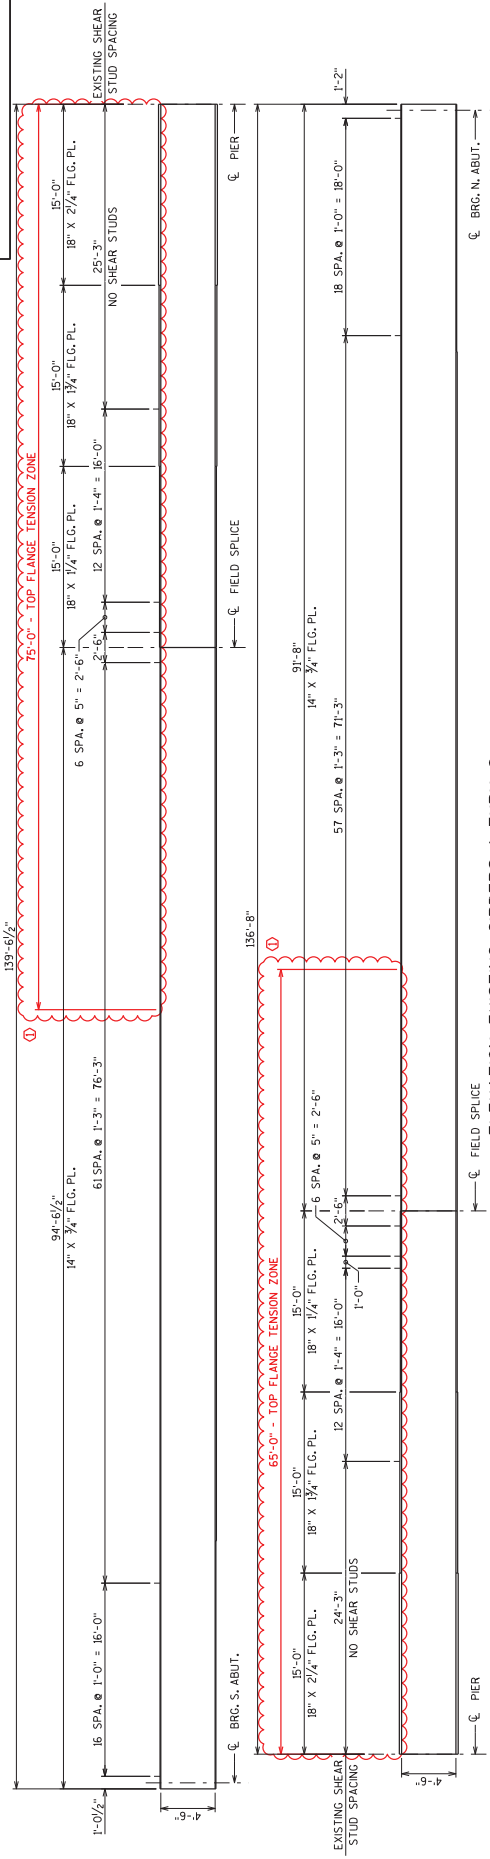

ELEVATION EXISTING GIRDERS 1 THRU 8
FOR INFORMATION ONLY

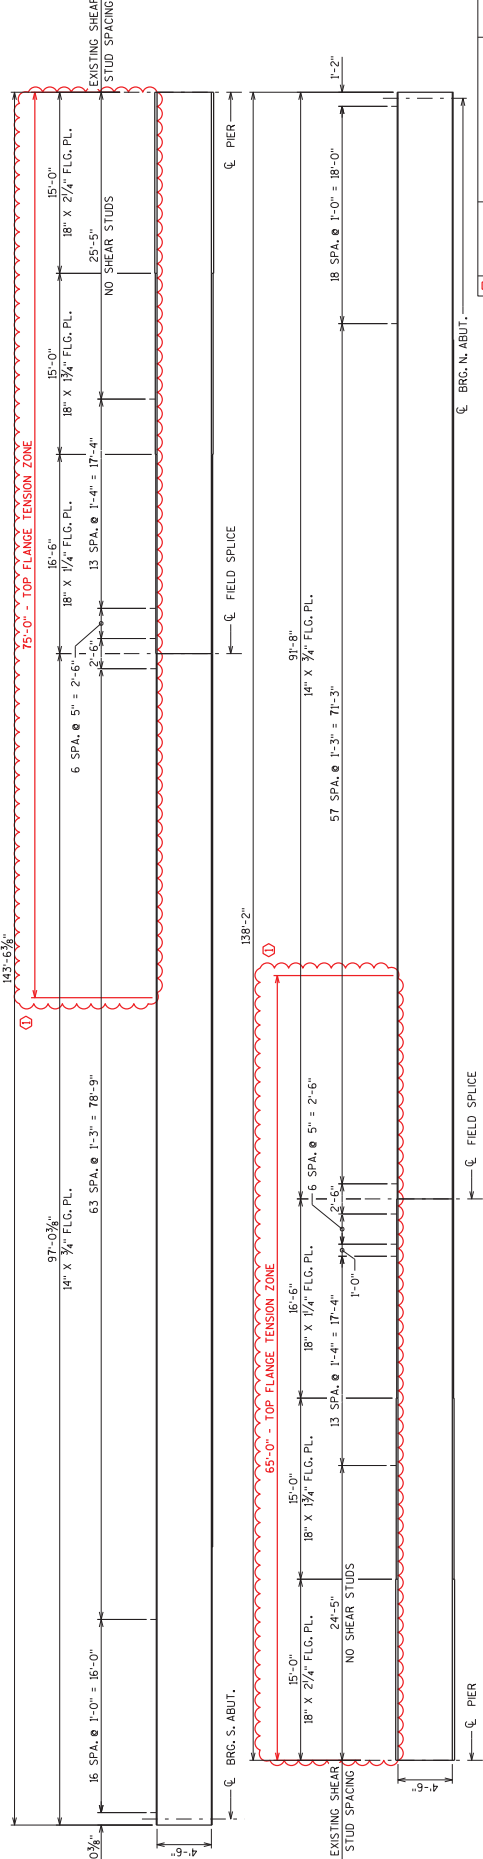

ELEVATION EXISTING GIRDER 9
FOR INFORMATION ONLY

NOTE: DO NOT FIELD WELD WITHIN THE TOP FLANGE TENSION ZONES




Addendum No. 01
ID 1120-57-60
Revised Sheet 586
November 9, 2023


11/6/23

NOV/2023	TENSION ZONES	JLR
NO. DATE	REVISION	BY
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION STRUCTURES DESIGN SECTION		
STRUCTURE B-70-132		
BR/MN	JLR	PLANS
BR	CK/D	LMK
SUPERSTRUCTURE DETAILS 1		
SHEET 14		
586		

STATE PROJECT NUMBER
1120-57-60

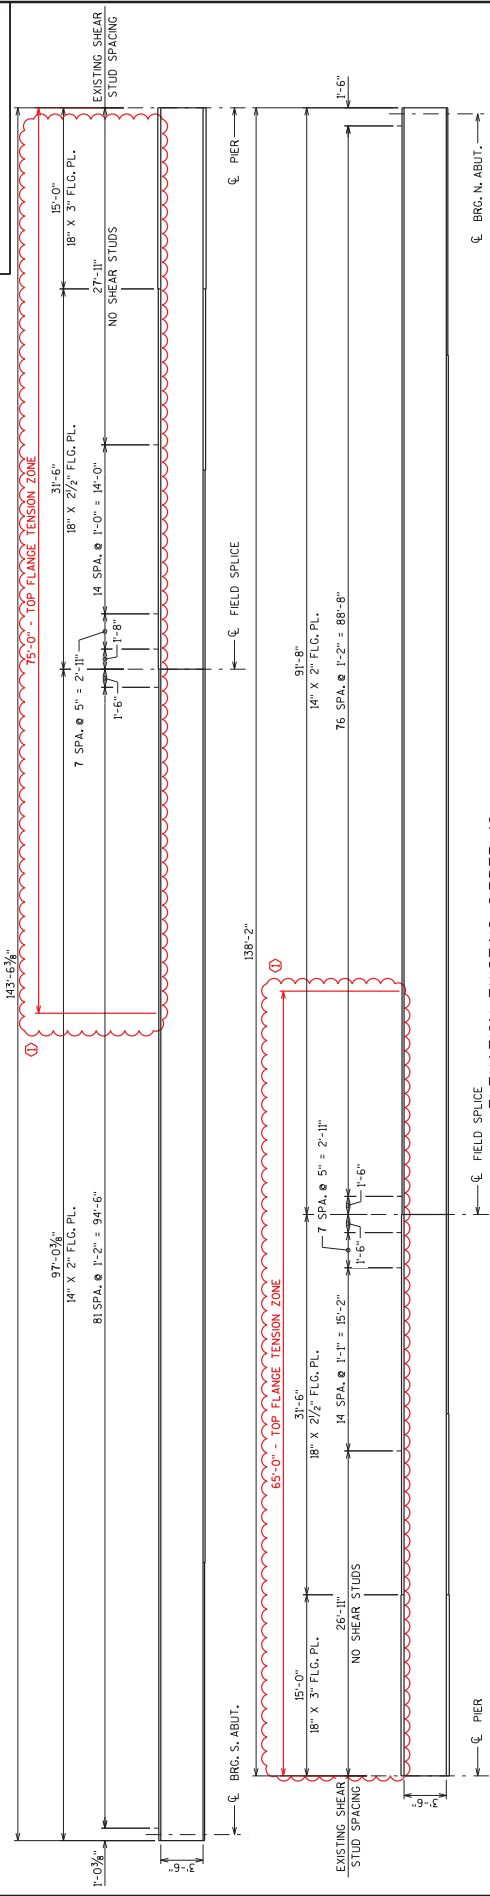

ELEVATION EXISTING GIRDER I0
FOR INFORMATION ONLY

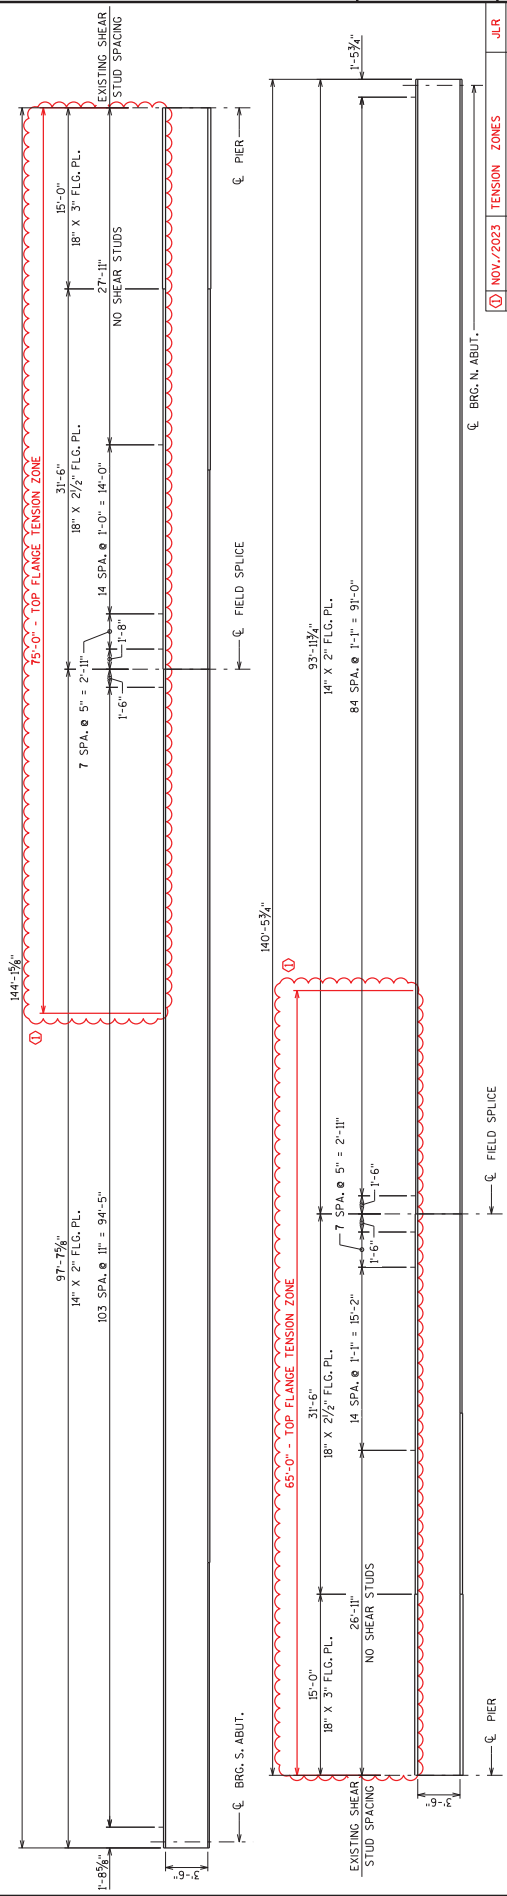

ELEVATION EXISTING GIRDER I1
FOR INFORMATION ONLY

Ⓢ NOTE: DO NOT FIELD WELD WITHIN THE TOP FLANGE TENSION ZONES



Addendum No. 01
ID 1120-57-60
Revised Sheet 587
November 9, 2023

NOV/2023	TENSION ZONES	JLR
NO. DATE	REVISION	BY
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION STRUCTURES DESIGN SECTION		
STRUCTURE B-70-132		
BR/MIN	JLR	PLANS
BR/MIN	JLR	CHKD.
SUPERSTRUCTURE DETAILS 2		SHEET 15
		587



Proposal Schedule of Items

Proposal ID: 20231114021 Project(s): 1120-57-60, 1517-14-71

Federal ID(s): WISC 2024010, WISC 2024013

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0002	108.4300 RBC Progress Schedule	1.000 EACH	_____.	_____.
0004	201.0105 Clearing	4.000 STA	_____.	_____.
0006	201.0205 Grubbing	4.000 STA	_____.	_____.
0008	203.0220 Removing Structure (structure) 01. B-44-0062	1.000 EACH	_____.	_____.
0010	203.0220 Removing Structure (structure) 02. B-70-0084	1.000 EACH	_____.	_____.
0012	203.0220 Removing Structure (structure) 03. B-70-132	1.000 EACH	_____.	_____.
0014	203.0220 Removing Structure (structure) 03. N-70-0009	1.000 EACH	_____.	_____.
0016	203.0330 Debris Containment (structure) 01. B-70-132	1.000 EACH	_____.	_____.
0018	203.0330 Debris Containment (structure) 03. B-70-0406	1.000 EACH	_____.	_____.
0020	204.0100 Removing Concrete Pavement	592.000 SY	_____.	_____.
0022	204.0110 Removing Asphaltic Surface	3,931.000 SY	_____.	_____.
0024	204.0120 Removing Asphaltic Surface Milling	27,956.000 SY	_____.	_____.
0026	204.0150 Removing Curb & Gutter	6.000 LF	_____.	_____.
0028	204.0157 Removing Concrete Barrier	416.000 LF	_____.	_____.
0030	204.0165 Removing Guardrail	16,256.000 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20231114021 Project(s): 1120-57-60, 1517-14-71

Federal ID(s): WISC 2024010, WISC 2024013

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0032	204.0170 Removing Fence	204.000 LF	_____.	_____.
0034	204.0180 Removing Delineators and Markers	26.000 EACH	_____.	_____.
0036	204.0195 Removing Concrete Bases	4.000 EACH	_____.	_____.
0038	204.0220 Removing Inlets	23.000 EACH	_____.	_____.
0040	204.0245 Removing Storm Sewer (size) 01. 12-Inch	1,508.000 LF	_____.	_____.
0042	204.0245 Removing Storm Sewer (size) 02. 15-Inch	200.000 LF	_____.	_____.
0044	204.0245 Removing Storm Sewer (size) 03. 18-Inch	591.000 LF	_____.	_____.
0046	204.0245 Removing Storm Sewer (size) 04. 24-Inch	32.000 LF	_____.	_____.
0048	204.0260 Abandoning Inlets	1.000 EACH	_____.	_____.
0050	204.0270 Abandoning Culvert Pipes	1.000 EACH	_____.	_____.
0052	204.9060.S Removing (item description) 01. Apron Endwalls	1.000 EACH	_____.	_____.
0054	205.0100 Excavation Common	99.000 CY	_____.	_____.
0056	206.2001 Excavation for Structures Culverts (structure) 01. B-44-0062	1.000 EACH	_____.	_____.
0058	206.2001 Excavation for Structures Culverts (structure) 02. B-70-0084	1.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20231114021 Project(s): 1120-57-60, 1517-14-71

Federal ID(s): WISC 2024010, WISC 2024013

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0060	206.5001 Cofferdams (structure) 01. B-44-0062	1.000 EACH	_____.	_____.
0062	206.5001 Cofferdams (structure) 02. B-70-0084	1.000 EACH	_____.	_____.
0064	209.0300.S Backfill Coarse Aggregate (size) 01. Size No. 1	1,285.000 CY	_____.	_____.
0066	210.2500 Backfill Structure Type B	491.000 TON	_____.	_____.
0068	211.0201 Prepare Foundation for Concrete Pavement (project) 01. 1120-57-60	1.000 EACH	_____.	_____.
0070	211.0400 Prepare Foundation for Asphaltic Shoulders	18.000 STA	_____.	_____.
0072	213.0100 Finishing Roadway (project) 01. 1120-57-60	1.000 EACH	_____.	_____.
0074	213.0100 Finishing Roadway (project) 02. 1517-14-71	1.000 EACH	_____.	_____.
0076	305.0110 Base Aggregate Dense 3/4-Inch	982.000 TON	_____.	_____.
0078	305.0120 Base Aggregate Dense 1 1/4-Inch	619.000 TON	_____.	_____.
0080	305.0500 Shaping Shoulders	105.000 STA	_____.	_____.
0082	312.0110 Select Crushed Material	194.000 TON	_____.	_____.
0084	415.1090 Concrete Pavement HES 9-Inch	440.000 SY	_____.	_____.
0086	415.1110 Concrete Pavement HES 11-Inch	3,920.000 SY	_____.	_____.
0088	416.0610 Drilled Tie Bars	4,012.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20231114021 Project(s): 1120-57-60, 1517-14-71

Federal ID(s): WISC 2024010, WISC 2024013

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0090	416.0620 Drilled Dowel Bars	7,999.000 EACH	_____.	_____.
0092	416.1715 Concrete Pavement Repair SHES	4,197.000 SY	_____.	_____.
0094	416.1725 Concrete Pavement Replacement SHES	5,577.000 SY	_____.	_____.
0096	420.1000 Continuous Diamond Grinding Concrete Pavement	484,190.000 SY	_____.	_____.
0098	450.4000 HMA Cold Weather Paving	1,204.000 TON	_____.	_____.
0100	455.0605 Tack Coat	2,146.000 GAL	_____.	_____.
0102	460.2000 Incentive Density HMA Pavement	2,230.000 DOL	1.00000	2,230.00
0104	460.5224 HMA Pavement 4 LT 58-28 S	3,476.000 TON	_____.	_____.
0106	465.0105 Asphaltic Surface	182.000 TON	_____.	_____.
0108	465.0110 Asphaltic Surface Patching	15.000 TON	_____.	_____.
0110	465.0510 Asphaltic Rumble Strips, Shoulder Divided Roadway	38,813.000 LF	_____.	_____.
0112	502.0100 Concrete Masonry Bridges	786.000 CY	_____.	_____.
0114	502.3101 Expansion Device	479.000 LF	_____.	_____.
0116	502.3200 Protective Surface Treatment	92.000 SY	_____.	_____.
0118	502.3205 Pigmented Surface Sealer Reseal	8,510.000 SY	_____.	_____.
0120	502.3210 Pigmented Surface Sealer	301.000 SY	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20231114021 Project(s): 1120-57-60, 1517-14-71

Federal ID(s): WISC 2024010, WISC 2024013

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0122	502.4106 Adhesive Anchors 3/4-inch	11.000 EACH	_____.	_____.
0124	502.4204 Adhesive Anchors No. 4 Bar	120.000 EACH	_____.	_____.
0126	502.4205 Adhesive Anchors No. 5 Bar	454.000 EACH	_____.	_____.
0128	504.0100 Concrete Masonry Culverts	98.000 CY	_____.	_____.
0130	504.0500 Concrete Masonry Retaining Walls	9.000 CY	_____.	_____.
0132	505.0600 Bar Steel Reinforcement HS Coated Structures	203,830.000 LB	_____.	_____.
0134	505.0904 Bar Couplers No. 4	10.000 EACH	_____.	_____.
0136	505.0905 Bar Couplers No. 5	1,038.000 EACH	_____.	_____.
0138	505.0906 Bar Couplers No. 6	15.000 EACH	_____.	_____.
0140	506.0605 Structural Steel HS	3,776.000 LB	_____.	_____.
0142	509.0301 Preparation Decks Type 1	25.000 SY	_____.	_____.
0144	509.0302 Preparation Decks Type 2	10.000 SY	_____.	_____.
0146	509.0310.S Sawing Pavement Deck Preparation Areas	250.000 LF	_____.	_____.
0148	509.1000 Joint Repair	124.000 SY	_____.	_____.
0150	509.1500 Concrete Surface Repair	57.000 SF	_____.	_____.
0152	509.2100.S Concrete Masonry Deck Repair	57.000 CY	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20231114021 Project(s): 1120-57-60, 1517-14-71

Federal ID(s): WISC 2024010, WISC 2024013

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0154	509.5100.S Polymer Overlay	46.000 SY	_____.	_____.
0156	509.9015.S Removing Polymer Overlay (structure) 01. B-70-0130	28.000 SY	_____.	_____.
0158	509.9015.S Removing Polymer Overlay (structure) 02. B-70-0131	2,500.000 SY	_____.	_____.
0160	511.1200 Temporary Shoring (structure) 01. B-44-0062	440.000 SF	_____.	_____.
0162	511.1200 Temporary Shoring (structure) 02. B-70-0084	775.000 SF	_____.	_____.
0164	516.0500 Rubberized Membrane Waterproofing	27.000 SY	_____.	_____.
0166	517.0601 Painting Epoxy System (structure) 01. N-70-0009	1.000 EACH	_____.	_____.
0168	517.1010.S Concrete Staining (structure) 01. B-70-0406	81.000 SF	_____.	_____.
0170	517.1050.S Architectural Surface Treatment (structure) 01. B-70-0406	36.000 SF	_____.	_____.
0172	517.3001.S Structure Overcoating Cleaning and Priming (structure) 01. N-70-0009	1.000 EACH	_____.	_____.
0174	517.4001.S Containment and Collection of Waste Materials (structure) 01. N-70-0009	1.000 EACH	_____.	_____.
0176	517.6001.S Portable Decontamination Facility	1.000 EACH	_____.	_____.
0178	520.8000 Concrete Collars for Pipe	26.000 EACH	_____.	_____.
0180	522.1012 Apron Endwalls for Culvert Pipe Reinforced Concrete 12-Inch	18.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20231114021 Project(s): 1120-57-60, 1517-14-71

Federal ID(s): WISC 2024010, WISC 2024013

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0182	522.1015 Apron Endwalls for Culvert Pipe Reinforced Concrete 15-Inch	2.000 EACH	_____.	_____.
0184	522.1018 Apron Endwalls for Culvert Pipe Reinforced Concrete 18-Inch	5.000 EACH	_____.	_____.
0186	601.0415 Concrete Curb & Gutter 6-Inch Sloped 30-Inch Type J	6.000 LF	_____.	_____.
0188	601.0590 Concrete Curb & Gutter 4-Inch Sloped 36-Inch Type TBTT	530.000 LF	_____.	_____.
0190	602.3210 Concrete Rumble Strips, Shoulder Divided Roadway	17,200.000 LF	_____.	_____.
0192	603.0105 Concrete Barrier Single-Faced 32-Inch	330.000 LF	_____.	_____.
0194	603.1142 Concrete Barrier Type S42	40.000 LF	_____.	_____.
0196	603.3113 Concrete Barrier Transition Type NJ32SF to S36	1.000 EACH	_____.	_____.
0198	603.3513 Concrete Barrier Transition Type S32 to S36	1.000 EACH	_____.	_____.
0200	603.3535 Concrete Barrier Transition Type S36 to S42	2.000 EACH	_____.	_____.
0202	603.8000 Concrete Barrier Temporary Precast Delivered	9,737.500 LF	_____.	_____.
0204	603.8125 Concrete Barrier Temporary Precast Installed	15,462.500 LF	_____.	_____.
0206	603.8500 Anchoring Concrete Barrier Temporary Precast	4,875.000 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20231114021 Project(s): 1120-57-60, 1517-14-71

Federal ID(s): WISC 2024010, WISC 2024013

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0208	603.8505 Anchoring Concrete Barrier Temporary Precast on Bridge Decks	2,787.500 LF	_____.	_____.
0210	606.0200 Riprap Medium	190.000 CY	_____.	_____.
0212	606.0300 Riprap Heavy	101.000 CY	_____.	_____.
0214	608.0312 Storm Sewer Pipe Reinforced Concrete Class III 12-Inch	280.000 LF	_____.	_____.
0216	608.0318 Storm Sewer Pipe Reinforced Concrete Class III 18-Inch	222.000 LF	_____.	_____.
0218	608.0412 Storm Sewer Pipe Reinforced Concrete Class IV 12-Inch	582.000 LF	_____.	_____.
0220	608.0415 Storm Sewer Pipe Reinforced Concrete Class IV 15-Inch	151.000 LF	_____.	_____.
0222	608.0418 Storm Sewer Pipe Reinforced Concrete Class IV 18-Inch	180.000 LF	_____.	_____.
0224	608.0424 Storm Sewer Pipe Reinforced Concrete Class IV 24-Inch	32.000 LF	_____.	_____.
0226	611.0610 Inlet Covers Type BW	2.000 EACH	_____.	_____.
0228	611.0612 Inlet Covers Type C	1.000 EACH	_____.	_____.
0230	611.0654 Inlet Covers Type V	9.000 EACH	_____.	_____.
0232	611.2005 Manholes 5-FT Diameter	6.000 EACH	_____.	_____.
0234	611.3004 Inlets 4-FT Diameter	1.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20231114021 Project(s): 1120-57-60, 1517-14-71

Federal ID(s): WISC 2024010, WISC 2024013

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0236	611.3220 Inlets 2x2-FT	9.000 EACH	_____.	_____.
0238	611.3225 Inlets 2x2.5-FT	1.000 EACH	_____.	_____.
0240	612.0106 Pipe Underdrain 6-Inch	545.000 LF	_____.	_____.
0242	612.0108 Pipe Underdrain 8-Inch	61.000 LF	_____.	_____.
0244	614.0905 Crash Cushions Temporary	36.000 EACH	_____.	_____.
0246	614.2300 MGS Guardrail 3	14,525.000 LF	_____.	_____.
0248	614.2500 MGS Thrie Beam Transition	788.000 LF	_____.	_____.
0250	614.2610 MGS Guardrail Terminal EAT	33.000 EACH	_____.	_____.
0252	614.2620 MGS Guardrail Terminal Type 2	23.000 EACH	_____.	_____.
0254	616.0206 Fence Chain Link 6-FT	204.000 LF	_____.	_____.
0256	618.0100 Maintenance and Repair of Haul Roads (project) 01. 1120-57-60	1.000 EACH	_____.	_____.
0258	618.0100 Maintenance and Repair of Haul Roads (project) 02. 1517-14-71	1.000 EACH	_____.	_____.
0260	619.1000 Mobilization	1.000 EACH	_____.	_____.
0262	624.0100 Water	19.300 MGAL	_____.	_____.
0264	625.0100 Topsoil	760.000 SY	_____.	_____.
0266	625.0500 Salvaged Topsoil	5,047.000 SY	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20231114021 Project(s): 1120-57-60, 1517-14-71

Federal ID(s): WISC 2024010, WISC 2024013

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0268	628.1504 Silt Fence	24,800.000 LF	_____.	_____.
0270	628.1520 Silt Fence Maintenance	25,300.000 LF	_____.	_____.
0272	628.1905 Mobilizations Erosion Control	6.000 EACH	_____.	_____.
0274	628.1910 Mobilizations Emergency Erosion Control	8.000 EACH	_____.	_____.
0276	628.2004 Erosion Mat Class I Type B	5,047.000 SY	_____.	_____.
0278	628.7005 Inlet Protection Type A	2.000 EACH	_____.	_____.
0280	628.7010 Inlet Protection Type B	222.000 EACH	_____.	_____.
0282	628.7015 Inlet Protection Type C	12.000 EACH	_____.	_____.
0284	628.7555 Culvert Pipe Checks	26.000 EACH	_____.	_____.
0286	629.0210 Fertilizer Type B	5.400 CWT	_____.	_____.
0288	630.0130 Seeding Mixture No. 30	90.300 LB	_____.	_____.
0290	630.0200 Seeding Temporary	10.000 LB	_____.	_____.
0292	630.0500 Seed Water	17.000 MGAL	_____.	_____.
0294	633.5200 Markers Culvert End	25.000 EACH	_____.	_____.
0296	642.5401 Field Office Type D	1.000 EACH	_____.	_____.
0298	643.0300 Traffic Control Drums	232,816.000 DAY	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20231114021 Project(s): 1120-57-60, 1517-14-71

Federal ID(s): WISC 2024010, WISC 2024013

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0300	643.0420 Traffic Control Barricades Type III	16,233.000 DAY	_____.	_____.
0302	643.0705 Traffic Control Warning Lights Type A	32,466.000 DAY	_____.	_____.
0304	643.0715 Traffic Control Warning Lights Type C	57,148.000 DAY	_____.	_____.
0306	643.0800 Traffic Control Arrow Boards	2,010.000 DAY	_____.	_____.
0308	643.0900 Traffic Control Signs	63,752.000 DAY	_____.	_____.
0310	643.0910 Traffic Control Covering Signs Type I	49.000 EACH	_____.	_____.
0312	643.0920 Traffic Control Covering Signs Type II	999.000 EACH	_____.	_____.
0314	643.1000 Traffic Control Signs Fixed Message	451.000 SF	_____.	_____.
0316	643.1050 Traffic Control Signs PCMS	371.000 DAY	_____.	_____.
0318	643.1070 Traffic Control Cones 42-Inch	2,816.000 DAY	_____.	_____.
0320	643.1200.S Portable Automated Real-Time Traffic Queue Warning System	856.000 DAY	_____.	_____.
0322	643.3105 Temporary Marking Line Paint 4-Inch	2,700.000 LF	_____.	_____.
0324	643.3150 Temporary Marking Line Removable Tape 4-Inch	1,285.000 LF	_____.	_____.
0326	643.3170 Temporary Marking Line Epoxy 6-Inch	627,029.000 LF	_____.	_____.
0328	643.3180 Temporary Marking Line Removable Tape 6-Inch	42,945.000 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20231114021 Project(s): 1120-57-60, 1517-14-71

Federal ID(s): WISC 2024010, WISC 2024013

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0330	643.3270 Temporary Marking Line Epoxy 10-Inch	60,415.000 LF	_____.	_____.
0332	643.3280 Temporary Marking Line Removable Tape 10-Inch	1,130.000 LF	_____.	_____.
0334	643.3960 Temporary Marking Removable Mask Out Tape 6-Inch	1,350.000 LF	_____.	_____.
0336	643.3970 Temporary Marking Removable Mask Out Tape 10-Inch	530.000 LF	_____.	_____.
0338	643.5000 Traffic Control	1.000 EACH	_____.	_____.
0340	645.0105 Geotextile Type C	162.000 SY	_____.	_____.
0342	645.0112 Geotextile Type DF Schedule B	337.000 SY	_____.	_____.
0344	645.0120 Geotextile Type HR	1,281.000 SY	_____.	_____.
0346	646.1020 Marking Line Epoxy 4-Inch	2,653.000 LF	_____.	_____.
0348	646.1555 Marking Line Grooved Contrast Permanent Tape 4-Inch	810.000 LF	_____.	_____.
0350	646.2020 Marking Line Epoxy 6-Inch	2,635.000 LF	_____.	_____.
0352	646.2025 Marking Line Grooved Black Epoxy 6-Inch	46,566.000 LF	_____.	_____.
0354	646.2040 Marking Line Grooved Wet Ref Epoxy 6-Inch	212,115.000 LF	_____.	_____.
0356	646.2050 Marking Line Grooved Permanent Tape 6-Inch	47,150.000 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20231114021 Project(s): 1120-57-60, 1517-14-71

Federal ID(s): WISC 2024010, WISC 2024013

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0358	646.3555 Marking Line Grooved Contrast Permanent Tape 8-Inch	547.000 LF	_____.	_____.
0360	646.4020 Marking Line Epoxy 10-Inch	570.000 LF	_____.	_____.
0362	646.4025 Marking Line Grooved Black Epoxy 10-Inch	4,910.000 LF	_____.	_____.
0364	646.4050 Marking Line Grooved Permanent Tape 10-Inch	40,524.000 LF	_____.	_____.
0366	646.5020 Marking Arrow Epoxy	56.000 EACH	_____.	_____.
0368	646.5120 Marking Word Epoxy	17.000 EACH	_____.	_____.
0370	646.6120 Marking Stop Line Epoxy 18-Inch	353.000 LF	_____.	_____.
0372	646.6220 Marking Yield Line Epoxy 18-Inch	20.000 EACH	_____.	_____.
0374	646.6466 Cold Weather Marking Epoxy 6-Inch	4,500.000 LF	_____.	_____.
0376	646.6470 Cold Weather Marking Epoxy 10-Inch	4,000.000 LF	_____.	_____.
0378	646.7220 Marking Chevron Epoxy 24-Inch	315.000 LF	_____.	_____.
0380	646.7420 Marking Crosswalk Epoxy Transverse Line 6-Inch	376.000 LF	_____.	_____.
0382	646.9000 Marking Removal Line 4-Inch	61,670.000 LF	_____.	_____.
0384	646.9010 Marking Removal Line Water Blasting 4-Inch	6,740.000 LF	_____.	_____.
0386	646.9055 Marking Removal Line Grooved Contrast Permanent Tape 4-Inch	50,166.000 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20231114021 Project(s): 1120-57-60, 1517-14-71

Federal ID(s): WISC 2024010, WISC 2024013

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0388	646.9155 Marking Removal Line Grooved Contrast Permanent Tape 8-Inch	42,139.000 LF	_____.	_____.
0390	646.9310 Marking Removal Special Marking Water Blasting	3.000 EACH	_____.	_____.
0392	646.9400 Marking Removal Plowable Raised Pavement Markers	61.000 EACH	_____.	_____.
0394	650.4000 Construction Staking Storm Sewer	49.000 EACH	_____.	_____.
0396	650.6501 Construction Staking Structure Layout (structure) 01. B-44-0062	1.000 EACH	_____.	_____.
0398	650.6501 Construction Staking Structure Layout (structure) 02. B-70-0084	1.000 EACH	_____.	_____.
0400	650.6501 Construction Staking Structure Layout (structure) 03. B-70-0132	1.000 EACH	_____.	_____.
0402	650.6501 Construction Staking Structure Layout (structure) 10. N-70-0009	1.000 EACH	_____.	_____.
0404	650.7000 Construction Staking Concrete Pavement	530.000 LF	_____.	_____.
0406	650.8000 Construction Staking Resurfacing Reference	115,480.000 LF	_____.	_____.
0408	650.9911 Construction Staking Supplemental Control (project) 01. 1120-57-60	1.000 EACH	_____.	_____.
0410	652.0125 Conduit Rigid Metallic 2-Inch	16.000 LF	_____.	_____.
0412	652.0225 Conduit Rigid Nonmetallic Schedule 40 2-Inch	362.000 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20231114021 Project(s): 1120-57-60, 1517-14-71

Federal ID(s): WISC 2024010, WISC 2024013

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0414	652.0325 Conduit Rigid Nonmetallic Schedule 80 2-Inch	90.000 LF	_____.	_____.
0416	653.0164 Pull Boxes Non-Conductive 24x42-Inch	8.000 EACH	_____.	_____.
0418	653.0208 Junction Boxes 8x8x8-Inch	6.000 EACH	_____.	_____.
0420	653.0220 Junction Boxes 18x6x6-Inch	1.000 EACH	_____.	_____.
0422	653.0905 Removing Pull Boxes	6.000 EACH	_____.	_____.
0424	654.0220 Concrete Control Cabinet Bases Type 10	4.000 EACH	_____.	_____.
0426	655.0615 Electrical Wire Lighting 10 AWG	8,620.000 LF	_____.	_____.
0428	656.0201 Electrical Service Meter Breaker Pedestal (location) 01. IH 41 & Cecil Street	1.000 EACH	_____.	_____.
0430	656.0201 Electrical Service Meter Breaker Pedestal (location) 02. IH 41 & Main Street	1.000 EACH	_____.	_____.
0432	656.0201 Electrical Service Meter Breaker Pedestal (location) 03. IH 41 & CTH O	1.000 EACH	_____.	_____.
0434	656.0201 Electrical Service Meter Breaker Pedestal (location) 04. IH 41 & Spencer Street	1.000 EACH	_____.	_____.
0436	690.0150 Sawing Asphalt	9,556.000 LF	_____.	_____.
0438	690.0250 Sawing Concrete	25,528.000 LF	_____.	_____.
0440	715.0502 Incentive Strength Concrete Structures	4,815.000 DOL	1.00000	4,815.00



Proposal Schedule of Items

Proposal ID: 20231114021 Project(s): 1120-57-60, 1517-14-71

Federal ID(s): WISC 2024010, WISC 2024013

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0442	740.0440 Incentive IRI Ride	239,130.000 DOL	1.00000	239,130.00
0444	801.0117 Railroad Flagging Reimbursement	112,450.000 DOL	1.00000	112,450.00
0446	999.2000.S Installing and Maintaining Bird Deterrent System (station) 01. Station 1269'SB'+00	1.000 EACH	_____.	_____.
0448	999.2000.S Installing and Maintaining Bird Deterrent System (station) 02. Station 1269'NB'+00	1.000 EACH	_____.	_____.
0450	999.2000.S Installing and Maintaining Bird Deterrent System (station) 03. Station 137'FWN'+00	1.000 EACH	_____.	_____.
0452	ASP.1T0A On-the-Job Training Apprentice at \$5.00/HR	2,200.000 HRS	5.00000	11,000.00
0454	ASP.1T0G On-the-Job Training Graduate at \$5.00/HR	5,960.000 HRS	5.00000	29,800.00
0456	SPV.0035 Special 01. Rapid Set Deck Repair	1.000 CY	_____.	_____.
0458	SPV.0060 Special 01. Inlets 2X3-FT Modified	7.000 EACH	_____.	_____.
0460	SPV.0060 Special 02. Inlet Covers Type 27-M Bolted	13.000 EACH	_____.	_____.
0462	SPV.0060 Special 03. Temporary Support B-70-132	1.000 EACH	_____.	_____.
0464	SPV.0060 Special 04. Reset Existing Bearings	10.000 EACH	_____.	_____.
0466	SPV.0090 Special 01. Cured in Place Pipe Liner, 12-Inch	360.000 LF	_____.	_____.
0468	SPV.0090 Special 02. Glare Screens Temporary	2,687.500 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20231114021 Project(s): 1120-57-60, 1517-14-71

Federal ID(s): WISC 2024010, WISC 2024013

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0470	SPV.0090 Special 03. Bridge Deck Crack Sealing	1,900.000 LF	_____.	_____.
0472	SPV.0090 Special 04. Joint Sealing	2,439.000 LF	_____.	_____.
0474	SPV.0090 Special 05. Foundation Drilling 42-Inch Diameter	28.000 LF	_____.	_____.
0476	SPV.0090 Special 06. Salvage and Reinstall Steel Plate Beam Guard	75.000 LF	_____.	_____.
0478	SPV.0165 Special 01. Noise Barriers Double-Sided Sound Absorptive N-70-0009	1,890.000 SF	_____.	_____.
0480	SPV.0180 Special 01. Removing Rumble Strips	3,335.000 SY	_____.	_____.
0482	SPV.0180 Special 02. Resin Binder High Friction Surface Treatment	19,950.000 SY	_____.	_____.
0484	SPV.0180 Special 03. Methacrylate Flood Seal	17,469.000 SY	_____.	_____.
0486	SPV.0180 Special 04. High Friction Surface Treatment Polymer Overlay	5,070.000 SY	_____.	_____.
Section: 0001			Total:	_____.
			Total Bid:	_____.

