



# Wisconsin Department of Transportation

October 30, 2023

## Division of Transportation Systems Development

Bureau of Project Development  
4822 Madison Yards Way, 4<sup>th</sup> Floor South  
Madison, WI 53705

Telephone: (608) 266-1631  
Facsimile (FAX): (608) 266-8459

### NOTICE TO ALL CONTRACTORS:

**Proposal #43: 8220-00-70, WISC 2024040**  
**Gilman - Medford**  
**Black River Bridge B-60-0001**  
**STH 64**  
**Taylor County**

### Letting of November 14, 2023

This is Addendum No. 01, which provides for the following:

#### Special Provisions:

Added Special Provisions	
Article No.	Description
21	Asphaltic Surface, Item 465.0105

#### Schedule of Items:

Added Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Quantity Added	Proposal Total After Addendum
465.0105	Asphaltic Surface	TON	0	154	154

Deleted Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Proposal Quantity Change (-)	Proposal Total After Addendum
460.2000	Incentive Density HMA Pavement	DOL	100	-100	0
460.6244	HMA Pavement 4 MT 58-34 S	TON	154	-154	0

**Plan Sheets:**

<b>Revised Plan Sheets</b>	
<b>Plan Sheet</b>	<b>Plan Sheet Title (brief description of changes to sheet)</b>
3	Typical Sections (Replaced 4 MT 58-34 S with Asphaltic Surface)
11	Miscellaneous Quantities (switched bid item for Asphaltic Surface)

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

*Mike Coleman*

Proposal Development Specialist  
Proposal Management Section

**ADDENDUM NO. 01**

**8220-00-70**

**October 30, 2023**

**Special Provisions**

**21. Asphaltic Surface, Item 465.0105**

Conform to standard spec 465 as modified in this special provision.

**Materials**

Furnish a 4 MT 58-28 S asphaltic mixture.


**Schedule of Items**

Attached, dated October 30, 2023, are the revised Schedule of Items Pages 1 - 6.

**Plan Sheets**

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:  
Revised: 3 and 11.


END OF ADDENDUM

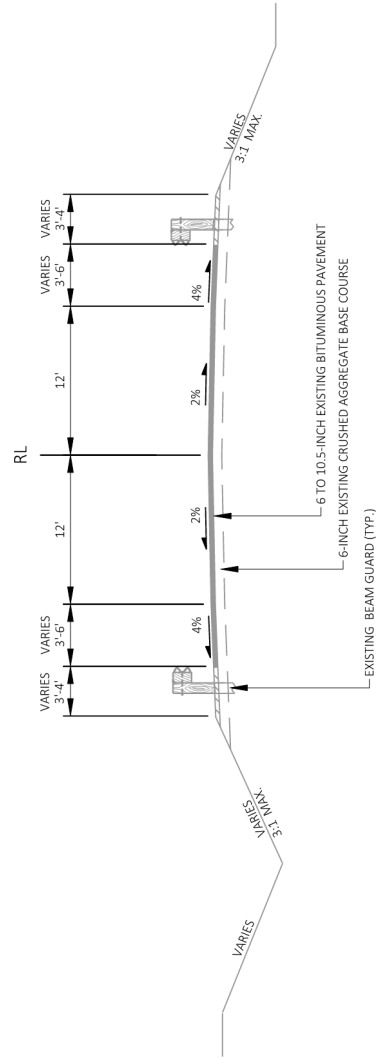

EXISTING TYPICAL SECTION - STH 64  
STA 479+40 - STA 483+05

Addendum No. 01  
ID 8220-00-70  
Revised Sheet 3  
October 30, 2023

- LEGEND
- ① ASPHALTIC SURFACE, 7-INCH LOWER, 2 1/2-INCH, (4MT 58-345) UPPER, 2-INCH, (4MT 58-345)
  - ② BASE AGGREGATE DENSE 1 1/4-INCH, 12-INCH
  - ③ BASE AGGREGATE DENSE 3/4-INCH
  - ④ REMOVE, SALVAGE, AND REINSTALL GUARDRAIL
  - Ⓐ SEEDING MIXTURE NO. 30 & FERTILIZER TYPE B
  - Ⓑ SALVAGED TOPSOIL, SEEDING MIXTURE NO. 30, FERTILIZER TYPE B & EROSION MAT URBAN CLASS I TYPE B

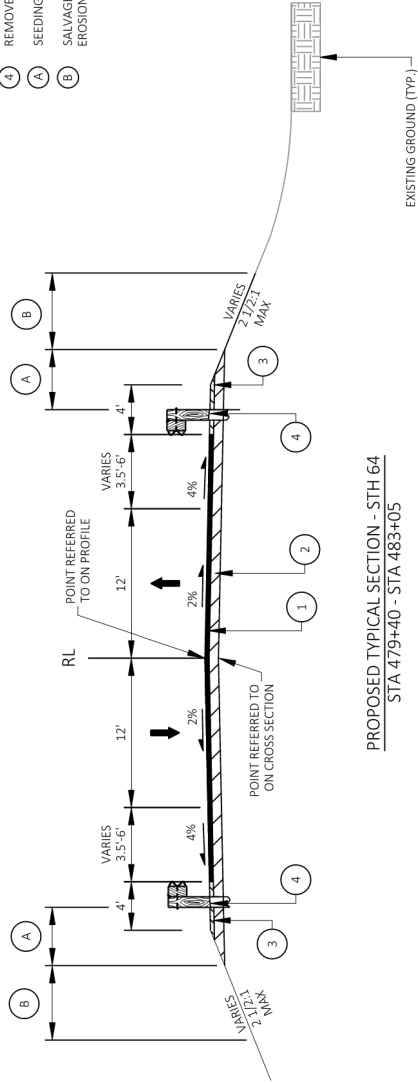

PROPOSED TYPICAL SECTION - STH 64  
STA 479+40 - STA 483+05

CONCRETE SURFACE DRAINS

CATEGORY	STATION	LOCATION	REMARKS
0010	482+50 LT	STH 64	
0010	482+90 RT	STH 64	
<b>PROJECT TOTAL</b>			<b>1.6</b>

416.1010  
CONCRETE SURFACE DRAINS  
CY

BASE AGGREGATE DENSE

CATEGORY	STATION TO	STATION	LOCATION	TON	REMARKS
0010	479+40	483+05	STH 64	29	
<b>PROJECT TOTAL</b>				<b>29</b>	<b>452</b>

305.0110 305.0120  
BASE AGGREGATE DENSE 3/4-INCH  
BASE AGGREGATE DENSE 1 1/4-INCH  
TON

RIPRAP

CATEGORY	STATION	LOCATION	REMARKS
0010	482+50 LT	STH 64	
0010	482+90 RT	STH 64	
<b>PROJECT TOTAL</b>			<b>5.8</b>

606.0200 645.0130  
RIPRAP MEDIUM GEOTEXTILE TYPER  
CY SY

ASPHALTIC ITEMS

CATEGORY	STATION TO	STATION	LOCATION	GAL	TON	REMARKS
0010	479+40	483+05	STH 64	55	154	
<b>PROJECT TOTAL</b>				<b>55</b>	<b>154</b>	

455.0605 465.0105  
TACK COAT ASPHALTIC SURFACE  
GAL TON

CONCRETE ITEMS

CATEGORY	STATION TO	STATION	LOCATION	SY	LF	REMARKS
0010	479+40	483+05	STH 64	27	116.6	
<b>PROJECT TOTAL</b>				<b>27</b>	<b>116.6</b>	<b>19</b>

415.0060 415.0410 601.0588 601.0590  
CONCRETE PAVEMENT 6-INCH APPROACH SLAB TYPE TBT  
CONCRETE CURB & GUTTER 4-INCH SLOPED 36-INCH TYPE TBT  
CONCRETE CURB & GUTTER 4-INCH SLOPED 36-INCH TYPE TBT  
SY LF LF

MISCELLANEOUS QUANTITIES

CATEGORY	STATION TO	STATION	LOCATION	SY	LF	REMARKS
0010	479+40	483+05	STH 64	27	116.6	
<b>PROJECT TOTAL</b>				<b>27</b>	<b>116.6</b>	<b>19</b>

601.0588 601.0590  
CONCRETE CURB & GUTTER 4-INCH SLOPED 36-INCH TYPE TBT  
CONCRETE CURB & GUTTER 4-INCH SLOPED 36-INCH TYPE TBT  
LF LF

Addendum No. 01  
ID 8220-00-70  
Revised Sheet 11  
October 30, 2023



Proposal Schedule of Items

Proposal ID: 20231114043 Project(s): 8220-00-70

Federal ID(s): WISC 2024040

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0002	203.0260 Removing Structure Over Waterway Minimal Debris (structure) 01. B-60-0001	1.000 EACH	_____.	_____.
0004	204.0165 Removing Guardrail	50.000 LF	_____.	_____.
0006	205.0100 Excavation Common	569.000 CY	_____.	_____.
0008	206.1001 Excavation for Structures Bridges (structure) 01. B-60-0001	1.000 EACH	_____.	_____.
0010	213.0100 Finishing Roadway (project) 01. 8220-00-70	1.000 EACH	_____.	_____.
0012	305.0110 Base Aggregate Dense 3/4-Inch	29.000 TON	_____.	_____.
0014	305.0120 Base Aggregate Dense 1 1/4-Inch	452.000 TON	_____.	_____.
0016	415.0060 Concrete Pavement 6-Inch	27.000 SY	_____.	_____.
0018	415.0410 Concrete Pavement Approach Slab	116.600 SY	_____.	_____.
0020	455.0605 Tack Coat	55.000 GAL	_____.	_____.
0026	502.0100 Concrete Masonry Bridges	251.000 CY	_____.	_____.
0028	502.3101 Expansion Device	74.000 LF	_____.	_____.
0030	502.3200 Protective Surface Treatment	735.000 SY	_____.	_____.
0032	502.3210 Pigmented Surface Sealer	220.000 SY	_____.	_____.
0034	502.4205 Adhesive Anchors No. 5 Bar	45.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20231114043 Project(s): 8220-00-70

Federal ID(s): WISC 2024040

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0036	505.0600 Bar Steel Reinforcement HS Coated Structures	52,070.000 LB	_____.	_____.
0038	509.1500 Concrete Surface Repair	108.000 SF	_____.	_____.
0040	514.0445 Floor Drains Type GC	8.000 EACH	_____.	_____.
0042	514.2625 Downspout 6-Inch	21.000 LF	_____.	_____.
0044	517.0901.S Preparation and Coating of Top Flanges (structure) 01. B-60-0001	1.000 EACH	_____.	_____.
0046	517.1801.S Structure Repainting Recycled Abrasive (structure) 01. B-60-0001	1.000 EACH	_____.	_____.
0048	517.4501.S Negative Pressure Containment and Collection of Waste Materials (structure) 01. B-60-0001	1.000 EACH	_____.	_____.
0050	517.6001.S Portable Decontamination Facility	1.000 EACH	_____.	_____.
0052	601.0588 Concrete Curb & Gutter 4-Inch Sloped 36-Inch Type TBT	86.000 LF	_____.	_____.
0054	601.0590 Concrete Curb & Gutter 4-Inch Sloped 36-Inch Type TBTT	19.000 LF	_____.	_____.
0056	602.3010 Concrete Surface Drains	1.600 CY	_____.	_____.
0058	606.0200 Riprap Medium	5.800 CY	_____.	_____.
0060	606.0300 Riprap Heavy	8.000 CY	_____.	_____.
0062	614.0150 Anchor Assemblies for Steel Plate Beam Guard	4.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20231114043 Project(s): 8220-00-70

Federal ID(s): WISC 2024040

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0064	614.0345 Steel Plate Beam Guard Short Radius	43.000 LF	_____.	_____.
0066	614.0950 Replacing Guardrail Posts and Blocks	69.000 EACH	_____.	_____.
0068	618.0100 Maintenance and Repair of Haul Roads (project) 01. 8220-00-70	1.000 EACH	_____.	_____.
0070	619.1000 Mobilization	1.000 EACH	_____.	_____.
0072	624.0100 Water	8.000 MGAL	_____.	_____.
0074	625.0500 Salvaged Topsoil	265.000 SY	_____.	_____.
0076	628.1504 Silt Fence	500.000 LF	_____.	_____.
0078	628.1520 Silt Fence Maintenance	500.000 LF	_____.	_____.
0080	628.1905 Mobilizations Erosion Control	2.000 EACH	_____.	_____.
0082	628.1910 Mobilizations Emergency Erosion Control	1.000 EACH	_____.	_____.
0084	628.2008 Erosion Mat Urban Class I Type B	288.000 SY	_____.	_____.
0086	628.7560 Tracking Pads	2.000 EACH	_____.	_____.
0088	629.0210 Fertilizer Type B	0.250 CWT	_____.	_____.
0090	630.0130 Seeding Mixture No. 30	5.000 LB	_____.	_____.
0092	630.0200 Seeding Temporary	1.000 LB	_____.	_____.
0094	630.0500 Seed Water	6.000 MGAL	_____.	_____.





Proposal Schedule of Items

Proposal ID: 20231114043 Project(s): 8220-00-70

Federal ID(s): WISC 2024040

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0096	634.0614 Posts Wood 4x6-Inch X 14-FT	18.000 EACH	_____.	_____.
0098	637.2210 Signs Type II Reflective H	12.000 SF	_____.	_____.
0100	637.2230 Signs Type II Reflective F	132.000 SF	_____.	_____.
0102	638.2602 Removing Signs Type II	6.000 EACH	_____.	_____.
0104	638.3000 Removing Small Sign Supports	6.000 EACH	_____.	_____.
0106	642.5001 Field Office Type B	1.000 EACH	_____.	_____.
0108	643.0300 Traffic Control Drums	35.000 DAY	_____.	_____.
0110	643.0420 Traffic Control Barricades Type III	1,575.000 DAY	_____.	_____.
0112	643.0705 Traffic Control Warning Lights Type A	2,850.000 DAY	_____.	_____.
0114	643.0900 Traffic Control Signs	8,850.000 DAY	_____.	_____.
0116	643.0920 Traffic Control Covering Signs Type II	2.000 EACH	_____.	_____.
0118	643.1050 Traffic Control Signs PCMS	14.000 DAY	_____.	_____.
0120	643.5000 Traffic Control	1.000 EACH	_____.	_____.
0122	645.0120 Geotextile Type HR	28.000 SY	_____.	_____.
0124	645.0130 Geotextile Type R	21.000 SY	_____.	_____.
0126	646.1020 Marking Line Epoxy 4-Inch	110,460.000 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20231114043 Project(s): 8220-00-70

Federal ID(s): WISC 2024040

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0128	646.2020 Marking Line Epoxy 6-Inch	1,150.000 LF	_____.	_____.
0130	648.0100 Locating No-Passing Zones	7.540 MI	_____.	_____.
0132	650.4500 Construction Staking Subgrade	153.000 LF	_____.	_____.
0134	650.5000 Construction Staking Base	153.000 LF	_____.	_____.
0136	650.5500 Construction Staking Curb Gutter and Curb & Gutter	86.000 LF	_____.	_____.
0138	650.6501 Construction Staking Structure Layout (structure) 01. B-60-0001	1.000 EACH	_____.	_____.
0140	650.9911 Construction Staking Supplemental Control (project) 01. 8220-00-70	1.000 EACH	_____.	_____.
0142	650.9920 Construction Staking Slope Stakes	153.000 LF	_____.	_____.
0144	690.0150 Sawing Asphalt	88.000 LF	_____.	_____.
0146	715.0502 Incentive Strength Concrete Structures	1,506.000 DOL	1.00000	1,506.00
0148	715.0720 Incentive Compressive Strength Concrete Pavement	500.000 DOL	1.00000	500.00
0150	999.2000.S Installing and Maintaining Bird Deterrent System (station) 01. 481+20	1.000 EACH	_____.	_____.
0152	ASP.1T0A On-the-Job Training Apprentice at \$5.00/HR	300.000 HRS	5.00000	1,500.00
0154	ASP.1T0G On-the-Job Training Graduate at \$5.00/HR	300.000 HRS	5.00000	1,500.00



Proposal Schedule of Items

Proposal ID: 20231114043 Project(s): 8220-00-70

Federal ID(s): WISC 2024040

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0156	SPV.0090 Special 01. Remove, Salvage, and Reinstall Guardrail	216.000 LF	_____.	_____.
0158	465.0105 Asphaltic Surface	154.000 TON	_____.	_____.
<b>Section: 0001</b>			<b>Total:</b>	_____.
			<b>Total Bid:</b>	_____.

