



Wisconsin Department of Transportation

Division of Transportation Systems Development

Bureau of Project Development
4822 Madison Yards Way, 4th Floor South
Madison, WI 53705

December 7, 2023

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

Proposal #12: 7323-00-71, WISC 2024058
STH 16 - CTH S
La Crosse River Bridge, B-32-0245
CTH M
La Crosse County

Letting of December 12, 2023

This is Addendum No. 01, which provides for the following:

Schedule of Items:

Revised Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Proposal Quantity Change (-)	Proposal Total After Addendum
502.0100	Concrete Masonry Bridges	CY	1162	171	1333
503.0172	Prestressed Girder Type I 72W-Inch	LF	972	-18	954

Plan Sheets:

Revised Plan Sheets ID 7323-00-71	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
73	Structure Plan-Cross Section, Notes and Quantities (quantity changes for items 502.0100 Concrete Masonry Bridges & 503.0172 Prestressed Girder Type I 72W-Inch)

Schedule of Items

Attached, dated December 7, 2023, are the revised Schedule of Items Page 2.

Plan Sheets ID 7323-00-71

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:

Revised: 73.

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,


Mike Coleman

Proposal Development Specialist
Proposal Management Section

END OF ADDENDUM

GENERAL NOTES

- DRAWINGS SHALL NOT BE SCALED.
- ALL DIMENSIONS ARE IN FEET AND INCHES UNLESS OTHERWISE NOTED.
- ALL STATIONS AND ELEVATION ARE IN FEET. ELEVATIONS ARE REFERENCE TO THE NAVD 88 (2007) DATUM.
- BAR STEEL REINFORCEMENT SHALL BE EMBEDDED 2" CLEAR UNLESS OTHERWISE NOTED.
- THE FIRST OR FIRST TWO DIGITS OF THE BAR MARK IDENTIFIES THE BAR SIZE.
- JOINT FILLER SHALL CONFORM TO THE REQUIREMENTS OF AASHTO DESIGNATION M53 TYPE 1, 2, OR 3 OR AASHTO DESIGNATION M23.
- THE SLOPE OF THE FILL IN FRONT OF THE ABUTMENTS SHALL BE COVERED WITH RIPRAP HEAVY AND GEOTEXTILE TYPE HR TO THE EXTENT SHOWN ON THE GENERAL PLAN SHEET AND IN THE ABUTMENT DETAILS.
- THE EXISTING GROUNDLINE SHALL BE THE UPPER LIMITS OF EXCAVATION FOR STRUCTURES.
- AT ABUTMENTS, ALL SPACES EXCAVATED AND NOT OCCUPIED BY THE NEW STRUCTURE SHALL BE BACKFILLED WITH STRUCTURE BACKFILL UNLESS OTHERWISE NOTED.
- THE HAUNCH CONCRETE QUANTITY IS BASED ON THE AVERAGE HAUNCH SHOWN ON THE PRESTRESSED GIRDER DETAILS SHEET.
- BEVEL EXPOSED EDGES OF CONCRETE 3/4" UNLESS OTHERWISE NOTED.
- SEAL ALL EXPOSED HORIZONTAL AND VERTICAL SURFACES OF 1/2" FILLER WITH NON-STAINING NON-ASPHALTIC JOINT SEALER (1" DEEP & HOLD 1/8" BELOW SURFACE OF CONCRETE).
- COAT WITH "PROTECTIVE SURFACE TREATMENT" PER THE STANDARD SPECIFICATIONS AND THE SUPERSTRUCTURE DETAILS SHEET. APPLY PROTECTIVE SURFACE TREATMENT TO TOP OF BRIDGE DECK.
- FOR EXISTING STRUCTURE SEE PROFILE GRADE LINE THIS SHEET.
- PIGMENTED SURFACE SEALER SHALL BE APPLIED TO THE INSIDE ENDS, AND TOP FACES OF PARAPETS.

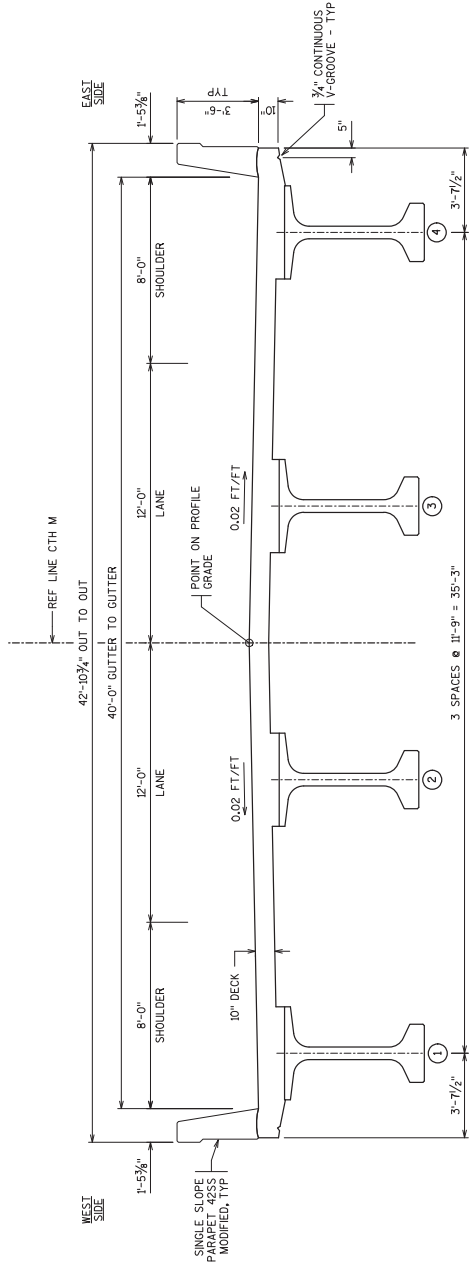

CROSS SECTION THRU BRIDGE

(LOOKING NORTH)
(SEE SECTION THRU PIER ON SHEET 3)

BID ITEM NUMBER	BID ITEMS	UNIT	SOUTH ABUT	PIER 1	PIER 2	NORTH ABUT	SUPER	TOTALS
203.0260	REMOVING STRUCTURE OVER WATERWAY MINIMAL DEBRIS B-32-4	EACH						1
206.1001	EXCAVATION FOR STRUCTURES BRIDGES B-32-245	EACH						1
206.5001	COFFERDAM B-32-245	EACH		1	1			2
210.1800	BACKFILL STRUCTURE TYPE A	TON	877	214.3	269.9	550	1427	1427
502.0100	CONCRETE MASONRY BRIDGES	CY	137.3	181	350	677	1345.3	1345.3
502.0100	CONCRETE MASONRY SEAL	CY					1080	1080
502.3200	PROTECTIVE SURFACE TREATMENT	SY					298	298
503.0172	PIGMENTED SURFACE SEALER	SY					1080	1080
505.0400	PRESTRESSED GIRDER TYPE 1 72W-INCH	LF					5230	5230
505.0600	BAR STEEL REINFORCEMENT HS STRUCTURES	LB	1920	8917	8917	5230	24984	24984
506.2605	BEARING PADS ELASTOMERIC NON-LAMINATED	LB	10000	3190	3190	4370	92520	92520
506.4000	STEEL DIAPHRAGMS B-32-245	EACH	4	8	8	4	24	24
516.0500	RUBBERIZED MEMBRANE WATERPROOFING	SY	48			44	12	12
550.1120	PIILING STEEL HP 12-INCH X 53 LB	LF					400	400
606.0300	RIPPAP HEAVY	CY	560			523	1083	1083
612.0406	PIPE UNDERDRAIN WRAPPED 6-INCH	LF	115			105	220	220
614.0150	ANCHOR ASSEMBLIES FOR STEEL PLATE BEAM GUARD	EACH	2			2	4	4
645.0111	GEOTEXTILE TYPE DF SCHEDULE A	SY	54			50	104	104
645.0120	GEOTEXTILE TYPE HR	SY	868			809	1677	1677
	NON-BID ITEMS							
	FILLER	SIZE	-	-	-	-	-	1/2" & 3/4"
	NAMEPLATE	EACH	1					1

NO.	DATE	QUANTITY REVISIONS	REVISION	BY
1	12/16/23	1	REVISED	CJB

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION


STRUCTURE B-32-245

DRAWN BY: [Signature]
PLANS RAD C/D: NCK
SHEET 2 OF 31

CROSS SECTION, NOTES AND QUANTITIES


73

Addendum No. 01
ID 7323-00-71
Revised Sheet 73
December 7, 2023



PROFILE GRADE LINE

(CTH M)

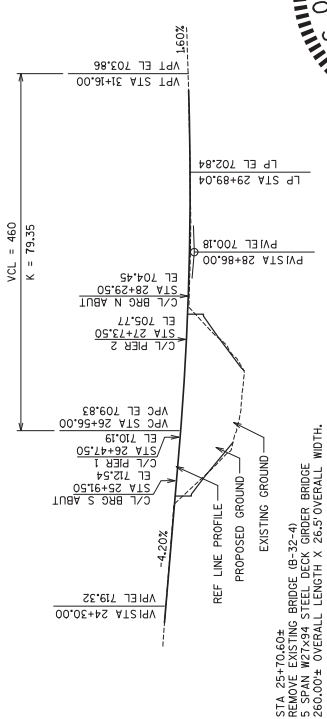

STA 25+70.60+
REMOVE EXISTING BRIDGE (B-32-4)
REPLACE WITH 12' DECK BRIDGE
260.00' OVERALL LENGTH X 26.5' OVERALL WIDTH.

12/07/23

12/16/2023



Proposal Schedule of Items

Proposal ID: 20231212012 Project(s): 7323-00-71

Federal ID(s): WISC 2024058

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0002	201.0105 Clearing	4.000 STA	_____.	_____.
0004	201.0205 Grubbing	4.000 STA	_____.	_____.
0006	203.0100 Removing Small Pipe Culverts	8.000 EACH	_____.	_____.
0008	203.0260 Removing Structure Over Waterway Minimal Debris (structure) 01. B-32-04	1.000 EACH	_____.	_____.
0010	204.0150 Removing Curb & Gutter	62.000 LF	_____.	_____.
0012	204.0165 Removing Guardrail	350.000 LF	_____.	_____.
0014	204.0190 Removing Surface Drains	2.000 EACH	_____.	_____.
0016	204.0220 Removing Inlets	2.000 EACH	_____.	_____.
0018	205.0100 Excavation Common	2,205.000 CY	_____.	_____.
0020	206.1001 Excavation for Structures Bridges (structure) 01. B-32-245	1.000 EACH	_____.	_____.
0022	206.5001 Cofferdams (structure) B-32-245	2.000 EACH	_____.	_____.
0024	208.0100 Borrow	1,261.000 CY	_____.	_____.
0026	210.1500 Backfill Structure Type A	1,427.000 TON	_____.	_____.
0028	213.0100 Finishing Roadway (project) 01. 7323-00-71	1.000 EACH	_____.	_____.
0030	305.0110 Base Aggregate Dense 3/4-Inch	146.000 TON	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20231212012 Project(s): 7323-00-71

Federal ID(s): WISC 2024058

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0032	305.0120 Base Aggregate Dense 1 1/4-Inch	2,032.000 TON	_____.	_____.
0034	312.0110 Select Crushed Material	1,288.000 TON	_____.	_____.
0036	415.0080 Concrete Pavement 8-Inch	84.000 SY	_____.	_____.
0038	415.0410 Concrete Pavement Approach Slab	134.000 SY	_____.	_____.
0040	455.0605 Tack Coat	87.000 GAL	_____.	_____.
0042	460.2000 Incentive Density HMA Pavement	310.000 DOL	1.00000	310.00
0044	460.5223 HMA Pavement 3 LT 58-28 S	286.000 TON	_____.	_____.
0046	460.5224 HMA Pavement 4 LT 58-28 S	191.000 TON	_____.	_____.
0048	465.0120 Asphaltic Surface Driveways and Field Entrances	20.000 TON	_____.	_____.
0050	502.0100 Concrete Masonry Bridges	1,333.000 CY	_____.	_____.
0052	502.1100 Concrete Masonry Seal	531.000 CY	_____.	_____.
0054	502.3200 Protective Surface Treatment	1,080.000 SY	_____.	_____.
0056	502.3210 Pigmented Surface Sealer	288.000 SY	_____.	_____.
0058	503.0172 Prestressed Girder Type I 72W-Inch	954.000 LF	_____.	_____.
0060	505.0400 Bar Steel Reinforcement HS Structures	24,984.000 LB	_____.	_____.
0062	505.0600 Bar Steel Reinforcement HS Coated Structures	169,670.000 LB	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20231212012 Project(s): 7323-00-71

Federal ID(s): WISC 2024058

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0064	506.2605 Bearing Pads Elastomeric Non-Laminated	24.000 EACH	_____.	_____.
0066	506.4000 Steel Diaphragms (structure) 01. B-32-0245	12.000 EACH	_____.	_____.
0068	516.0500 Rubberized Membrane Waterproofing	92.000 SY	_____.	_____.
0070	520.1024 Apron Endwalls for Culvert Pipe 24-Inch	4.000 EACH	_____.	_____.
0072	520.3324 Culvert Pipe Class III-A 24-Inch	56.000 LF	_____.	_____.
0074	521.1012 Apron Endwalls for Culvert Pipe Steel 12-Inch	2.000 EACH	_____.	_____.
0076	530.0112 Culvert Pipe Corrugated Polyethylene 12-Inch	93.000 LF	_____.	_____.
0078	550.1120 Piling Steel HP 12-Inch X 53 Lb	400.000 LF	_____.	_____.
0080	601.0411 Concrete Curb & Gutter 30-Inch Type D	48.000 LF	_____.	_____.
0082	601.0557 Concrete Curb & Gutter 6-Inch Sloped 36-Inch Type D	113.000 LF	_____.	_____.
0084	601.0588 Concrete Curb & Gutter 4-Inch Sloped 36-Inch Type TBT	106.000 LF	_____.	_____.
0086	601.0590 Concrete Curb & Gutter 4-Inch Sloped 36-Inch Type TBTT	25.000 LF	_____.	_____.
0088	606.0200 Riprap Medium	6.000 CY	_____.	_____.
0090	606.0300 Riprap Heavy	1,083.000 CY	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20231212012 Project(s): 7323-00-71

Federal ID(s): WISC 2024058

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0092	608.0315 Storm Sewer Pipe Reinforced Concrete Class III 15-Inch	170.000 LF	_____.	_____.
0094	608.0324 Storm Sewer Pipe Reinforced Concrete Class III 24-Inch	90.000 LF	_____.	_____.
0096	608.3012 Storm Sewer Pipe Class III-A 12-Inch	14.000 LF	_____.	_____.
0098	611.0530 Manhole Covers Type J	1.000 EACH	_____.	_____.
0100	611.0627 Inlet Covers Type HM	1.000 EACH	_____.	_____.
0102	611.0639 Inlet Covers Type H-S	1.000 EACH	_____.	_____.
0104	611.0642 Inlet Covers Type MS	2.000 EACH	_____.	_____.
0106	611.0654 Inlet Covers Type V	4.000 EACH	_____.	_____.
0108	611.2004 Manholes 4-FT Diameter	1.000 EACH	_____.	_____.
0110	611.3004 Inlets 4-FT Diameter	1.000 EACH	_____.	_____.
0112	611.3220 Inlets 2x2-FT	4.000 EACH	_____.	_____.
0114	611.3901 Inlets Median 1 Grate	2.000 EACH	_____.	_____.
0116	612.0406 Pipe Underdrain Wrapped 6-Inch	220.000 LF	_____.	_____.
0118	614.0150 Anchor Assemblies for Steel Plate Beam Guard	4.000 EACH	_____.	_____.
0120	614.0200 Steel Thrie Beam Structure Approach	20.600 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20231212012 Project(s): 7323-00-71

Federal ID(s): WISC 2024058

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0122	614.0345 Steel Plate Beam Guard Short Radius	35.100 LF	_____.	_____.
0124	614.0390 Steel Plate Beam Guard Short Radius Terminal	1.000 EACH	_____.	_____.
0126	614.2300 MGS Guardrail 3	62.500 LF	_____.	_____.
0128	614.2500 MGS Thrie Beam Transition	118.200 LF	_____.	_____.
0130	614.2610 MGS Guardrail Terminal EAT	3.000 EACH	_____.	_____.
0132	618.0100 Maintenance and Repair of Haul Roads (project) 01. 7323-00-71	1.000 EACH	_____.	_____.
0134	619.1000 Mobilization	1.000 EACH	_____.	_____.
0136	624.0100 Water	52.000 MGAL	_____.	_____.
0138	625.0500 Salvaged Topsoil	4,646.000 SY	_____.	_____.
0140	628.1504 Silt Fence	760.000 LF	_____.	_____.
0142	628.1520 Silt Fence Maintenance	1,520.000 LF	_____.	_____.
0144	628.1905 Mobilizations Erosion Control	3.000 EACH	_____.	_____.
0146	628.1910 Mobilizations Emergency Erosion Control	4.000 EACH	_____.	_____.
0148	628.2008 Erosion Mat Urban Class I Type B	4,668.000 SY	_____.	_____.
0150	628.6005 Turbidity Barriers	339.000 SY	_____.	_____.
0152	628.7005 Inlet Protection Type A	8.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20231212012 Project(s): 7323-00-71

Federal ID(s): WISC 2024058

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0154	628.7015 Inlet Protection Type C	6.000 EACH	_____.	_____.
0156	628.7504 Temporary Ditch Checks	94.000 LF	_____.	_____.
0158	629.0210 Fertilizer Type B	3.200 CWT	_____.	_____.
0160	630.0170 Seeding Mixture No. 70	19.000 LB	_____.	_____.
0162	630.0200 Seeding Temporary	128.000 LB	_____.	_____.
0164	630.0500 Seed Water	107.000 MGAL	_____.	_____.
0166	633.5200 Markers Culvert End	2.000 EACH	_____.	_____.
0168	638.2602 Removing Signs Type II	5.000 EACH	_____.	_____.
0170	638.3000 Removing Small Sign Supports	5.000 EACH	_____.	_____.
0172	642.5001 Field Office Type B	1.000 EACH	_____.	_____.
0174	643.0420 Traffic Control Barricades Type III	3,300.000 DAY	_____.	_____.
0176	643.0705 Traffic Control Warning Lights Type A	5,100.000 DAY	_____.	_____.
0178	643.0900 Traffic Control Signs	25,650.000 DAY	_____.	_____.
0180	643.0920 Traffic Control Covering Signs Type II	8.000 EACH	_____.	_____.
0182	643.1050 Traffic Control Signs PCMS	14.000 DAY	_____.	_____.
0184	643.5000 Traffic Control	1.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20231212012 Project(s): 7323-00-71

Federal ID(s): WISC 2024058

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0186	645.0111 Geotextile Type DF Schedule A	104.000 SY	_____.	_____.
0188	645.0120 Geotextile Type HR	1,685.000 SY	_____.	_____.
0190	645.0220 Geogrid Type SR	16,354.000 SY	_____.	_____.
0192	646.1020 Marking Line Epoxy 4-Inch	2,744.000 LF	_____.	_____.
0194	650.4000 Construction Staking Storm Sewer	11.000 EACH	_____.	_____.
0196	650.4500 Construction Staking Subgrade	412.000 LF	_____.	_____.
0198	650.5000 Construction Staking Base	412.000 LF	_____.	_____.
0200	650.5500 Construction Staking Curb Gutter and Curb & Gutter	290.000 LF	_____.	_____.
0202	650.6501 Construction Staking Structure Layout (structure) 01. B-32-0245	1.000 EACH	_____.	_____.
0204	650.7000 Construction Staking Concrete Pavement	77.000 LF	_____.	_____.
0206	650.9911 Construction Staking Supplemental Control (project) 01. 7323-00-71	1.000 EACH	_____.	_____.
0208	650.9920 Construction Staking Slope Stakes	473.000 LF	_____.	_____.
0210	690.0150 Sawing Asphalt	72.000 LF	_____.	_____.
0212	715.0502 Incentive Strength Concrete Structures	500.000 DOL	1.00000	500.00
0214	715.0720 Incentive Compressive Strength Concrete Pavement	500.000 DOL	1.00000	500.00



Proposal Schedule of Items

Proposal ID: 20231212012 Project(s): 7323-00-71

Federal ID(s): WISC 2024058

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0216	ASP.1T0A On-the-Job Training Apprentice at \$5.00/HR	500.000 HRS	5.00000	2,500.00
0218	ASP.1T0G On-the-Job Training Graduate at \$5.00/HR	375.000 HRS	5.00000	1,875.00
0220	SPV.0060 Special 01. Inlets 5-FT Diameter	1.000 EACH	_____.	_____.
Section: 0001			Total:	_____.
			Total Bid:	_____.

