



# Wisconsin Department of Transportation

## Division of Transportation Systems Development

Bureau of Project Development  
4822 Madison Yards Way, 4<sup>th</sup> Floor South  
Madison, WI 53705

December 6, 2023

Telephone: (608) 266-1631  
Facsimile (FAX): (608) 266-8459

### NOTICE TO ALL CONTRACTORS:

**Proposal #15: 1060-53-70, WISC 2024063  
Various Noise Wall Locations  
Locations on STN Per Annual Plan  
Off System  
Milwaukee & Waukesha Counties**

### Letting of December 12, 2023

This is Addendum No. 01, which provides for the following:

#### Schedule of Items:

Revised Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Proposal Quantity Change(-)	Proposal Total After Addendum
SPV.0060.01	Top Precast Sound Barrier Panel Support Repair	EACH	10	-3	7
SPV.0060.02	Removing and Reinstalling Sound Panels	EACH	349	-8	341
SPV.0165.02	Replacement Noise Barrier Panels Double Sided Sound Absorptive B-40-017	SF	135	+53	188

#### Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
96 & 97	Removed Top Panel Support Repair information and updated quantities. Added Noise Barrier Loading Diagram standard detail.

**Schedule of Items**

Attached, dated December 6, 2023, are the revised Schedule of Items Pages 5 and 6.

**Plan Sheets**

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:  
Revised: 96 & 97.

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,




*Mike Coleman*

Proposal Development Specialist  
Proposal Management Section


END OF ADDENDUM

Addendum No. 01  
ID 1060-53-70  
Revised Sheet 96  
December 6, 2023


STATE PROJECT NUMBER  
1060-53-70

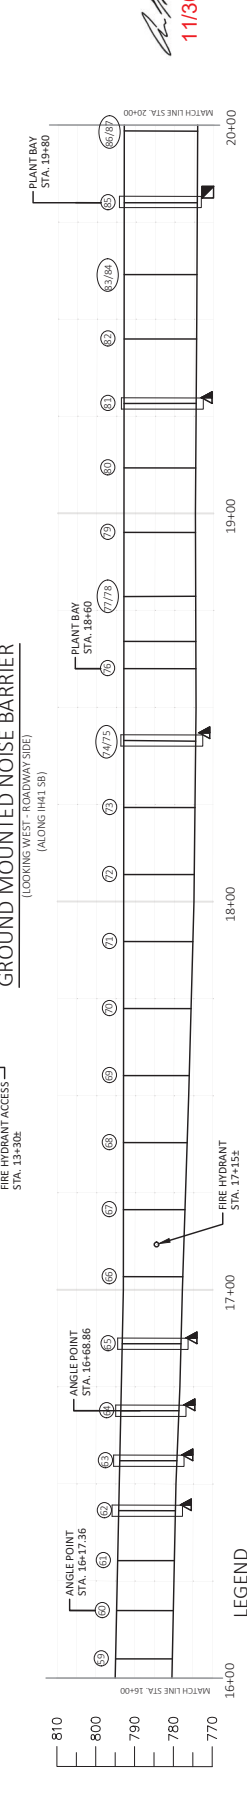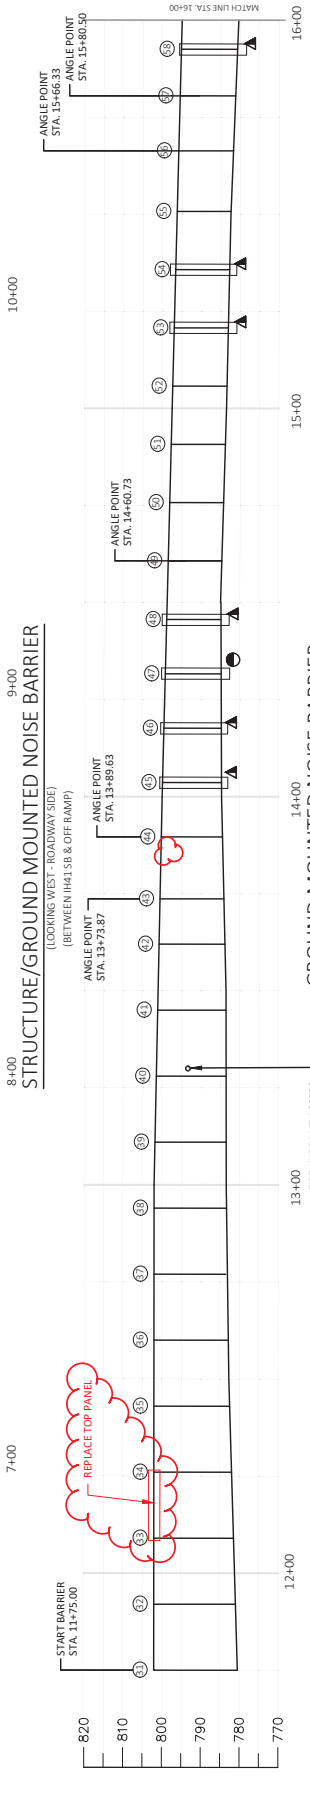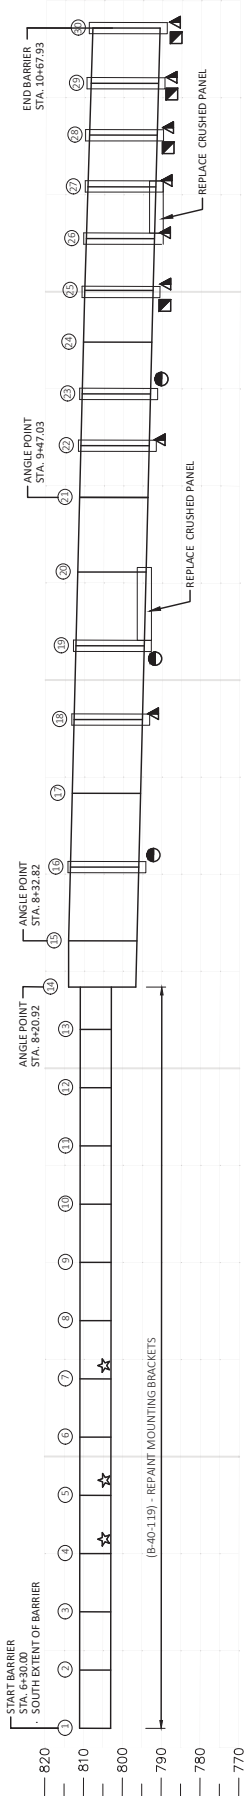

- LEGEND**
- SUPPORT POST (NUMBERED SOUTH TO NORTH)
  - ◻ CONCRETE SURFACE REPAIR ON ROADSIDE
  - ◻ CONCRETE SURFACE REPAIR ON RESIDENTIAL SIDE
  - ◻ REPLACE POST
  - ◻ PANEL SUPPORT REPAIR

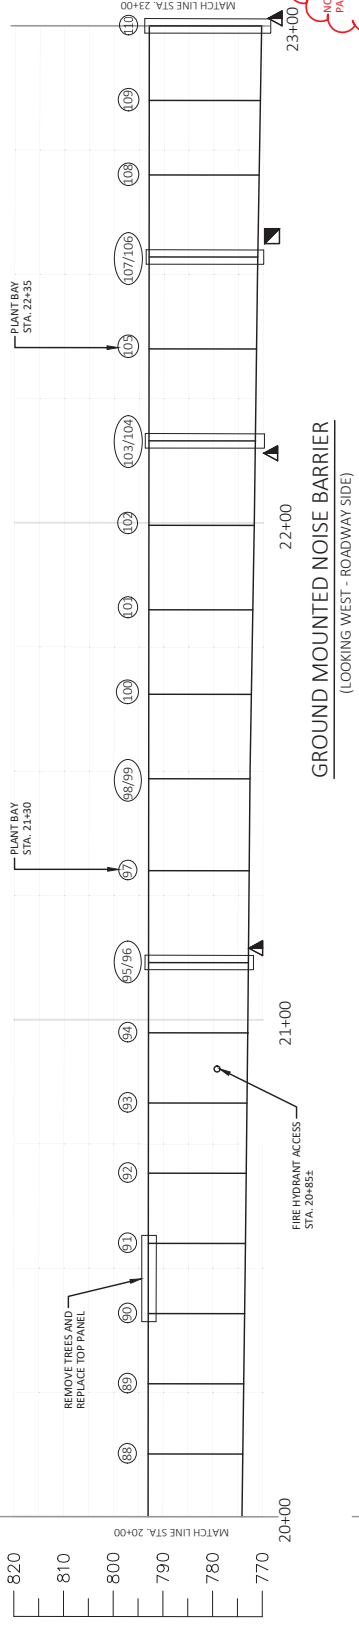


- SUPPORT POST REPLACEMENT SEQUENCE**
1. LOCATE SUPPORT POSTS THAT REQUIRE REPLACEMENT. SEE PLANS FOR LOCATION AND AS DIRECTED BY THE ENGINEER.
  2. REMOVE AND SALVAGE EXISTING UNDAMAGED PANELS FROM THE STRUCTURAL SUPPORT POSTS BY LIFTING THEM OUT. COST TO REMOVE, STORE, AND REINSTALL THE SOUND PANELS IS INCLUDED IN THE BID ITEM "REMOVING AND REINSTALLING SOUND PANELS". ANY DAMAGE TO THE SOUND PANELS CAUSED BY THE CONTRACTOR DURING REMOVAL, STORAGE OR REINSTALLING THE PANELS SHALL BE REPAIRED BY THE CONTRACTOR AT NO ADDITIONAL COST TO THE DEPARTMENT.
  3. REMOVE THE EXISTING CONCRETE POST AND CONCRETE FOUNDATION. MINIMIZE DISTURBANCE TO SURROUNDING SOILS.
  4. FILL HOLE WITH "BACKFILL CONTROLLED LOW STRENGTH" TO THE EXISTING GROUNDLINE.
  5. DRILL FOUNDATION FOR NEW POST AT LOCATION OF OLD POST.
  6. INSTALL NEW POST AND POUR FOUNDATION.
  7. REINSTALL SALVAGED SOUND PANELS.

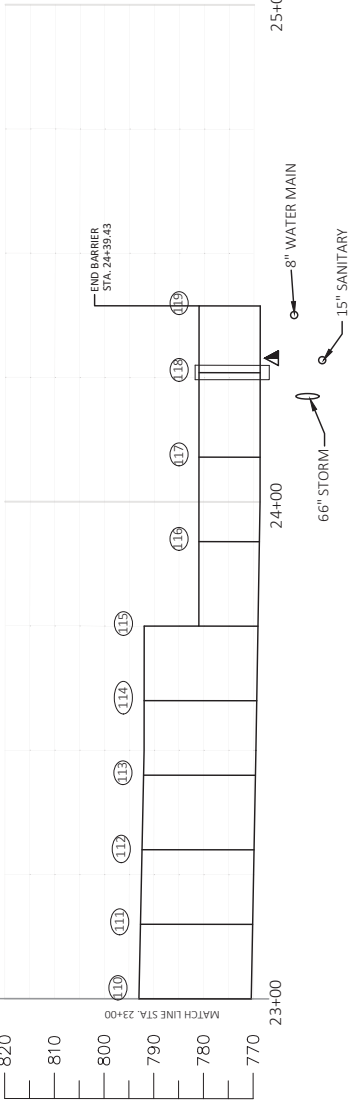

**BOTTOM PANEL SUPPORT REPAIR SEQUENCE**

1. LOCATE SOUND PANELS THAT HAVE SETTLED PAST THE EXISTING SUPPORT BRACKETS.
2. REMOVE AND SALVAGE EXISTING UNDAMAGED PANELS FROM THE STRUCTURAL SUPPORT POSTS BY LIFTING THEM OUT. COST TO REMOVE, STORE, AND REINSTALL THE SOUND PANELS IS INCLUDED IN THE BID ITEM "REMOVING AND REINSTALLING SOUND PANELS". ANY DAMAGE TO THE SOUND PANELS CAUSED BY THE CONTRACTOR DURING REMOVAL, STORAGE OR REINSTALLING THE PANELS SHALL BE REPAIRED BY THE CONTRACTOR AT NO ADDITIONAL COST TO THE DEPARTMENT.
3. REPAIR SOUND BARRIER PANEL SUPPORT BRACKETS AS SHOWN IN DETAILS.
4. REINSTALL SALVAGED SOUND PANELS.

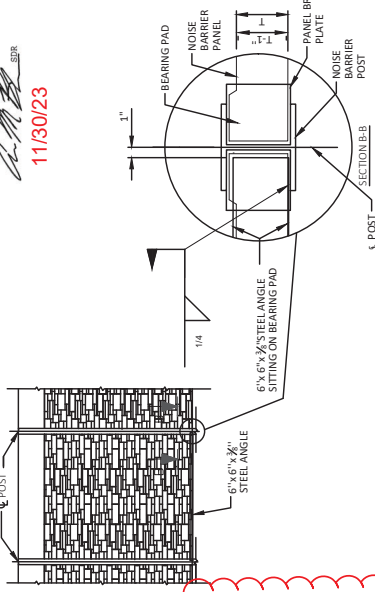

**PANEL REPLACEMENT SEQUENCE**

1. LOCATE DAMAGED SOUND PANEL
2. REMOVE AND SALVAGE EXISTING UNDAMAGED PANELS FROM THE STRUCTURAL SUPPORT POSTS BY LIFTING THEM OUT. COST TO REMOVE, STORE, AND REINSTALL THE SOUND PANELS IS INCLUDED IN THE BID ITEM "REMOVING AND REINSTALLING SOUND PANELS". ANY DAMAGE TO THE UNDAMAGED PANELS CAUSED BY THE CONTRACTOR DURING REMOVAL, STORAGE OR REINSTALLING THE PANELS SHALL BE REPAIRED BY THE CONTRACTOR AT NO ADDITIONAL COST TO THE DEPARTMENT.
3. REMOVE AND REPLACE FINISHED DAMAGED PANEL UNDER BID ITEM "REPLACEMENT NOISE BARRIER PANELS DOUBLE SIDED SOUND ABSORPTIVE N-40-17".
4. REPLACE SALVAGED PANELS



Addendum No. 01  
ID 1060-53-70  
Revised Sheet 97  
December 6, 2023



NO.	DATE	REVISION	BY
1	11/29/23	LOADING & QUANTITIES	JUC

STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
STRUCTURE N-40-17	BY
DESIGNED BY	DATE
CHECKED BY	DATE
APPROVED BY	DATE

GENERAL PLAN & ELEVATION 2	SHEET 2 OF 2
97	

**BOTTOM PANEL SUPPORT REPAIR DETAIL**



Proposal Schedule of Items

Proposal ID: 20231212015 Project(s): 1060-53-70

Federal ID(s): WISC 2024063

SECTION: 0001 Roadway Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0002	202.0105 Roadside Clearing	11.000 STA	_____.	_____.
0004	204.0170 Removing Fence	75.000 LF	_____.	_____.
0006	213.0100 Finishing Roadway (project) 01. 1060-53-70	1.000 EACH	_____.	_____.
0008	502.6500 Protective Coating Clear	65.000 GAL	_____.	_____.
0010	509.1500 Concrete Surface Repair	333.000 SF	_____.	_____.
0012	517.3001.S Structure Overcoating Cleaning and Priming (structure) 01. N-40-006	1.000 EACH	_____.	_____.
0014	517.3001.S Structure Overcoating Cleaning and Priming (structure) 02. N-40-017	1.000 EACH	_____.	_____.
0016	517.3001.S Structure Overcoating Cleaning and Priming (structure) 03. N-40-033	1.000 EACH	_____.	_____.
0018	517.3001.S Structure Overcoating Cleaning and Priming (structure) 04. N-40-034	1.000 EACH	_____.	_____.
0020	517.3001.S Structure Overcoating Cleaning and Priming (structure) 05. N-40-040	1.000 EACH	_____.	_____.
0022	517.3001.S Structure Overcoating Cleaning and Priming (structure) 06. N-40-041	1.000 EACH	_____.	_____.
0024	517.3001.S Structure Overcoating Cleaning and Priming (structure) 07. N-40-042	1.000 EACH	_____.	_____.
0026	517.3001.S Structure Overcoating Cleaning and Priming (structure) 08. N-40-043	1.000 EACH	_____.	_____.
0028	517.3001.S Structure Overcoating Cleaning and Priming (structure) 09. N-40-046	1.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20231212015 Project(s): 1060-53-70

Federal ID(s): WISC 2024063

SECTION: 0001 Roadway Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0030	517.3001.S Structure Overcoating Cleaning and Priming (structure) 10. N-40-047	1.000 EACH	_____.	_____.
0032	517.3001.S Structure Overcoating Cleaning and Priming (structure) 11. N-67-001	1.000 EACH	_____.	_____.
0034	517.3001.S Structure Overcoating Cleaning and Priming (structure) 12. N-40-078	1.000 EACH	_____.	_____.
0036	517.4001.S Containment and Collection of Waste Materials (structure) 01. N-40-006	1.000 EACH	_____.	_____.
0038	517.4001.S Containment and Collection of Waste Materials (structure) 02. N-40-017	1.000 EACH	_____.	_____.
0040	517.4001.S Containment and Collection of Waste Materials (structure) 03. N-40-033	1.000 EACH	_____.	_____.
0042	517.4001.S Containment and Collection of Waste Materials (structure) 04. N-40-034	1.000 EACH	_____.	_____.
0044	517.4001.S Containment and Collection of Waste Materials (structure) 05. N-40-040	1.000 EACH	_____.	_____.
0046	517.4001.S Containment and Collection of Waste Materials (structure) 06. N-40-041	1.000 EACH	_____.	_____.
0048	517.4001.S Containment and Collection of Waste Materials (structure) 07. N-40-042	1.000 EACH	_____.	_____.
0050	517.4001.S Containment and Collection of Waste Materials (structure) 08. N-40-043	1.000 EACH	_____.	_____.
0052	517.4001.S Containment and Collection of Waste Materials (structure) 09. N-40-046	1.000 EACH	_____.	_____.
0054	517.4001.S Containment and Collection of Waste Materials (structure) 10. N-40-047	1.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20231212015 Project(s): 1060-53-70

Federal ID(s): WISC 2024063

SECTION: 0001 Roadway Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0056	517.4001.S Containment and Collection of Waste Materials (structure) 11. N-67-001	1.000 EACH	_____.	_____.
0058	517.4001.S Containment and Collection of Waste Materials (structure) 12. N-40-078	1.000 EACH	_____.	_____.
0060	606.0100 Riprap Light	140.000 CY	_____.	_____.
0062	616.0204 Fence Chain Link 4-FT	25.000 LF	_____.	_____.
0064	616.0205 Fence Chain Link 5-FT	25.000 LF	_____.	_____.
0066	616.0206 Fence Chain Link 6-FT	25.000 LF	_____.	_____.
0068	616.0404 Fence Chain Link Salvaged 4-FT	25.000 LF	_____.	_____.
0070	616.0405 Fence Chain Link Salvaged 5-FT	25.000 LF	_____.	_____.
0072	616.0406 Fence Chain Link Salvaged 6-FT	25.000 LF	_____.	_____.
0074	619.1000 Mobilization	1.000 EACH	_____.	_____.
0076	628.1504 Silt Fence	650.000 LF	_____.	_____.
0078	628.1520 Silt Fence Maintenance	650.000 LF	_____.	_____.
0080	628.1905 Mobilizations Erosion Control	5.000 EACH	_____.	_____.
0082	628.1910 Mobilizations Emergency Erosion Control	2.000 EACH	_____.	_____.
0084	628.2004 Erosion Mat Class I Type B	2,240.000 SY	_____.	_____.
0086	628.7010 Inlet Protection Type B	39.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20231212015 Project(s): 1060-53-70

Federal ID(s): WISC 2024063

SECTION: 0001 Roadway Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0088	628.7504 Temporary Ditch Checks	65.000 LF	_____.	_____.
0090	628.7555 Culvert Pipe Checks	13.000 EACH	_____.	_____.
0092	629.0205 Fertilizer Type A	6.000 CWT	_____.	_____.
0094	630.0130 Seeding Mixture No. 30	44.000 LB	_____.	_____.
0096	630.0200 Seeding Temporary	64.000 LB	_____.	_____.
0098	630.0500 Seed Water	53.000 MGAL	_____.	_____.
0100	634.0618 Posts Wood 4x6-Inch X 18-FT	5.000 EACH	_____.	_____.
0102	637.2210 Signs Type II Reflective H	443.750 SF	_____.	_____.
0104	638.2102 Moving Signs Type II	5.000 EACH	_____.	_____.
0106	638.2602 Removing Signs Type II	187.000 EACH	_____.	_____.
0108	638.3000 Removing Small Sign Supports	5.000 EACH	_____.	_____.
0110	643.0300 Traffic Control Drums	10,000.000 DAY	_____.	_____.
0112	643.0420 Traffic Control Barricades Type III	750.000 DAY	_____.	_____.
0114	643.0705 Traffic Control Warning Lights Type A	1,500.000 DAY	_____.	_____.
0116	643.0715 Traffic Control Warning Lights Type C	1,300.000 DAY	_____.	_____.
0118	643.0800 Traffic Control Arrow Boards	115.000 DAY	_____.	_____.





Proposal Schedule of Items

Proposal ID: 20231212015 Project(s): 1060-53-70

Federal ID(s): WISC 2024063

SECTION: 0001 Roadway Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0120	643.0900 Traffic Control Signs	2,200.000 DAY	_____.	_____.
0122	643.1050 Traffic Control Signs PCMS	26.000 DAY	_____.	_____.
0124	643.4100 Traffic Control Interim Lane Closure	28.000 EACH	_____.	_____.
0126	643.5000 Traffic Control	1.000 EACH	_____.	_____.
0128	644.1810 Temporary Pedestrian Barricade	32.000 LF	_____.	_____.
0130	645.0130 Geotextile Type R	520.000 SY	_____.	_____.
0132	ASP.1T0A On-the-Job Training Apprentice at \$5.00/HR	300.000 HRS	5.00000	1,500.00
0134	ASP.1T0G On-the-Job Training Graduate at \$5.00/HR	900.000 HRS	5.00000	4,500.00
0136	SPV.0060 Special 01. Top Precast Sound Barrier Panel Support Repair	7.000 EACH	_____.	_____.
0138	SPV.0060 Special 02. Removing and Reinstalling Sound Panels	341.000 EACH	_____.	_____.
0140	SPV.0060 Special 03. Noise Barrier Support Post Replacement	4.000 EACH	_____.	_____.
0142	SPV.0060 Special 04. Traffic Control Close-Open Freeway Service Ramp	42.000 EACH	_____.	_____.
0144	SPV.0060 Special 05. Traffic Control Close-Open Freeway to Freeway System Ramp	4.000 EACH	_____.	_____.
0146	SPV.0060 Special 06. Traffic Control Local Road Lane Closure	38.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20231212015 Project(s): 1060-53-70

Federal ID(s): WISC 2024063

SECTION: 0001 Roadway Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0148	SPV.0060 Special 07. Bottom Precast Sound Barrier Panel Support Repair	31.000 EACH	_____.	_____.
0150	SPV.0165 Special 01. Replacement Noise Barrier Panels Double-Sided Sound Absorptive N-40-006	104.000 SF	_____.	_____.
0152	SPV.0165 Special 02. Replacement Noise Barrier Panels Double-Sided Sound Absorptive N-40-017	188.000 SF	_____.	_____.
0154	SPV.0165 Special 04. Replacement Noise Barrier Panels Double-Sided Sound Absorptive N-67-001	45.000 SF	_____.	_____.
<b>Section: 0001</b>			<b>Total:</b>	_____.
			<b>Total Bid:</b>	_____.