



Wisconsin Department of Transportation

Division of Transportation Systems Development

Bureau of Project Development
4822 Madison Yards Way, 4th Floor South
Madison, WI 53705

December 29, 2023

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

Proposal #14: 2365-05-71, WISC 2024103
V Greendale, W Grange Avenue
S 76th Street to S 84th Street
LOC STR
Milwaukee County

Letting of January 9, 2024

This is Addendum No. 01, which provides for the following:

Schedule of Items:

Revised Bid Item Quantities *					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Proposal Quantity Change (-)	Proposal Total After Addendum
201.0205	Grubbing	STA	3	0	3
203.0220	Removing Structure B-40-519	Each	1	0	1
502.3200	Protective Surface Treatment	SY	363	0	363
509.0301	Preparation Decks Type 1	SY	140	0	140
509.0302	Preparation Decks Type 2	SY	56	0	56
509.0500	Cleaning Decks	SY	363	0	363
509.1200	Curb Repair	LF	15	0	15
509.1500	Concrete Surface Repair	SF	103	0	103
509.2000	Full-Depth Deck Repair	SY	1	0	1
509.2500	Concrete Masonry Overlay Decks	CY	35	0	35
652.0605	Conduit Special 2-Inch	LF	3296	0	3296
653.0140	Pull Boxes Steel 24x42-Inch	Each	3	0	3
653.0905	Removing Pull Boxes	Each	1	0	1
654.0105	Concrete Bases Type 5	Each	23	0	23
655.0625	Electrical Wire Lighting 6 AWG	LF	17,902	0	17,902

*** All items listed above inadvertently were listed in the proposal as being fixed price. This addendum removes the fixed price.**

Added Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Quantity Added	Proposal Total After Addendum
628.6005	Turbidity Barrier	SY	0	50	50

Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
30	Erosion Control (revised seeding mixture and added turbidity barrier)
52	Miscellaneous Quantities (added turbidity barrier)

Added Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of why sheet was added)
82A	8E 11 Turbidity Barrier (Bid item added to plan)

Schedule of Items

Attached, dated December 29, 2023, are the revised Schedule of Items Pages 1 – 9.

Plan Sheets

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:

Revised: 30 and 52.

Added: 82A.


The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman

Proposal Development Specialist
Proposal Management Section

END OF ADDENDUM

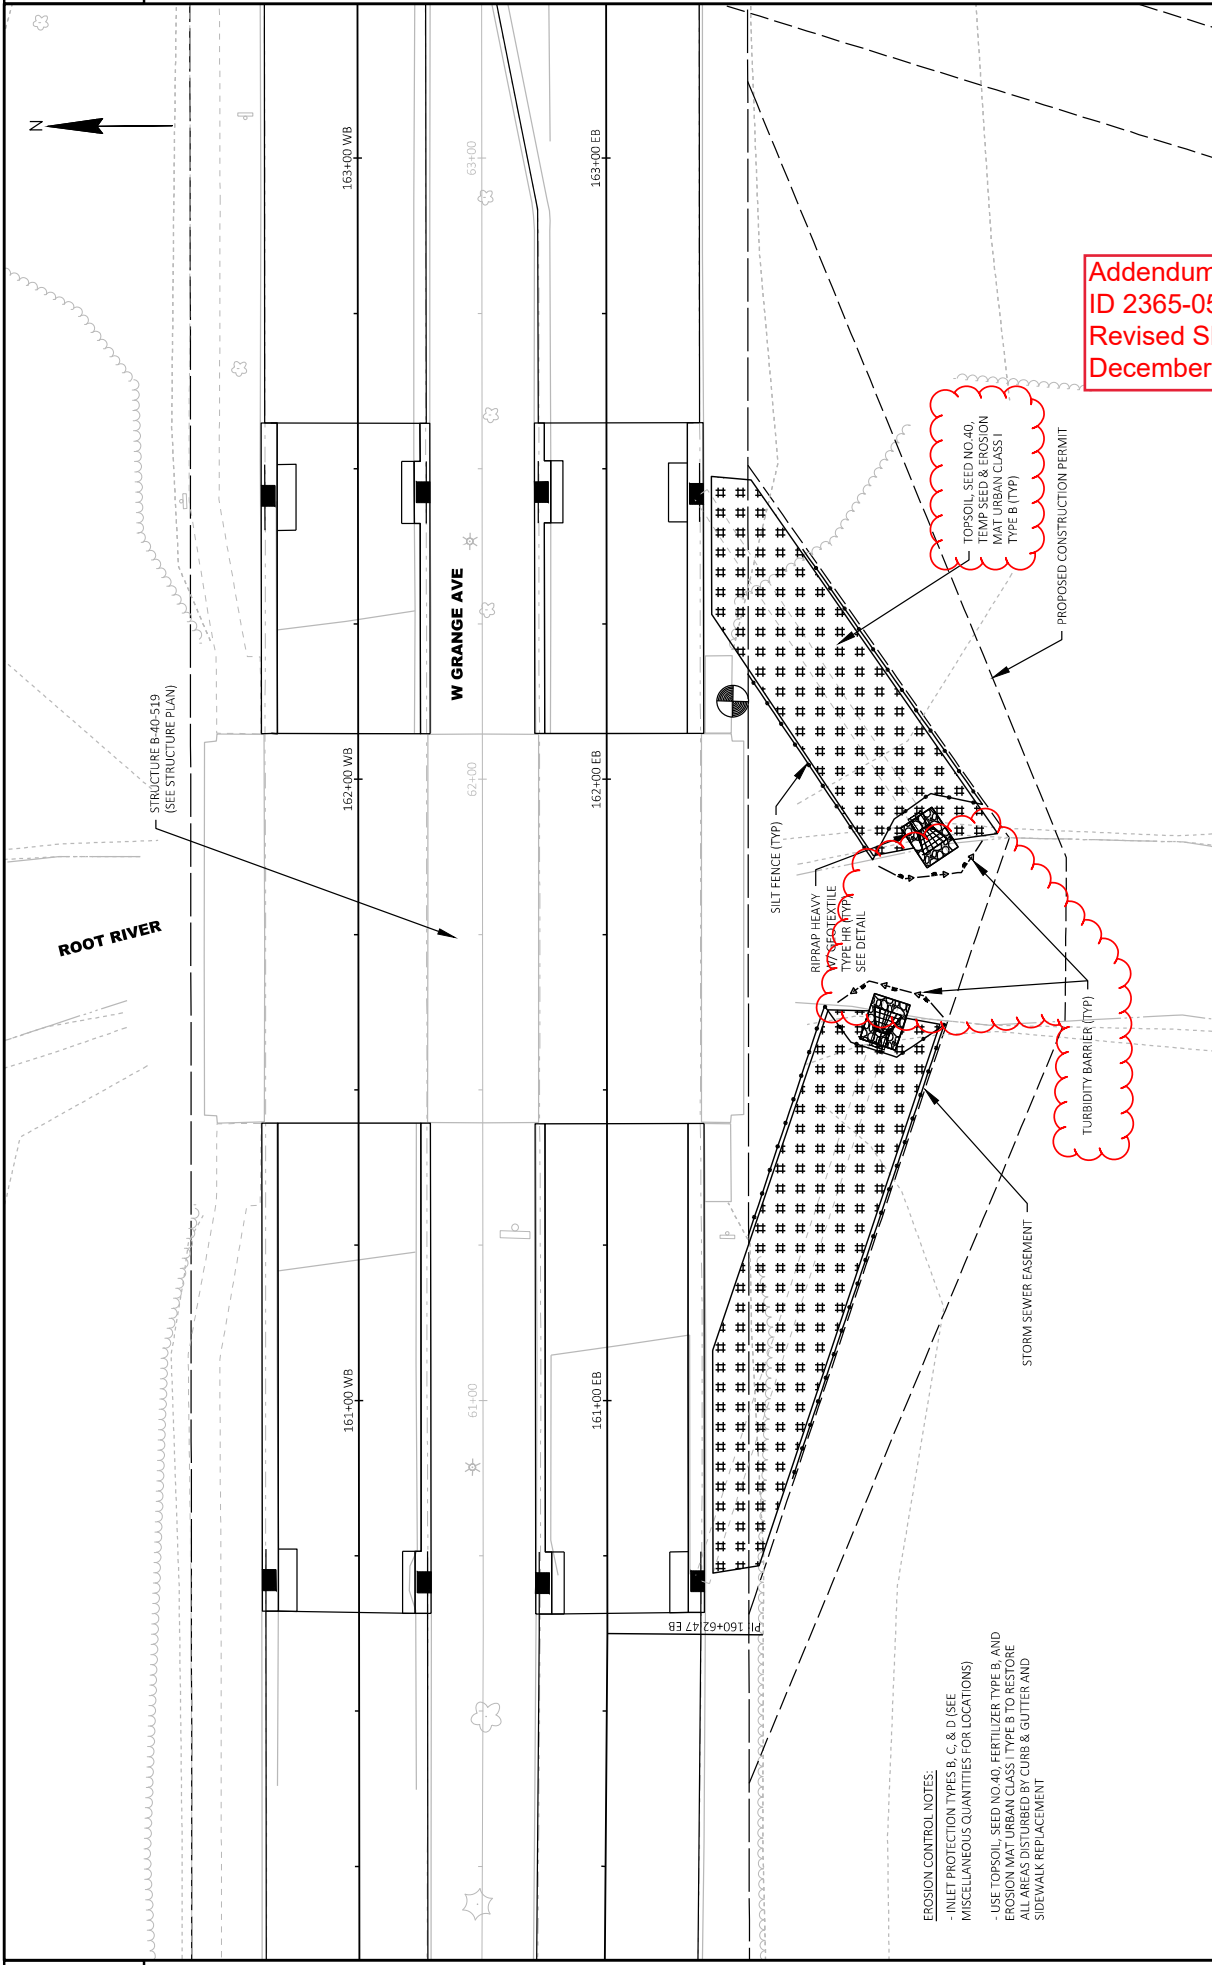

Addendum No. 01
 ID 2365-05-71
 Revised Sheet
 December 29, 2023

EROSION CONTROL NOTES:
 - INLET PROTECTION TYPES B, C, & D (SEE MISCELLANEOUS QUANTITIES FOR LOCATIONS)
 - USE TOPSOIL, SEED NO. 40, FERTILIZER TYPE B, AND EROSION MAT URBAN CLASS 1 TYPE B TO RESTORE AREAS DISTURBED BY CURB & GUTTER AND SIDEWALK REPLACEMENT

PROJECT NO: 2365-05-71	COUNTY: MILWAUKEE	EROSION CONTROL	SHEET 30	E
FILE NAME: I:\04\072800 GRANGE\CD\ SHEET\PLAN\022001-EC - ADDENDUM.DWG	HWY: WEST GRANGE AVENUE	PLOT BY: JOHNSON, ZACHARY	PLOT NAME:	
LAYOUT NAME: 022001-EC	PLOT DATE: 12/29/2023 8:58 AM			

RESTORATION ITEMS & EROSION CONTROL

Table with columns: LOCATION, TOPSOIL SY, SILTFENCE LF, SILTFENCE MAINTENANCE LF, EROSION MAINTENANCE SY, TURBIDITY BARRIERS SY, FERTILIZER TYPE, SEEDING MIXTURE NO. 40, SEEDING NURSE CROP LB, SEED WATER MISCAL, and INLET PROTECTION. Includes sub-totals for 940, 320, 320, 940, 50, 0.40, 28, 8, 22.

NOTE: UNDISTRIBUTED QUANTITY 25% OF TOTAL

SIGNING ITEMS

Main table with columns: SIGN NO, APPROX EXISTING LOCATION, APPROX NEW LOCATION, SIGN CODE, SIGN SIZE WH, SIGN SIZE INCH X 14 FT, SIGN SIZE POSTS WOOD 4X6 INCH X 16 FT, SIGN TYPE I REFLECTIVE SF, SIGN TYPE II REFLECTIVE SF, REMOVING SIGNS TYPE I EACH, REMOVING SMALL SIGN SUPPORTS EACH, REMARKS, and PROTECTION TYPE. Includes sub-totals for 940, 320, 320, 940, 50, 0.40, 28, 8, 22.

Addendum No. 01 ID 2365-05-71 Revised Sheet 52 December 29, 2023

INLET PROTECTION

Table with columns: STRUCTURE NO., STATION, LOCATION, PROTECTION TYPE, and INLET TYPE. Lists structures from MH2 to INL47 with their respective details.


TOTAL 0010

6

40


18

ALL ITEMS ON THIS SHEET ARE CATEGORY 0010 UNLESS OTHERWISE NOTED

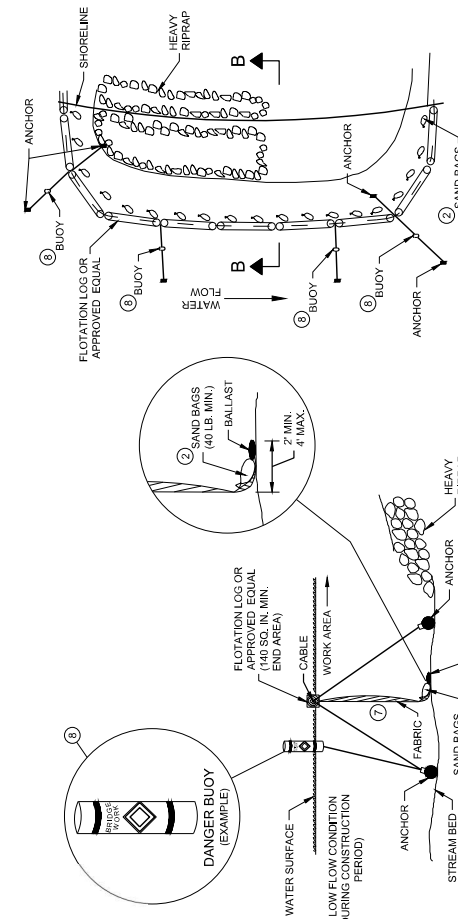

SECTION A - A
TURBIDITY BARRIER - STANDARD POST INSTALLATION

TURBIDITY BARRIER - FLOAT ALTERNATIVE
CAUTION - SEE NOTE 6

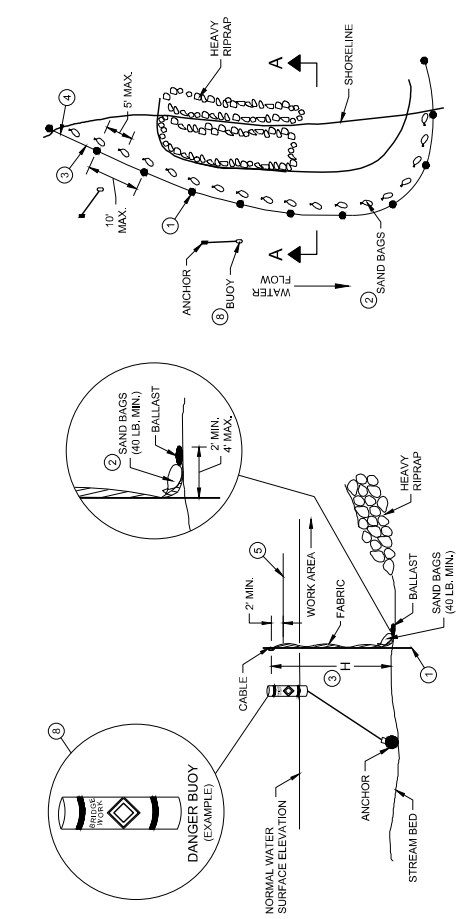


SECTION B - B
TURBIDITY BARRIER - FLOAT ALTERNATIVE

TURBIDITY BARRIER PLACEMENT DETAILS

- GENERAL NOTES**
- DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERMIT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND THE APPLICABLE SPECIAL PROVISIONS.
- TURBIDITY BARRIER MAY BE REMOVED AT THE ENGINEERS DISCRETION, WHEN PERMANENT EROSION CONTROL MEASURES HAVE BEEN ESTABLISHED.
- 1 DRIVEN STEEL POSTS, PIPES, OR CHANNELS LENGTH SHALL BE SUFFICIENT TO SECURELY SUPPORT BARRIER AT HIGH WATER ELEVATIONS.
 - 2 SAND BAGS TO BE USED AS ADDITIONAL BALLAST WHEN ORDERED BY THE ENGINEER TO MEET ADVERSE FIELD CONDITIONS. SPACE AS APPROPRIATE FOR SITE CONDITIONS.
 - 3 WHEN BARRIER HEIGHT "H" EXCEEDS 8 FEET, POST SPACING MAY NEED TO BE DECREASED.
 - 4 IN WATERWAYS SUBJECT TO FLUCTUATING WATER ELEVATIONS, PROVISIONS SHOULD BE MADE TO ALLOW THE WATER TO EQUALIZE ON EACH SIDE OF THE BARRIER. THIS MAY BE ACCOMPLISHED BY LEAVING A PORTION OF THE BARRIER OPEN ON THE UPSTREAM END.
 - 5 ESTIMATED HIGH WATER ELEVATION DURING CONSTRUCTION PERIOD. MINIMUM BARRIER HEIGHT SHALL BE 2' GREATER THAN EITHER THE 02 ELEVATION OR THE ESTIMATED HIGH WATER ELEVATION DURING CONSTRUCTION, WHICHEVER IS GREATER.
 - 6 FLOAT ALTERNATIVE WILL ONLY BE ALLOWED WITH WRITTEN APPROVAL OF THE ENGINEER, AND IS MEANT FOR LOCATIONS WHERE BEDROCK PREVENTS THE INSTALLATION OF POSTS.
 - 7 ALLOW SUFFICIENT SLACK VERTICALLY AND HORIZONTALLY SO THAT SEDIMENT BUILD UP WILL NOT SEPARATE OR LOWER THE TURBIDITY BARRIER.
 - 8 USE AS DIRECTED BY COAST GUARD OR DNR PERMIT WHEN WORKING IN NAVIGABLE WATERWAYS.

GENERAL NOTES

6

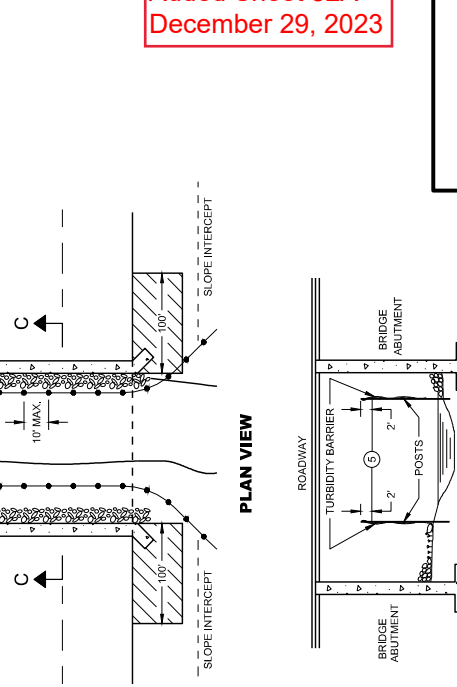

SECTION C - C
TURBIDITY BARRIER AT STRUCTURES

TYPICAL PLACEMENT AT STRUCTURES

Addendum No. 01
ID 2365-05-71
Added Sheet 82A
December 29, 2023

TURBIDITY BARRIER
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION
APPROVED _____ DATE _____
ISSUED BY: ERLC DATE: _____ CHIEF ENGINEER: _____ 82A IT



Proposal Schedule of Items

Proposal ID: 20240109014 Project(s): 2365-05-71

Federal ID(s): WISC 2024120

SECTION: 0001 Roadway Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0002	201.0205 Grubbing	3.000 STA	_____.	_____.
0004	203.0100 Removing Small Pipe Culverts	2.000 EACH	_____.	_____.
0006	203.0220 Removing Structure (structure) 01. B-40-519	1.000 EACH	_____.	_____.
0008	204.0100 Removing Concrete Pavement	2,920.000 SY	_____.	_____.
0010	204.0109.S Removing Concrete Surface Partial Depth	105,500.000 SF	_____.	_____.
0012	204.0110 Removing Asphaltic Surface	180.000 SY	_____.	_____.
0014	204.0115 Removing Asphaltic Surface Butt Joints	350.000 SY	_____.	_____.
0016	204.0150 Removing Curb & Gutter	32.000 LF	_____.	_____.
0018	204.0155 Removing Concrete Sidewalk	240.000 SY	_____.	_____.
0020	204.9060.S Removing (item description) 01. Direct Burial Lighting Units	22.000 EACH	_____.	_____.
0022	204.9060.S Removing (item description) 02. Underdeck Luminaires	1.000 EACH	_____.	_____.
0024	205.0100 Excavation Common	2,110.000 CY	_____.	_____.
0026	211.0101 Prepare Foundation for Asphaltic Paving (project) 01. 2365-05-71	1.000 EACH	_____.	_____.
0028	213.0100 Finishing Roadway (project) 01. 2365-05-71	1.000 EACH	_____.	_____.
0030	305.0110 Base Aggregate Dense 3/4-Inch	10.000 TON	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20240109014 Project(s): 2365-05-71

Federal ID(s): WISC 2024120

SECTION: 0001 Roadway Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0032	305.0120 Base Aggregate Dense 1 1/4-Inch	1,610.000 TON	_____.	_____.
0034	320.0125 Concrete Base 6-Inch	1,150.000 SY	_____.	_____.
0036	335.0100 Rubblizing	11,800.000 SY	_____.	_____.
0038	416.0610 Drilled Tie Bars	60.000 EACH	_____.	_____.
0040	455.0605 Tack Coat	2,010.000 GAL	_____.	_____.
0042	460.2000 Incentive Density HMA Pavement	3,260.000 DOL	1.00000	3,260.00
0044	460.6223 HMA Pavement 3 MT 58-28 S	3,280.000 TON	_____.	_____.
0046	460.6224 HMA Pavement 4 MT 58-28 S	1,800.000 TON	_____.	_____.
0048	502.3200 Protective Surface Treatment	363.000 SY	_____.	_____.
0050	509.0301 Preparation Decks Type 1	140.000 SY	_____.	_____.
0052	509.0302 Preparation Decks Type 2	56.000 SY	_____.	_____.
0054	509.0500 Cleaning Decks	363.000 SY	_____.	_____.
0056	509.1200 Curb Repair	15.000 LF	_____.	_____.
0058	509.1500 Concrete Surface Repair	103.000 SF	_____.	_____.
0060	509.2000 Full-Depth Deck Repair	1.000 SY	_____.	_____.
0062	509.2500 Concrete Masonry Overlay Decks	35.000 CY	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20240109014 Project(s): 2365-05-71

Federal ID(s): WISC 2024120

SECTION: 0001 Roadway Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0064	520.8000 Concrete Collars for Pipe	52.000 EACH	_____.	_____.
0066	522.1024 Apron Endwalls for Culvert Pipe Reinforced Concrete 24-Inch	2.000 EACH	_____.	_____.
0068	601.0319 Concrete Curb & Gutter 19-Inch	280.000 LF	_____.	_____.
0070	601.0331 Concrete Curb & Gutter 31-Inch	680.000 LF	_____.	_____.
0072	601.0600 Concrete Curb Pedestrian	22.000 LF	_____.	_____.
0074	602.0405 Concrete Sidewalk 4-Inch	1,940.000 SF	_____.	_____.
0076	602.0505 Curb Ramp Detectable Warning Field Yellow	130.000 SF	_____.	_____.
0078	606.0300 Riprap Heavy	8.000 CY	_____.	_____.
0080	608.0312 Storm Sewer Pipe Reinforced Concrete Class III 12-Inch	320.000 LF	_____.	_____.
0082	608.0315 Storm Sewer Pipe Reinforced Concrete Class III 15-Inch	40.000 LF	_____.	_____.
0084	608.0318 Storm Sewer Pipe Reinforced Concrete Class III 18-Inch	56.000 LF	_____.	_____.
0086	608.0324 Storm Sewer Pipe Reinforced Concrete Class III 24-Inch	120.000 LF	_____.	_____.
0088	611.0420 Reconstructing Manholes	3.000 EACH	_____.	_____.
0090	611.0430 Reconstructing Inlets	1.000 EACH	_____.	_____.
0092	611.2004 Manholes 4-FT Diameter	8.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20240109014 Project(s): 2365-05-71

Federal ID(s): WISC 2024120

SECTION: 0001 Roadway Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0094	611.3230 Inlets 2x3-FT	33.000 EACH	_____.	_____.
0096	611.8110 Adjusting Manhole Covers	1.000 EACH	_____.	_____.
0098	611.8120.S Cover Plates Temporary	8.000 EACH	_____.	_____.
0100	618.0100 Maintenance and Repair of Haul Roads (project) 01. 2365-05-71	1.000 EACH	_____.	_____.
0102	619.1000 Mobilization	1.000 EACH	_____.	_____.
0104	620.0300 Concrete Median Sloped Nose	146.000 SF	_____.	_____.
0106	624.0100 Water	18.000 MGAL	_____.	_____.
0108	625.0100 Topsoil	940.000 SY	_____.	_____.
0110	628.1504 Silt Fence	320.000 LF	_____.	_____.
0112	628.1520 Silt Fence Maintenance	320.000 LF	_____.	_____.
0114	628.1905 Mobilizations Erosion Control	3.000 EACH	_____.	_____.
0116	628.1910 Mobilizations Emergency Erosion Control	3.000 EACH	_____.	_____.
0118	628.2008 Erosion Mat Urban Class I Type B	940.000 SY	_____.	_____.
0120	628.7010 Inlet Protection Type B	6.000 EACH	_____.	_____.
0122	628.7015 Inlet Protection Type C	40.000 EACH	_____.	_____.
0124	628.7020 Inlet Protection Type D	18.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20240109014 Project(s): 2365-05-71

Federal ID(s): WISC 2024120

SECTION: 0001 Roadway Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0126	629.0210 Fertilizer Type B	0.400 CWT	_____.	_____.
0128	630.0140 Seeding Mixture No. 40	28.000 LB	_____.	_____.
0130	630.0400 Seeding Nurse Crop	8.000 LB	_____.	_____.
0132	630.0500 Seed Water	22.000 MGAL	_____.	_____.
0134	634.0614 Posts Wood 4x6-Inch X 14-FT	16.000 EACH	_____.	_____.
0136	634.0616 Posts Wood 4x6-Inch X 16-FT	24.000 EACH	_____.	_____.
0138	637.2210 Signs Type II Reflective H	181.910 SF	_____.	_____.
0140	637.2230 Signs Type II Reflective F	72.000 SF	_____.	_____.
0142	638.2602 Removing Signs Type II	41.000 EACH	_____.	_____.
0144	638.3000 Removing Small Sign Supports	24.000 EACH	_____.	_____.
0146	642.5001 Field Office Type B	1.000 EACH	_____.	_____.
0148	643.0300 Traffic Control Drums	30,375.000 DAY	_____.	_____.
0150	643.0420 Traffic Control Barricades Type III	7,965.000 DAY	_____.	_____.
0152	643.0705 Traffic Control Warning Lights Type A	12,285.000 DAY	_____.	_____.
0154	643.0715 Traffic Control Warning Lights Type C	810.000 DAY	_____.	_____.
0156	643.0900 Traffic Control Signs	7,290.000 DAY	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20240109014 Project(s): 2365-05-71

Federal ID(s): WISC 2024120

SECTION: 0001 Roadway Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0158	643.1050 Traffic Control Signs PCMS	28.000 DAY	_____.	_____.
0160	643.3205 Temporary Marking Line Paint 8-Inch	316.000 LF	_____.	_____.
0162	643.3250 Temporary Marking Line Removable Tape 8-Inch	472.000 LF	_____.	_____.
0164	643.5000 Traffic Control	1.000 EACH	_____.	_____.
0166	644.1410 Temporary Pedestrian Surface Asphalt	500.000 SF	_____.	_____.
0168	644.1440 Temporary Pedestrian Surface Matting	1,190.000 SF	_____.	_____.
0170	644.1601 Temporary Pedestrian Curb Ramp	440.000 DAY	_____.	_____.
0172	644.1605 Temporary Pedestrian Detectable Warning Field	190.000 SF	_____.	_____.
0174	644.1810 Temporary Pedestrian Barricade	2,360.000 LF	_____.	_____.
0176	645.0120 Geotextile Type HR	15.000 SY	_____.	_____.
0178	646.1020 Marking Line Epoxy 4-Inch	6,650.000 LF	_____.	_____.
0180	646.3020 Marking Line Epoxy 8-Inch	630.000 LF	_____.	_____.
0182	646.5020 Marking Arrow Epoxy	9.000 EACH	_____.	_____.
0184	646.6120 Marking Stop Line Epoxy 18-Inch	370.000 LF	_____.	_____.
0186	646.7420 Marking Crosswalk Epoxy Transverse Line 6-Inch	850.000 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20240109014 Project(s): 2365-05-71

Federal ID(s): WISC 2024120

SECTION: 0001 Roadway Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0188	646.8120 Marking Curb Epoxy	24.000 LF	_____.	_____.
0190	646.8220 Marking Island Nose Epoxy	1.000 EACH	_____.	_____.
0192	646.9110 Marking Removal Line Water Blasting 8-Inch	641.000 LF	_____.	_____.
0194	650.4000 Construction Staking Storm Sewer	47.000 EACH	_____.	_____.
0196	650.5500 Construction Staking Curb Gutter and Curb & Gutter	1,360.000 LF	_____.	_____.
0198	650.8000 Construction Staking Resurfacing Reference	5,585.000 LF	_____.	_____.
0200	650.9000 Construction Staking Curb Ramps	15.000 EACH	_____.	_____.
0202	650.9500 Construction Staking Sidewalk (project) 01. 2365-05-71	1.000 EACH	_____.	_____.
0204	650.9911 Construction Staking Supplemental Control (project) 01. 2365-05-71	1.000 EACH	_____.	_____.
0206	652.0605 Conduit Special 2-Inch	3,296.000 LF	_____.	_____.
0208	653.0140 Pull Boxes Steel 24x42-Inch	3.000 EACH	_____.	_____.
0210	653.0900 Adjusting Pull Boxes	1.000 EACH	_____.	_____.
0212	653.0905 Removing Pull Boxes	1.000 EACH	_____.	_____.
0214	654.0105 Concrete Bases Type 5	23.000 EACH	_____.	_____.
0216	655.0625 Electrical Wire Lighting 6 AWG	17,902.000 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20240109014 Project(s): 2365-05-71

Federal ID(s): WISC 2024120

SECTION: 0001 Roadway Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0218	659.5000.S Lamp, Ballast, LED, Switch Disposal by Contractor	41.000 EACH	_____.	_____.
0220	690.0150 Sawing Asphalt	245.000 LF	_____.	_____.
0222	690.0250 Sawing Concrete	11,240.000 LF	_____.	_____.
0224	ASP.1T0A On-the-Job Training Apprentice at \$5.00/HR	400.000 HRS	5.00000	2,000.00
0226	ASP.1T0G On-the-Job Training Graduate at \$5.00/HR	600.000 HRS	5.00000	3,000.00
0228	SPV.0060 Special 01. Sanitary Sewer Manhole Rehabilitation	7.000 EACH	_____.	_____.
0230	SPV.0060 Special 02. Municipal Poles Type 5	23.000 EACH	_____.	_____.
0232	SPV.0060 Special 03. Municipal Luminaire Arms Single Member 4-1/2-Inch-Clamp 6-Ft	40.000 EACH	_____.	_____.
0234	SPV.0060 Special 04. Municipal LED Luminaires	40.000 EACH	_____.	_____.
0236	SPV.0060 Special 05. Modifying Lighting Control Cabinet	1.000 EACH	_____.	_____.
0238	SPV.0060 Special 06. Inlet Covers Type HM-GJ, Special Modified	44.000 EACH	_____.	_____.
0240	SPV.0060 Special 07. Section Corner Monuments	1.000 EACH	_____.	_____.
0242	SPV.0090 Special 01. Concrete Curb & Gutter 19-Inch Type A, Special	260.000 LF	_____.	_____.
0244	SPV.0090 Special 02. Concrete Curb & Gutter 31-Inch Type A, Special	630.000 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20240109014 Project(s): 2365-05-71

Federal ID(s): WISC 2024120

SECTION: 0001 Roadway Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0246	SPV.0090 Special 03. Railing Steel Type NY4 , Modified	127.000 LF	_____.	_____.
0248	628.6005 Turbidity Barriers	50.000 SY	_____.	_____.
Section: 0001			Total:	_____.
			Total Bid:	_____.