



TYPICAL VERTICAL SPACING LAYOUTS

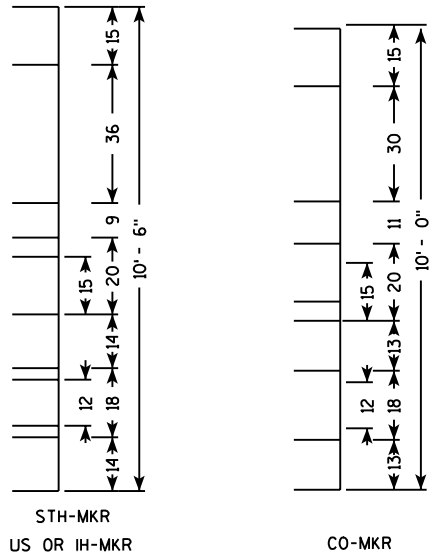


Particular shield and one line of message copy.

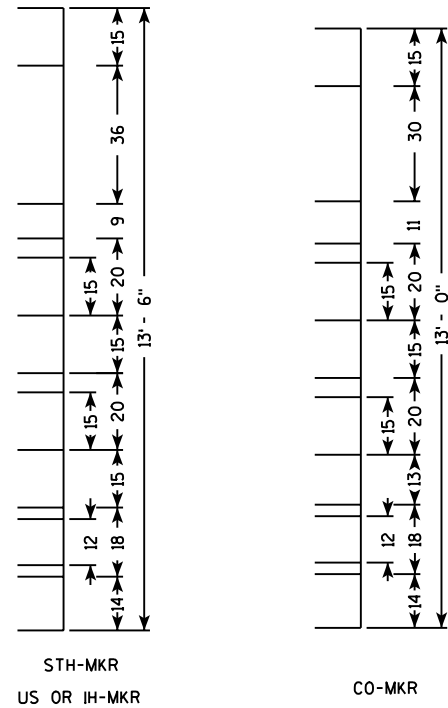


Particular shield and two lines of message copy.

TYPICAL EXAMPLES

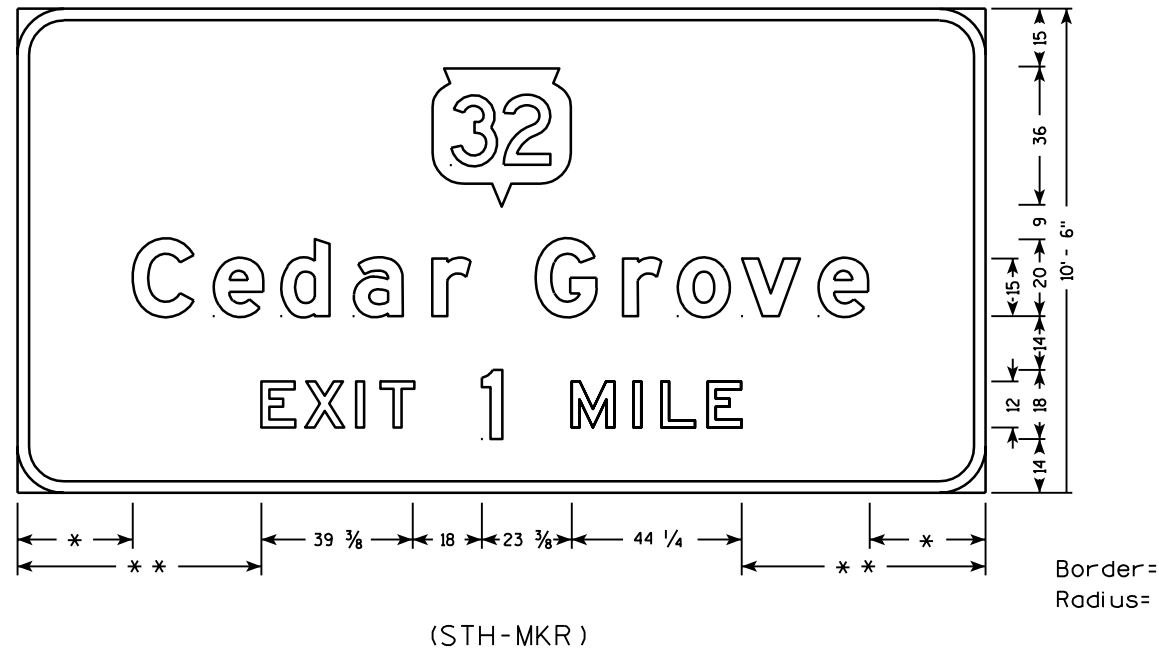

NOTES

1. All signs shall have 15" LC/20" UC message copy, Series E Modified. All Cap letters are 12" Series E.
2. Vertical spacing shall be as shown in the typical. Note the differences between the various marker heads, and the associated spacings.
3. The sign code for these signs is normally E1-1A.

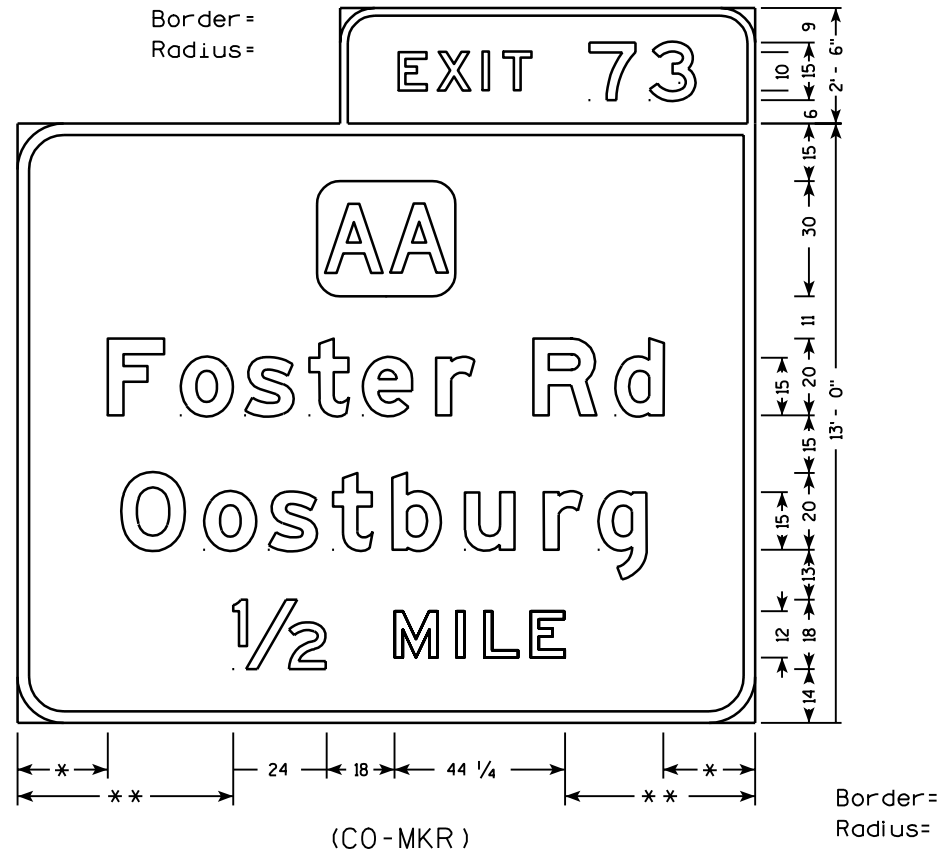

* Minimum dimension is normally height of upper case letter.

** To be optically centered on the sign.

GROUND MOUNTED
ADVANCE GUIDE SIGNS

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 9/15/05 PLATE NO. A11-2.4