



TYPICAL VERTICAL SPACING LAYOUTS

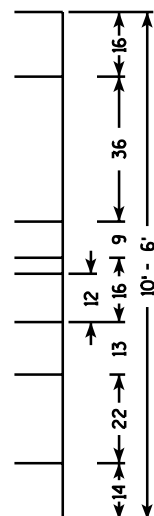


STH-MKR
US OR IH-MKR

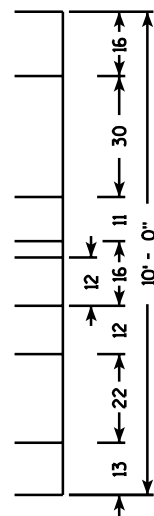


CO-MKR

Particular shield and one line of message copy.

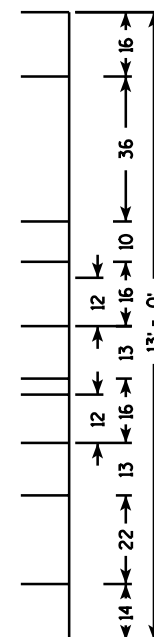


STH-MKR
US OR IH-MKR

Particular shield and two lines of message copy.

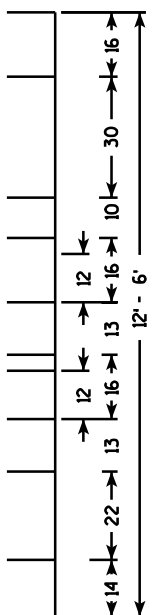


CO-MKR

TYPICAL EXAMPLES

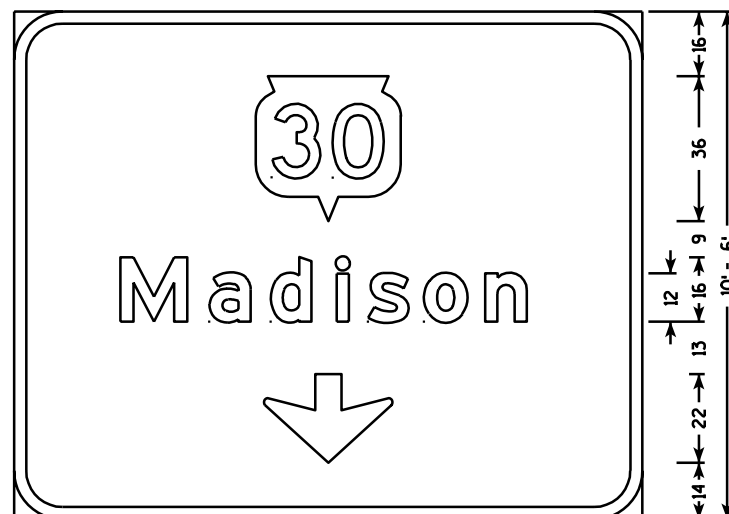

(STH-MKR)

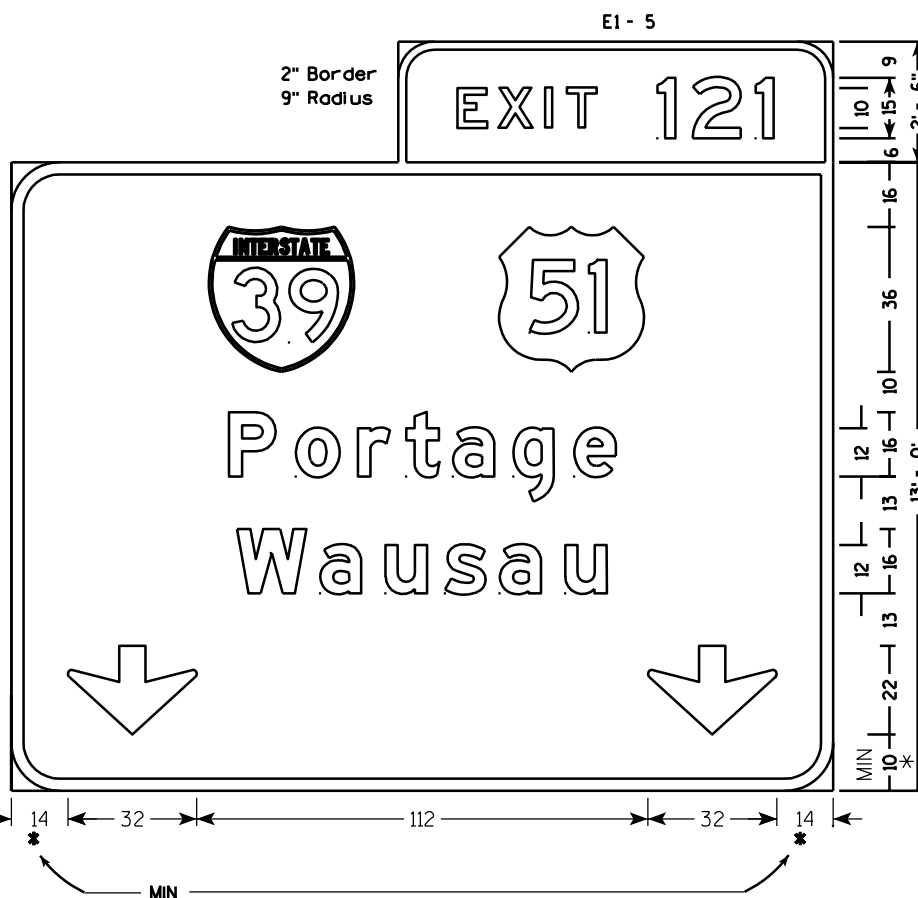

(IH-USH MKR)

NOTES

1. All signs shall have 12" LC/16" UC message copy, Series E Modified. All Cap letters are 10" Series E.
2. Vertical spacing shall be as shown in the typical. Note the differences between the various marker heads, and the associated spacings.
3. The sign code for these signs is normally E6-51.

BORDER-RADIUS TABLE

BORDER	
60 - 150 sq. ft.	= 2" Border
Over 150 sq. ft.	= 3" Border

CORNER RADIUS	
6' - 8' High	= 9" Radius
Over 8' High	= 12" Radius

* Adjust spacing to achieve proper balance

7

7

**OVERHEAD MOUNTED
ADVANCE GUIDE SIGNS**

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
For Director, Office of Traffic

DATE 9/27/05 PLATE NO. A11-4A.1