



Wisconsin Department of Transportation

January 9, 2025

Division of Transportation Systems Development

Bureau of Project Development
4822 Madison Yards Way, 4th Floor South
Madison, WI 53705

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

Proposal #39: 8610-02-74, WISC 2025175
C Chippewa Falls, Bay Street
High Street to Bridge Street
STH 124
Chippewa County

8610-08-73, WISC 2025176
Chippewa Falls – Bloomer
Elm Street to CTH S
STH 124
Chippewa County

Letting of January 14, 2025

This is Addendum No. 02, which provides for the following:

Special Provisions:

Added Special Provisions	
Article No.	Description
30	Adjusting Manhole Covers, Item 611.8110
31	Cover Plates Temporary, Item 611.8120.S

Schedule of Items:

Revised Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Proposal Quantity Change (-)	Proposal Total After Addendum
204.0110	Removing Asphaltic Surface	SY	172	984	1,156
460.6645	HMA Pavement 5 MT 58-34 V	TON	13,403	-283	13,120
465.0105	Asphaltic Surface	TON	278	287	565
650.9000	Construction Staking Curb Ramps	EA	80	35	115
690.0150	Sawing Asphalt	LF	5,076	296	5,372
690.0250	Sawing Concrete	LF	3,240	10	3,250

Added Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Quantity Added	Proposal Total After Addendum
611.8120.S	Cover Plates Temporary	EA	0	67	67

Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
11	Typical Section - Updated callout to use Asphaltic Surface near curbs
24	Construction Detail - Updated callout to use Asphaltic Surface near curbs
169	Miscellaneous Quantity - Updated Removing Asphaltic Surface quantity
170	Miscellaneous Quantity - Updated Removing Asphaltic Surface quantity
175	Miscellaneous Quantity - Updated HMA Pavement and Asphaltic Surface quantities
176	Miscellaneous Quantity - Updated HMA Pavement and Asphaltic Surface quantities
178	PWL Mixture Use Table - Updated Bid Item and Underlying Surface columns
181	Miscellaneous Quantity - Updated Construction Staking Curb Ramp quantity
182	Miscellaneous Quantity - Updated Construction Staking Curb Ramp quantity
183	Miscellaneous Quantity – Added Cover Plates Temporary Bid Item
184	Miscellaneous Quantity – Added Cover Plates Temporary Bid Item
195	Miscellaneous Quantity – Updated Sawing Asphalt quantity
196	Miscellaneous Quantity – Updated Sawing Asphalt and Sawing Concrete quantities

Added Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of why sheet was added)
170A	Typical Section – Split table to fit on sheets

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman

Proposal Development Specialist
Proposal Management Section

ADDENDUM NO. 02
8610-02-74, 8610-08-73
January 9, 2025

Special Provisions

30. Adjusting Manhole Covers, Item 611.8110.

This special provision describes adjusting manhole covers conforming to standard spec 611 as modified in this special provision.

Adjust manhole covers located in pavement areas in two separate operations. Initially, remove designated manhole covers along with sufficient pavement to permit installation of temporary cover plate over the opening. Fill the excavated area with asphaltic pavement mixture, which shall remain in place until contract milling and paving operations permit setting the manhole frames to grade. During the second phase, remove the asphaltic pavement mixture surrounding the manhole plus the temporary cover plate, and set the manhole cover to final grade. The department will measure and pay for the items of asphaltic pavement mixture, temporary cover plate, milling, and paving separately.

Supplement standard spec 611.3.7 with the following:

Set the manhole frames so that they comply with the surface requirements of standard spec 450.3.2.9. At the completion of the paving, a 6-foot straightedge shall be placed over the centerline of each manhole frame parallel to the direction of traffic. A measurement shall be made at each side of the frame. The two measurements shall be averaged. If this average is greater than 5/8 inches, reset the manhole frame to the correct plane and elevation. If this average is 5/8 inches or less but greater than 3/8 inches, the manhole frame shall be allowed to remain in place but shall be paid for at 50 percent of the contract unit price.

If the manhole frame is higher than the adjacent pavement, the two measurements shall be made at each end of the straightedge. These two measurements shall be averaged. The same criteria for acceptance and payment as above, shall apply.

stp-611-005 (20200629)

31. Cover Plates Temporary, Item 611.8120.S.

A Description

This special provision describes providing and removing steel plates to cover and support asphaltic pavement and traffic loading at manholes, inlets and similar structures during milling and paving operations.

B Materials

Provide a 0.25 inch minimum thickness steel plate that extends to the outside edge of the existing masonry.

C (Vacant)

D Measurement

The department will measure Cover Plates Temporary as each individual unit, acceptably completed.

E Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBER	DESCRIPTION	UNIT
611.8120.S	Cover Plates Temporary	EACH

Payment is full compensation for furnishing, installing, and removing the cover plates.

The steel plates shall become the property of the contractor when no longer needed in the contract work.

stp-611-006 (20151210)

Schedule of Items

Attached, dated January 9, 2025, are the revised Schedule of Items Pages 1 – 11.

Plan Sheets



The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:


Revised: 11, 24, 169, 170, 175, 176, 178, 181, 182, 183, 184, 195, and 196.

Added: 170A.

END OF ADDENDUM

PROJECT NO: 8610-02-74	HWY: STH 124	COUNTY: CHIPPEVA	FINISHED TYPICAL SECTIONS	SHEET 11	E
FILE NAME: C:\USER\ARB\LOCAL\ENGINEERING\4605\1241910_CAD\06\0604\6\SHEETS\PLAN-ARB\AMENDMENT\02\0302-5-A06\0604.DWG		PLOT DATE: 1/7/2025 9:34 AM		PLOT NAME: ARBUCKLE, AUBRIAN	
LAYOUT NAME: 02		PLOT TBY:		PLOT SCALE: 1"=10.30 FT	
VSD\PROJECTS\SHW-42					

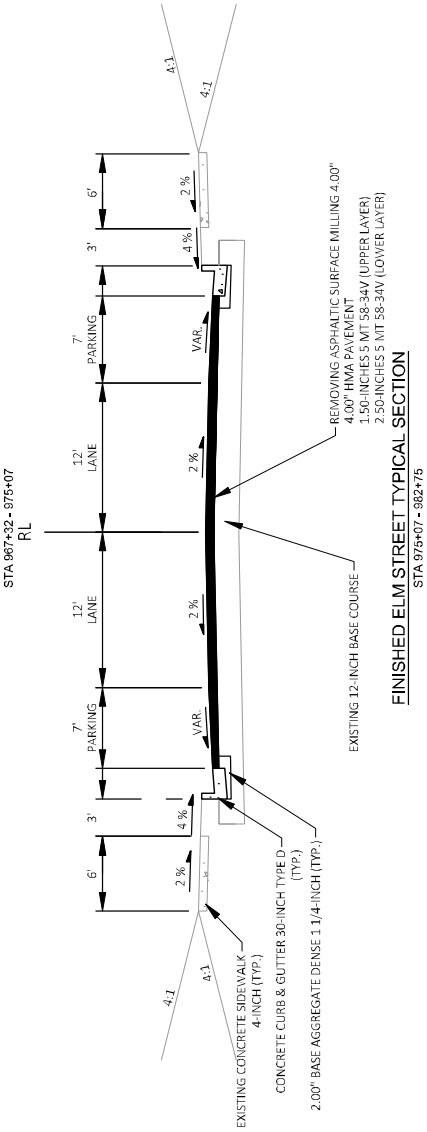

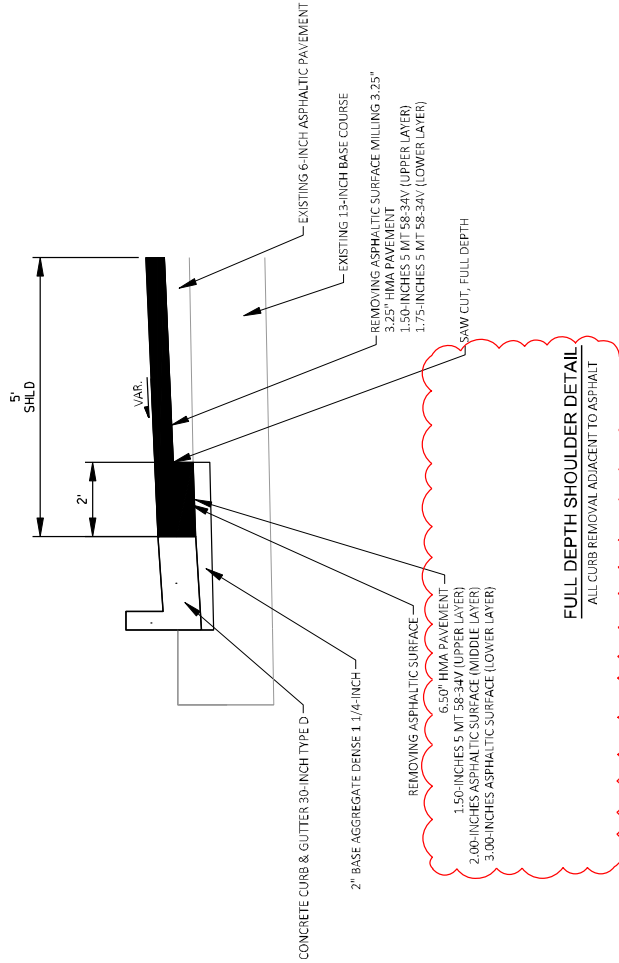

Addendum No. 02
ID 8110-02-74
Revised Sheet 24
January 9, 2025

PROJECT NO: 8610-08-73		HWY: STH 124	COUNTY: CHIPPEWA	CONSTRUCTION DETAILS		SHEET 24	E
FILE NAME: C:\USERS\BROCK\LEAVONE\DRIVE - AECOM\STH 124\010_CAD\06099476\SHEETS\PLAN - RAB AMENDMENT\02\001-CD-ADREN\BCL.DWG		PLOT DATE: 3/7/2025 10:26 AM		PLOT BY: ARBUCCLE, ADRIAN	PLOT NAME:	PLOT SCALE: 1"=10.00 FT	W:\5007\CAD\0105 SHEET 49

REMOVING CONCRETE SURFACE: REMOVING ASPHALTIC SURFACE

CATEGORY	CROSSROAD	STATION	- STATION	LOCATION	204.0105 REMOVING CONCRETE PAVEMENT BUTT JOINTS (SF)	204.0100 REMOVING CONCRETE PAVEMENT (SF)	204.0110 REMOVING ASPHALTIC SURFACE (SF)	204.0115 REMOVING ASPHALTIC SURFACE BUTT JOINTS (SF)	204.0120 REMOVING ASPHALTIC SURFACE MILLING (SF)	204.0109.S REMOVING CONCRETE SURFACE PARTIAL DEPTH (SF)	SPV.0180.01 REMOVING DISTRESSED PAVEMENT MILLING (SF)	NOTES
0010		938+59	- 941+34	LT/RT	170	--	--	--	--	--	--	1.5" DEPTH
0010		941+34	- 975+07	LT/RT	--	--	18	213	12,310	--	--	3.25" DEPTH
0010		975+07	- 982+75	LT/RT	--	--	153	--	2,500	--	--	4" DEPTH
0010	River/Bay				--	--	20	--	--	--	--	5" DEPTH
0010	Bay/Spring				--	--	27	17	--	--	--	5" DEPTH
0010	Bay/Central				--	--	29	17	--	--	--	5" DEPTH
0010	Bay/Grand				--	--	30	17	--	--	--	5" DEPTH
0010	Bay/Columbia				--	--	30	16	--	--	--	5" DEPTH
0010	Bay/Willow				--	--	32	16	--	--	--	5" DEPTH
0010	Bay/Birch				--	--	32	17	--	--	--	5" DEPTH
0010	Bay/Spruce				--	--	41	15	--	--	--	5" DEPTH
0010	Bay/Oak/Cedar				--	--	49	20	--	--	--	5" DEPTH
0010	Cedar/Bridge				--	--	40	17	--	--	--	5" DEPTH
0010	Brdge/Elm				--	--	34	16	--	--	--	5" DEPTH
0010	Elm/High/Pond/Jefferson				--	--	30	11	--	--	--	5" DEPTH
0020		938+59	- 941+34	LT/RT	133	--	82	3	4,500	7,067	--	1.5" DEPTH
0020		941+34	- 975+07	LT/RT	--	--	299	--	1,000	--	--	3.25" DEPTH, 5" DEPTH AT C&G
0020		975+07	- 982+75	LT/RT	--	--	953	--	--	--	--	3.25" DEPTH, 5" DEPTH AT C&G
0010				UNDISTRIBUTED	--	--	572	392	14,810	6,493	100	
PROJECT 8610-02-74 TOTALS CATEGORY 0010					170	0	381	3	5,500	7,067	100	
CATEGORY 0020					133	0	953	395	20,310	13,950	100	
PROJECT 8610-02-74 TOTALS					303	0						

Addendum No. 02
ID 8110-02-74
Revised Sheet 169
January 9, 2025

Addendum No. 02
ID 8110-02-74
Revised Sheet 170
January 9, 2025

REMOVING CONCRETE SURFACE, REMOVING ASPHALTIC SURFACE

1

2

CATEGORY	CROSSROAD	STATION	STATION	LOCATION	204.0105 REMOVING CONCRETE PAVEMENT BUTT JOINTS (SY)	204.0100 REMOVING CONCRETE PAVEMENT (SY)	204.0110 REMOVING ASPHALTIC SURFACE (SY)	204.0115 REMOVING ASPHALTIC SURFACE BUTT JOINTS (SY)	204.0120 REMOVING ASPHALTIC SURFACE MILLING (SY)	204.0109.S REMOVING CONCRETE SURFACE PARTIAL DEPTH (SY)	SPV.0180.01 REMOVING DISTRESSED PAVEMENT MILLING (SY)	NOTES
001.0		982+75 -	986+18	L/RT	--	--	--	209	1,450	--	--	3.25" DBPTH
001.0		987+73 -	991+00	L/RT	--	--	--	209	1,380	--	--	3.25" DBPTH
001.0		991+00 -	994+22	L/RT	--	--	--	--	3,110	--	--	3.25" DBPTH
001.0		999+22 -	1010+35	L/RT	--	--	--	--	4,200	--	--	3.25" DBPTH
001.0		1010+35 -	1015+35	L/RT	--	--	--	--	2,150	--	--	3.25" DBPTH
001.0		1015+35 -	1024+80	L/RT	--	--	--	--	3,690	--	--	3.25" DBPTH
001.0		1024+80 -	1028+21	L/RT	--	--	--	--	1,290	--	--	3.25" DBPTH
001.0		1028+21 -	1050+93	L/RT	--	--	--	--	8,580	--	--	2.25" DBPTH
001.0		1050+93 -	1051+98	L/RT	--	--	--	--	4,390	--	--	2.25" DBPTH
001.0		1051+98 -	1064+33	L/RT	--	--	--	--	--	--	--	2.25" DBPTH
001.0		1064+33 -	1065+38	L/RT	--	--	--	--	1,140	--	--	2.25" DBPTH
001.0		1065+38 -	1068+60	L/RT	--	--	--	--	2,260	--	--	2.25" DBPTH
001.0		1068+60 -	1073+61	L/RT	--	--	--	--	2,350	--	--	2.25" DBPTH
001.0		1073+61 -	1078+62	L/RT	--	--	--	178	1,270	--	--	3.25" DBPTH
001.0		1078+62 -	1080+00	L/RT	--	--	--	--	2,958	--	--	3.25" DBPTH
001.0		1080+00 -	1086+15	L/RT	--	230	--	--	--	--	--	CONCRETE TRUCK APRON ON RAB
001.0		1081+00 -	1082+94	L/RT	--	--	--	14	--	--	--	5" DBPTH ATC&G
001.0	Elm/High/Pond/Jefferson				--	--	25	8	376	--	--	3.25" DBPTH, 5" DBPTH ATC&G
001.0	Bridgewater				--	--	37	12	200	--	--	3.25" DBPTH, 5" DBPTH ATC&G
001.0	John				--	--	42	7	100	--	--	3.25" DBPTH, 5" DBPTH ATC&G
001.0	Fair				--	--	18	5	100	--	--	3.25" DBPTH, 5" DBPTH ATC&G
001.0	Invine Park				--	--	15	8	872	--	--	3.25" DBPTH, 5" DBPTH ATC&G
001.0	Edward				--	--	15	8	87	--	--	3.25" DBPTH, 5" DBPTH ATC&G
001.0	1st				--	--	14	8	87	--	--	3.25" DBPTH, 5" DBPTH ATC&G
001.0	2nd				--	--	6	8	87	--	--	3.25" DBPTH, 5" DBPTH ATC&G
001.0	3rd				--	--	5	8	87	--	--	3.25" DBPTH, 5" DBPTH ATC&G
001.0	4th				--	--	--	8	121	--	--	3.25" DBPTH
001.0	7th				--	--	--	6	56	--	--	3.25" DBPTH
001.0	136th				--	--	--	8	429	--	--	3.25" DBPTH
001.0	State/140th				--	--	--	196	--	--	--	3.25" DBPTH
001.0	CTH S			SOUTH LEG	--	--	--	183	--	--	--	3.25" DBPTH
001.0	CTH S			WEST LEG	--	--	--	190	--	--	--	3.25" DBPTH
001.0	CTH S			EAST LEG	--	--	--	167	--	--	--	3.25" DBPTH
001.0	CTH S			NORTH LEG	--	--	--	--	--	--	--	3.25" DBPTH
001.0				UNDISTRIBUTED	--	--	--	--	--	--	--	3.25" DBPTH
001.0				CATEGORY 0010	0	230	177	1,440	43,252	0	300	
001.0				CATEGORY 0020	0	0	0	0	0	0	0	
001.0				TOTALS	0	230	177	1,440	43,252	0	300	

REMOVING CONCRETE SURFACE: REMOVING ASPHALTIC SURFACE CONTINUED

CATEGORY	CROSSROAD	STATION	-	STATION	LOCATION	204.0105 REMOVING CONCRETE PAVEMENT BUTT JOINTS (\$Y)	204.0100 REMOVING CONCRETE PAVEMENT (\$Y)	204.0110 REMOVING ASPHALTIC SURFACE (\$Y)	204.0115 REMOVING ASPHALTIC SURFACE BUTT JOINTS (\$Y)	204.0120 REMOVING ASPHALTIC SURFACE MILLING (\$Y)	204.0109.S REMOVING CONCRETE SURFACE PARTIAL DEPTH (\$F)	SPV.0180.01 REMOVING DISTRESSED PAVEMENT MILLING (\$Y)	NOTES
0020		982+75 -		986+18	L/RT	--	--	12	--	--	--	--	5"DEPTH AT C&G
0020		987+73 -		991+00	L/RT	--	--	6	--	--	--	--	5"DEPTH AT C&G
0020		991+00 -		999+22	L/RT	--	--	--	--	--	--	--	--
0020		999+22 -		1010+35	L/RT	--	--	--	--	--	--	--	--
0020		1010+35 -		1015+35	L/RT	--	--	8	--	--	--	--	5"DEPTH AT C&G
0020		1015+35 -		1024+80	L/RT	--	--	--	--	--	--	--	--
0020		1024+80 -		1028+21	L/RT	--	--	--	--	--	--	--	--
0020		1028+21 -		1050+93	L/RT	--	--	--	--	--	--	--	--
0020		1050+93 -		1051+98	L/RT	--	--	--	--	--	--	--	--
0020		1051+98 -		1064+33	L/RT	--	--	--	--	--	--	--	--
0020		1064+33 -		1065+38	L/RT	--	--	--	--	--	--	--	--
0020		1065+38 -		1068+60	L/RT	--	--	--	--	--	--	--	--
0020		1068+60 -		1073+61	L/RT	--	--	--	--	--	--	--	--
0020		1073+61 -		1078+62	L/RT	--	--	--	--	--	--	--	--
0020		1078+62 -		1080+00	L/RT	--	--	--	--	--	--	--	--
0020		1080+00 -		1086+15	L/RT	--	--	--	--	--	--	--	--
0020		1081+00 -		1082+94	L/RT	--	--	177	1,440	43,252	0	300	--
PROJECT 8610-08-73 TOTALS CATEGORY 0010						0	230	177	1,440	43,252	0	300	--
CATEGORY 0020						0	0	203	0	0	0	0	--
TOTALS						0	230	203	1,440	43,252	0	300	--
PROJECT 8610-08-74 TOTALS						303	230	1,156	1,835	63,562	13,560	400	--
COMBINED 8610-02-74 AND 8610-08-73 TOTALS						303	230	1,156	1,835	63,562	13,560	400	--
TOTALS						303	230	1,156	1,835	63,562	13,560	400	--

Addendum No. 02
ID 8110-02-74
Added Sheet 170A
January 9, 2025

Addendum No. 02
ID 8110-02-74
Revised Sheet 175
January 9, 2025

BASE PATCHING CONCRETE

CATEGORY	STATION	-	STATION	LOCATION	(CY)	REMOVING PAVEMENT FOR BASE PATCHING	(CY)	BASE PATCHING CONCRETESHES	(CY)	416.0610 TIEBARS	416.0620 DOWEL BARS	690.0250 SAWING CONCRETE	NOTES
0010	938+59	-	941+34	LT/RT	40	40	40	60	60	240	32	600	9" DEPTH
0020	938+59	-	941+34	RT	5	5	5	8	8	32	80	80	9" DEPTH
PROJECT 8610-02-74 TOTALS													
CATEGORY 0010					40	40	40	60	60	240	32	600	
CATEGORY 0020					5	5	5	8	8	32	80	80	
TOTALS					45	45	45	68	68	272	112	680	
COMBINED 8610-02-74 AND 8610-08-73 TOTALS													
TOTALS					45	45	45	68	68	272	112	680	

* BID ITEMS ELSEWHERE

BASE AGGREGATE & HMA PAVEMENT

CATEGORY	CROSSROAD	STATION	-	STATION	LOCATION	211.0400 PREPARE FOUNDATION FOR ASPHALTIC SHOULDER	305.0110 BASE AGGREGATE DENSE 3/4-INCH	(TON)	305.0120 BASE AGGREGATE DENSE 1-1/4-INCH	(TON)	460.6645 HMA PAVEMENT 5 MT 58-34 V	465.0105 ASPHALTIC SURFACE PATCHING	(TON)	465.0110 ASPHALTIC SURFACE AND FIELD ENTRANCES	(TON)	465.0120 ASPHALTIC SURFACE DRIVEWAYS	455.0605 TACK COAT WATER	NOTES
0010		938+59	-	941+34	LT/RT	--	--	--	--	--	2,415	13	53	--	--	231	--	
0010		941+34	-	975+07	LT/RT	--	--	--	--	--	630	--	--	--	--	1,575	--	
0010		975+07	-	982+75	LT/RT	--	--	--	--	--	--	--	--	--	--	326	--	
0010	River/Bay					--	--	--	16	--	--	--	--	--	--	--	--	
0010	Bay/Spring					--	--	--	22	--	--	8	--	--	--	--	0.4	
0010	Bay/Central					--	--	--	25	--	--	8	--	--	--	0.4	0.5	
0010	Bay/Grand					--	--	--	27	--	--	9	--	--	--	--	0.4	
0010	Bay/Columbia					--	--	--	24	--	--	9	--	--	--	--	0.5	
0010	Bay/Willow					--	--	--	28	--	--	11	--	--	--	--	0.4	
0010	Bay/Birch					--	--	--	22	--	--	9	--	--	--	--	0.4	
0010	Bay/Spruce					--	--	--	28	--	--	12	--	--	--	--	0.5	
0010	Bay/Oak/Cedar					--	--	--	26	--	--	14	--	--	--	--	0.4	
0010	Cedar/Bridge					--	--	--	24	--	--	12	--	--	--	--	0.4	
0010	Bridge/Elm					--	--	--	20	--	--	10	--	--	--	--	0.4	
0010	Elm/High/Pond/Jefferson					--	--	--	15	--	--	9	--	--	--	--	0.3	
0020		938+59	-	941+34	LT/RT	--	--	--	--	--	880	23	--	--	--	53	--	
0020		941+34	-	975+07	LT/RT	--	--	--	6	--	--	--	--	--	--	567	0.1	
0020		975+07	-	982+75	LT/RT	--	--	--	17	--	--	84	--	--	--	126	0.3	
PROJECT 8610-02-74 TOTALS							0	0	277	3,282	124	53	0	0	2,132	46		
CATEGORY 0020							0	0	23	1,083	107	0	0	0	746	0.4		
TOTALS							0	0	300	4,365	231	53	0	0	2,878	5.0		
PROJECT 8610-02-74 TOTALS																		

PROJECT NO: 8610-02-74/8610-08-73

HWY: STH 124

COUNTY: CHIPPEWA

MISCELLANEOUS QUANTITIES

SHEET 175

E

FILE NAME : ...030201_mq.ppt

PLOT DATE : 1/7/2025 12:45 PM

PLOT BY :

PLOT NAME : 030201.mq

PLOT SCALE : 1.0000002.000000

WISDOT / CADDS SHEET 42

BASE AGGREGATE & HMA PAVEMENT

CATEGORY	GROSSROAD	STATION	STATION	LOCATION	211.0400 PREPARE FOUNDATION FOR ASPHALTIC SHOULERS	305.0110 BASE AGGREGATE DENSE	305.0120 BASE AGGREGATE DENSE	460.6645 HMA PAVEMENT 5 MT/58-34 V	465.0105 ASPHALTIC SURFACE	465.0110 ASPHALTIC SURFACE PATCHING	465.0120 ASPHALTIC SURFACE DRIVEWAYS AND FIELD ENTRANCES	455.0605 TACK COAT	624.0100 WATER (MGAL)	NOTES
0010		982+75	- 986+18	L7/RT	--	--	--	294	--	13	--	179	--	
0010		987+73	- 991+00	L7/RT	--	--	--	273	--	13	--	179	--	
0010		991+00	- 999+22	L7/RT	--	--	--	620	--	14	--	389	--	
0010		999+22	- 1010+35	L7/RT	--	--	--	840	--	13	--	525	--	
0010		1010+35	- 1015+35	L7/RT	--	--	--	431	--	13	--	273	--	
0010		1015+35	- 1024+80	L7/RT	--	--	--	894	--	14	--	462	--	
0010		1024+80	- 1028+21	L7/RT	--	--	--	252	--	13	--	158	--	
0010		1028+21	- 1050+93	L7/RT	22	318	39	1,722	--	13	89	1,082	4.9	CULVERT REPLACEMENT
0010		1050+93	- 1051+98	L7/RT	1	63	578	137	133	13	--	42	10.1	
0010		1051+98	- 1064+33	L7/RT	13	42	272	882	--	13	--	557	0.7	
0010		1064+33	- 1065+38	L7/RT	1	63	578	137	135	13	--	42	10.1	CULVERT REPLACEMENT
0010		1065+38	- 1068+60	L7/RT	3	11	--	231	--	14	--	147	0.2	
0010		1068+60	- 1073+61	L7/RT	5	21	--	452	--	13	--	284	0.4	
0010		1073+61	- 1078+62	L7/RT	5	11	--	473	--	13	--	294	0.2	
0010		1078+62	- 1080+00	L7/RT	--	--	--	436	--	14	--	158	--	
0010		1080+00	- 1086+13	L7/RT	--	--	30	750	10	1	--	285	--	
0010	Elm/High/Pond/Jefferson Bridgewater				--	--	11	10	11	--	--	16	0.2	
0010					--	--	23	10	12	--	--	32	0.4	
0010	John				--	--	21	30	6	2	--	16	0.2	
0010	Fair				--	--	10	15	5	--	--	16	0.2	
0010	IrvinePark				--	--	8	16	5	--	--	16	0.2	
0010	Edward				--	--	8	16	5	--	--	16	0.2	
0010	1st				--	--	5	17	4	--	--	16	0.1	
0010	2nd				--	--	4	19	2	--	--	16	0.1	
0010	3rd				--	--	2	19	2	--	--	16	0.1	
0010	4th				--	--	--	21	--	--	--	16	--	
0010	7th				--	--	--	21	--	--	--	16	--	
0010	136th				--	--	--	42	--	--	--	32	--	
0010	State/140th				--	--	--	21	--	--	--	16	--	
0020		982+75	- 986+18	L7/RT	--	--	2	--	4	2	--	0.3	0.1	
0020		987+73	- 991+00	L7/RT	--	--	2	--	2	--	--	0.3	0.1	
0020		991+00	- 999+22	L7/RT	--	--	--	--	--	--	--	--	--	
0020		999+22	- 1010+35	L7/RT	--	--	--	--	--	--	--	--	--	
0020		1010+35	- 1015+35	L7/RT	--	--	--	--	--	--	--	--	--	
0020		1015+35	- 1024+80	L7/RT	--	--	2	3	--	2	--	0.4	0.1	
0020		1024+80	- 1028+21	L7/RT	--	--	--	--	--	--	--	--	--	
0020		1028+21	- 1050+93	L7/RT	--	--	--	--	--	--	--	--	--	
0020		1050+93	- 1051+98	L7/RT	--	--	--	--	--	--	--	--	--	
0020		1051+98	- 1064+33	L7/RT	--	--	--	--	--	--	--	--	--	
0020		1064+33	- 1065+38	L7/RT	--	--	--	--	--	--	--	--	--	
0020		1065+38	- 1068+60	L7/RT	--	--	--	--	--	--	--	--	--	
0020		1068+60	- 1073+61	L7/RT	--	--	--	--	--	--	--	--	--	
0020		1073+61	- 1078+62	L7/RT	--	--	--	--	--	--	--	--	--	
0020		1078+62	- 1080+00	L7/RT	--	--	--	--	--	--	--	--	--	
PROJECT 8610-08-73 TOTALS														
						50	529	1,589	8,751	2	200	5,280	29.0	
						0	0	0	0	0	89	0	0.3	
						50	529	1,589	8,751	2	200	5,280	29.3	
PROJECT 8610-02-74 AND 8610-08-73 TOTALS														
						50	529	1,895	13,120	2	253	8,159	34.3	

Addendum No. 02
ID 8110-02-74
Revised Sheet 176
January 9, 2025

Addendum No. 02
ID 8110-02-74
Revised Sheet 178
January 9, 2025

8610-02-74 P.W. MIXTURE USE TABLE

LOCATION	STATION	MIXTURE USE	UNDERLYING SURFACE	BID ITEM	TONS	THICKNESS	QUALITY MANAGEMENT PROGRAM TO BE USED FOR:	
							MIXTURE ACCEPTANCE	DENSITY ACCEPTANCE
12 FOOT DRIVING LANE	938+63 - 941+34	UPPER LAYER	5 MT 58-34V	5 MT 58-34V	61	1.5"	INCENTIVE AIR VOIDS HMA PAVEMENT SPV.0055.02	INCENTIVE DENSITY P.W. HMA PAVEMENT SPV.0055.01
12 FOOT DRIVING LANE	938+63 - 941+34	LOWER LAYER	EXISTING MILLED CONCRETE SURFACE	5 MT 58-34V	40	1.0"	INCENTIVE AIR VOIDS HMA PAVEMENT SPV.0055.02	INCENTIVE DENSITY P.W. HMA PAVEMENT SPV.0055.01
SHOULDERS	938+63 - 941+34	UPPER LAYER	5 MT 58-34V	5 MT 58-34V	108	1.5"	INCENTIVE AIR VOIDS HMA PAVEMENT SPV.0055.02	ACCEPTANCE TESTING BY THE DEPARTMENT; NOT ELIGIBLE FOR INCENTIVE
SHOULDERS	938+63 - 941+34	LOWER LAYER	EXISTING MILLED CONCRETE SURFACE	5 MT 58-34V	72	1.0"	INCENTIVE AIR VOIDS HMA PAVEMENT SPV.0055.02	ACCEPTANCE TESTING BY THE DEPARTMENT; NOT ELIGIBLE FOR INCENTIVE
12 FOOT DRIVING LANE	941+34 - 975+07	UPPER LAYER	5 MT 58-34V	5 MT 58-34V	756	1.5"	INCENTIVE AIR VOIDS HMA PAVEMENT SPV.0055.02	INCENTIVE DENSITY P.W. HMA PAVEMENT SPV.0055.01
12 FOOT DRIVING LANE	941+34 - 975+07	LOWER LAYER	EXISTING MILLED SURFACE	5 MT 58-34V	881	1.75"	INCENTIVE AIR VOIDS HMA PAVEMENT SPV.0055.02	INCENTIVE DENSITY P.W. HMA PAVEMENT SPV.0055.01
SHOULDERS	941+34 - 975+07	UPPER LAYER	5 MT 58-34V	5 MT 58-34V	743	1.5"	INCENTIVE AIR VOIDS HMA PAVEMENT SPV.0055.02	ACCEPTANCE TESTING BY THE DEPARTMENT; NOT ELIGIBLE FOR INCENTIVE
SHOULDERS	941+34 - 975+07	LOWER LAYER	EXISTING MILLED SURFACE / BASE AGGREGATE	5 MT 58-34V	872	1.75"	INCENTIVE AIR VOIDS HMA PAVEMENT SPV.0055.02	ACCEPTANCE TESTING BY THE DEPARTMENT; NOT ELIGIBLE FOR INCENTIVE
CURB FILL	973+40 - 975+07	MIDDLE LAYER	ASPHALTIC SURFACE	ASPHALTIC SURFACE	4	2.0"	QMP AS PER SS.465	ACCEPTANCE TESTING BY ORDINARY COMPACTION
CURB FILL	973+40 - 975+07	LOWER LAYER	BASE AGGREGATE	ASPHALTIC SURFACE	6	3.0"	QMP AS PER SS.465	ACCEPTANCE TESTING BY ORDINARY COMPACTION
12 FOOT DRIVING LANE	975+07 - 982+75	UPPER LAYER	5 MT 58-34V	5 MT 58-34V	172	1.5"	INCENTIVE AIR VOIDS HMA PAVEMENT SPV.0055.02	INCENTIVE DENSITY P.W. HMA PAVEMENT SPV.0055.01
12 FOOT DRIVING LANE	975+07 - 982+75	LOWER LAYER	EXISTING BASE AGGREGATE	5 MT 58-34V	287	2.5"	INCENTIVE AIR VOIDS HMA PAVEMENT SPV.0055.02	INCENTIVE DENSITY P.W. HMA PAVEMENT SPV.0055.01
SHOULDERS	975+07 - 982+75	UPPER LAYER	5 MT 58-34V	5 MT 58-34V	196	1.5"	INCENTIVE AIR VOIDS HMA PAVEMENT SPV.0055.02	ACCEPTANCE TESTING BY THE DEPARTMENT; NOT ELIGIBLE FOR INCENTIVE
SHOULDERS	975+07 - 982+75	LOWER LAYER	EXISTING BASE AGGREGATE	5 MT 58-34V	180	2.5"	INCENTIVE AIR VOIDS HMA PAVEMENT SPV.0055.02	ACCEPTANCE TESTING BY THE DEPARTMENT; NOT ELIGIBLE FOR INCENTIVE
UNDISTRIBUTED	938+59 - 982+75	UPPER LAYER	4 MT 58-34V	5 MT 58-34V	107	1.5"	INCENTIVE AIR VOIDS HMA PAVEMENT SPV.0055.02	INCENTIVE DENSITY P.W. HMA PAVEMENT SPV.0055.01
UNDISTRIBUTED	938+59 - 982+75	LOWER LAYER	EXISTING MILLED SURFACE / EXISTING SURFACE	5 MT 58-34V	111	2.5"	INCENTIVE AIR VOIDS HMA PAVEMENT SPV.0055.02	INCENTIVE DENSITY P.W. HMA PAVEMENT SPV.0055.01
WEDGING / LOWER LAYER PAVEMENT REPAIR, POT HOLES	938+59 - 982+75	LOWER LAYER	EXISTING MILLED SURFACE / EXISTING SURFACE	ASPHALTIC SURFACE / ASPHALTIC SURFACE PATCHING	53	VARIES	QMP AS PER SS.465	ACCEPTANCE TESTING BY ORDINARY COMPACTION

PROJECT NO: 8610-02-74/8610-08-73

HWY: STH 124

COUNTY: CHIPPEWA

MISCELLANEOUS QUANTITIES

SHEET 178

E

FILE NAME : ...032031.mxd

PLOT DATE : 1/7/2025 12:45 PM

PLOT BY :

PLOT NAME : 032031.mxd

PLOT SCALE : 1:1000000.00000

WISDOT / CADDS SHEET 42

CONCRETE ITEMS

CATEGORY	CROSSROAD	STATION	STATION	LOCATION	601.0407 CONCRETE CURB & GUTTER 18-INCH TYPED (LF)	601.0409 CONCRETE CURB & GUTTER 30-INCH TYPE A (LF)	601.0411 CONCRETE CURB & GUTTER 30-INCH TYPED (LF)	601.0600 CONCRETE CURB PEDESTRIAN (LF)	602.0410 CONCRETE SIDEWALK 5-INCH (SF)	602.0505 CURB RAMP DETECTABLE WARNING FIELD YELLOW (SF)	602.0815 CONCRETE DRIVEWAY 7-INCH (SF)	602.0870 CONCRETE DRIVEWAY HES 8-INCH (SF)	650.9000 CONSTRUCTION CURB RAMPS (EACH)	650.9500.01 CONSTRUCTION STAKING SIDEWALK (EACH)
0010	River/Bay				--	90	--	--	809	40	--	--	4	--
0010	Bay/Spring				--	--	120	12	1,117	50	--	--	5	--
0010	Bay/Central				--	--	128	139	1,285	80	--	--	8	--
0010	Bay/Grand				--	--	135	116	1,340	80	--	--	8	--
0010	Bay/Columbia				--	--	132	154	1,209	70	--	--	7	--
0010	Bay/Willow				--	--	170	133	1,435	80	--	--	8	--
0010	Bay/Birch				--	--	142	114	1,093	80	--	--	8	--
0010	Bay/Spruce				--	--	182	54	1,427	80	--	--	8	--
0010	Bay/Oak/Cedar				--	--	219	113	1,327	104	--	--	10	--
0010	Cedar/Bridge				88	--	159	132	1,194	140	--	--	10	--
0010	Bridge/Eln				--	--	152	34	1,015	66	--	--	6	--
0010	Eln/HighPond/Jefferson				--	--	134	63	737	52	--	--	5	--
0020		938+59 -	941+34	LT/RT	--	--	--	--	--	--	--	--	--	--
0020		941+34 -	975+07	LT/RT	--	--	--	--	--	--	--	--	--	--
0020		975+07 -	982+75	LT/RT	--	--	366	--	--	--	--	44	--	--
0020					--	--	1,343	--	--	--	108	--	--	--
PROJECT 8610-02-74 TOTALS					88	90	1,673	1,064	13,988	922	0	0	87	--
CATEGORY 0020					0	0	1,709	0	0	0	108	44	0	--
TOTALS					88	90	3,382	1,064	13,988	922	108	44	87	1
PROJECT 8610-02-74 TOTALS														

Addendum No. 02
ID 8110-02-74
Revised Sheet 181
January 9, 2025

CONCRETE ITEMS

CATEGORY	CROSSROAD	STATION	STATION	LOCATION	601.0407 CONCRETE CURB & GUTTER 18-INCH TYPED (LF)	601.0409 CONCRETE CURB & GUTTER 30-INCH TYPE A (LF)	601.0411 CONCRETE CURB & GUTTER 30-INCH TYPED (LF)	601.0600 CONCRETE CURB PEDESTRIAN (LF)	602.0410 CONCRETE SIDEWALK 5-INCH (SF)	602.0505 CURB RAMP DETECTABLE WARNING FIELD YELLOW (SF)	602.0815 CONCRETE DRIVEWAY 7-INCH (SF)	605.0870 CONCRETE DRIVEWAY HES 8-INCH (SF)	650.9000 CONSTRUCTION CURB RAMPS (EACH)	650.9500.02 CONSTRUCTION STAKING SIDEWALK 861.0-08-73 (EACH)
0010	Elm/High/Pond/Jefferson													
0010	Bridgewater													
0010	John													
0010	Fair													
0010	Irvine Park													
0010	Edward													
0010	1st													
0010	2nd													
0010	3rd													
0010	4th													
0010	7th													
0010	136th													
0010	State/140th													
0020		982+75	-	986+18										
0020		987+73	-	991+00										
0020		991+00	-	999+22										
0020		999+22	-	1010+35										
0020		1010+35	-	1015+35										
0020		1015+35	-	1024+80										
0020		1024+80	-	1028+21										
0020		1028+21	-	1050+93										
0020		1050+93	-	1051+98										
0020		1051+98	-	1064+33										
0020		1064+33	-	1065+38										
0020		1065+38	-	1068+60										
0020		1068+60	-	1073+61										
0020		1073+61	-	1078+62										
0020		1078+62	-	1080+00										
PROJECT 8610-08-73 TOTALS					0	0	780	122	4,527	306	0	0	28	
CATEGORY 0020					0	0	112	0	0	0	0	0	0	
TOTALS					0	0	892	122	4,527	306	0	0	28	
PROJECT 8610-08-73 TOTALS					88	90	4,274	1,186	18,515	1,228	108	44	115	
COMBINED 8610-02-74 AND 8610-08-73 TOTALS														

CONCRETE ITEMS CONTINUED

CATEGORY	STATION	STATION	LOCATION	CY	405.0100 COLORING CONCRETE WISDOT RED	415.0080 CONCRETE PAVEMENT	601.0415 CONCRETE CURB & GUTTER 6-INCH SLOPED
0010	1081+78	-	1082+96	--		--	360
0010	1081+80	-	1082+94	51		226	--
PROJECT 8610-08-73 TOTALS				51	226		360
CATEGORY 0020				--	--	--	--
TOTALS				51	226		360
COMBINED 8610-02-74 AND 8610-08-73 TOTALS				51	226		360

Addendum No. 02
ID 8110-02-74
Revised Sheet 182
January 9, 2025

STORM SEWER ITEMS

CATEGORY	CROSSROAD	STATION	STATION	LOCATION	STORM SEWER PIPE REINFORCED CONCRETE CLASS IV 12-INCH (LF)	611.0624 INLET COVER TYPE H (EACH)	611.3230 INLETS 2X3-FT (EACH)	611.8110 ADJUSTING MANHOLE COVERS (EACH)	611.8115 ADJUSTING INLET COVERS (EACH)	611.8120.S COVER PLATES TEMPORARY (EACH)	611.9710 SALVAGED INLET COVERS (EACH)	650.4000 CONSTRUCTION STAKING STORM SEWER (EACH)
0010		938+59	- 941+34	LT/RT	-	-	-	-	-	-	-	-
0010		941+34	- 975+07	LT/RT	-	-	-	11	-	11	-	-
0010		975+07	- 982+75	LT/RT	49	2	2	-	-	-	-	2
0010	River/Bay				-	-	-	4	-	4	-	-
0010	Bay/Spring				-	-	-	2	-	2	-	-
0010	Bay/Central				-	-	-	3	-	3	-	-
0010	Bay/Grand				-	-	-	4	-	4	-	-
0010	Bay/Columbia				-	-	-	3	-	3	-	-
0010	Bay/Willow				-	-	-	4	-	4	-	-
0010	Bay/Birch				-	-	-	6	-	6	-	-
0010	Bay/Spruce				-	-	-	2	-	2	-	-
0010	Bay/Oak/Cedar				-	-	-	3	-	3	-	-
0010	Cedar/Bridge				-	-	-	2	-	2	-	-
0010	Bridge/Elm				-	-	-	3	-	3	-	-
0010	Elm/High/Pond/Jefferson				-	-	-	1	-	1	-	-
PROJECT 8610-02-74 TOTALS					49	2	2	44	39	44	0	2
CATEGORY 0010					0	0	0	0	0	0	0	0
CATEGORY 0020					49	2	2	44	39	44	0	2
TOTALS												
PROJECT 8610-02-74 TOTALS												

Addendum No. 02
ID 8110-02-74
Revised Sheet 183
January 9, 2025

Addendum No. 02
ID 8110-02-74
Revised Sheet 184
January 9, 2025

3

3

STORM SEWER ITEMS

CATEGORY	CROSSROAD	STATION	STATION	LOCATION	608.0412 STORM SEWER PIPE REINFORCED CONCRETE CLASS IV 12-INCH (LF)	611.0624 INLET COVER TYPE H (EACH)	611.3230 INLETS 2X3-FT (EACH)	611.8110 ADJUSTING MANHOLE COVERS (EACH)	611.8115 ADJUSTING INLET COVERS (EACH)	611.8120.S COVER PLATES TEMPORARY (EACH)	611.9710 SALVAGED INLET COVERS (EACH)	650.4000 CONSTRUCTION STAKING STORM SEWER (EACH)
0010		982+75 -	986+18	L7/RT	-	-	-	-	-	-	-	-
0010		987+73 -	991+00	L7/RT	-	-	-	-	-	-	-	-
0010		991+00 -	999+22	L7/RT	-	-	-	-	-	-	-	-
0010		999+22 -	1010+35	L7/RT	-	-	-	3	-	3	-	-
0010		1010+35 -	1015+35	L7/RT	-	-	-	-	-	-	-	-
0010		1015+35 -	1024+80	L7/RT	-	-	-	1	-	1	-	-
0010		1024+80 -	1028+21	L7/RT	-	-	-	1	-	1	-	-
0010		1028+21 -	1050+93	L7/RT	-	-	-	-	-	-	-	-
0010		1050+93 -	1051+98	L7/RT	-	-	-	-	-	-	-	-
0010		1051+98 -	1064+33	L7/RT	-	-	-	-	-	-	-	-
0010		1064+33 -	1065+38	L7/RT	-	-	-	-	-	-	-	-
0010		1065+38 -	1068+60	L7/RT	-	-	-	-	-	-	-	-
0010		1068+60 -	1073+61	L7/RT	-	-	-	-	-	-	-	-
0010		1073+61 -	1078+62	L7/RT	-	-	-	-	-	-	-	-
0010		1078+62 -	1080+00	L7/RT	-	-	-	-	-	-	-	-
0010		1082+90 -	1083+00	L7/RT	-	-	-	-	-	-	-	-
0010	Etn/High/Pond/Jefferson								1		2	
0010	Bridgewater											
0010	John							1		1		
0010	Fair							3		3		
0010	IrvinePark							2		2		
0010	Edward							1		1		
0010	1st							3		3		
0010	2nd							2		2		
0010	3rd							2		2		
0010	4th							1		1		
0010	7th							1		1		
0010	136th							-		-		
0010	State/140th							-		-		
PROJECT 8610-08-73 TOTALS					0	0	0	23	5	23	2	0
CATEGORY 0010					0	0	0	0	0	0	0	0
CATEGORY 0020					0	0	0	0	0	0	0	0
TOTALS					49	0	0	23	5	23	2	0
PROJECT 8610-08-73 TOTALS												
COMBINED 8610-02-74 AND 8610-08-73 TOTALS								67	44	67	2	2

PROJECT NO: 8610-02-74/8610-08-73

HWY: STH 124

COUNTY: CHIPPEWA

MISCELLANEOUS QUANTITIES

SHEET 184

E

FILE NAME : ...030201.mxd

PLOT DATE : 1/7/2025 12:45 PM

PLOT BY :

PLOT NAME : 030201.mxd

PLOT SCALE : 1:1000000.00000

WISDOT / CADDS SHEET 42

Addendum No. 02
ID 8110-02-74
Revised Sheet 195
January 9, 2025

SAWING ITEMS

CATEGORY	CROSSROAD	STATION	-	STATION	LOCATION	690.0150 SAWING ASPHALT (LF)	* 690.0250 SAWING CONCRETE (LF)	NOTES
0010		938+63	-	941+34	LT/RT	--	481	
0010	River/Bay						235	
0010	Bay/Spring					126	170	
0010	Bay/Central					147	162	
0010	Bay/Grand					143	184	
0010	Bay/Columbia					136	99	
0010	Bay/Willow					177	99	
0010	Bay/Birch					151	71	
0010	Bay/Spruce					189	70	
0010	Bay/Oak/Cedar					228	78	
0010	Cedar/Bridge					261	123	
0010	Bridge/Elm					151	62	
0010	Elm/High/Pond/Jefferson					139	59	
0020		938+63	-	941+34	LT/RT	353	45	
0020		941+34	-	975+07	LT/RT		48	
0020		975+07	-	982+75	LT/RT		168	
0010					UNDISTRIBUTED	1,280	84	
						175		
		PROJECT 8610-02-74 TOTALS			CATEGORY 0010	2,023	1,977	
					CATEGORY 0020	1,063	260	
		PROJECT 8610-02-74 TOTALS			TOTALS	3,656	2,237	

* BID ITEM LISTED ELSEWHERE

SAWING ITEMS

CATEGORY	CROSSROAD	STATION	STATION	LOCATION	690.0150 SAWING ASPHALT (LF)	* 690.0250 SAWING CONCRETE (LF)	NOTES
0010		1081+78 -	1082+96	L7/RT	361	--	
0010		1086+13 -	1086+13	L7/RT	32	--	
0010	Elm/High/Pond/Jefferson				113	30	
0010	Bridgewater				174	77	
0010	John				194	43	
0010	Fair				94	41	
0010	Irvine Park				69	37	
0010	Edward				69	32	
0010	1st				72	22	
0010	2nd				39	20	
0010	3rd				22	10	
0010	4th						
0010	7th						
0010	136th						
0010	State/140th						
0020		982+75 -	986+18	L7/RT	50	5	
0020		987+73 -	991+00	L7/RT	--	--	
0020		991+00 -	999+22	L7/RT	--	--	
0020		999+22 -	1010+35	L7/RT	--	--	
0020		1010+35 -	1015+35	L7/RT	--	--	
0020		1015+35 -	1024+80	L7/RT	--	--	
0020		1024+80 -	1028+21	L7/RT	--	--	
0020		1028+21 -	1050+93	L7/RT	--	--	
0020		1050+93 -	1051+98	L7/RT	--	--	
0020		1051+98 -	1064+33	L7/RT	--	--	
0020		1064+33 -	1065+38	L7/RT	60	--	
0020		1065+38 -	1068+60	L7/RT	--	--	
0020		1068+60 -	1073+61	L7/RT	60	--	
0020		1073+61 -	1078+62	L7/RT	--	--	
0020		1078+62 -	1080+00	L7/RT	--	--	
0010				UNDISTRIBUTED	225	--	DRIVEWAYS NORTH OF 4TH AVE
0010				UNDISTRIBUTED	82	16	
PROJECT 8610-02-74 TOTALS					1,546	328	
CATEGORY 0010					1,546	328	
CATEGORY 0020					1,716	333	
TOTALS					5,372	2,570	
PROJECT 8610-02-74 AND 8610-08-73 TOTALS					1,716	333	
CATEGORY 0010					1,716	333	
CATEGORY 0020					1,716	333	
TOTALS					5,372	2,570	
COMBINED 8610-02-74 AND 8610-08-73 TOTALS					1,716	333	
CATEGORY 0010					1,716	333	
CATEGORY 0020					1,716	333	
TOTALS					5,372	2,570	
* BID ITEM LISTED ELSEWHERE							

Addendum No. 02
ID 8110-02-74
Revised Sheet 196
January 9, 2025



Proposal Schedule of Items

Page 1 of 11

Proposal ID: 20250114039 Project(s): 8610-02-74, 8610-08-73

Federal ID(s): WISC 2025175, WISC 2025176

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0002	201.0205 Grubbing	2.000 STA	_____.	_____.
0004	203.0100 Removing Small Pipe Culverts	2.000 EACH	_____.	_____.
0006	204.0105 Removing Concrete Pavement Butt Joints	303.000 SY	_____.	_____.
0008	204.0109.S Removing Concrete Surface Partial Depth	13,560.000 SF	_____.	_____.
0010	204.0110 Removing Asphaltic Surface	1,156.000 SY	_____.	_____.
0012	204.0115 Removing Asphaltic Surface Butt Joints	1,099.000 SY	_____.	_____.
0014	204.0120 Removing Asphaltic Surface Milling	60,663.000 SY	_____.	_____.
0016	204.0150 Removing Curb & Gutter	4,464.000 LF	_____.	_____.
0018	204.0155 Removing Concrete Sidewalk	2,177.000 SY	_____.	_____.
0020	204.0195 Removing Concrete Bases	2.000 EACH	_____.	_____.
0022	204.0210 Removing Manholes	1.000 EACH	_____.	_____.
0024	204.0215 Removing Catch Basins	2.000 EACH	_____.	_____.
0026	204.0245 Removing Storm Sewer (size) 01. 12-Inch	55.000 LF	_____.	_____.
0028	205.0100 Excavation Common	2,122.000 CY	_____.	_____.
0030	208.1500.S Temporary Lane Shift During Culvert Work	2.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 2 of 11

Proposal ID: 20250114039 Project(s): 8610-02-74, 8610-08-73

Federal ID(s): WISC 2025175, WISC 2025176

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0032	211.0101 Prepare Foundation for Asphaltic Paving (project) 01. 8610-02-74	1.000 EACH	_____.	_____.
0034	211.0101 Prepare Foundation for Asphaltic Paving (project) 02. 8610-08-73	1.000 EACH	_____.	_____.
0036	211.0400 Prepare Foundation for Asphaltic Shoulders	50.000 STA	_____.	_____.
0038	213.0100 Finishing Roadway (project) 01. 8610-02-74	1.000 EACH	_____.	_____.
0040	213.0100 Finishing Roadway (project) 02. 8610-08-73	1.000 EACH	_____.	_____.
0042	305.0110 Base Aggregate Dense 3/4-Inch	529.000 TON	_____.	_____.
0044	305.0120 Base Aggregate Dense 1 1/4-Inch	1,895.000 TON	_____.	_____.
0046	390.0100 Removing Pavement for Base Patching	45.000 CY	_____.	_____.
0048	390.0405 Base Patching Concrete SHES	45.000 CY	_____.	_____.
0050	416.0610 Drilled Tie Bars	68.000 EACH	_____.	_____.
0052	416.0620 Drilled Dowel Bars	272.000 EACH	_____.	_____.
0054	455.0605 Tack Coat	8,159.000 GAL	_____.	_____.
0056	460.0105.S HMA Percent Within Limits (PWL) Test Strip Volumetrics	1.000 EACH	_____.	_____.
0058	460.6645 HMA Pavement 5 MT 58-34 V	13,120.000 TON	_____.	_____.



Proposal Schedule of Items

Page 3 of 11

Proposal ID: 20250114039 Project(s): 8610-02-74, 8610-08-73

Federal ID(s): WISC 2025175, WISC 2025176

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0060	460.9000.S Material Transfer Vehicle	1.000 EACH	_____.	_____.
0062	465.0105 Asphaltic Surface	565.000 TON	_____.	_____.
0064	465.0110 Asphaltic Surface Patching	253.000 TON	_____.	_____.
0066	465.0120 Asphaltic Surface Driveways and Field Entrances	89.000 TON	_____.	_____.
0068	520.8700 Cleaning Culvert Pipes	1.000 EACH	_____.	_____.
0070	522.2319 Culvert Pipe Reinforced Concrete Horizontal Elliptical Class HE-III 19x30-Inch	178.000 LF	_____.	_____.
0072	522.2619 Apron Endwalls for Culvert Pipe Reinforced Concrete Horizontal Elliptical 19x30-Inch	6.000 EACH	_____.	_____.
0074	601.0407 Concrete Curb & Gutter 18-Inch Type D	88.000 LF	_____.	_____.
0076	601.0409 Concrete Curb & Gutter 30-Inch Type A	90.000 LF	_____.	_____.
0078	601.0411 Concrete Curb & Gutter 30-Inch Type D	4,274.000 LF	_____.	_____.
0080	601.0600 Concrete Curb Pedestrian	1,186.000 LF	_____.	_____.
0082	602.0410 Concrete Sidewalk 5-Inch	18,515.000 SF	_____.	_____.
0084	602.0505 Curb Ramp Detectable Warning Field Yellow	1,228.000 SF	_____.	_____.
0086	602.0815 Concrete Driveway 7-Inch	108.000 SY	_____.	_____.



Proposal Schedule of Items

Page 4 of 11

Proposal ID: 20250114039 Project(s): 8610-02-74, 8610-08-73

Federal ID(s): WISC 2025175, WISC 2025176

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0088	602.0870 Concrete Driveway HES 8-Inch	44.000 SY	_____.	_____.
0090	606.0200 Riprap Medium	6.000 CY	_____.	_____.
0092	608.0412 Storm Sewer Pipe Reinforced Concrete Class IV 12-Inch	49.000 LF	_____.	_____.
0094	611.0624 Inlet Covers Type H	2.000 EACH	_____.	_____.
0096	611.3230 Inlets 2x3-FT	2.000 EACH	_____.	_____.
0098	611.8110 Adjusting Manhole Covers	67.000 EACH	_____.	_____.
0100	611.8115 Adjusting Inlet Covers	44.000 EACH	_____.	_____.
0102	619.1000 Mobilization	1.000 EACH	_____.	_____.
0104	621.0100 Landmark Reference Monuments	1.000 EACH	_____.	_____.
0106	624.0100 Water	34.300 MGAL	_____.	_____.
0108	625.0100 Topsoil	380.000 SY	_____.	_____.
0110	625.0500 Salvaged Topsoil	1,420.000 SY	_____.	_____.
0112	628.1905 Mobilizations Erosion Control	46.000 EACH	_____.	_____.
0114	628.1910 Mobilizations Emergency Erosion Control	12.000 EACH	_____.	_____.
0116	628.2023 Erosion Mat Class II Type B	1,938.000 SY	_____.	_____.
0118	628.7005 Inlet Protection Type A	2.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 5 of 11

Proposal ID: 20250114039 Project(s): 8610-02-74, 8610-08-73

Federal ID(s): WISC 2025175, WISC 2025176

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0120	628.7015 Inlet Protection Type C	98.000 EACH	_____.	_____.
0122	628.7555 Culvert Pipe Checks	28.000 EACH	_____.	_____.
0124	629.0205 Fertilizer Type A	3.100 CWT	_____.	_____.
0126	630.0120 Seeding Mixture No. 20	63.000 LB	_____.	_____.
0128	630.0160 Seeding Mixture No. 60	4.900 LB	_____.	_____.
0130	630.0200 Seeding Temporary	74.000 LB	_____.	_____.
0132	630.0500 Seed Water	39.200 MGAL	_____.	_____.
0134	631.0300 Sod Water	7.100 MGAL	_____.	_____.
0136	631.1000 Sod Lawn	391.000 SY	_____.	_____.
0138	633.5200 Markers Culvert End	8.000 EACH	_____.	_____.
0140	642.5001 Field Office Type B	1.000 EACH	_____.	_____.
0142	643.0300 Traffic Control Drums	117,081.000 DAY	_____.	_____.
0144	643.0900 Traffic Control Signs	46,930.000 DAY	_____.	_____.
0146	643.1050 Traffic Control Signs PCMS	14.000 DAY	_____.	_____.
0148	643.3170 Temporary Marking Line Epoxy 6-Inch	50,007.000 LF	_____.	_____.
0150	643.3180 Temporary Marking Line Removable Tape 6-Inch	440.000 LF	_____.	_____.



Proposal Schedule of Items

Page 6 of 11

Proposal ID: 20250114039 Project(s): 8610-02-74, 8610-08-73

Federal ID(s): WISC 2025175, WISC 2025176

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0152	643.3350 Temporary Marking Crosswalk Removable Tape 6-inch	6,800.000 LF	_____.	_____.
0154	643.5000 Traffic Control	1.000 EACH	_____.	_____.
0156	644.1430 Temporary Pedestrian Surface Plate	291.000 SF	_____.	_____.
0158	644.1440 Temporary Pedestrian Surface Matting	3,480.000 SF	_____.	_____.
0160	644.1601 Temporary Pedestrian Curb Ramp	8,793.000 DAY	_____.	_____.
0162	644.1605 Temporary Pedestrian Detectable Warning Field	2,491.000 SF	_____.	_____.
0164	644.1810 Temporary Pedestrian Barricade	13,500.000 LF	_____.	_____.
0166	645.0120 Geotextile Type HR	13.000 SY	_____.	_____.
0168	646.2040 Marking Line Grooved Wet Ref Epoxy 6-Inch	41,577.000 LF	_____.	_____.
0170	646.4040 Marking Line Grooved Wet Ref Epoxy 10-Inch	1,188.000 LF	_____.	_____.
0172	646.4720 Marking Line Same Day Epoxy 6-Inch	22,691.000 LF	_____.	_____.
0174	646.5020 Marking Arrow Epoxy	20.000 EACH	_____.	_____.
0176	646.5120 Marking Word Epoxy	7.000 EACH	_____.	_____.
0178	646.5220 Marking Symbol Epoxy	26.000 EACH	_____.	_____.
0180	646.6120 Marking Stop Line Epoxy 18-Inch	953.000 LF	_____.	_____.



Proposal Schedule of Items

Page 7 of 11

Proposal ID: 20250114039 Project(s): 8610-02-74, 8610-08-73

Federal ID(s): WISC 2025175, WISC 2025176

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0182	646.7120 Marking Diagonal Epoxy 12-Inch	1,244.000 LF	_____.	_____.
0184	646.7420 Marking Crosswalk Epoxy Transverse Line 6-Inch	5,109.000 LF	_____.	_____.
0186	646.7520 Marking Crosswalk Epoxy Block Style 24-Inch	36.000 LF	_____.	_____.
0188	646.8320 Marking Parking Stall Epoxy	2,540.000 LF	_____.	_____.
0190	646.9000 Marking Removal Line 4-Inch	440.000 LF	_____.	_____.
0192	650.4000 Construction Staking Storm Sewer	2.000 EACH	_____.	_____.
0194	650.4500 Construction Staking Subgrade	210.000 LF	_____.	_____.
0196	650.5000 Construction Staking Base	210.000 LF	_____.	_____.
0198	650.5500 Construction Staking Curb Gutter and Curb & Gutter	4,802.000 LF	_____.	_____.
0200	650.6000 Construction Staking Pipe Culverts	3.000 EACH	_____.	_____.
0202	650.8000 Construction Staking Resurfacing Reference	14,599.000 LF	_____.	_____.
0204	650.9000 Construction Staking Curb Ramps	115.000 EACH	_____.	_____.
0206	650.9500 Construction Staking Sidewalk (project) 01. 8610-02-74	1.000 EACH	_____.	_____.
0208	650.9500 Construction Staking Sidewalk (project) 02. 8610-08-73	1.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 8 of 11

Proposal ID: 20250114039 Project(s): 8610-02-74, 8610-08-73

Federal ID(s): WISC 2025175, WISC 2025176

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0210	650.9911 Construction Staking Supplemental Control (project) 01. 8610-02-74	1.000 EACH	_____.	_____.
0212	650.9911 Construction Staking Supplemental Control (project) 02. 8610-08-73	1.000 EACH	_____.	_____.
0214	650.9920 Construction Staking Slope Stakes	410.000 LF	_____.	_____.
0216	652.0235 Conduit Rigid Nonmetallic Schedule 40 3-Inch	65.000 LF	_____.	_____.
0218	652.0700.S Install Conduit into Existing Item	6.000 EACH	_____.	_____.
0220	653.0900 Adjusting Pull Boxes	20.000 EACH	_____.	_____.
0222	654.0110 Concrete Bases Type 10	2.000 EACH	_____.	_____.
0224	654.0120 Concrete Bases Type 10-Special	4.000 EACH	_____.	_____.
0226	655.0230 Cable Traffic Signal 5-14 AWG	545.000 LF	_____.	_____.
0228	655.0240 Cable Traffic Signal 7-14 AWG	573.000 LF	_____.	_____.
0230	655.0260 Cable Traffic Signal 12-14 AWG	63.000 LF	_____.	_____.
0232	655.0515 Electrical Wire Traffic Signals 10 AWG	762.000 LF	_____.	_____.
0234	655.0900 Traffic Signal EVP Detector Cable	546.000 LF	_____.	_____.
0236	657.0345 Poles Type 9	2.000 EACH	_____.	_____.
0238	657.0347 Poles Type 9-Special	4.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 9 of 11

Proposal ID: 20250114039 Project(s): 8610-02-74, 8610-08-73

Federal ID(s): WISC 2025175, WISC 2025176

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0240	657.0520 Monotube Arms 20-FT	1.000 EACH	_____.	_____.
0242	657.0525 Monotube Arms 25-FT	1.000 EACH	_____.	_____.
0244	657.0536 Monotube Arms 35-FT-Special	4.000 EACH	_____.	_____.
0246	658.0173 Traffic Signal Face 3S 12-Inch	11.000 EACH	_____.	_____.
0248	658.0416 Pedestrian Signal Face 16-Inch	2.000 EACH	_____.	_____.
0250	658.5070 Signal Mounting Hardware (location) 01. STH 124/Bay Street & River Street	1.000 EACH	_____.	_____.
0252	658.5070 Signal Mounting Hardware (location) 02. STH 124/Bay Street & Spring Street	1.000 EACH	_____.	_____.
0254	658.5070 Signal Mounting Hardware (location) 03. STH 124/Bay Street & Central Street	1.000 EACH	_____.	_____.
0256	658.5070 Signal Mounting Hardware (location) 04. STH 124/Bay Street & Grand Avenue	1.000 EACH	_____.	_____.
0258	658.5070 Signal Mounting Hardware (location) 05. STH 124/Bay Street & Columbia Street	1.000 EACH	_____.	_____.
0260	690.0150 Sawing Asphalt	5,372.000 LF	_____.	_____.
0262	690.0250 Sawing Concrete	3,250.000 LF	_____.	_____.
0264	740.0440 Incentive IRI Ride	10,712.000 DOL	1.00000	10,712.00
0266	ASP.1T0A On-the-Job Training Apprentice at \$5.00/HR	200.000 HRS	5.00000	1,000.00



Proposal Schedule of Items

Page 10 of 11

Proposal ID: 20250114039 Project(s): 8610-02-74, 8610-08-73

Federal ID(s): WISC 2025175, WISC 2025176

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0268	ASP.1T0G On-the-Job Training Graduate at \$5.00/HR	300.000 HRS	5.00000	1,500.00
0270	SPV.0055 Special 01. Incentive Density PWL HMA Pavement	7,135.000 DOL	1.00000	7,135.00
0272	SPV.0055 Special 02. Incentive Air Voids HMA Pavement	12,392.000 DOL	1.00000	12,392.00
0274	SPV.0055 Special 03. Incentive Density HMA Pavement Longitudinal Joints	7,780.000 DOL	1.00000	7,780.00
0276	SPV.0060 Special 01. Salvaging Traffic Signals Equipment STH 124/Bay Street & River Street	1.000 EACH	_____.	_____.
0278	SPV.0060 Special 02. Salvaging Traffic Signal Head	4.000 EACH	_____.	_____.
0280	SPV.0060 Special 03. Salvaging and Reinstalling EVP Detectors STH 124/Bay Street & River Street	1.000 EACH	_____.	_____.
0282	SPV.0090 Special 01. Ditch Cleaning	313.000 LF	_____.	_____.
0284	SPV.0165 Special 01. Salvage and Reinstall Brick Pavers	87.000 SF	_____.	_____.
0286	SPV.0180 Special 01. Removing Distressed Pavement Milling	400.000 SY	_____.	_____.
0288	SPV.0180 Special 02. Prepare Topsoil For Lawn Type Turf	391.000 SY	_____.	_____.
0290	204.0100 Removing Concrete Pavement	230.000 SY	_____.	_____.
0292	405.0100 Coloring Concrete WisDOT Red	51.000 CY	_____.	_____.



Proposal Schedule of Items

Page 11 of 11

Proposal ID: 20250114039 Project(s): 8610-02-74, 8610-08-73

Federal ID(s): WISC 2025175, WISC 2025176

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0294	415.0080 Concrete Pavement 8-Inch	226.000 SY	_____.	_____.
0296	601.0415 Concrete Curb & Gutter 6-Inch Sloped 30-Inch Type J	360.000 LF	_____.	_____.
0298	611.9710 Salvaged Inlet Covers	2.000 EACH	_____.	_____.
0300	628.7504 Temporary Ditch Checks	28.000 LF	_____.	_____.
0302	638.2102 Moving Signs Type II	8.000 EACH	_____.	_____.
0304	638.4000 Moving Small Sign Supports	8.000 EACH	_____.	_____.
0306	611.8120.S Cover Plates Temporary	67.000 EACH	_____.	_____.
Section: 0001			Total:	_____.
			Total Bid:	_____.

