




Wisconsin Flagging Handbook Quiz

Name: _____ Agency: _____

You are allowed to use your notes and training slides to complete the quiz.

1. T F Flaggers shall always wear ANSI 107-2015 type R compliant vest and pants
2. T F If one of the warning signs has blown over, the flagger should immediately leave the flagger station and upright it.
3. T F If a crash occurs, do not leave your post
4. T F If you become confused while flagging, let motorists through, but tell them to proceed with caution
5. T F When flagging operation is not in effect, remove temporary portable rumble strips
6. T F Your safety, the safety of your crew, and the safety of the motoring public are more important than any work operation being performed.
7. Temporary Portable Rumble Strips should be installed on:
 - a. Gravel
 - b. Milled Surfaces
 - c. Asphalt paved less than 12 hours ago
 - d. None of the above
8. Single Flagger Operations can be used on:
 - a. Curvy and hilly roads with poor sight distance
 - b. Low volume roads (1,500 average daily traffic) and work zone area 500 feet or less
 - c. When trucks are crossing the highway or making a left turn
 - d. Work being done at a roundabout
9. Use a pilot car when distance between flaggers exceeds:
 - a. 500'
 - b. 1 mile
 - c. 2 miles
 - d. A length where CB radios cannot be used to communicate
10. Where is the correct placement for a flagger at a workzone near a railroad crossing for traffic going northbound:
 - a. Location 1 at 1000' prior to the railroad track
 - b. Location 2 at 200-300' prior to the railroad track
 - c. Location 3 at the railroad track
 - d. Location 4 at the railroad track in the opposite traffic lane

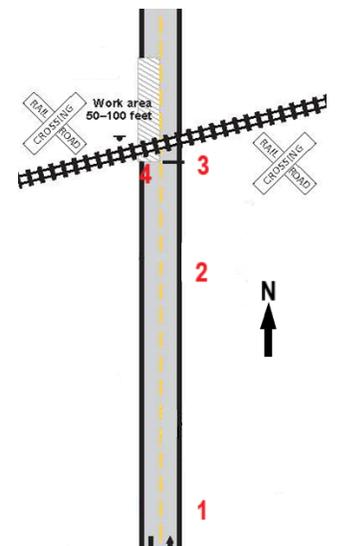



Wisconsin Flagging Handbook Quiz

ANSWER KEY

Name: _____ Agency: _____

You are allowed to use your notes and training slides to complete the quiz.

1. T F Flaggers shall always wear ANSI 107-2015 type R compliant vest and pants
2. T F If one of the warning signs has blown over, the flagger should immediately leave the flagger station and upright it.
3. T F If a crash occurs, do not leave your post
4. T F If you become confused while flagging, let motorists through, but tell them to proceed with caution
5. T F When flagging operation is not in effect, remove temporary portable rumble strips
6. T F Your safety, the safety of your crew, and the safety of the motoring public are more important than any work operation being performed.
7. Temporary Portable Rumble Strips should be installed on:
 - a. Gravel
 - b. Milled Surfaces
 - c. Asphalt paved less than 12 hours ago
 - d. **None of the above**
8. Single Flagger Operations can be used on:
 - a. Curvy and hilly roads with poor sight distance
 - b. **Low volume roads (1,500 average daily traffic) and work zone area 500 feet or less**
 - c. When trucks are crossing the highway or making a left turn
 - d. Work being done at a roundabout
9. Use a pilot car when distance between flaggers exceeds:
 - a. 500'
 - b. 1 mile
 - c. **2 miles**
 - d. A length where CB radios cannot be used to communicate
10. Where is the correct placement for a flagger at a workzone near a railroad crossing for traffic going northbound:
 - a. Location 1 at 1000' prior to the railroad track
 - b. **Location 2 at 200-300' prior to the railroad track**
 - c. Location 3 at the railroad track
 - d. Location 4 at the railroad track in the opposite traffic lane

