



Wisconsin Department of Transportation

January 27, 2025

Division of Transportation Systems Development

Bureau of Project Development
4822 Madison Yards Way, 4th Floor South
Madison, WI 53705

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

Proposal #07: 5688-00-76, WISC 2025306
Town of Arena, Frame Road
Blue Mounds Creek Bridge B-25-0200
Loc Str
Iowa County

Letting of February 11, 2025

This is Addendum No. 01, which provides for the following:

Special Provisions:

Added Special Provisions	
Article No.	Description
18	Notice to Contractor – Creosote Lumber

Deleted Special Provisions	
Article No.	Description
13	Excavation, Hauling, and Disposal of Creosote Contaminated Soil, Item 205.0506.S

Schedule of Items:

Deleted Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Proposal Quantity Change (-)	Proposal Total After Addendum
205.0506.S	Excavation, Hauling, and Disposal of Creosote Contaminated Soil, Item 205.0506.S	Ton	200	-200	0

Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
10	Removed Item 205.0506.S Excavation, Hauling, and Disposal of Creosote Contaminated Soil from MQ plan sheet.

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman

Proposal Development Specialist
Proposal Management Section

ADDENDUM NO. 01

5688-00-76

January 27, 2025

Special Provisions

13. DELETED

18. Notice to Contractor – Creosote Lumber.

The Wisconsin Department of Natural Resources requires proper disposal of the creosote timbers that will result from the removal of P-25-904. Proper disposal includes, but is not limited to, land filling or use as landscape timbers. Under no circumstances should this material be burned or buried on site. Beneficial re-use of this material is an option, and the contractor may contact Eric Heggelund at the WDNR Fitchburg Region Headquarters for additional information on disposal options.

Disposal shall be incidental to 203.0250 Removing Structure Over Waterway Remove Debris (P-25-904).
stp-107-130 (20220628)

Schedule of Items

Attached, dated January 27, 2025, are the revised Schedule of Items Pages 1 – 5.

Plan Sheets

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:

Revised: 10.

END OF ADDENDUM

PERMANENT SIGNING

APPROX. STATION	POSITION	LOCATION	SIGN CODE	SIGN DESCRIPTION	SIGN SIZE	WOOD 4x6-1/2 FT INCH X 12 FT (EACH)	637.2230 SIGN TYPE II REFLECTIVE F (SF)	638.2602 REMOVING SIGN TYPE II (EACH)	638.3000 REMOVING SMALL SIGN SUPPORTS (EACH)
2+70	RIGHT	MAINLINE	W5-53	ONE LANE BRIDGE	---	---	---	1	---
10+98	RIGHT	MAINLINE	W5-52R	BRIDGE HASH MARKS	12X36	1	3.00	1	---
10+49	LEFT	MAINLINE	W5-52R	BRIDGE HASH MARKS	12X36	1	3.00	1	---
10+58	RIGHT	MAINLINE	W5-52R	BRIDGE HASH MARKS	---	---	---	1	---
10+92	RIGHT	MAINLINE	W5-52R	BRIDGE HASH MARKS	---	---	---	1	---
10+87	RIGHT	MAINLINE	W5-52R	BRIDGE HASH MARKS	12X36	1	3.00	1	---
10+87	LEFT	MAINLINE	W5-52R	BRIDGE HASH MARKS	12X36	1	3.00	1	---
13+00	LEFT	MAINLINE	W5-53	ONE LANE BRIDGE	---	---	---	1	---
TOTALS =									6

SAWING ASPHALT

STATION	LOCATION	690.0150 (LF)
10+00	MAINLINE	20
11+40	MAINLINE	19
TOTAL =		39

TRAFFIC CONTROL

STATION - STATION	LOCATION	643.0300 TRAFFIC CONTROL DRUMS (DAY)	643.0420 TRAFFIC CONTROL BARRICADES TYPE III (DAY)	643.0705 TRAFFIC CONTROL WARNING LIGHTS TYPE A (DAY)	643.0715 TRAFFIC CONTROL WARNING LIGHTS TYPE C (DAY)	643.0800 TRAFFIC CONTROL SIGNS (DAY)	643.5000 TRAFFIC CONTROL (EACH)	
10+00 - 11+40	MAINLINE	880	1,460	1,900	880	2,340	1	
TOTALS =								1


GEOTEXTILE

STATION - STATION	LOCATION	645.0105 TYPE SAS (SY)
20+00 - 23+72	TEMPORARY BYPASS	1020
TOTAL =		1020

CONSTRUCTION STAKING

STATION - STATION	LOCATION	650.4500 SUBGRADE (LF)	650.5000 BASE (LF)	650.6501 STRUCTURE LAYOUT (EACH)	650.9911 SUPPLEMENTAL CONTROL (EACH)	650.9920 SLOPES STAKES (LF)	
20+00 - 23+72	TEMPORARY BYPASS	348	348	---	---	348	
10+00 - 11+40	MAINLINE	104	104	1	1	104	
5688-00-76	PROJECT	---	---	---	---	---	
TOTALS =							452

*CATEGORY 020

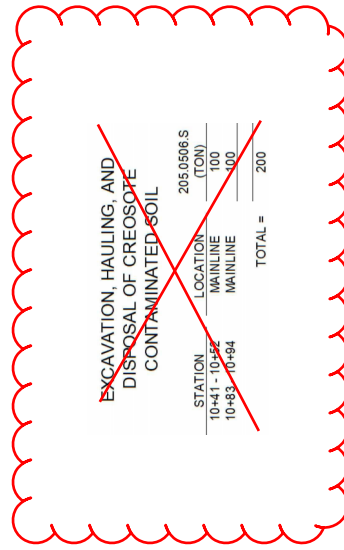

Addendum No. 01
ID 5688-00-76
Revised Sheet 10
January 27, 2025



Proposal Schedule of Items

Proposal ID: 20250211007 Project(s): 5688-00-76

Federal ID(s): WISC 2025306

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0002	201.0205 Grubbing	4.000 STA	_____.	_____.
0004	203.0250 Removing Structure Over Waterway Remove Debris (structure) 01. P-25-904	1.000 EACH	_____.	_____.
0006	205.0100 Excavation Common	1,070.000 CY	_____.	_____.
0010	206.1001 Excavation for Structures Bridges (structure) 01. B-25-200	1.000 EACH	_____.	_____.
0012	208.0100 Borrow	1,305.000 CY	_____.	_____.
0014	210.1500 Backfill Structure Type A	276.000 TON	_____.	_____.
0016	213.0100 Finishing Roadway (project) 01. 5688- 00-76	1.000 EACH	_____.	_____.
0018	305.0110 Base Aggregate Dense 3/4-Inch	200.000 TON	_____.	_____.
0020	305.0120 Base Aggregate Dense 1 1/4-Inch	280.000 TON	_____.	_____.
0022	455.0605 Tack Coat	13.000 GAL	_____.	_____.
0024	465.0105 Asphaltic Surface	64.000 TON	_____.	_____.
0026	502.0100 Concrete Masonry Bridges	114.000 CY	_____.	_____.
0028	502.3200 Protective Surface Treatment	163.000 SY	_____.	_____.
0030	505.0400 Bar Steel Reinforcement HS Structures	3,960.000 LB	_____.	_____.
0032	505.0600 Bar Steel Reinforcement HS Coated Structures	16,410.000 LB	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250211007 Project(s): 5688-00-76

Federal ID(s): WISC 2025306

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0034	513.4061 Railing Tubular Type M	82.000 LF	_____.	_____.
0036	516.0500 Rubberized Membrane Waterproofing	10.000 SY	_____.	_____.
0038	526.0101 Temporary Structure (station) 01. 21+90	1.000 EACH	_____.	_____.
0040	550.2104 Piling CIP Concrete 10 3/4 X 0.25-Inch	805.000 LF	_____.	_____.
0042	606.0300 Riprap Heavy	140.000 CY	_____.	_____.
0044	612.0406 Pipe Underdrain Wrapped 6-Inch	138.000 LF	_____.	_____.
0046	618.0100 Maintenance and Repair of Haul Roads (project) 01. 5688-00-76	1.000 EACH	_____.	_____.
0048	619.1000 Mobilization	1.000 EACH	_____.	_____.
0050	624.0100 Water	7.000 MGAL	_____.	_____.
0052	625.0500 Salvaged Topsoil	250.000 SY	_____.	_____.
0054	627.0200 Mulching	2,070.000 SY	_____.	_____.
0056	628.1504 Silt Fence	570.000 LF	_____.	_____.
0058	628.1520 Silt Fence Maintenance	1,140.000 LF	_____.	_____.
0060	628.1905 Mobilizations Erosion Control	5.000 EACH	_____.	_____.
0062	628.1910 Mobilizations Emergency Erosion Control	3.000 EACH	_____.	_____.
0064	628.6005 Turbidity Barriers	360.000 SY	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250211007 Project(s): 5688-00-76

Federal ID(s): WISC 2025306

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0066	628.7504 Temporary Ditch Checks	24.000 LF	_____.	_____.
0068	629.0210 Fertilizer Type B	1.000 CWT	_____.	_____.
0070	630.0120 Seeding Mixture No. 20	5.000 LB	_____.	_____.
0072	630.0160 Seeding Mixture No. 60	2.000 LB	_____.	_____.
0074	630.0200 Seeding Temporary	20.000 LB	_____.	_____.
0076	630.0300 Seeding Borrow Pit	21.000 LB	_____.	_____.
0078	630.0500 Seed Water	35.000 MGAL	_____.	_____.
0080	633.1100 Delineators Temporary	24.000 EACH	_____.	_____.
0082	634.0612 Posts Wood 4x6-Inch X 12-FT	4.000 EACH	_____.	_____.
0084	637.2230 Signs Type II Reflective F	12.000 SF	_____.	_____.
0086	638.2602 Removing Signs Type II	6.000 EACH	_____.	_____.
0088	638.3000 Removing Small Sign Supports	6.000 EACH	_____.	_____.
0090	642.5001 Field Office Type B	1.000 EACH	_____.	_____.
0092	643.0300 Traffic Control Drums	880.000 DAY	_____.	_____.
0094	643.0420 Traffic Control Barricades Type III	1,460.000 DAY	_____.	_____.
0096	643.0705 Traffic Control Warning Lights Type A	1,900.000 DAY	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250211007 Project(s): 5688-00-76

Federal ID(s): WISC 2025306

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0098	643.0715 Traffic Control Warning Lights Type C	880.000 DAY	_____.	_____.
0100	643.0900 Traffic Control Signs	2,340.000 DAY	_____.	_____.
0102	643.5000 Traffic Control	1.000 EACH	_____.	_____.
0104	645.0111 Geotextile Type DF Schedule A	84.000 SY	_____.	_____.
0106	645.0120 Geotextile Type HR	235.000 SY	_____.	_____.
0108	645.0140 Geotextile Type SAS	1,020.000 SY	_____.	_____.
0110	650.4500 Construction Staking Subgrade	452.000 LF	_____.	_____.
0112	650.5000 Construction Staking Base	452.000 LF	_____.	_____.
0114	650.6501 Construction Staking Structure Layout (structure) 01. B-25-0200	1.000 EACH	_____.	_____.
0116	650.9911 Construction Staking Supplemental Control (project) 01. 5688-00-76	1.000 EACH	_____.	_____.
0118	650.9920 Construction Staking Slope Stakes	452.000 LF	_____.	_____.
0120	690.0150 Sawing Asphalt	39.000 LF	_____.	_____.
0122	715.0502 Incentive Strength Concrete Structures	685.000 DOL	1.00000	685.00
0124	999.2005.S Maintaining Bird Deterrent System (station) 01. 5688-00-76	1.000 EACH	_____.	_____.
0126	ASP.1T0A On-the-Job Training Apprentice at \$5.00/HR	1,200.000 HRS	5.00000	6,000.00



Proposal Schedule of Items

Proposal ID: 20250211007 Project(s): 5688-00-76

Federal ID(s): WISC 2025306

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0128	ASP.1T0G On-the-Job Training Graduate at \$5.00/HR	600.000 HRS	5.00000	3,000.00
0130	SPV.0085 Special 01. Native Pollinator Seeding Mixture No. 95A	12.000 LB	_____.	_____.
0132	SPV.0090 Special 01. Flashing Stainless Steel	67.000 LF	_____.	_____.
Section: 0001			Total:	_____.
			Total Bid:	_____.

