



Wisconsin Department of Transportation

Division of Transportation Systems Development

Bureau of Project Development
4822 Madison Yards Way, 4th Floor South
Madison, WI 53705

February 3, 2025

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

Proposal #32: 9026-00-01, WISC 2025327
T Brazeau, Old 64 Road
Peshtigo Brook Bridge
Loc Str
Oconto County

Letting of February 11, 2025

This is Addendum No. 01, which provides for the following:

Schedule of Items:

Added Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Quantity Added	Proposal Total After Addendum
465.0105	Asphaltic Surface	Ton	0	40	40

Deleted Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Proposal Quantity Change (-)	Proposal Total After Addendum
460.2000	Incentive Density HMA Pavement	Dol	30	(30)	0
460.5223	HMA Pavement 3 LT 58-28 S	Ton	22	(22)	0
460.5224	HMA Pavement 4 LT 58-28 S	Ton	18	(18)	0

Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
3	Typical Sections (Revised HMA Pavement to Asphaltic Surface)
10	Miscellaneous Quantities (Removed HMA Pavement items and added Asphaltic Surface)

Schedule of Items

Attached, dated February 3, 2025, are the revised Schedule of Items Pages 1 – 4.

Plan Sheets

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:

Revised: 3 and 8.


The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,


Mike Coleman

Proposal Development Specialist
Proposal Management Section

END OF ADDENDUM

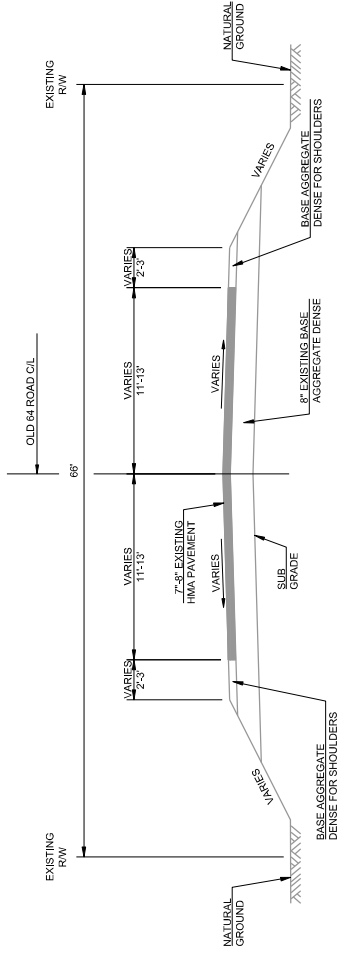

EXISTING TYPICAL SECTION FOR OLD 64 ROAD
 STA. 9+25 - STA. 10+75

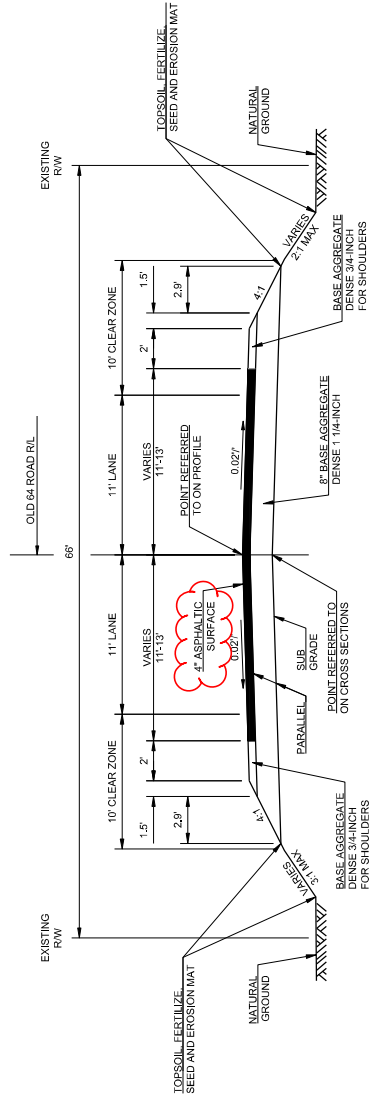

FINISHED TYPICAL SECTION FOR OLD 64 ROAD
 STA. 9+25 - STA. 9+56
 STA. 10+44 - STA. 10+75

PAVEMENT LAYERS	
4" ASPHALTIC SURFACE	1.75" UPPER LAYER 2.25" LOWER LAYER

Addendum No. 01
 ID 9026-00-01
 Revised Sheet 3
 February 3, 2025

Addendum No. 01
ID 9026-00-01
Revised Sheet 10
February 3, 2025

ASPHALTIC PAVEMENT

STATION	TO	STATION	LOCATION	TACK COAT GAL	465.0105 ASPHALTIC SURFACE TON	REMARKS
9+25	-	9+56	OLD 64 ROAD	6	20	SOUTH APPROACH
10+44	-	10+75	OLD 64 ROAD	6	20	NORTH APPROACH
TOTAL 0010				12	40	

LANDSCAPING ITEMS

STATION	TO	STATION	LOCATION	TOPSOIL SY	EROSION MAT CLASS	URBAN TYPE	FERTILIZER CWT	SEEDING MIXTURE NO.	WATER MGAL	SEED 630.0500
9+25	-	9+77	OLD 64 ROAD, LT	36	36	0.1	0.1	1.0	0.8	
9+25	-	9+77	OLD 64 ROAD, RT	52	52	0.1	0.1	1.4	1.2	
10+23	-	10+75	OLD 64 ROAD, LT	52	52	0.1	0.1	1.4	1.2	
10+23	-	10+75	OLD 64 ROAD, RT	20	20	0.1	0.1	0.5	0.4	
UNDISTRIBUTED				40	40	0.6	0.6	1.7	1.4	
TOTAL 0010				200	200	1	1	6	5	

SILT FENCE

STATION	TO	STATION	LOCATION	SILT FENCE LF	628.1504 SILT FENCE MAINTENANCE LF
9+25	-	9+67	OLD 64 ROAD, LT	42	84
9+25	-	9+97	OLD 64 ROAD, RT	72	144
10+02	-	10+75	OLD 64 ROAD, LT	73	146
10+22	-	10+50	OLD 64 ROAD, RT	28	56
UNDISTRIBUTED				45	90
TOTAL 0010				260	520

MOBILIZATIONS EROSION CONTROL

STATION	TO	STATION	LOCATION	MOBILIZATIONS EROSION CONTROL EACH	628.1905 MOBILIZATIONS EROSION CONTROL EACH
9+25	-	10+75	OLD 64 ROAD	5	5
TOTAL 0010				5	5

TURBIDITY BARRIER

STATION	TO	STATION	LOCATION	TURBIDITY BARRIERS SY	628.6005 TURBIDITY BARRIERS SY
TOTAL 0010				55	120

ROCK BAGS

STATION	TO	STATION	LOCATION	ROCK BAGS EACH	628.7570 ROCK BAGS EACH
9+58	-	9+92	OLD 64 ROAD, LT	15	15
10+10	-	10+50	OLD 64 ROAD, RT	15	15
UNDISTRIBUTED				15	15
TOTAL 0010				15	15

ALL ITEMS ON THIS SHEET
ARE CATEGORY 0010
UNLESS OTHERWISE NOTED

PROJECT NO: 9026-00-01

HWY: OLD 64 ROAD

COUNTY: OCONTO

MISCELLANEOUS QUANTITIES

SHEET: 10

E



Proposal Schedule of Items

Proposal ID: 20250211032 Project(s): 9026-00-01

Federal ID(s): WISC 2025327

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0002	201.0205 Grubbing	2.000 STA	_____.	_____.
0004	203.0220 Removing Structure (structure) 01. B-42-0066	1.000 EACH	_____.	_____.
0006	204.0165 Removing Guardrail	246.000 LF	_____.	_____.
0008	205.0100 Excavation Common	104.000 CY	_____.	_____.
0010	206.1001 Excavation for Structures Bridges (structure) 01. B-42-0135	1.000 EACH	_____.	_____.
0012	210.1500 Backfill Structure Type A	410.000 TON	_____.	_____.
0014	213.0100 Finishing Roadway (project) 01. 9026-00-01	1.000 EACH	_____.	_____.
0016	305.0110 Base Aggregate Dense 3/4-Inch	10.000 TON	_____.	_____.
0018	305.0120 Base Aggregate Dense 1 1/4-Inch	150.000 TON	_____.	_____.
0020	415.0410 Concrete Pavement Approach Slab	122.000 SY	_____.	_____.
0022	450.4000 HMA Cold Weather Paving	40.000 TON	_____.	_____.
0024	455.0605 Tack Coat	12.000 GAL	_____.	_____.
0032	502.0100 Concrete Masonry Bridges	181.000 CY	_____.	_____.
0034	502.3200 Protective Surface Treatment	213.000 SY	_____.	_____.
0036	505.0400 Bar Steel Reinforcement HS Structures	5,120.000 LB	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250211032 Project(s): 9026-00-01

Federal ID(s): WISC 2025327

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0038	505.0600 Bar Steel Reinforcement HS Coated Structures	20,970.000 LB	_____.	_____.
0040	513.4061 Railing Tubular Type M	160.000 LF	_____.	_____.
0042	516.0500 Rubberized Membrane Waterproofing	20.000 SY	_____.	_____.
0044	550.2104 Piling CIP Concrete 10 3/4 X 0.25-Inch	920.000 LF	_____.	_____.
0046	606.0300 Riprap Heavy	137.000 CY	_____.	_____.
0048	612.0406 Pipe Underdrain Wrapped 6-Inch	150.000 LF	_____.	_____.
0050	619.1000 Mobilization	1.000 EACH	_____.	_____.
0052	624.0100 Water	4.000 MGAL	_____.	_____.
0054	625.0100 Topsoil	200.000 SY	_____.	_____.
0056	628.1504 Silt Fence	260.000 LF	_____.	_____.
0058	628.1520 Silt Fence Maintenance	520.000 LF	_____.	_____.
0060	628.1905 Mobilizations Erosion Control	5.000 EACH	_____.	_____.
0062	628.1910 Mobilizations Emergency Erosion Control	3.000 EACH	_____.	_____.
0064	628.2008 Erosion Mat Urban Class I Type B	200.000 SY	_____.	_____.
0066	628.6005 Turbidity Barriers	120.000 SY	_____.	_____.
0068	628.7570 Rock Bags	75.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250211032 Project(s): 9026-00-01

Federal ID(s): WISC 2025327

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0070	629.0210 Fertilizer Type B	1.000 CWT	_____.	_____.
0072	630.0120 Seeding Mixture No. 20	6.000 LB	_____.	_____.
0074	630.0500 Seed Water	5.000 MGAL	_____.	_____.
0076	634.0612 Posts Wood 4x6-Inch X 12-FT	4.000 EACH	_____.	_____.
0078	637.2230 Signs Type II Reflective F	12.000 SF	_____.	_____.
0080	638.2602 Removing Signs Type II	6.000 EACH	_____.	_____.
0082	638.3000 Removing Small Sign Supports	6.000 EACH	_____.	_____.
0084	642.5001 Field Office Type B	1.000 EACH	_____.	_____.
0086	643.0420 Traffic Control Barricades Type III	910.000 DAY	_____.	_____.
0088	643.0705 Traffic Control Warning Lights Type A	1,680.000 DAY	_____.	_____.
0090	643.0900 Traffic Control Signs	1,400.000 DAY	_____.	_____.
0092	643.1000 Traffic Control Signs Fixed Message	45.000 SF	_____.	_____.
0094	643.1050 Traffic Control Signs PCMS	14.000 DAY	_____.	_____.
0096	643.5000 Traffic Control	1.000 EACH	_____.	_____.
0098	645.0111 Geotextile Type DF Schedule A	50.000 SY	_____.	_____.
0100	645.0120 Geotextile Type HR	270.000 SY	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250211032 Project(s): 9026-00-01

Federal ID(s): WISC 2025327

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0102	650.4500 Construction Staking Subgrade	104.000 LF	_____.	_____.
0104	650.5000 Construction Staking Base	104.000 LF	_____.	_____.
0106	650.6501 Construction Staking Structure Layout (structure) 01. B-42-0135	1.000 EACH	_____.	_____.
0108	650.9911 Construction Staking Supplemental Control (project) 01. 9026-00-01	1.000 EACH	_____.	_____.
0110	650.9920 Construction Staking Slope Stakes	104.000 LF	_____.	_____.
0112	690.0150 Sawing Asphalt	48.000 LF	_____.	_____.
0114	715.0502 Incentive Strength Concrete Structures	1,086.000 DOL	1.00000	1,086.00
0116	715.0720 Incentive Compressive Strength Concrete Pavement	500.000 DOL	1.00000	500.00
0118	ASP.1T0A On-the-Job Training Apprentice at \$5.00/HR	400.000 HRS	5.00000	2,000.00
0120	ASP.1T0G On-the-Job Training Graduate at \$5.00/HR	200.000 HRS	5.00000	1,000.00
0122	465.0105 Asphaltic Surface	40.000 TON	_____.	_____.
Section: 0001			Total:	_____.
			Total Bid:	_____.