



Wisconsin Department of Transportation

February 3, 2025

Division of Transportation Systems Development

Bureau of Project Development
4822 Madison Yards Way, 4th Floor South
Madison, WI 53705

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

- | | |
|---|--|
| <p>Proposal #33: 1590-18-71
 Monico - Laona
 STH 55 South to Otter Creek Road
 USH 8
 Forest County</p> | <p>1590-18-81
 Monico - Laona
 Otter Creek Road to STH 32 South
 USH 8
 Forest County</p> |
| <p>1590-18-82
 Monico - Laona
 Multi-Modal Tunnel
 USH 8
 Forest County</p> | <p>1590-18-83
 Monico - Laona
 Firekeeper Road to Bug Lake Road
 USH 8
 Forest County</p> |
| <p>9813-02-70, WISC 2025334
 USH 8 Shared Pathway Phase 1
 Firekeeper Road to Love Knot
 Lane
 Non Hwy
 Forest County</p> | |

Letting of February 11, 2025

This is Addendum No. 02, which provides for the following:

Schedule of Items:

Revised Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Proposal Quantity Change (-)	Proposal Total After Addendum
646.2040	Marking Line Grooved Wet Ref Epoxy 6-Inch	LF	101,470	116,215	217,685
465.0105	Asphaltic Surface		1,916	1,820	3,736

Added Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Quantity Added	Proposal Total After Addendum
643.0920	Traffic Control Covering Signs Type II	EACH	0	7	7

Deleted Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Proposal Quantity Change (-)	Proposal Total After Addendum
643.0910	Traffic Control Covering Signs Type I	EACH	7	-7	0
465.0125	Asphaltic Surface Temporary	TON	1,210	-1,210	0

Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
23	Construction Detail – Updated the thickness of asphalt
99	Miscellaneous Quantities – Asphaltic Surface Temp. changed to Asphaltic Surface and quantity was updated
113	Miscellaneous Quantities – Traffic Control Covering Signs change to Type II
115	Miscellaneous Quantities – Pavement Marking Quantity Table Revised

Schedule of Items

Attached, dated February 5, 2025, are the revised Schedule of Items Pages 1 – 21.

Plan Sheets

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:

Revised: 23, 99, 113, 115


The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman


Proposal Development Specialist
Proposal Management Section

END OF ADDENDUM

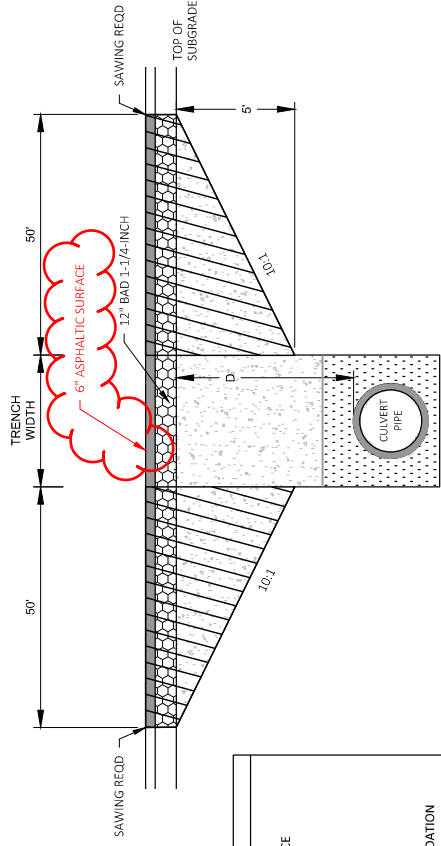

TRANSITION CUT DEPTH (T) = THE LESSER OF DEPTH TO CENTER OF PIPE OR 5 FT.
DO NOT EXTEND TRANSITION CUT BELOW HORIZONTAL CENTER OF PIPE.

DEPTH D < 6 FT

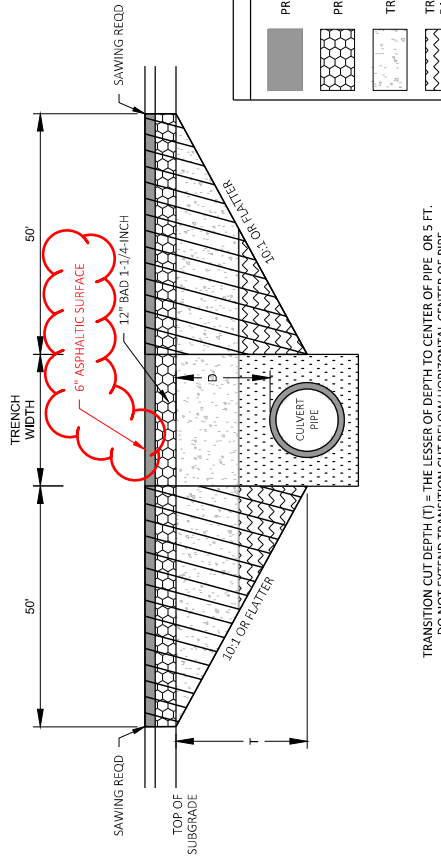

DEPTH D ≥ 6 FT

NOTES

- TRANSITION CUT IS PAID AS EXCAVATION COMMON.
- TRANSITION CUT WIDTH IS FROM SUBGRADE SHOULDER POINT TO SUBGRADE SHOULDER POINT.
- BACKFILL THE TRANSITION CUT AREAS WITH FOUNDATION AND TRENCH BACKFILL AS SPECIFIED IN STANDARD SPEC 520.
- PERFORM CULVERT PIPE INSTALLATION BEFORE MILLING AND PAVING.
- PLACE ASPHALTIC SURFACE AFTER CULVERT PIPE INSTALLATION AND BEFORE MILLING AND PAVING.

CULVERT PIPE TRANSITION

ROUTE	STA (CL)	DEPTH D (FT)	PIPE DIA (IN)	REMARKS	ROUTE	STA (CL)	DEPTH D (FT)	PIPE DIA (IN)	REMARKS
USH 8	491+29	3.7	24	21008000181	USH 8	935+03	1.3	HE-14X23	21008000214
USH 8	498+03	2.3	36	21008000182*	USH 8	950+47	4.8	48	21008000215
USH 8	736+29	6.2	24	21008000203	USH 8	979+99	2.0	24	21008000216
USH 8	757+80	0.7	24	21008000205	USH 8	989+41	3.5	30	21008000217
USH 8	816+21	7.8	30	21008000208	USH 8	1000+94	2.5	24	21008000218
USH 8	858+72	4.7	30	21008000211	USH 8	1000+07	1.9	24	21008000219
USH 8	911+83	3.1	24	21008000212					
USH 8	926+54	2.2	24	21008000213					

*SEE PLAN/PROFILE SHEETS FOR SAW CUT LAYOUT AT CTH-W INTERSECTION

Addendum No. 02
ID 1590-18-71/81
Revised Sheet 23
February 5, 2025

Addendum No. 02
ID 1590-18-71/81
Revised Sheet 99
February 5, 2025

ASPHALTIC SURFACE SUMMARY

STA	LOCATION	TON	TON	TON	SY
PROJECT ID 1590-18-71					
CAT0010					
423+75	USH 8, RT	--	23	--	--
472+92	USH 8, RT	--	--	15	15
480+57	USH 8, RT	--	--	15	15
563+75	USH 8, RT	--	--	15	15
565+17	USH 8, RT	--	--	15	15
589+44	USH 8, RT	--	--	15	15
589+84	USH 8, RT	--	--	15	15
590+62	USH 8, LT	--	--	10	10
593+57	USH 8, RT	--	--	15	15
594+90	USH 8, RT	--	--	15	15
589+75	USH 8, RT	--	133	--	--
594+25	USH 8, RT	--	90	--	--
CULVERT X-ING PATCHES		--	--	345	--
CURE & GUTTER PATCHES		20	--	--	--
UNDISTRIBUTED		255	--	--	--
1590-18-71 SUBTOTALS					
		275	246	345	130
PROJECT ID 1590-18-81					
CAT0010					
USH 8, RT & LT		--	95	--	--
CULVERT X-ING PATCHES		--	--	1,475	--
UNDISTRIBUTED		255	15	--	--
1590-18-81 SUBTOTALS					
		255	110	1,475	0
CONTRACT TOTAL					
		530	356	1,820	130

RUMBLE STRIPS

STATION	TO	STATION	LF	LF	REMARKS
PROJECT ID 1590-18-71					
CAT0010					
456+40	-	480+54	--	2,414	BEGIN PROJECT LIMITS
484+54	-	496+53	--	1,199	
500+53	-	522+31	--	2,178	
526+47	-	550+53	--	2,406	
554+53	-	562+51	--	798	RECONSTRUCT ALIGNMENT
566+51	-	587+74	--	2,123	RECONSTRUCT ALIGNMENT
591+74	-	605+08	--	1,334	RECONSTRUCT ALIGNMENT
611+34	-	619+26	--	792	
623+26	-	678+21	--	5,495	
682+42	-	682+75	--	33	END PROJECT LIMITS
1590-18-71 SUBTOTALS					
			0	18,772	
PROJECT ID 1590-18-81					
CAT0010					
682+75	-	730+50	--	4,775	BEGIN PROJECT LIMITS
734+50	-	851+40	--	11,690	
855+40	-	873+15	--	1,775	
880+68	-	890+89	--	1,021	
894+89	-	911+46	--	1,657	
915+46	-	932+36	--	1,690	
936+36	-	953+35	--	1,699	
957+35	-	965+65	--	829	
972+73	-	1000+50	--	2,777	END 55 MPH ZONE
892+90	-	1012+86	--	23,992	TYPE 1
1590-18-81 SUBTOTALS					
			23,992	27,913	
CONTRACT TOTAL					
			23,992	46,685	

TRAFFIC CONTROL

643.0920
TRAFFIC CONTROL
COVERING SIGNS TYPE II

PROJECT ID	CAT0010	ROADWAY / LOCATION	DAYS	DURATION	643.0300		643.0420		643.0705		643.0715		643.0800		643.0900		643.1000		643.5000		
					TRAFFIC CONTROL	DRUMS	DAY	BARRICADES	DAY	LIGHTS	DAY	TRAFFIC CONTROL	WARNING LIGHTS, TYPE A	DAY	TRAFFIC CONTROL	WARNING LIGHTS, TYPE C	DAY	TRAFFIC CONTROL		ARROW BOARDS	DAY
1590-18-71	CAT0010	USH 8 - PED. ACCOMMODATION	45	120	--	--	--	--	--	18	810	1	45	--	--	--	9	405	--	--	0.7
		USH 8 SHOULDER CLOSURES	60	60	--	--	--	--	--	--	52	3,120	--	--	--	2	120	--	--	--	--
		USH 8 SINGLE RIGHT LANE CLOSURE	45	120	--	8	360	8	360	16	720	60	2,700	4	180	1	45	--	--	--	--
		USH 8 ROAD CLOSED	160	--	--	20	3,200	40	6,400	--	--	--	--	--	--	8	1,280	--	--	--	--
		FOREST AVE	211	--	4	844	8	1,688	8	1,688	--	--	--	--	6	1,266	--	--	--	--	--
		PARK AVE	211	--	4	844	8	1,688	8	1,688	--	--	--	--	6	1,266	--	--	--	--	--
		PROSPECT AVE	211	--	4	844	8	1,688	8	1,688	--	--	--	--	6	1,266	--	--	--	--	--
		GRANDVIEW AVE	211	--	4	844	8	1,688	8	1,688	--	--	--	--	6	1,266	--	--	--	--	--
		HIGHLAND VIEW	211	--	4	844	8	1,688	8	1,688	--	--	--	--	6	1,266	--	--	--	--	--
		CTH W / CORNING RD	211	--	4	844	8	1,688	8	1,688	--	--	--	--	6	1,266	--	--	--	--	--
		BEAR RD	211	--	4	844	8	1,688	8	1,688	--	--	--	--	6	1,266	--	--	--	--	--
		FIRE KEEPER RD	211	--	6	1,266	8	1,688	8	1,688	--	--	--	--	9	1,899	--	--	--	--	--
		YOUNGS LANE	211	--	8	1,688	8	1,688	8	1,688	--	--	--	--	12	2,532	--	--	--	--	--
		KWEDA KIK LANE	211	--	8	1,688	8	1,688	8	1,688	--	--	--	--	12	2,532	--	--	--	--	--
		INDIAN DR / BUG LAKE RD	211	--	4	844	8	1,688	8	1,688	--	--	--	--	6	1,266	--	--	--	--	--
		LOVE KNOT LANE	211	--	4	844	8	1,688	8	1,688	--	--	--	--	6	1,266	--	--	--	--	--
		OTTER CREEK RD	211	--	4	844	8	1,688	8	1,688	--	--	--	--	6	1,266	--	--	--	--	--
		DETOUR ROUTE	150	--	1	150	8	1,200	8	1,200	--	--	--	--	435	85,250	1	7	89.5	--	--
1590-18-71 SUBTOTALS					300	14,400	91	16,792	186	31,074	113	5,865	4	180	548	86,723	1	7	89.5	0.7	
PROJECT ID 1590-18-81																					
CAT0010																					
PROJECT					--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	0.3
POTAWATOMI TRAIL					211	--	4	844	8	1,688	--	--	--	--	--	6	1,266	--	--	--	--
SHOEMAKER LN					211	--	4	844	8	1,688	--	--	--	--	6	1,266	--	--	--	--	--
AIRPORT LN					211	--	4	844	8	1,688	--	--	--	--	6	1,266	--	--	--	--	--
W SILVER LAKE RD					211	--	4	844	8	1,688	--	--	--	--	6	1,266	--	--	--	--	--
E SILVER LAKE RD					211	10	2,110	5	1,055	10	2,110	--	--	--	7	1,477	--	--	--	--	--
CONNOR FARM RD					211	--	4	844	8	1,688	--	--	--	--	6	1,266	--	--	--	--	--
TOWER LN					211	--	4	844	8	1,688	--	--	--	--	6	1,266	--	--	--	--	--
SCATTERED LAKE RD					211	--	4	844	8	1,688	--	--	--	--	6	1,266	--	--	--	--	--
MILL RD					211	--	4	844	8	1,688	--	--	--	--	6	1,266	--	--	--	--	--
1590-18-81 SUBTOTALS					10	2,110	37	7,807	74	15,614	0	0	0	0	55	11,605	--	--	--	0.3	
CONTRACT TOTAL					310	16,510	128	24,599	260	46,688	113	5,865	4	180	603	98,328	1	7	89.5	1	
PROJECT NO: 1590-18-71/81					HWY: USH 8					COUNTY: FOREST					MISCELLANEOUS QUANTITIES					SHEET 113	

Addendum No. 02
ID 1590-18-71/81
Revised Sheet 115
February 5, 2025

PAVEMENT MARKING SUMMARY

CAT	STA	TO	STA	MARKING LINE	646.2040		646.4040		646.5020		646.6120		646.7120		646.9000	648.0100	COMMENTS
					MARKING LINE	GROOVED WET REF	MARKING LINE	GROOVED WET REF	MARKING LINE	STOP LINE	MARKING LINE	DIAGONAL	MARKING LINE	REMOVAL			
CAT	STA	TO	STA	PAINT	EPOXY 6-INCH		EPOXY 10-INCH		ARROW	EPOXY	18-INCH	EPOXY	12-INCH	4-INCH	LF	MI	
					(WHITE)	(YELLOW)	(WHITE)	(WHITE)									
643.3165	---	---	---	TEMPORARY MARKING LINE													
416+22	439+00	-	439+00	---	4,060	5,280	--	--	6	--	40	--	2,915	--	--	--	
439+00	489+00	-	489+00	900	9,640	11,745	45	--	6	--	2,390	--	--	--	--	--	
489+00	539+00	-	539+00	6,305	9,595	6,305	270	--	--	--	--	--	--	--	--	--	
539+00	589+00	-	589+00	9,985	9,690	9,985	335	--	30	--	--	--	--	--	--	--	
589+00	639+00	-	639+00	9,969	9,390	9,970	--	--	30	--	--	--	--	--	--	--	
639+00	682+75	-	682+75	8,174	8,545	8,175	--	--	--	--	--	--	--	--	--	--	
UNDISTRIBUTED	1,050			1,050	1,550	1,550	20	--	5	--	120	--	--	--	--	0.98	LOCATING NO PASSING ZONE IS RECONSTRUCT LIMITS
1590-18-71 SUBTOTALS	36,383				105,480		670	12	65	2,550	2,915					0.98	
PROJECT ID 1590-18-81																	
CAT	682+75	-	689+00	1,251	1,250	1,250	--	--	--	--	--	--	--	--	--	--	
689+00	739+00	-	739+00	7,444	9,925	7,445	--	--	--	--	--	--	--	--	--	--	
739+00	789+00	-	789+00	7,422	9,895	7,420	--	--	--	--	--	--	--	--	--	--	
789+00	839+00	-	839+00	7,500	10,000	7,500	--	--	--	--	--	--	--	--	--	--	
839+00	889+00	-	889+00	7,440	9,920	7,440	--	--	--	--	--	--	--	--	--	--	
889+00	939+00	-	939+00	6,953	9,270	6,955	--	--	--	--	--	--	--	--	--	0.95	
939+00	989+00	-	989+00	7,215	9,620	7,215	--	--	--	--	--	--	--	--	--	0.95	
989+00	1012+86	-	1012+86	1,650	2,200	1,650	--	--	--	--	--	--	--	--	--	0.45	
UNDISTRIBUTED - SHOULDER WIDENING	1,150			1,150	1,850	1,400	--	--	--	--	--	--	--	--	--	--	
1590-18-81 SUBTOTALS	48,024				112,205		0	0	0	0	0	0	0	0	0	2.35	
CONTRACT TOTAL	84,407				217,685		670	12	65	2,550	2,915					3.33	



Proposal Schedule of Items

Proposal ID: 20250211033 Project(s): 1590-18-71, 1590-18-81, 1590-18-82, 1590-18-83, 9813-02-70

Federal ID(s): N/A, N/A, WISC 2025334, N/A, N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0002	201.0205 Grubbing	119.000 STA	_____	_____
0004	201.0215 Grubbing	0.290 ACRE	_____	_____
0006	202.0110 Roadside Clearing	30.000 SY	_____	_____
0008	203.0100 Removing Small Pipe Culverts	20.000 EACH	_____	_____
0010	203.0250 Removing Structure Over Waterway Remove Debris (structure) 001. C-21-9703	1.000 EACH	_____	_____
0012	204.0110 Removing Asphaltic Surface	812.600 SY	_____	_____
0014	204.0115 Removing Asphaltic Surface Butt Joints	905.000 SY	_____	_____
0016	204.0120 Removing Asphaltic Surface Milling	199,310.000 SY	_____	_____
0018	204.0150 Removing Curb & Gutter	1,527.000 LF	_____	_____
0020	204.0155 Removing Concrete Sidewalk	107.000 SY	_____	_____
0022	204.0165 Removing Guardrail	205.000 LF	_____	_____
0024	204.0167 Removing Cable Barrier	3,740.000 LF	_____	_____
0026	204.0170 Removing Fence	290.000 LF	_____	_____
0028	204.0245 Removing Storm Sewer (size) 001. 15-Inch	37.000 LF	_____	_____
0030	204.0270 Abandoning Culvert Pipes	1.000 EACH	_____	_____



Proposal Schedule of Items

Proposal ID: 20250211033 Project(s): 1590-18-71, 1590-18-81, 1590-18-82, 1590-18-83, 9813-02-70

Federal ID(s): N/A, N/A, WISC 2025334, N/A, N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0032	205.0100 Excavation Common	337,540.000 CY	_____.	_____.
0034	206.2001 Excavation for Structures Culverts (structure) 001. C-21-9703	1.000 EACH	_____.	_____.
0036	206.2001 Excavation for Structures Culverts (structure) 002. B-21-35	1.000 EACH	_____.	_____.
0038	206.5001 Cofferdams (structure) 001. 21008000215	1.000 EACH	_____.	_____.
0040	208.1100 Select Borrow	1,736.000 CY	_____.	_____.
0042	210.1500 Backfill Structure Type A	5,160.000 TON	_____.	_____.
0044	210.2500 Backfill Structure Type B	1,270.000 TON	_____.	_____.
0046	211.0101 Prepare Foundation for Asphaltic Paving (project) 001. 1590-18-71	1.000 EACH	_____.	_____.
0048	211.0101 Prepare Foundation for Asphaltic Paving (project) 002. 1590-18-81	1.000 EACH	_____.	_____.
0050	211.0400 Prepare Foundation for Asphaltic Shoulders	261.000 STA	_____.	_____.
0052	213.0100 Finishing Roadway (project) 001. 1590-18-71	1.000 EACH	_____.	_____.
0054	213.0100 Finishing Roadway (project) 002. 1590-18-81	1.000 EACH	_____.	_____.
0056	305.0110 Base Aggregate Dense 3/4-Inch	19,657.000 TON	_____.	_____.
0058	305.0120 Base Aggregate Dense 1 1/4-Inch	35,863.000 TON	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250211033 Project(s): 1590-18-71, 1590-18-81, 1590-18-82, 1590-18-83, 9813-02-70

Federal ID(s): N/A, N/A, WISC 2025334, N/A, N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0060	305.0130 Base Aggregate Dense 3-Inch	357.000 TON	_____.	_____.
0062	305.0500 Shaping Shoulders	6.000 STA	_____.	_____.
0064	311.0110 Breaker Run	140.000 TON	_____.	_____.
0066	415.0070 Concrete Pavement 7-Inch	1,938.000 SY	_____.	_____.
0068	450.4000 HMA Cold Weather Paving	22,500.000 TON	_____.	_____.
0070	455.0605 Tack Coat	15,294.000 GAL	_____.	_____.
0072	460.0105.S HMA Percent Within Limits (PWL) Test Strip Volumetrics	2.000 EACH	_____.	_____.
0074	460.0110.S HMA Percent Within Limits (PWL) Test Strip Density	3.000 EACH	_____.	_____.
0076	460.2005 Incentive Density PWL HMA Pavement	41,097.000 DOL	1.00000	41,097.00
0078	460.2007 Incentive Density HMA Pavement Longitudinal Joints	29,840.000 DOL	1.00000	29,840.00
0080	460.2010 Incentive Air Voids HMA Pavement	51,010.000 DOL	1.00000	51,010.00
0082	460.5223 HMA Pavement 3 LT 58-28 S	77.000 TON	_____.	_____.
0084	460.5244 HMA Pavement 4 LT 58-34 S	60.000 TON	_____.	_____.
0086	460.6223 HMA Pavement 3 MT 58-28 S	29,490.000 TON	_____.	_____.
0088	460.6244 HMA Pavement 4 MT 58-34 S	21,520.000 TON	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250211033 Project(s): 1590-18-71, 1590-18-81, 1590-18-82, 1590-18-83, 9813-02-70

Federal ID(s): N/A, N/A, WISC 2025334, N/A, N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0090	465.0105 Asphaltic Surface	3,736.000 TON	_____.	_____.
0092	465.0110 Asphaltic Surface Patching	525.000 TON	_____.	_____.
0094	465.0120 Asphaltic Surface Driveways and Field Entrances	275.000 TON	_____.	_____.
0098	465.0315 Asphaltic Flumes	130.000 SY	_____.	_____.
0100	465.0520 Asphaltic Rumble Strips, Shoulder	23,992.000 LF	_____.	_____.
0102	465.0560 Asphaltic Rumble Strips, Centerline	46,685.000 LF	_____.	_____.
0104	502.3210 Pigmented Surface Sealer	121.000 SY	_____.	_____.
0106	502.4205 Adhesive Anchors No. 5 Bar	52.000 EACH	_____.	_____.
0108	504.0100 Concrete Masonry Culverts	944.000 CY	_____.	_____.
0110	505.0400 Bar Steel Reinforcement HS Structures	91,920.000 LB	_____.	_____.
0112	505.0600 Bar Steel Reinforcement HS Coated Structures	19,030.000 LB	_____.	_____.
0114	511.1200 Temporary Shoring (structure) 001. C-21-9703	555.000 SF	_____.	_____.
0116	516.0500 Rubberized Membrane Waterproofing	72.000 SY	_____.	_____.
0118	516.0610.S Sheet Membrane Waterproofing for Buried Structures	646.000 SY	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250211033 Project(s): 1590-18-71, 1590-18-81, 1590-18-82, 1590-18-83, 9813-02-70

Federal ID(s): N/A, N/A, WISC 2025334, N/A, N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0120	517.1010.S Concrete Staining (structure) 001. B-21-35	2,997.000 SF	_____.	_____.
0122	517.1015.S Concrete Staining Multi-Color (structure) 001. B-21-35	3,926.000 SF	_____.	_____.
0124	517.1050.S Architectural Surface Treatment (structure) 001. B-21-35	3,804.000 SF	_____.	_____.
0126	520.1024 Apron Endwalls for Culvert Pipe 24-Inch	17.000 EACH	_____.	_____.
0128	520.1030 Apron Endwalls for Culvert Pipe 30-Inch	8.000 EACH	_____.	_____.
0130	520.1036 Apron Endwalls for Culvert Pipe 36-Inch	3.000 EACH	_____.	_____.
0132	520.3324 Culvert Pipe Class III-A 24-Inch	560.000 LF	_____.	_____.
0134	520.3330 Culvert Pipe Class III-A 30-Inch	286.000 LF	_____.	_____.
0136	520.3336 Culvert Pipe Class III-A 36-Inch	106.000 LF	_____.	_____.
0138	520.8000 Concrete Collars for Pipe	6.000 EACH	_____.	_____.
0140	521.1048 Apron Endwalls for Culvert Pipe Steel 48-Inch	2.000 EACH	_____.	_____.
0142	521.3148 Culvert Pipe Corrugated Steel 48-Inch	93.000 LF	_____.	_____.
0144	522.0124 Culvert Pipe Reinforced Concrete Class III 24-Inch	36.000 LF	_____.	_____.
0146	522.0136 Culvert Pipe Reinforced Concrete Class III 36-Inch	8.000 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250211033 Project(s): 1590-18-71, 1590-18-81, 1590-18-82, 1590-18-83, 9813-02-70

Federal ID(s): N/A, N/A, WISC 2025334, N/A, N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0148	522.0418 Culvert Pipe Reinforced Concrete Class IV 18-Inch	156.000 LF	_____.	_____.
0150	522.0424 Culvert Pipe Reinforced Concrete Class IV 24-Inch	68.000 LF	_____.	_____.
0152	522.0436 Culvert Pipe Reinforced Concrete Class IV 36-Inch	15.000 LF	_____.	_____.
0154	522.1012 Apron Endwalls for Culvert Pipe Reinforced Concrete 12-Inch	11.000 EACH	_____.	_____.
0156	522.1018 Apron Endwalls for Culvert Pipe Reinforced Concrete 18-Inch	10.000 EACH	_____.	_____.
0158	522.1024 Apron Endwalls for Culvert Pipe Reinforced Concrete 24-Inch	10.000 EACH	_____.	_____.
0160	522.1036 Apron Endwalls for Culvert Pipe Reinforced Concrete 36-Inch	4.000 EACH	_____.	_____.
0162	522.2314 Culvert Pipe Reinforced Concrete Horizontal Elliptical Class HE-III 14x23-Inch	64.000 LF	_____.	_____.
0164	522.2414 Culvert Pipe Reinforced Concrete Horizontal Elliptical Class HE-IV 14x23-Inch	16.000 LF	_____.	_____.
0166	522.2614 Apron Endwalls for Culvert Pipe Reinforced Concrete Horizontal Elliptical 14x23-Inch	4.000 EACH	_____.	_____.
0168	522.2629 Apron Endwalls for Culvert Pipe Reinforced Concrete Horizontal Elliptical 29x45-Inch	1.000 EACH	_____.	_____.
0170	601.0411 Concrete Curb & Gutter 30-Inch Type D	443.000 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250211033 Project(s): 1590-18-71, 1590-18-81, 1590-18-82, 1590-18-83, 9813-02-70

Federal ID(s): N/A, N/A, WISC 2025334, N/A, N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0172	601.0553 Concrete Curb & Gutter 4-Inch Sloped 36-Inch Type D	20.000 LF	_____	_____
0174	601.0557 Concrete Curb & Gutter 6-Inch Sloped 36-Inch Type D	2,060.000 LF	_____	_____
0176	601.0582 Concrete Curb & Gutter 4-Inch Sloped 36-Inch Type T	12.000 LF	_____	_____
0178	601.0600 Concrete Curb Pedestrian	43.000 LF	_____	_____
0180	602.0410 Concrete Sidewalk 5-Inch	5,207.000 SF	_____	_____
0182	602.0505 Curb Ramp Detectable Warning Field Yellow	10.000 SF	_____	_____
0184	602.0515 Curb Ramp Detectable Warning Field Natural Patina	260.000 SF	_____	_____
0186	602.0605 Curb Ramp Detectable Warning Field Radial Yellow	105.000 SF	_____	_____
0188	602.0615 Curb Ramp Detectable Warning Field Radial Natural Patina	145.000 SF	_____	_____
0190	602.3010 Concrete Surface Drains	1.950 CY	_____	_____
0192	606.0200 Riprap Medium	390.000 CY	_____	_____
0194	606.0300 Riprap Heavy	45.000 CY	_____	_____
0196	606.0400 Riprap Extra-Heavy	50.000 CY	_____	_____
0198	608.0315 Storm Sewer Pipe Reinforced Concrete Class III 15-Inch	80.000 LF	_____	_____



Proposal Schedule of Items

Proposal ID: 20250211033 Project(s): 1590-18-71, 1590-18-81, 1590-18-82, 1590-18-83, 9813-02-70

Federal ID(s): N/A, N/A, WISC 2025334, N/A, N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0200	608.0324 Storm Sewer Pipe Reinforced Concrete Class III 24-Inch	583.000 LF	_____	_____
0202	608.0330 Storm Sewer Pipe Reinforced Concrete Class III 30-Inch	61.000 LF	_____	_____
0204	608.0412 Storm Sewer Pipe Reinforced Concrete Class IV 12-Inch	345.000 LF	_____	_____
0206	608.0415 Storm Sewer Pipe Reinforced Concrete Class IV 15-Inch	60.000 LF	_____	_____
0208	608.0418 Storm Sewer Pipe Reinforced Concrete Class IV 18-Inch	103.000 LF	_____	_____
0210	608.0424 Storm Sewer Pipe Reinforced Concrete Class IV 24-Inch	451.000 LF	_____	_____
0212	608.2329 Storm Sewer Pipe Reinforced Concrete Horizontal Elliptical Class HE-III 29x45-Inch	38.000 LF	_____	_____
0214	608.3018 Storm Sewer Pipe Class III-A 18-Inch	571.000 LF	_____	_____
0216	611.0530 Manhole Covers Type J	4.000 EACH	_____	_____
0218	611.0612 Inlet Covers Type C	8.000 EACH	_____	_____
0220	611.0627 Inlet Covers Type HM	7.000 EACH	_____	_____
0222	611.0642 Inlet Covers Type MS	26.000 EACH	_____	_____
0224	611.2004 Manholes 4-FT Diameter	6.000 EACH	_____	_____
0226	611.2005 Manholes 5-FT Diameter	4.000 EACH	_____	_____



Proposal Schedule of Items

Proposal ID: 20250211033 Project(s): 1590-18-71, 1590-18-81, 1590-18-82, 1590-18-83, 9813-02-70

Federal ID(s): N/A, N/A, WISC 2025334, N/A, N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0228	611.2008 Manholes 8-FT Diameter	2.000 EACH	_____.	_____.
0230	611.3004 Inlets 4-FT Diameter	1.000 EACH	_____.	_____.
0232	611.3230 Inlets 2x3-FT	6.000 EACH	_____.	_____.
0234	611.3901 Inlets Median 1 Grate	18.000 EACH	_____.	_____.
0236	611.3902 Inlets Median 2 Grate	4.000 EACH	_____.	_____.
0238	612.0406 Pipe Underdrain Wrapped 6-Inch	207.000 LF	_____.	_____.
0240	612.0902.S Insulation Board Polystyrene (inch) 001. 2 -Inch	676.000 SY	_____.	_____.
0242	618.0100 Maintenance and Repair of Haul Roads (project) 001. 1590-18-71	1.000 EACH	_____.	_____.
0244	618.0100 Maintenance and Repair of Haul Roads (project) 002. 1590-18-81	1.000 EACH	_____.	_____.
0246	619.1000 Mobilization	1.000 EACH	_____.	_____.
0248	624.0100 Water	1,419.800 MGAL	_____.	_____.
0250	625.0100 Topsoil	151,879.000 SY	_____.	_____.
0252	627.0200 Mulching	4,758.000 SY	_____.	_____.
0254	628.1504 Silt Fence	14,110.000 LF	_____.	_____.
0256	628.1520 Silt Fence Maintenance	16,327.000 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250211033 Project(s): 1590-18-71, 1590-18-81, 1590-18-82, 1590-18-83, 9813-02-70

Federal ID(s): N/A, N/A, WISC 2025334, N/A, N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0258	628.1905 Mobilizations Erosion Control	23.000 EACH	_____.	_____.
0260	628.1910 Mobilizations Emergency Erosion Control	10.000 EACH	_____.	_____.
0262	628.2006 Erosion Mat Urban Class I Type A	6,252.000 SY	_____.	_____.
0264	628.2023 Erosion Mat Class II Type B	140,720.000 SY	_____.	_____.
0266	628.6510 Soil Stabilizer Type B	3.390 ACRE	_____.	_____.
0268	628.7005 Inlet Protection Type A	24.000 EACH	_____.	_____.
0270	628.7015 Inlet Protection Type C	19.000 EACH	_____.	_____.
0272	628.7020 Inlet Protection Type D	1.000 EACH	_____.	_____.
0274	628.7504 Temporary Ditch Checks	1,891.000 LF	_____.	_____.
0276	628.7515.S Stone Ditch Checks	161.000 CY	_____.	_____.
0278	628.7555 Culvert Pipe Checks	155.000 EACH	_____.	_____.
0280	628.7560 Tracking Pads	8.000 EACH	_____.	_____.
0282	628.7570 Rock Bags	631.000 EACH	_____.	_____.
0284	629.0205 Fertilizer Type A	14.020 CWT	_____.	_____.
0286	629.0210 Fertilizer Type B	91.000 CWT	_____.	_____.
0288	630.0120 Seeding Mixture No. 20	7,644.000 LB	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250211033 Project(s): 1590-18-71, 1590-18-81, 1590-18-82, 1590-18-83, 9813-02-70

Federal ID(s): N/A, N/A, WISC 2025334, N/A, N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0290	630.0500 Seed Water	3,028.000 MGAL	_____.	_____.
0292	633.5200 Markers Culvert End	55.000 EACH	_____.	_____.
0294	634.0612 Posts Wood 4x6-Inch X 12-FT	2.000 EACH	_____.	_____.
0296	634.0616 Posts Wood 4x6-Inch X 16-FT	63.000 EACH	_____.	_____.
0298	637.2210 Signs Type II Reflective H	174.560 SF	_____.	_____.
0300	637.2230 Signs Type II Reflective F	236.500 SF	_____.	_____.
0302	638.2102 Moving Signs Type II	40.000 EACH	_____.	_____.
0304	638.2602 Removing Signs Type II	10.000 EACH	_____.	_____.
0306	638.3000 Removing Small Sign Supports	41.000 EACH	_____.	_____.
0308	638.4000 Moving Small Sign Supports	5.000 EACH	_____.	_____.
0310	642.5001 Field Office Type B	1.000 EACH	_____.	_____.
0312	643.0300 Traffic Control Drums	16,510.000 DAY	_____.	_____.
0314	643.0420 Traffic Control Barricades Type III	27,305.000 DAY	_____.	_____.
0316	643.0705 Traffic Control Warning Lights Type A	47,918.000 DAY	_____.	_____.
0318	643.0715 Traffic Control Warning Lights Type C	5,865.000 DAY	_____.	_____.
0320	643.0800 Traffic Control Arrow Boards	180.000 DAY	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250211033 Project(s): 1590-18-71, 1590-18-81, 1590-18-82, 1590-18-83, 9813-02-70

Federal ID(s): N/A, N/A, WISC 2025334, N/A, N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0322	643.0900 Traffic Control Signs	101,034.000 DAY	_____.	_____.
0326	643.1000 Traffic Control Signs Fixed Message	89.500 SF	_____.	_____.
0328	643.3165 Temporary Marking Line Paint 6-Inch	84,407.000 LF	_____.	_____.
0330	643.3180 Temporary Marking Line Removable Tape 6-Inch	3,895.000 LF	_____.	_____.
0332	643.3350 Temporary Marking Crosswalk Removable Tape 6-inch	1,094.000 LF	_____.	_____.
0334	643.5000 Traffic Control	1.000 EACH	_____.	_____.
0336	644.1430 Temporary Pedestrian Surface Plate	238.000 SF	_____.	_____.
0338	644.1601 Temporary Pedestrian Curb Ramp	120.000 DAY	_____.	_____.
0340	644.1605 Temporary Pedestrian Detectable Warning Field	56.000 SF	_____.	_____.
0342	644.1810 Temporary Pedestrian Barricade	452.000 LF	_____.	_____.
0344	645.0105 Geotextile Type C	275.000 SY	_____.	_____.
0346	645.0120 Geotextile Type HR	951.000 SY	_____.	_____.
0348	645.0130 Geotextile Type R	2,647.000 SY	_____.	_____.
0350	645.0135 Geotextile Type SR	528.000 SY	_____.	_____.
0352	645.0220 Geogrid Type SR	7,926.000 SY	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250211033 Project(s): 1590-18-71, 1590-18-81, 1590-18-82, 1590-18-83, 9813-02-70

Federal ID(s): N/A, N/A, WISC 2025334, N/A, N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0354	646.2040 Marking Line Grooved Wet Ref Epoxy 6-Inch	217,685.000 LF	_____.	_____.
0356	646.4040 Marking Line Grooved Wet Ref Epoxy 10-Inch	670.000 LF	_____.	_____.
0358	646.5020 Marking Arrow Epoxy	12.000 EACH	_____.	_____.
0360	646.6120 Marking Stop Line Epoxy 18-Inch	65.000 LF	_____.	_____.
0362	646.6466 Cold Weather Marking Epoxy 6-Inch	45,000.000 LF	_____.	_____.
0364	646.6470 Cold Weather Marking Epoxy 10-Inch	400.000 LF	_____.	_____.
0366	646.7120 Marking Diagonal Epoxy 12-Inch	2,550.000 LF	_____.	_____.
0368	646.7420 Marking Crosswalk Epoxy Transverse Line 6-Inch	596.000 LF	_____.	_____.
0370	646.7520 Marking Crosswalk Epoxy Block Style 24-Inch	90.000 LF	_____.	_____.
0372	646.9000 Marking Removal Line 4-Inch	2,915.000 LF	_____.	_____.
0374	648.0100 Locating No-Passing Zones	3.330 MI	_____.	_____.
0376	650.4000 Construction Staking Storm Sewer	65.000 EACH	_____.	_____.
0378	650.4500 Construction Staking Subgrade	12,165.000 LF	_____.	_____.
0380	650.5000 Construction Staking Base	22,640.000 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250211033 Project(s): 1590-18-71, 1590-18-81, 1590-18-82, 1590-18-83, 9813-02-70

Federal ID(s): N/A, N/A, WISC 2025334, N/A, N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0382	650.5500 Construction Staking Curb Gutter and Curb & Gutter	2,566.000 LF	_____.	_____.
0384	650.6000 Construction Staking Pipe Culverts	41.000 EACH	_____.	_____.
0386	650.6501 Construction Staking Structure Layout (structure) 001. C-21-9703	1.000 EACH	_____.	_____.
0388	650.6501 Construction Staking Structure Layout (structure) 002. B-21-35	1.000 EACH	_____.	_____.
0390	650.7000 Construction Staking Concrete Pavement	1,233.000 LF	_____.	_____.
0392	650.8000 Construction Staking Resurfacing Reference	53,261.000 LF	_____.	_____.
0394	650.9000 Construction Staking Curb Ramps	27.000 EACH	_____.	_____.
0396	650.9500 Construction Staking Sidewalk (project) 001. 1590-18-71	1.000 EACH	_____.	_____.
0398	650.9500 Construction Staking Sidewalk (project) 003. 9813-02-70	1.000 EACH	_____.	_____.
0400	650.9911 Construction Staking Supplemental Control (project) 001. 1590-18-71	1.000 EACH	_____.	_____.
0402	650.9911 Construction Staking Supplemental Control (project) 002. 1590-18-81	1.000 EACH	_____.	_____.
0404	650.9911 Construction Staking Supplemental Control (project) 003. 1590-18-82	1.000 EACH	_____.	_____.
0406	650.9911 Construction Staking Supplemental Control (project) 004. 9813-02-70	1.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250211033 Project(s): 1590-18-71, 1590-18-81, 1590-18-82, 1590-18-83, 9813-02-70

Federal ID(s): N/A, N/A, WISC 2025334, N/A, N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0408	650.9920 Construction Staking Slope Stakes	12,565.000 LF	_____.	_____.
0410	652.0105 Conduit Rigid Metallic 3/4-Inch	25.000 LF	_____.	_____.
0412	652.0110 Conduit Rigid Metallic 1-Inch	23.000 LF	_____.	_____.
0414	652.0205 Conduit Rigid Nonmetallic Schedule 40 3/4-Inch	94.000 LF	_____.	_____.
0416	652.0210 Conduit Rigid Nonmetallic Schedule 40 1-Inch	471.000 LF	_____.	_____.
0418	652.0225 Conduit Rigid Nonmetallic Schedule 40 2-Inch	385.000 LF	_____.	_____.
0420	653.0164 Pull Boxes Non-Conductive 24x42-Inch	4.000 EACH	_____.	_____.
0422	653.0208 Junction Boxes 8x8x8-Inch	2.000 EACH	_____.	_____.
0424	655.0615 Electrical Wire Lighting 10 AWG	1,686.000 LF	_____.	_____.
0426	690.0150 Sawing Asphalt	7,749.000 LF	_____.	_____.
0428	690.0250 Sawing Concrete	123.000 LF	_____.	_____.
0430	715.0502 Incentive Strength Concrete Structures	5,618.000 DOL	1.00000	5,618.00
0432	715.0720 Incentive Compressive Strength Concrete Pavement	1,000.000 DOL	1.00000	1,000.00
0434	740.0440 Incentive IRI Ride	45,200.000 DOL	1.00000	45,200.00



Proposal Schedule of Items

Proposal ID: 20250211033 Project(s): 1590-18-71, 1590-18-81, 1590-18-82, 1590-18-83, 9813-02-70

Federal ID(s): N/A, N/A, WISC 2025334, N/A, N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0436	ASP.1T0A On-the-Job Training Apprentice at \$5.00/HR	2,100.000 HRS	5.00000	10,500.00
0438	ASP.1T0G On-the-Job Training Graduate at \$5.00/HR	4,800.000 HRS	5.00000	24,000.00
0440	SPV.0035 Special 201. Utility Trench Rock Excavation	500.000 CY	_____.	_____.
0442	SPV.0060 Special 001. Adjusting Water Valves	8.000 EACH	_____.	_____.
0444	SPV.0060 Special 002. Adjusting Sanitary Manhole Covers	4.000 EACH	_____.	_____.
0446	SPV.0060 Special 003. Foam Sealant Joint Repair C-21-9703	1.000 EACH	_____.	_____.
0448	SPV.0060 Special 101. Precast Concrete Panel	2.000 EACH	_____.	_____.
0450	SPV.0060 Special 102. Posts Wood 4X4-Inch X 12-FT	23.000 EACH	_____.	_____.
0452	SPV.0060 Special 103. Posts Wood 4X4-Inch X 14-FT	67.000 EACH	_____.	_____.
0454	SPV.0060 Special 104. Tunnel Luminaire	6.000 EACH	_____.	_____.
0456	SPV.0060 Special 106. Electrical Service Meter Breaker Pedestal Special	1.000 EACH	_____.	_____.
0458	SPV.0060 Special 106. Precast Concrete Planter	8.000 EACH	_____.	_____.
0460	SPV.0060 Special 107. Kiosks	4.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250211033 Project(s): 1590-18-71, 1590-18-81, 1590-18-82, 1590-18-83, 9813-02-70

Federal ID(s): N/A, N/A, WISC 2025334, N/A, N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0462	SPV.0060 Special 108. Concrete Footing (Concrete Base)	39.000 EACH	_____.	_____.
0464	SPV.0060 Special 109. Benches	8.000 EACH	_____.	_____.
0466	SPV.0060 Special 202. Removing Sanitary Manhole	1.000 EACH	_____.	_____.
0468	SPV.0060 Special 203. Removing Sanitary Cleanout	10.000 EACH	_____.	_____.
0470	SPV.0060 Special 204. Abandon Sanitary Manhole	2.000 EACH	_____.	_____.
0472	SPV.0060 Special 205. Remove Hydrant	5.000 EACH	_____.	_____.
0474	SPV.0060 Special 206. Remove 6-Inch Gate Valve	6.000 EACH	_____.	_____.
0476	SPV.0060 Special 207. Remove 8-Inch Gate Valve	1.000 EACH	_____.	_____.
0478	SPV.0060 Special 208. Remove 12-Inch Gate Valve	2.000 EACH	_____.	_____.
0480	SPV.0060 Special 209. Remove Valve Box	4.000 EACH	_____.	_____.
0482	SPV.0060 Special 210. Air Release Valve Manhole	1.000 EACH	_____.	_____.
0484	SPV.0060 Special 211. Connect To Existing Force Main	3.000 EACH	_____.	_____.
0486	SPV.0060 Special 212. Reconnect Existing Sanitary Lateral	10.000 EACH	_____.	_____.
0488	SPV.0060 Special 213. Temporary 4-Inch Sanitary Connection	5.000 EACH	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250211033 Project(s): 1590-18-71, 1590-18-81, 1590-18-82, 1590-18-83, 9813-02-70

Federal ID(s): N/A, N/A, WISC 2025334, N/A, N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0490	SPV.0060 Special 214. Temporary 6-Inch Force Main Connection	6.000 EACH	_____.	_____.
0492	SPV.0060 Special 215. Reconnect Existing Water Service Lateral	1.000 EACH	_____.	_____.
0494	SPV.0060 Special 216. Temporary Water Main Connection, 6-Inch	7.000 EACH	_____.	_____.
0496	SPV.0060 Special 217. Connect To Existing Water Main	4.000 EACH	_____.	_____.
0498	SPV.0060 Special 218. 6-Inch Gate Valve And Box	11.000 EACH	_____.	_____.
0500	SPV.0060 Special 219. 8-Inch Gate Valve And Box	14.000 EACH	_____.	_____.
0502	SPV.0060 Special 220. Fire Hydrant	11.000 EACH	_____.	_____.
0504	SPV.0060 Special 221. Remove And Reset Gate And Post	1.000 EACH	_____.	_____.
0506	SPV.0060 Special 222. Utility Line Openings	10.000 EACH	_____.	_____.
0508	SPV.0060 Special 247. Construction Staking Sanitary Sewer And Force Main (Project) 1590-18-83	1.000 EACH	_____.	_____.
0510	SPV.0060 Special 248. Construction Staking Water Main (Project) 1590-18-83	1.000 EACH	_____.	_____.
0512	SPV.0060 Special 253. Sanitary Sewer 8-Inch Cleanout	1.000 EACH	_____.	_____.
0514	SPV.0090 Special 101. Railing	3,693.000 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250211033 Project(s): 1590-18-71, 1590-18-81, 1590-18-82, 1590-18-83, 9813-02-70

Federal ID(s): N/A, N/A, WISC 2025334, N/A, N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0516	SPV.0090 Special 102. Profile Curb Cut	86.000 LF	_____.	_____.
0518	SPV.0090 Special 103. Staked Wattles	21,923.000 LF	_____.	_____.
0520	SPV.0090 Special 223. Remove Existing Sanitary Force Main 6-Inch Or Smaller	3,648.000 LF	_____.	_____.
0522	SPV.0090 Special 224. Remove Existing Casing Pipe	60.000 LF	_____.	_____.
0524	SPV.0090 Special 225. Remove Existing Water Main 12-Inch Or Smaller	3,346.000 LF	_____.	_____.
0526	SPV.0090 Special 226. Remove 24-Inch Steel Casing	50.000 LF	_____.	_____.
0528	SPV.0090 Special 227. Abandon 6-Inch Or Smaller Sanitary Or Force Main	9,863.000 LF	_____.	_____.
0530	SPV.0090 Special 228. Abandon 8-Inch Or Smaller Water Main	1,287.000 LF	_____.	_____.
0532	SPV.0090 Special 229. Abandon 12-Inch Water Main	1,115.000 LF	_____.	_____.
0534	SPV.0090 Special 230. 6-Inch Lift Station Force Main	8,130.000 LF	_____.	_____.
0536	SPV.0090 Special 231. 6-Inch Effluent Force Main	6,682.000 LF	_____.	_____.
0538	SPV.0090 Special 232. 8-Inch Sanitary Sewer Pipe	6,516.000 LF	_____.	_____.
0540	SPV.0090 Special 233. 8-Inch Sanitary Sewer SDR 26 Pipe	400.000 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250211033 Project(s): 1590-18-71, 1590-18-81, 1590-18-82, 1590-18-83, 9813-02-70

Federal ID(s): N/A, N/A, WISC 2025334, N/A, N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0542	SPV.0090 Special 234. 2-Inch Sanitary Lateral	33.000 LF	_____.	_____.
0544	SPV.0090 Special 235. 4-Inch Sanitary LateralL	435.000 LF	_____.	_____.
0546	SPV.0090 Special 236. 6-Inch Sanitary Lateral	54.000 LF	_____.	_____.
0548	SPV.0090 Special 237. 1-Inch Water Service Lateral	43.000 LF	_____.	_____.
0550	SPV.0090 Special 238. 6-Inch Water Main (Includes Hydrant Leads)	189.000 LF	_____.	_____.
0552	SPV.0090 Special 239. 8-Inch Water Main	5,862.000 LF	_____.	_____.
0554	SPV.0090 Special 241. Over Excavation For Pipe Bedding 0.5-FT To 1.5-FT (Force Main)	600.000 LF	_____.	_____.
0556	SPV.0090 Special 242. Over Excavation For Pipe Bedding 1.6-FT To 3.0-FT (Force Main)	600.000 LF	_____.	_____.
0558	SPV.0090 Special 243. Over Excavation For Pipe Bedding 0.5-FT To 1.5-FT (San 9-FT - 14FT Deep)	400.000 LF	_____.	_____.
0560	SPV.0090 Special 244. Over Excavation For Pipe Bedding 1.6-FT To 3.0-FT (San 9-FT - 14FT Deep)	400.000 LF	_____.	_____.
0562	SPV.0090 Special 245. Over Excavation For Pipe Bedding 0.5-FT To 1.5-FT (San 14.1-FT - 25FT Deep)	400.000 LF	_____.	_____.
0564	SPV.0090 Special 246. Over Excavation For Pipe Bedding 1.6-FT To 3.0-FT (San 14.1-FT - 25FT Deep)	400.000 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20250211033 Project(s): 1590-18-71, 1590-18-81, 1590-18-82, 1590-18-83, 9813-02-70

Federal ID(s): N/A, N/A, WISC 2025334, N/A, N/A

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0566	SPV.0090 Special 247. 2-1/2 - Inch Lift Station Force Main	95.000 LF	_____.	_____.
0568	SPV.0180 Special 001. Protective Thermoplastic Coating at Snowmobile Trail Crossings	315.000 SY	_____.	_____.
0570	SPV.0200 Special 249. 4-Inch Sanitary Lateral Riser	3.000 VF	_____.	_____.
0572	SPV.0200 Special 250. 6-Inch Sanitary Lateral Riser	3.000 VF	_____.	_____.
0574	SPV.0200 Special 251. Sanitary Sewer Manhole 4-FT Diameter	274.840 VF	_____.	_____.
0576	SPV.0200 Special 252. Sanitary Sewer Outside Drop Manhole	19.560 VF	_____.	_____.
0578	643.0920 Traffic Control Covering Signs Type II	7.000 EACH	_____.	_____.
Section: 0001			Total:	_____.
			Total Bid:	_____.

