

WKE

APRIL 2023

PROJECT ID: 2753-08-70

COUNTY: WAUKESHA

ORDER OF SHEETS

Section No. 1	Title
Section No. 2	General Notes
Section No. 2	Project Overview
Section No. 2	Typical Sections and Details
Section No. 2	Construction Details
Section No. 2	Paving Details
Section No. 2	Curb Ramp Details
Section No. 2	Erosion Control
Section No. 2	Permanent Signing
Section No. 2	Traffic Signal Plan
Section No. 2	Pavement Marking
Section No. 2	Traffic Control Plan
Section No. 2	Detour Plan
Section No. 3	Alignment Plan
Section No. 4	Miscellaneous Quantities
Section No. 5	Right of Way Plan
Section No. 9	Plan and Profile
Section No. 9	Cross Sections
TOTAL SHEETS = 158	



04

DESIGN DESIGNATION

CTH "VV" CTH "YY"	
A.D.T. 2023	= 19,300 17,600
A.D.T. 2043	= 21,700 19,800
T (D.H.V.)	= 4.6% 15.8%
D %	= 41/59 49/51

DESIGN SPEED	= 50M.P.H 45 M.P.H
ESALS	= 2,108,600


CONVENTIONAL SYMBOLS

PLAN	
CORPORATE LIMITS	
PROPERTY LINE	
LOT LINE	
LIMITED HIGHWAY EASEMENT	
EXISTING RIGHT OF WAY	
PROPOSED OR NEW R/W LINE	
SLOPE INTERCEPT	
REFERENCE LINE	
EXISTING CULVERT	
PROPOSED CULVERT (Box or Pipe)	
COMBUSTIBLE FLUIDS	
MARSH AREA	
WOODED OR SHRUB AREA	

PROFILE	
GRADE LINE	
ORIGINAL GROUND	
MARSH OR ROCK PROFILE (To be noted as such)	
SPECIAL DITCH	
GRADE ELEVATION	
CULVERT (Profile View)	
UTILITIES	
ELECTRIC	
FIBER OPTIC	
GAS	
SANITARY SEWER	
STORM SEWER	
TELEPHONE	
WATER	
UTILITY PEDESTAL	
POWER POLE	
TELEPHONE POLE	

STATE OF WISCONSIN
 DEPARTMENT OF TRANSPORTATION
 PLAN OF PROPOSED IMPROVEMENT
 V MENOMONEE FALLS CTH VV
 Intersection with CTH YY
 CTH WV
 WAUKESHA COUNTY

STATE PROJECT NUMBER
 2753-08-70

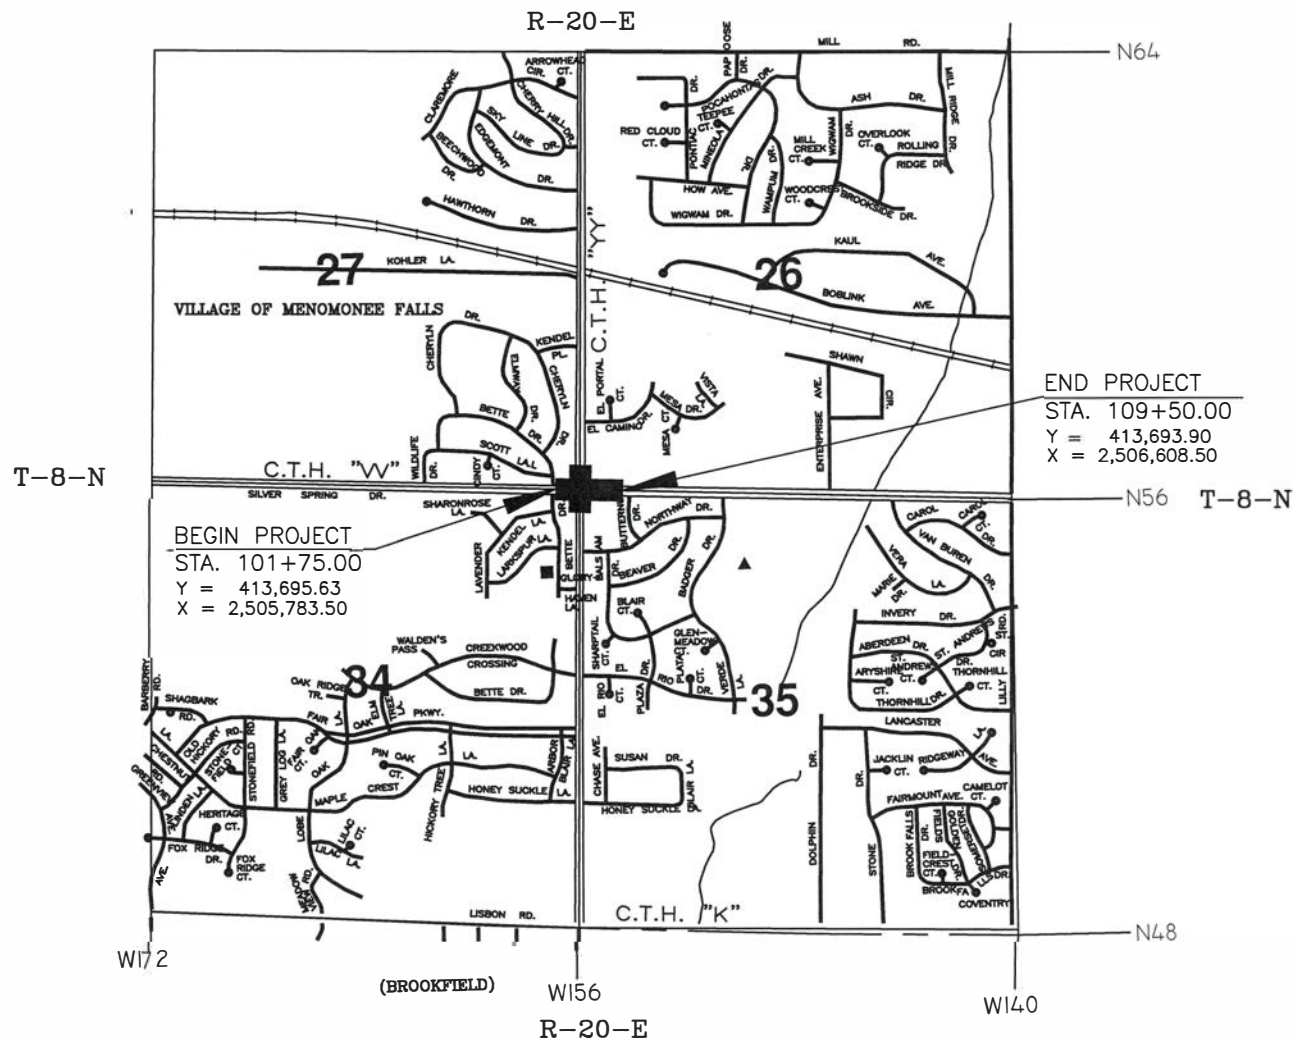

LAYOUT
 SCALE 0 1/4 MILE

TOTAL NET LENGTH OF CENTERLINE = 0.147 MI. (URBAN)

HORIZONTAL POSITIONS SHOWN ON THIS PLAN ARE GROUND COORDINATES AND REFERENCED TO STATE PROJECT NO 2753-06-70, WISCONSIN STATE PLANE COORDINATE SYSTEM, SOUTH ZONE, NAD 83(2011) AND CAN BE CONVERTED TO GRID COORDINATES USING THE COMBINATION FACTOR OF 0.99991230.

ALL ELEVATIONS SHOWN ON THIS PLAN ARE REFERENCED TO THE NAVD 1988(2012) USING THE WISCONSIN GEOID 12A IN U.S. SURVEY FEET.

STATE PROJECT	FEDERAL PROJECT	
	PROJECT	CONTRACT
2753-08-70	WISC 2023312	1

APPROVED FOR
 WAUKESHA COUNTY
 DEPARTMENT OF PUBLIC WORKS
 10/31/22 *Alison Buehler*
 Date Director
 10/31/22 *Kevin Braun*
 Date Engineering Services Manager

ORIGINAL PLANS PREPARED BY

 10/31/22 *Nathan Beth*
 Date Signature

STATE OF WISCONSIN
 DEPARTMENT OF TRANSPORTATION
 PREPARED BY
 Surveyor WAUK. CO. DEPT. OF PUBLIC WORKS
 Designer WAUK. CO. DEPT. OF PUBLIC WORKS
 Project Manager GREG HAFEMAN, P.E.
 Regional Examiner
 Regional Supervisor BRIAN BOOTHBY, P.E.

APPROVED FOR THE DEPARTMENT
 DATE: 10/31/22 *Suz Helen*
 (Signature)

SHEET E

UTILITIES CONTACTS

A.T. & T., INC.
MR. MATTHEW DINNAUER
2005 PEWAUKEE ROAD
WAUKESHA, WI 53188
262.237.0042
md9542@att.com

WE-ENERGIES
PAVING COORDINATOR
MR. LATROY BRUMFIELD
500 S. 116TH ST.
WEST ALLIS, WI 53214
we-utility-relocations@we-energies.com

WE-ENERGIES ELECTRIC
MR. GREG BOERNER
500 S. 116TH ST.
WEST ALLIS, WI 53214
618.409.5861
gregory.boerner@we-energies.com

WE-ENERGIES GAS
MR. JOE DABLE
500 S. 116TH ST.
WEST ALLIS, WI 53214
414.944.5543
joe.dable@we-energies.com

CHARTER COMMUNICATIONS
MR. NEAL LONG
1320 N. DR. MARTIN LUTHER KING JR. DR.
MILWAUKEE, WI 53212
414.430.7189
neal.long@charter.com

VILLAGE OF MENOMONEE FALLS
MR. TOM HOFFMAN, VILLAGE ENGINEER
SANITARY SEWER AND WATER
W156 N8480 PILGRIM ROAD
MENOMONEE FALLS, WI 53051
262.532.4415
thoffman@menomoenee-falls.org

WISDOT LIAISON

141 NW BARSTOW ST.
WAUKESHA, WI 53188
MR. GREG HAFEMAN
PHONE: 262.548.8677
greg.hafeman@dot.wi.gov

SEWRPC LIAISON

W239N1812 ROCKWOOD DR.
P.O. BOX 1607
WAUKESHA, WI 53187-1607
MR. ROB MERRY (CHIEF SURVEYOR)
PHONE: 262.953.4289
CELL: 920.912.1036
rmerry@sewrpc.org

W239N1812 ROCKWOOD DR.
P.O. BOX 1607
WAUKESHA, WI 53187-1607
MR. ANDY TRAEGER (CONSTRUCTION COORDINATOR)
PHONE: 262.953.4296
CELL: 262.853.8463
atraeger@sewrpc.org

WDNR LIAISON

MR. CRAIG WEBSTER
ENVIRONMENTAL COORDINATOR – SOUTHEAST REGION
141 NW BARSTOW ROOM 180
WAUKESHA, WI 53188
262.574.2141
craig.webster@wisconsin.gov

OTHER CONTACTS

WAUKESHA COUNTY DPW
515 W. MORELAND BLVD.
WAUKESHA, WI 53188

MS. ALLISON BUSSLER
DIRECTOR OF PUBLIC WORKS
262.548.7740
abussler@waukeshacounty.gov

MS. KAREN BRAUN
ENGINEERING SERVICES MANAGER
262.896.8538
kbraun@waukeshacounty.gov

MR. ED HINRICHS
PROJECT ENGINEER
262.548.7745
ehinrichs@waukeshacounty.gov

MR. JASON MAYER
PROJECT MANAGER
262.548.7749
jmayer@waukeshacounty.gov

MR. STEVE SCHULTZ
SIGN/SIGNAL MAINTENANCE
262.424.9192
sschultz@waukeshacounty.gov

VILLAGE OF MENOMONEE FALLS
MR. ARLYN JOHNSON, DIRECTOR OF PUBLIC WORKS
W156 N8480 PILGRIM ROAD
MENOMONEE FALLS, WI 53051
262.532.4701
ajohnson@menomoenee-falls.org



Dial 811 or (800) 242-8511

www.DiggersHotline.com

GENERAL NOTES

NO TREES OR SHRUBS ARE TO BE REMOVED UNLESS INDICATED FOR REMOVAL BY THE ENGINEER.

THE LOCATIONS OF EXISTING AND PROPOSED UTILITY INSTALLATIONS, AS SHOWN ON THE PLANS, ARE APPROXIMATE. THERE MAY BE OTHER UTILITIES AND UTILITY INSTALLATIONS WITHIN THE PROJECT LIMITS THAT ARE NOT SHOWN. CONTRACTOR SHALL IDENTIFY ANY POTENTIAL CONFLICTS AND NOTIFY ENGINEER. OWNER SHALL NOT BE RESPONSIBLE FOR DELAYS DUE TO IDENTIFIABLE CONFLICTS.

EXCAVATION BELOW SUBGRADE (EBS) SHALL NOT BE USED TO BALANCE YARDAGE. EBS IS NOT SHOWN ON THE CROSS SECTIONS, BUT WILL BE MEASURED AND PAID FOR AS EXCAVATION COMMON. THE PRECISE LOCATION OF THE EBS WILL BE DETERMINED BY THE ENGINEER.

PAVEMENTS ARE TO BE SAWCUT, AS INDICATED ON THE PLANS, TO PROVIDE A BUTT JOINT AT THE PROJECT LIMITS AND AT ALL ASPHALTIC DRIVEWAYS. SAWCUT AREAS ARE TO BE SQUEEGEED INTO NEAREST GRAVEL SHOULDER OR CURB AND GUTTER AREA AND REMOVED FROM THE SITE BEFORE MOVING TO NEXT SAW CUT AREA.

WHEN THE QUANTITY OF THE ITEMS OF BASE AGGREGATE OR HMA PAVEMENT IS MEASURED FOR PAYMENT BY THE TON, THE DEPTH OR THICKNESS OF THE LAYER SHOWN ON THE PLANS IS APPROXIMATE. THE ACTUAL THICKNESS WILL DEPEND ON THE DISTRIBUTION OF THE MATERIAL AS DIRECTED BY THE ENGINEER.

THE CRUSHED AGGREGATE FOR SHOULDERS ADJACENT TO THE HMA PAVEMENT SHALL NOT BE PLACED UNTIL AFTER THE SURFACE LAYER OF THE HMA PAVEMENT HAS BEEN LAID.

THE CONTRACTOR SHALL NOTIFY DIGGER'S HOTLINE AND AFFECTED UTILITIES PRIOR TO THE START OF WORK TO DETERMINE THE LATEST STATUS OF UTILITY RELOCATIONS. ANY LOCAL MUNICIPAL UTILITY WHICH IS NOT A MEMBER OF A ONE-CALL SYSTEM MUST BE CONTACTED SEPARATELY.

RE-TOPSOIL GRADED AREAS, AS DESIGNATED BY THE ENGINEER, IMMEDIATELY AFTER GRADING IS COMPLETED WITHIN THOSE AREAS. HYDROSEED TOP-SOILED AREAS, AS DESIGNATED BY THE ENGINEER, WITHIN FIVE (5) CALENDAR DAYS AFTER PLACEMENT OF TOPSOIL. IF GRADED AREAS OUTSIDE THE ROADBED (I.E. BETWEEN CURBS AND SIDEWALKS, OUTSIDE OF WALKS, ETC.) ARE LEFT EXPOSED FOR MORE THAN SEVEN (7) CALENDAR DAYS, SEED THOSE AREAS WITH TEMPORARY SEED.

STOCKPILE EXCESS MATERIAL OR SPOILS ON UPLAND AREAS AWAY FROM WETLANDS, FLOODPLAINS AND WATERWAYS. STOCKPILED SOIL SHALL BE PROTECTED AGAINST EROSION. IF STOCKPILED MATERIAL IS LEFT FOR MORE THAN SEVEN (7) CALENDAR DAYS, SEED THE STOCKPILE WITH TEMPORARY SEED AND MULCH.

EROSION CONTROL DEVICES ARE AT SUGGESTED LOCATIONS. THE ACTUAL LOCATIONS WILL BE DETERMINED BY THE CONTRACTORS ECIP AND BY THE ENGINEER. EROSION CONTROL DEVICES SHALL BE MAINTAINED UNTIL PERMANENT VEGETATION IS ESTABLISHED OR UNTIL THE ENGINEER DETERMINES THAT THE DEVICE IS NO LONGER REQUIRED.

CONTACT THE PROJECT ENGINEER AND THE SOUTHEASTERN WISCONSIN REGIONAL PLANNING COMMISSION (SEWRPC), AT LEAST TWO WEEKS PRIOR TO WORK NEAR ANY PUBLIC SURVEY MONUMENT.

NEW 6.5" PAVEMENT SHALL CONSIST OF:
3 LIFTS

2" SURFACE 5-MT PG58-28S UPPER LAYER (MILL OUT 2" PRIOR TO OVERLAY OF THE INTERSECTION)
2.25" BINDER 3-MT PG58-28S LOWER LAYER
2.25" BINDER 3-MT PG58-28S LOWER LAYER

NEW 2" OVERLAY PAVEMENT SHALL CONSIST OF:


1 LIFT
2" SURFACE 5-MT PG58-28S UPPER LAYER

INDEX OF SECTION 2 DRAWINGS


- GENERAL NOTES AND PROJECT CONTACTS
- PROJECT OVERVIEW
- TYPICAL EXISTING SECTIONS
- TYPICAL PROPOSED SECTIONS
- CONSTRUCTION DETAILS (REMOVAL PLAN)
- PAVING DETAILS
- CURB RAMP DETAILS
- EROSION CONTROL
- PERMANENT SIGNING PLAN
- TRAFFIC SIGNAL REMOVAL PLAN
- TEMPORARY TRAFFIC SIGNAL
- TRAFFIC SIGNAL PLAN
- TRAFFIC SIGNAL PHASING
- CABLE ROUTING CHART
- PAVEMENT MARKING PLAN
- TRAFFIC CONTROL
- ALIGNMENT LAYOUT AND SURVEY CONTROL

STANDARD ABBREVIATIONS


A.D.T.	AVERAGE DAILY TRAFFIC	P.C.	POINT OF CURVATURE
AC.	ACRE(S)	P.I.	POINT OF INTERSECTION
ASPH.	ASPHALT	P.L.	PROPERTY LINE
BM	BENCH MARK	P.R.C.	POINT OF REVERSE CURVATURE
C & G	CURB & GUTTER	P.T.	POINT OF TANGENCY
CB	CATCH BASIN	PAV'T.	PAVEMENT
C.S.C.P.	CORRUGATED STEEL CULVERT PIPE	R	RADIUS
C.Y.	CUBIC YARDS	C.P.R.C.	CULVERT PIPE REINFORCED CONCRETE
☉	CENTERLINE	RHF	RIGHT HAND FORWARD
CO.	COUNTY	RT.	RIGHT
C.T.H.	COUNTY TRUNK HIGHWAY	R/W	RIGHT OF WAY
CWT.	HUNDREDWEIGHT	S	SOUTH
D	DEGREE OF CURVE	SAN	SANITARY
D.H.V.	DESIGN HOURLY VOLUME	S.B.	SOUTHBOUND
DISCH.	DISCHARGE	S.D.D.	STANDARD DETAIL DRAWING
E	EAST	S.F.	SQUARE FEET
EA.	EACH	S.S.P.R.C.	STORM SEWER PIPE REINFORCED CONCRETE
E.B.	EASTBOUND	STA.	STATION
ESALS	EQUIVALENT SINGLE AXLE LOADS	S.Y.	SQUARE YARDS
ESMT.	EASEMENT	T	TANGENT
F.E.	FIELD ENTRANCE	T	TELEPHONE
FT.	FOOT (FEET)	T.L.E.	TEMPORARY LIMITED EASEMENT
G	GAS	VAR.	VARIES
I.P.	IRON PIPE	V.P.C.	VERTICAL POINT OF CURVATURE
K	RATE OF VERTICAL CURVATURE	V.P.I.	VERTICAL POINT OF INTERSECTION
L	LENGTH	V.P.T.	VERTICAL POINT OF TANGENCY
LB.	POUND(S)	W	WATER MAIN
L.F.	LINEAR FEET	W	WEST
LHF	LEFT HAND FORWARD	W.B.	WESTBOUND
LS	LUMP SUM	WV	WATER VALVE
LT.	LEFT	YD.	YARDS
MH	MANHOLE		
N	NORTH		
N.B.	NORTHBOUND		
NO.	NUMBER		



A CONCRETE MON.
WITH A SEWRPC
BRASS CAP
Y = 413,712.67
X = 2,506,108.50
STA. 205+17.78



REPLACE ALL EXISTING TRAFFIC SIGNAL EQUIPMENT
WITH MONOTUBE ASSEMBLIES AND VIDEO DETECTION






REMOVE CURB, CURB RAMPS & ISLANDS (TYP.)


STA 105+00.00 CTH VV
STA 205+00.00 CTH YY

END PROJECT
STA 109+75.00


BEGIN PROJECT
STA 101+75.00

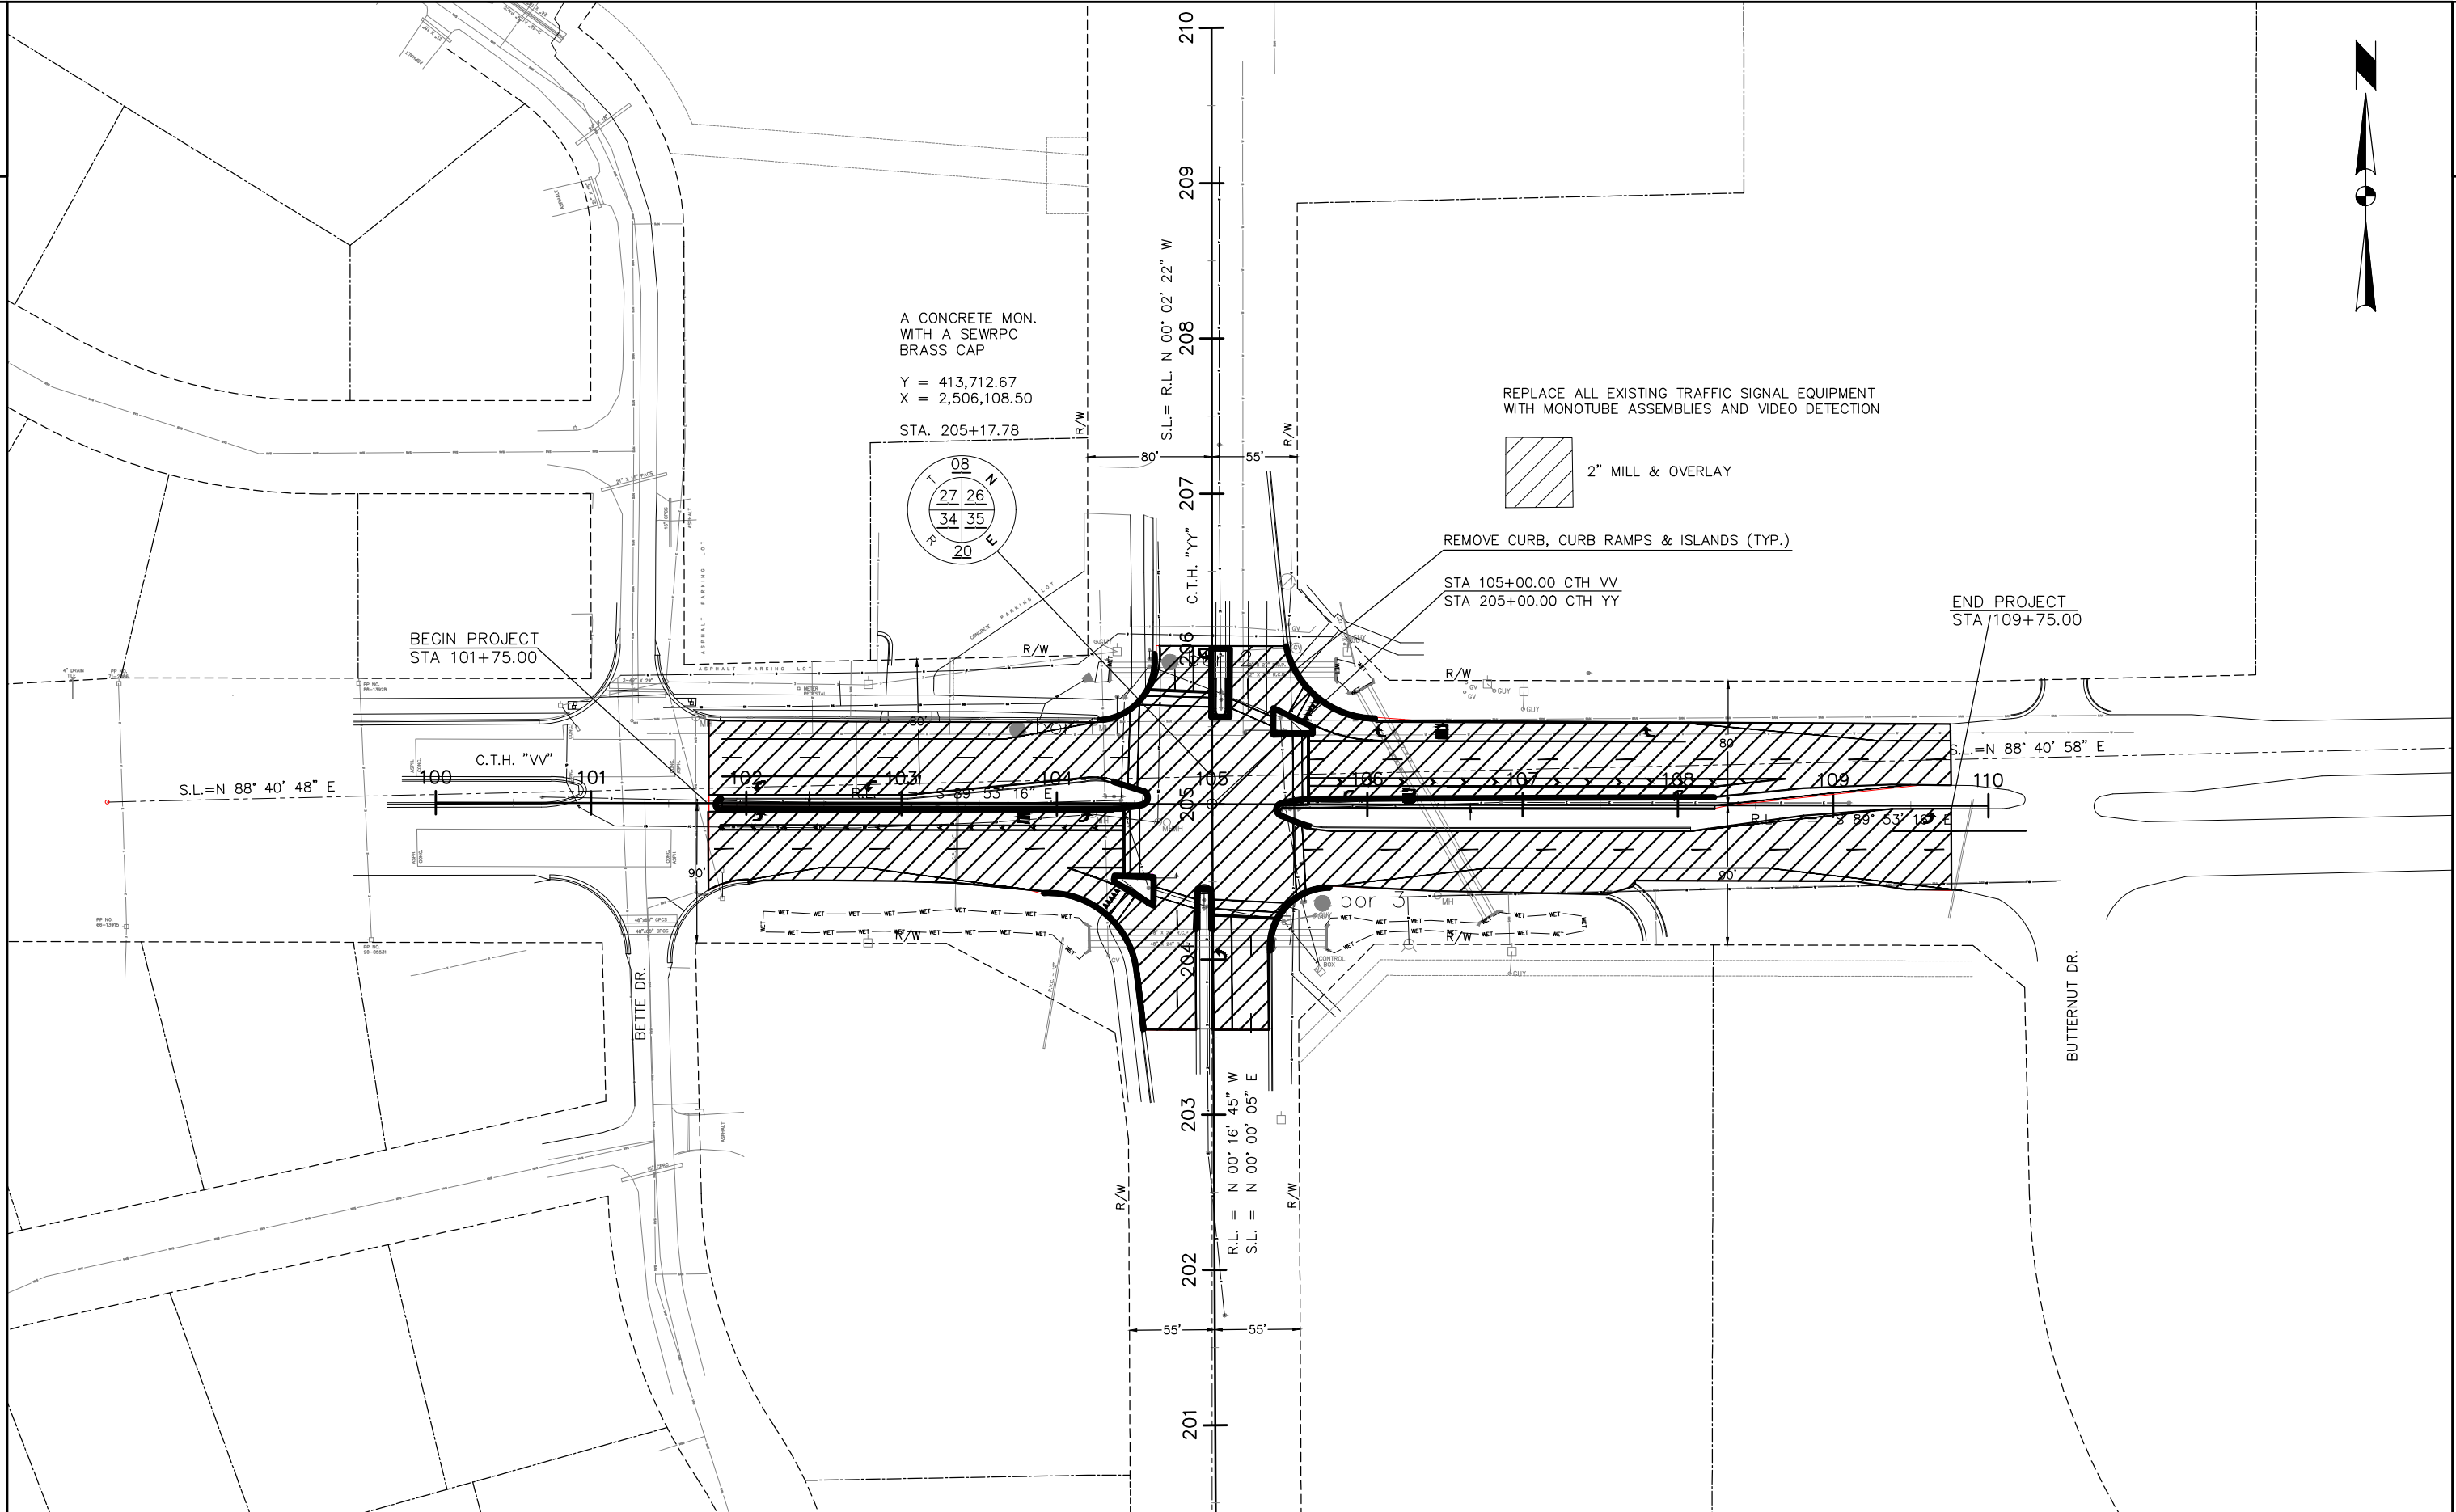

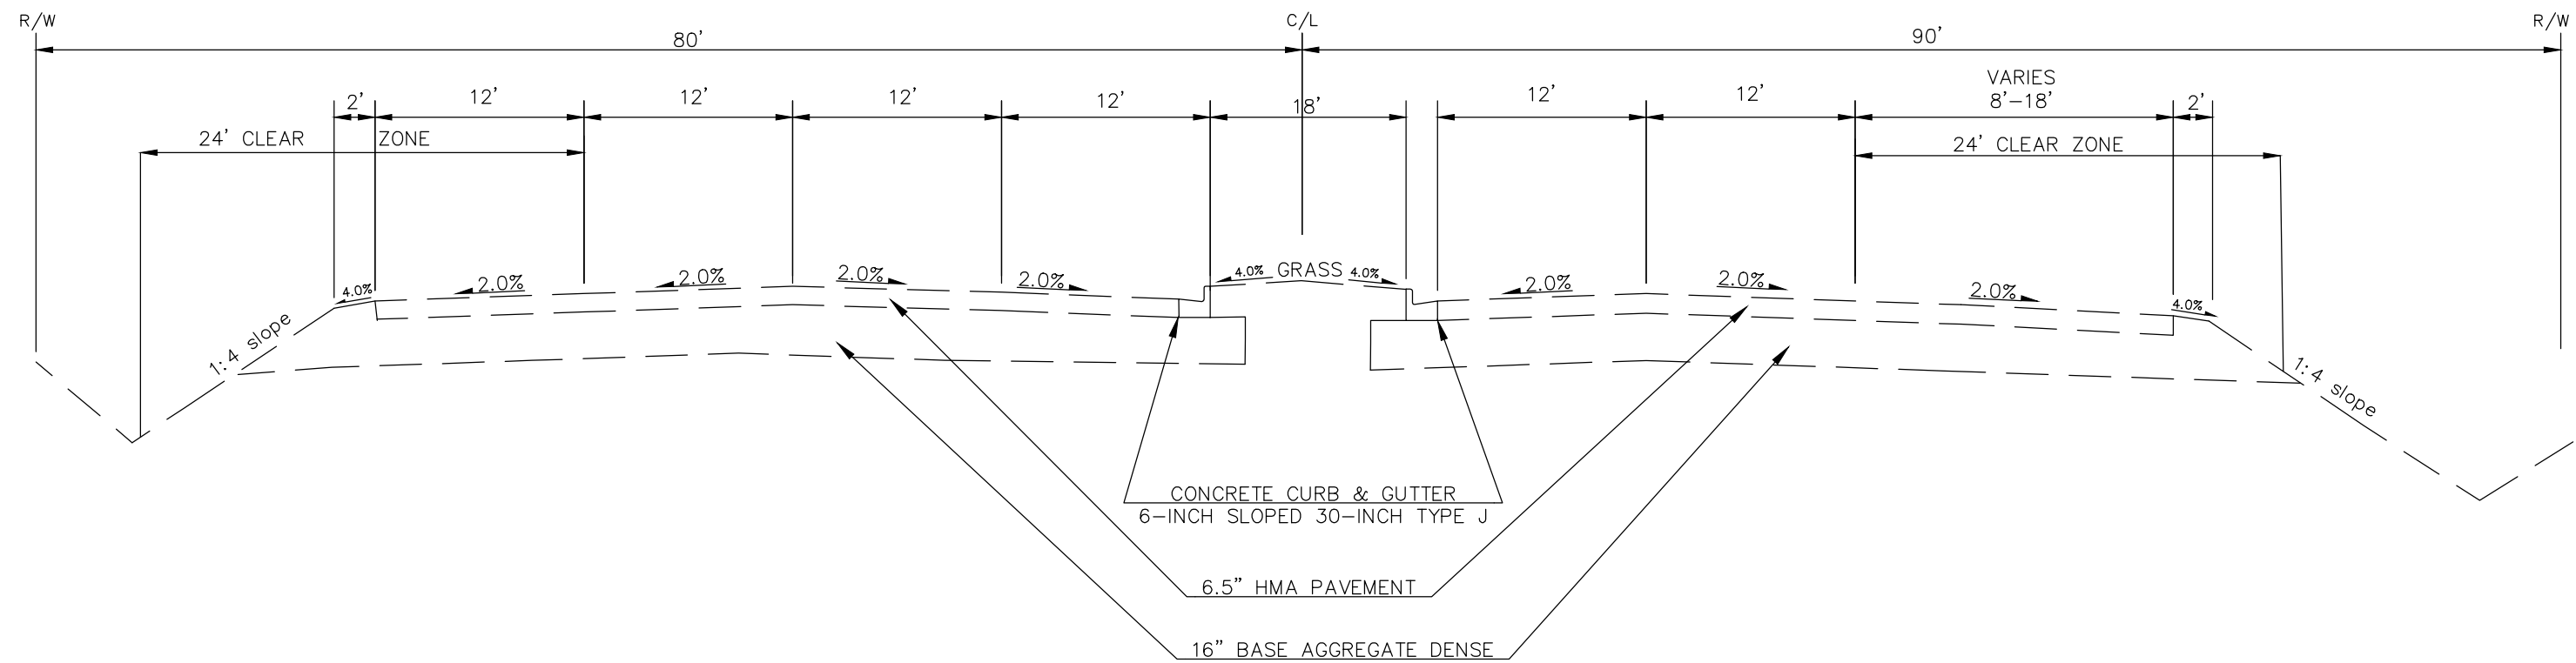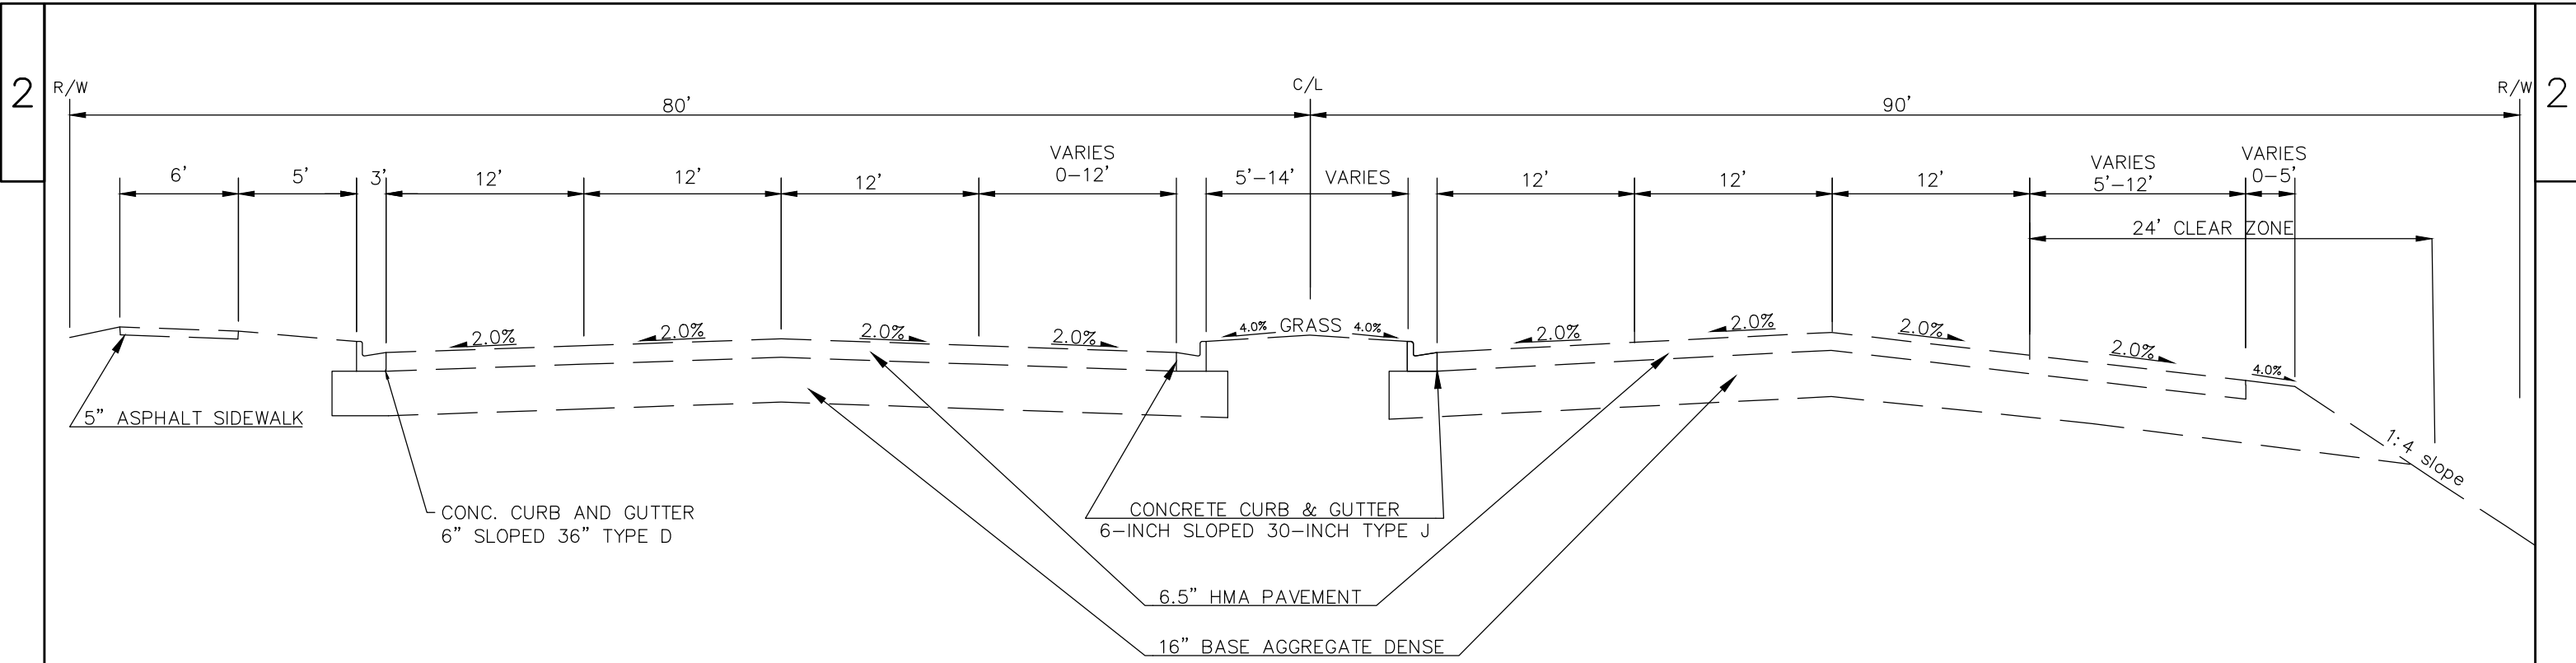


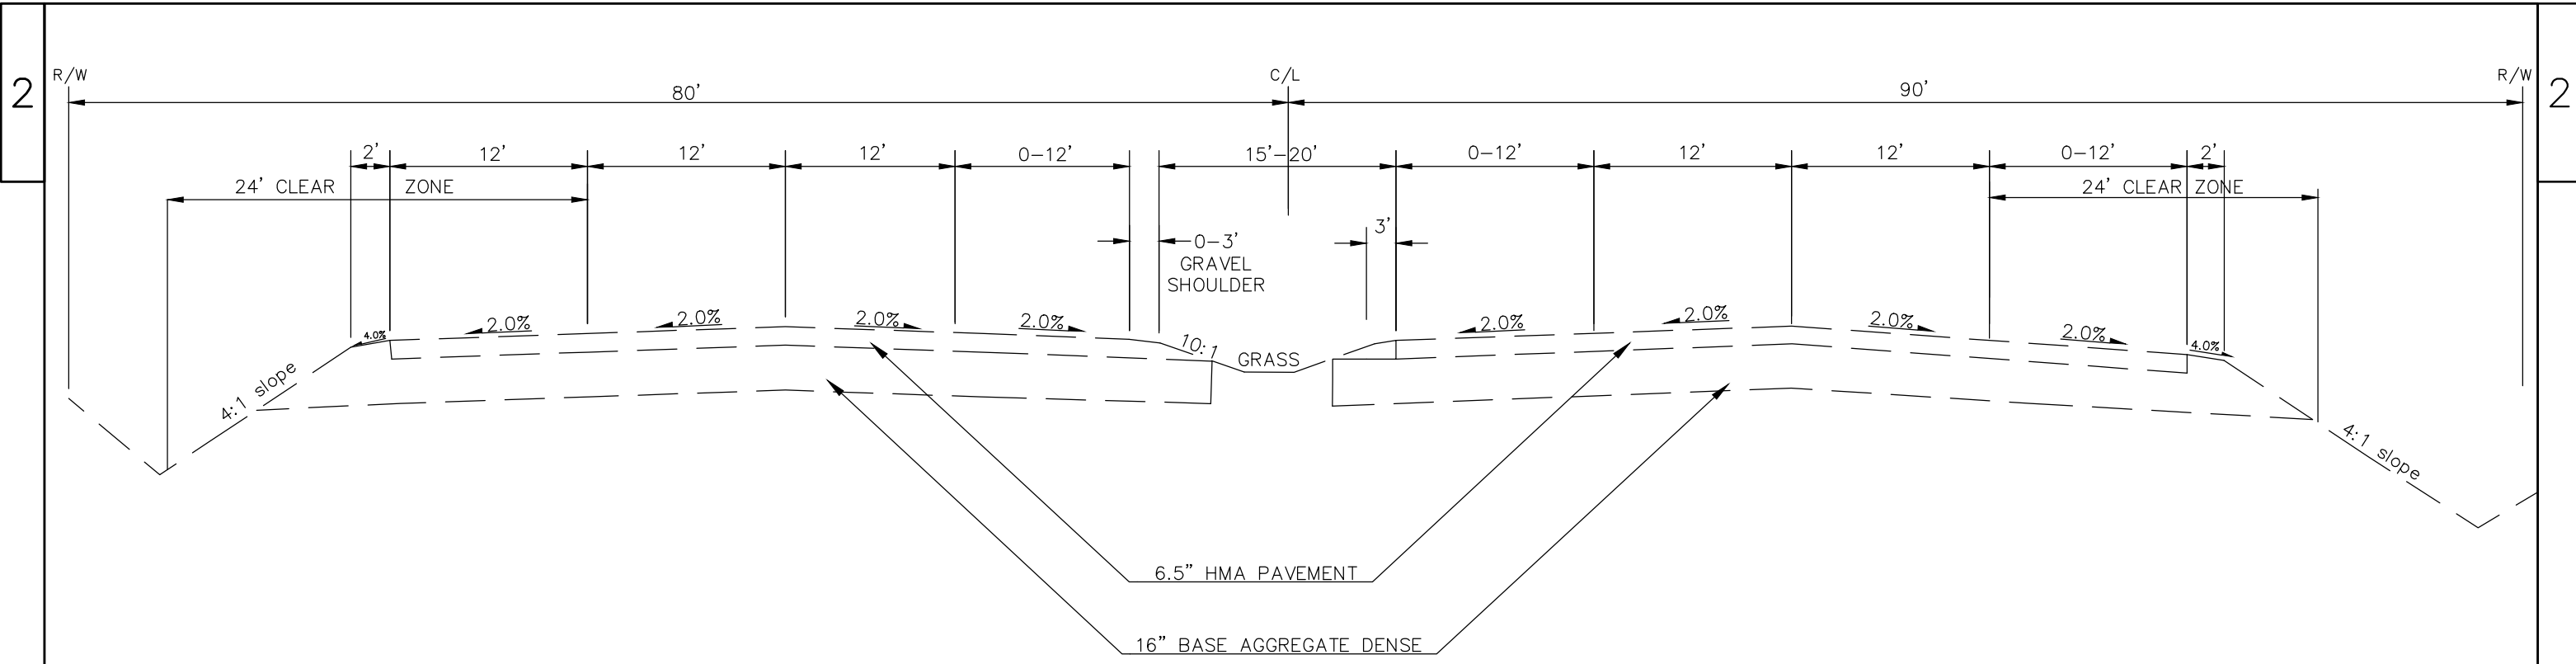


TYPICAL EXISTING SECTION
 CTH VV
 STA 108+24 TO STA 109+50

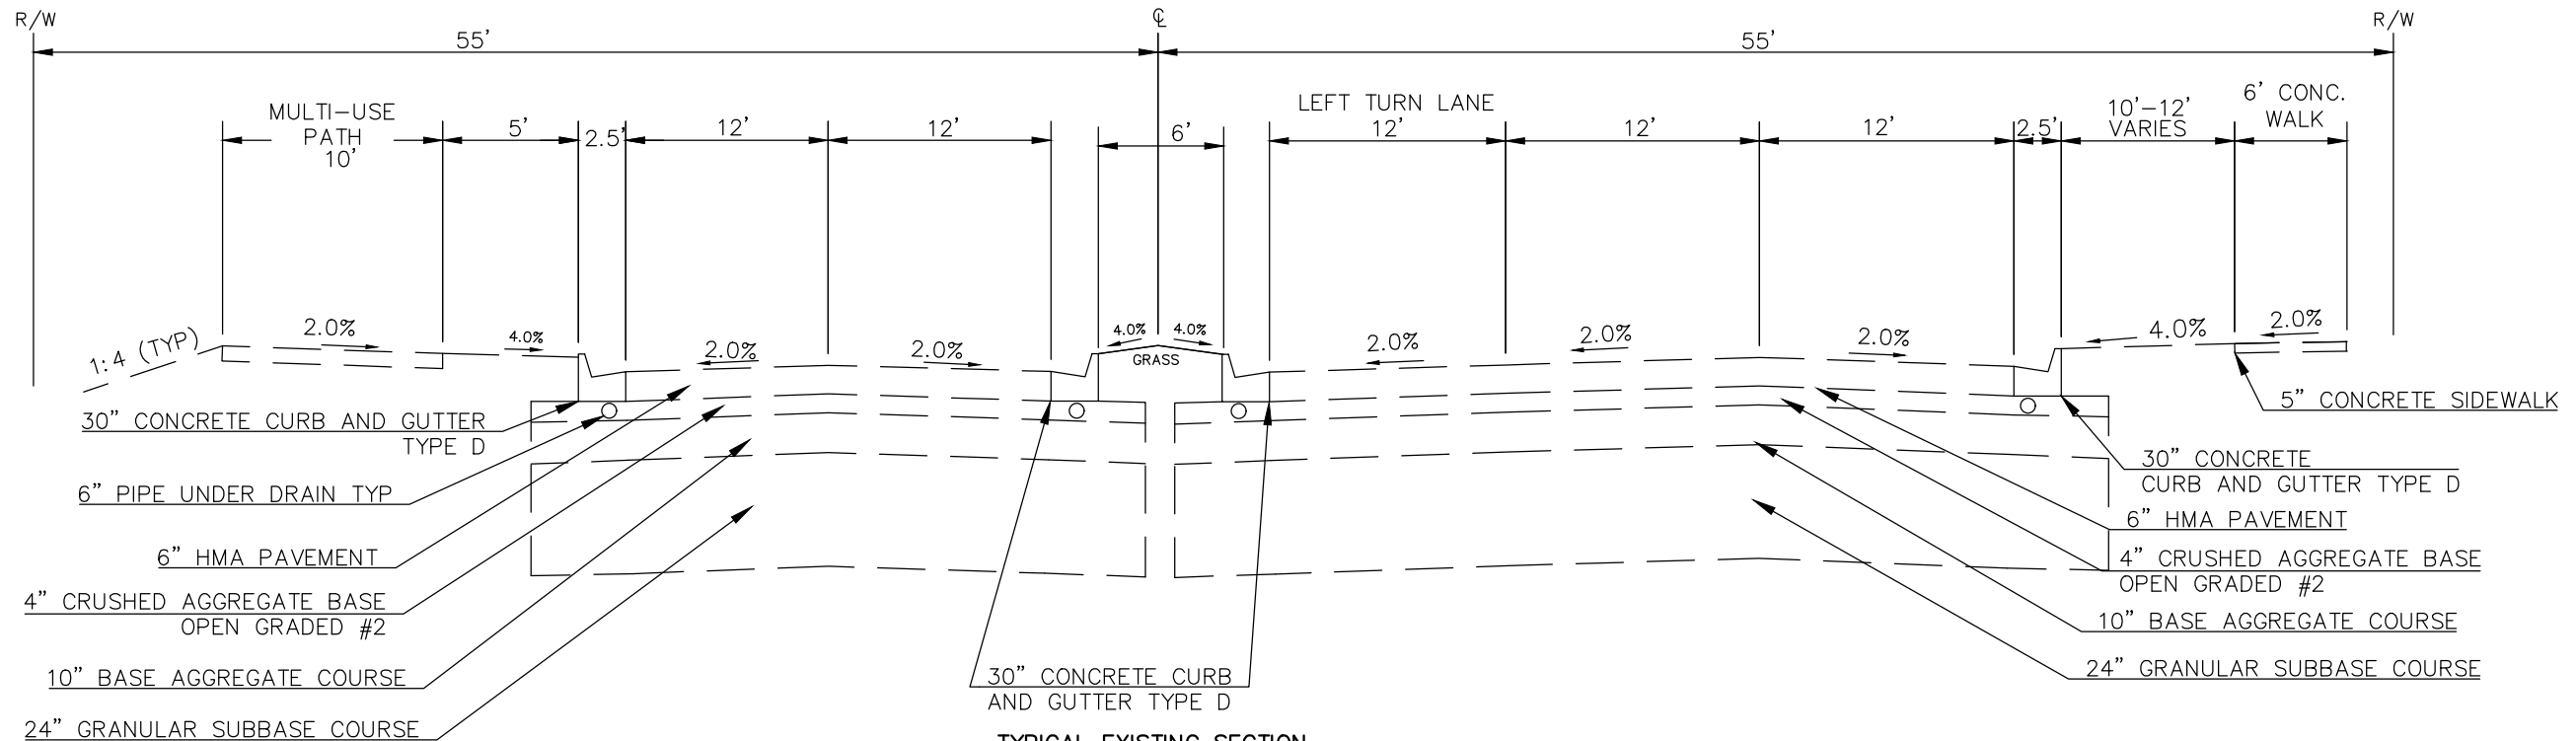


TYPICAL EXISTING SECTION
 CTH YY
 STA 203+00 TO STA 204+45

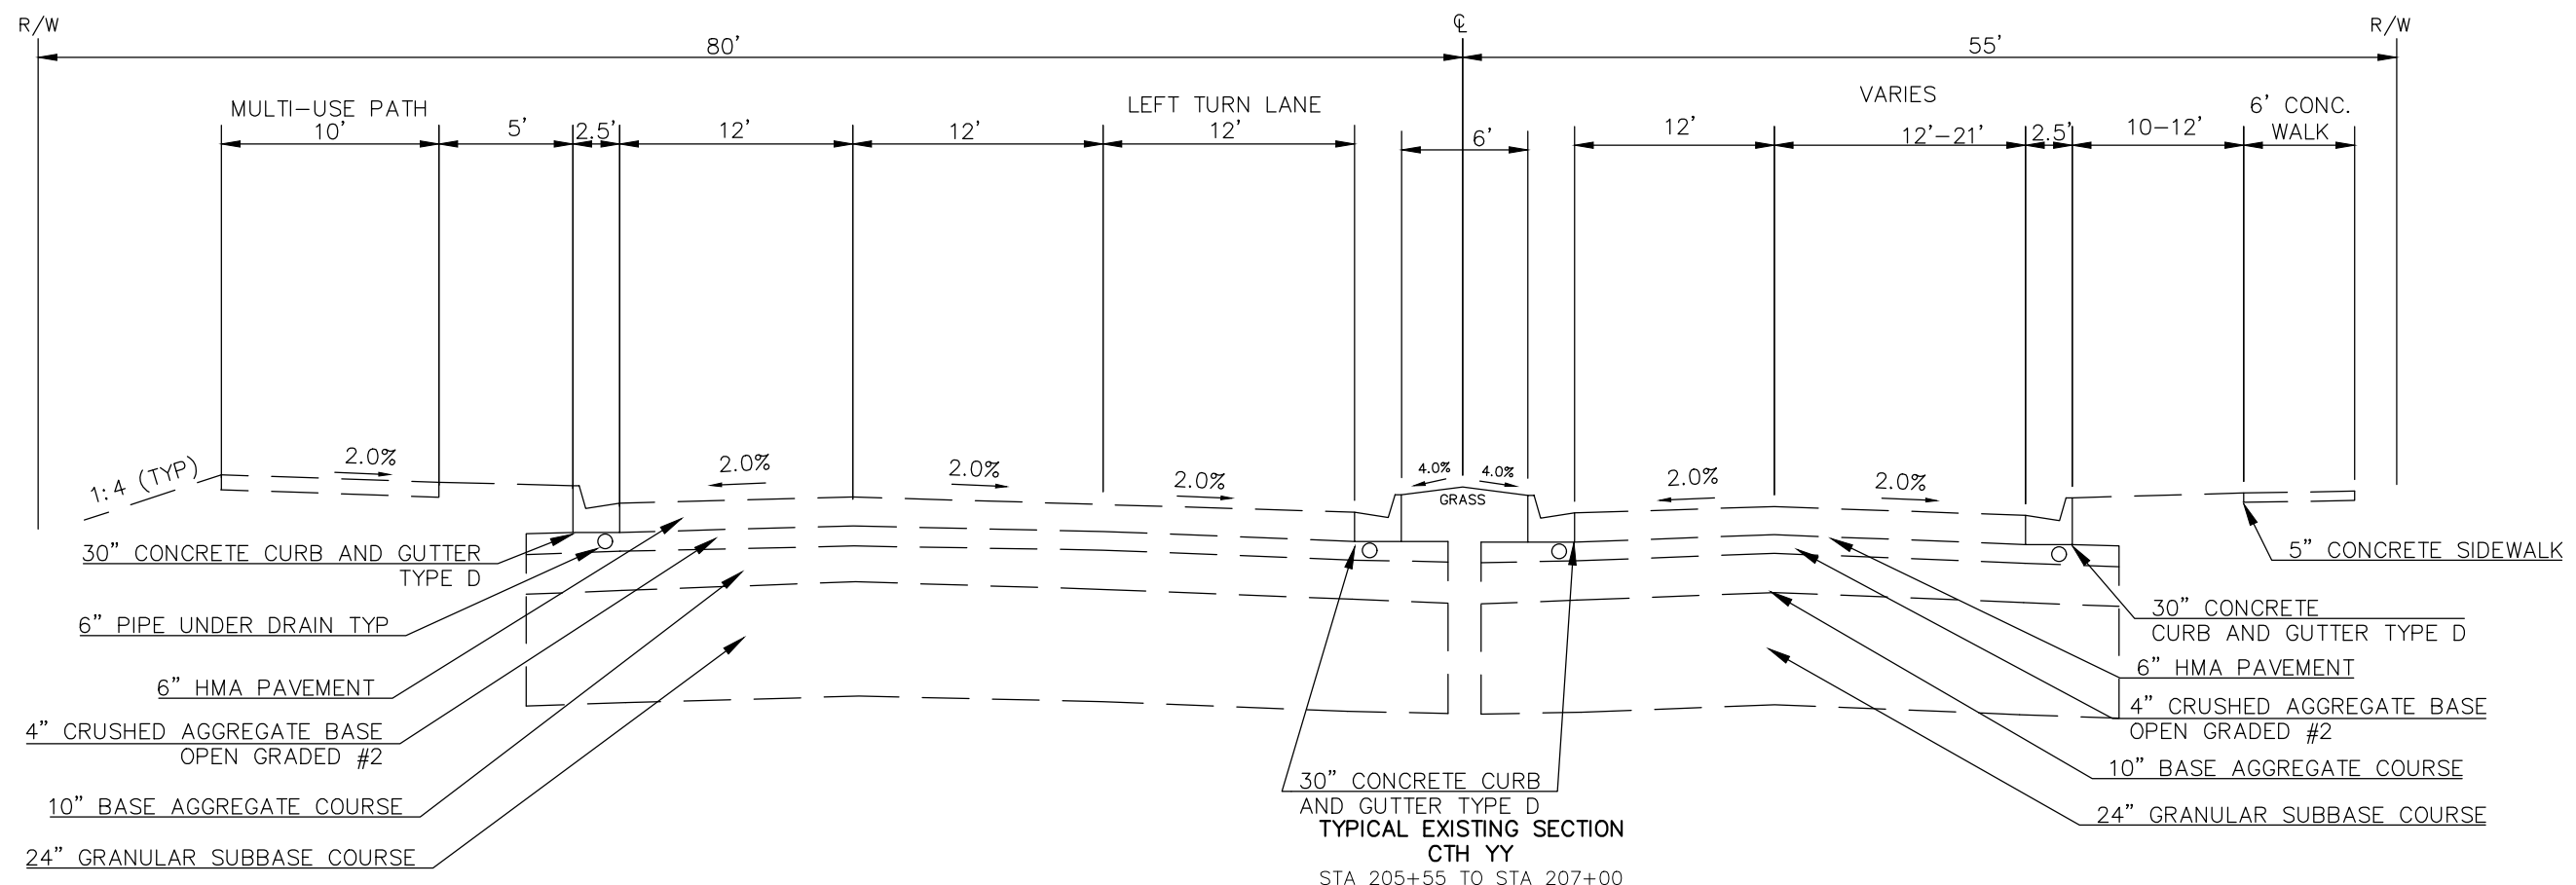


TYPICAL EXISTING SECTION
 CTH YY
 STA 205+55 TO STA 207+00

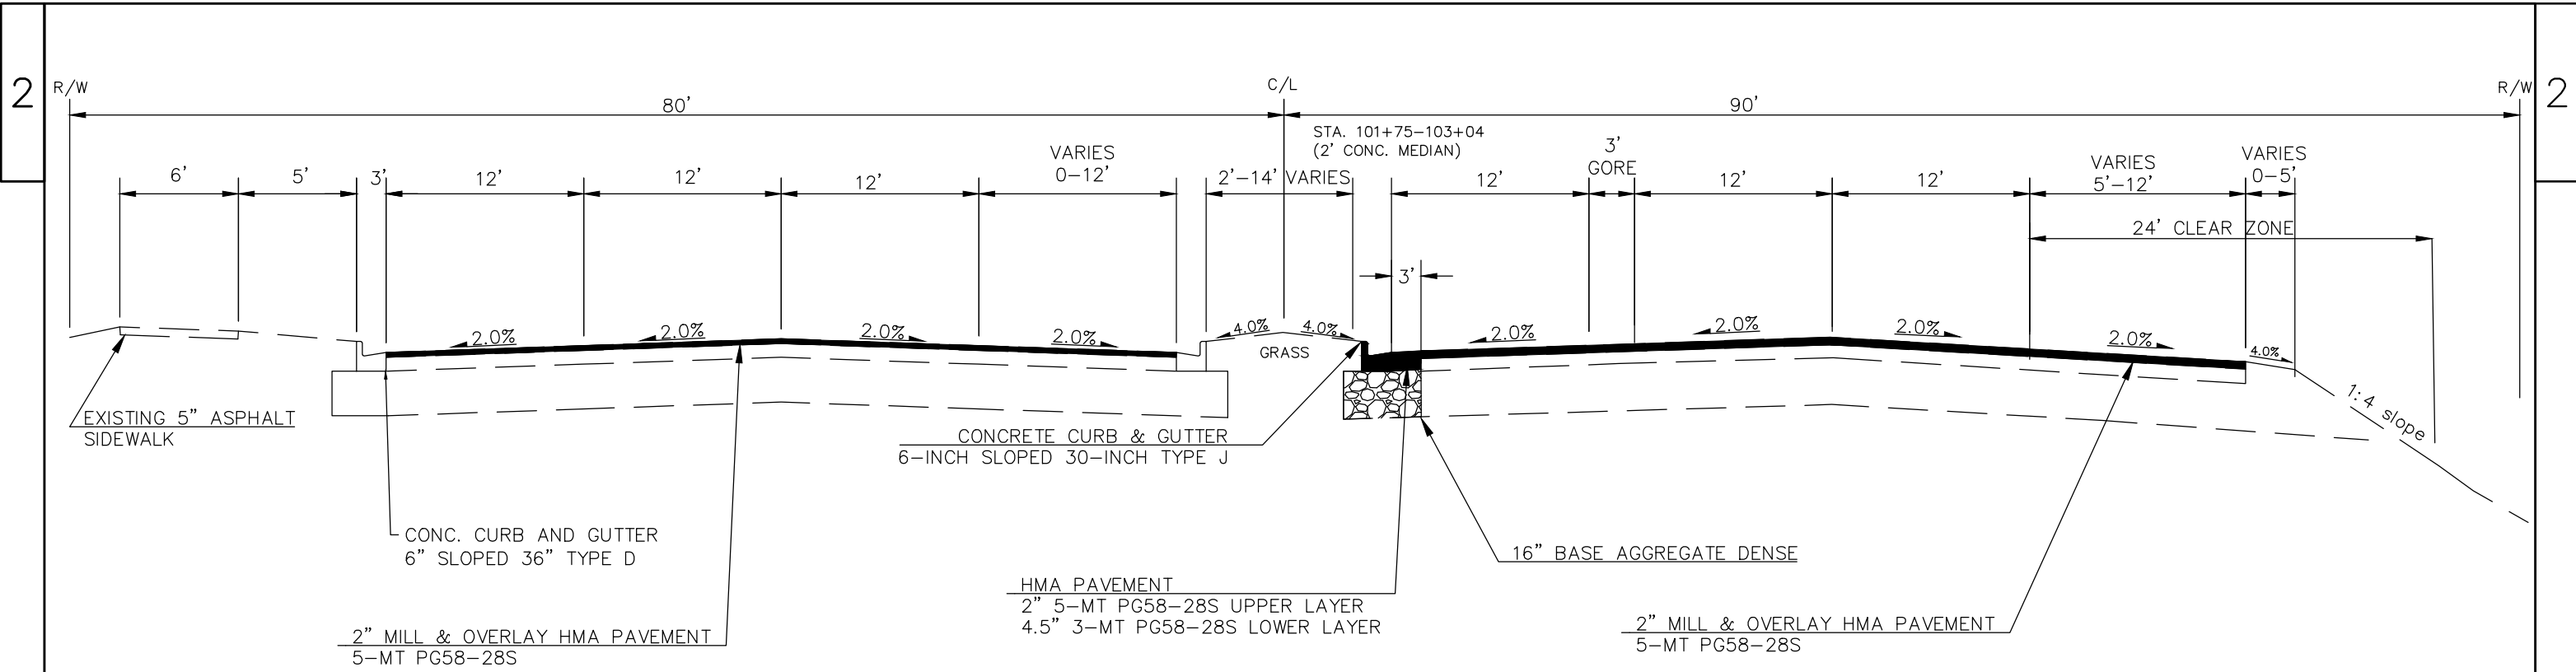


TYPICAL PROPOSED SECTION
 CTH VV
 STA 101+75 TO 104+46

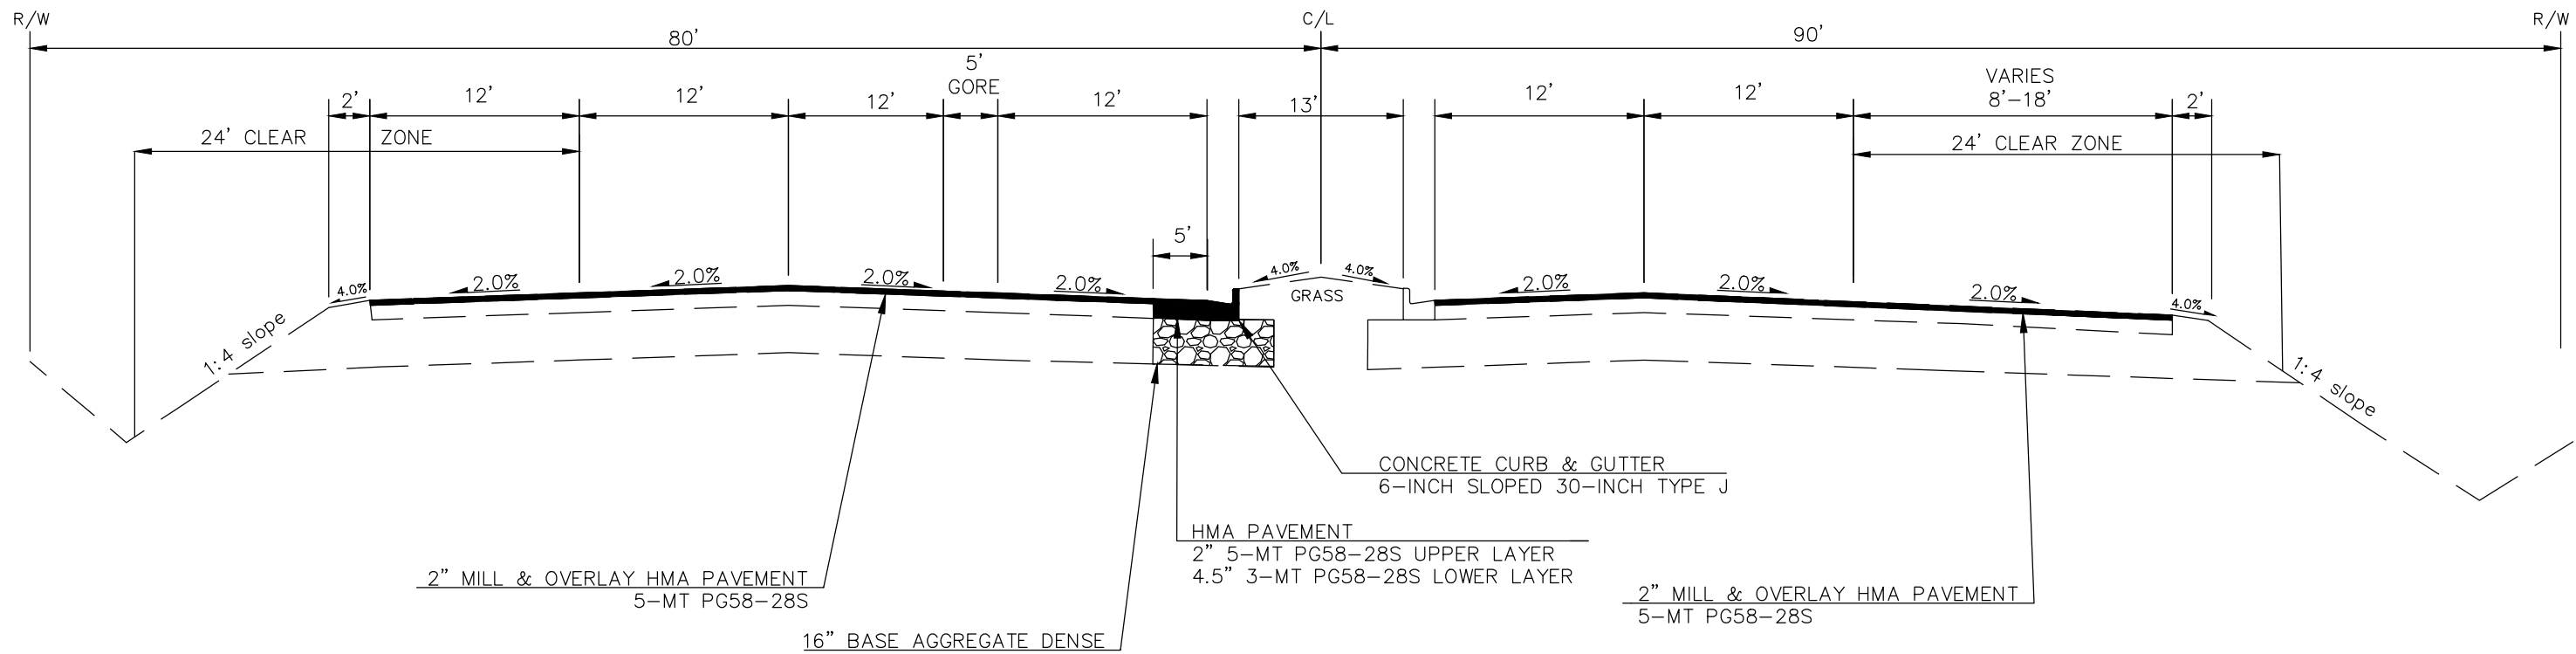


TYPICAL PROPOSED SECTION
 CTH VV
 STA 105+60 TO STA 108+24

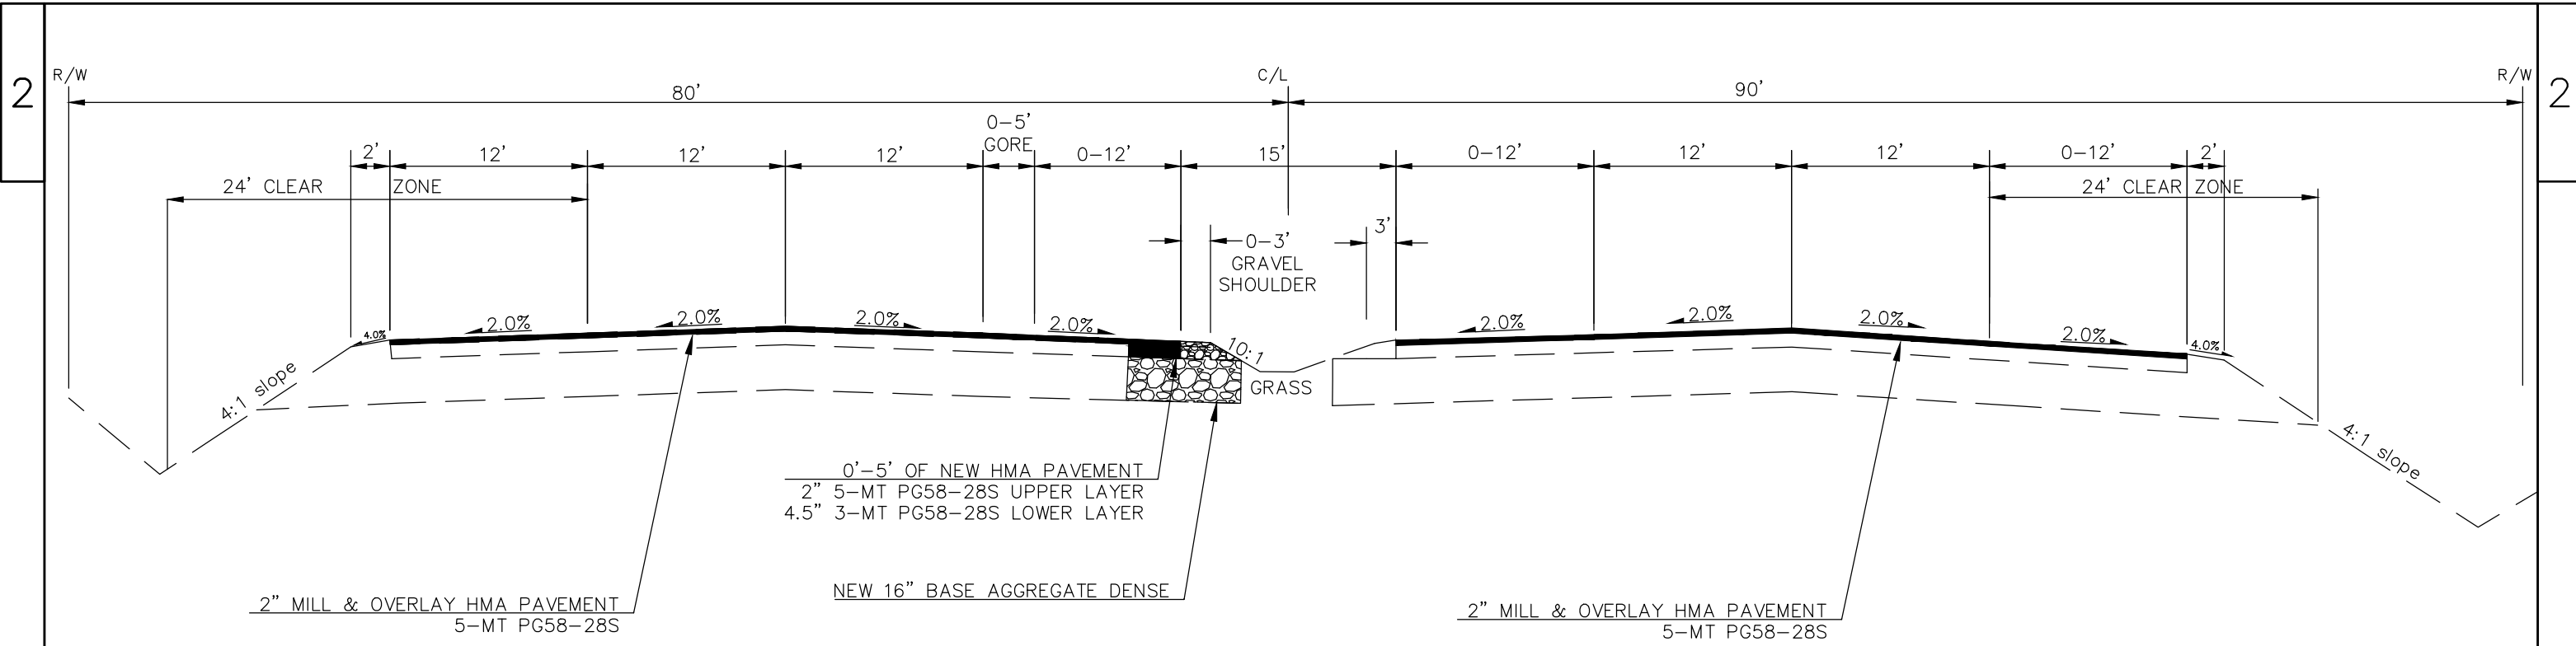


TYPICAL PROPOSED SECTION
CTH VV
STA 108+24 TO STA 109+50

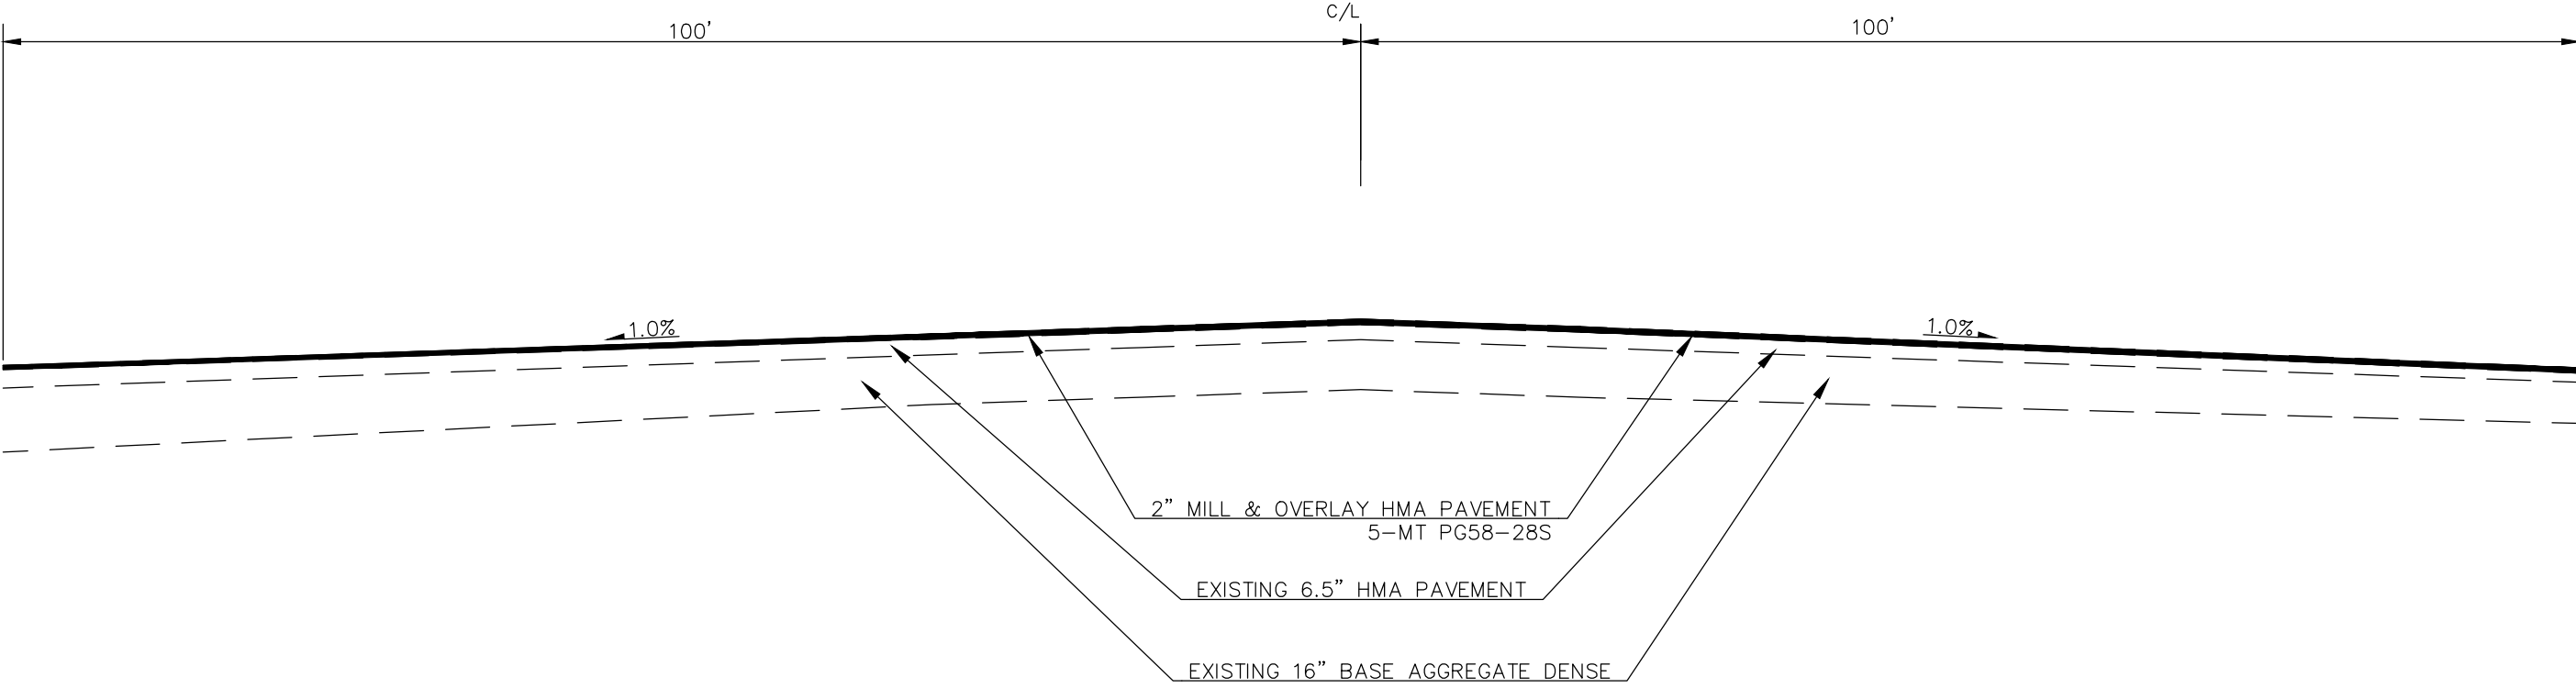



TYPICAL PROPOSED SECTION
CTH VV
STA 104+46 TO STA 105+60

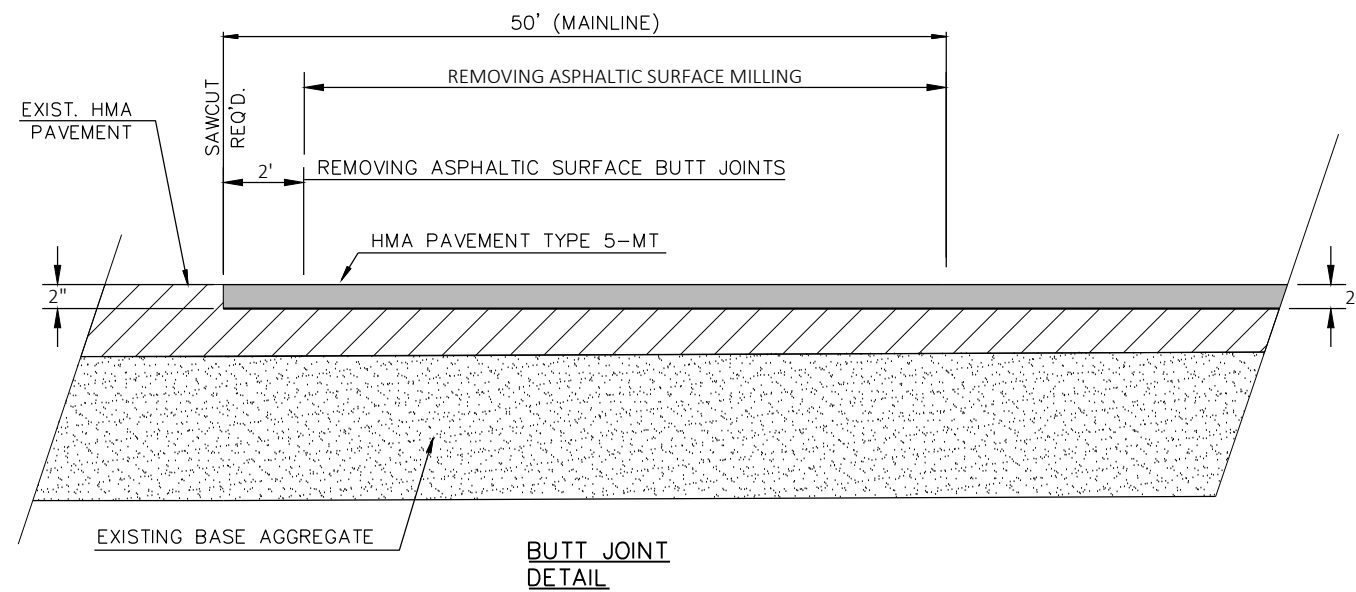


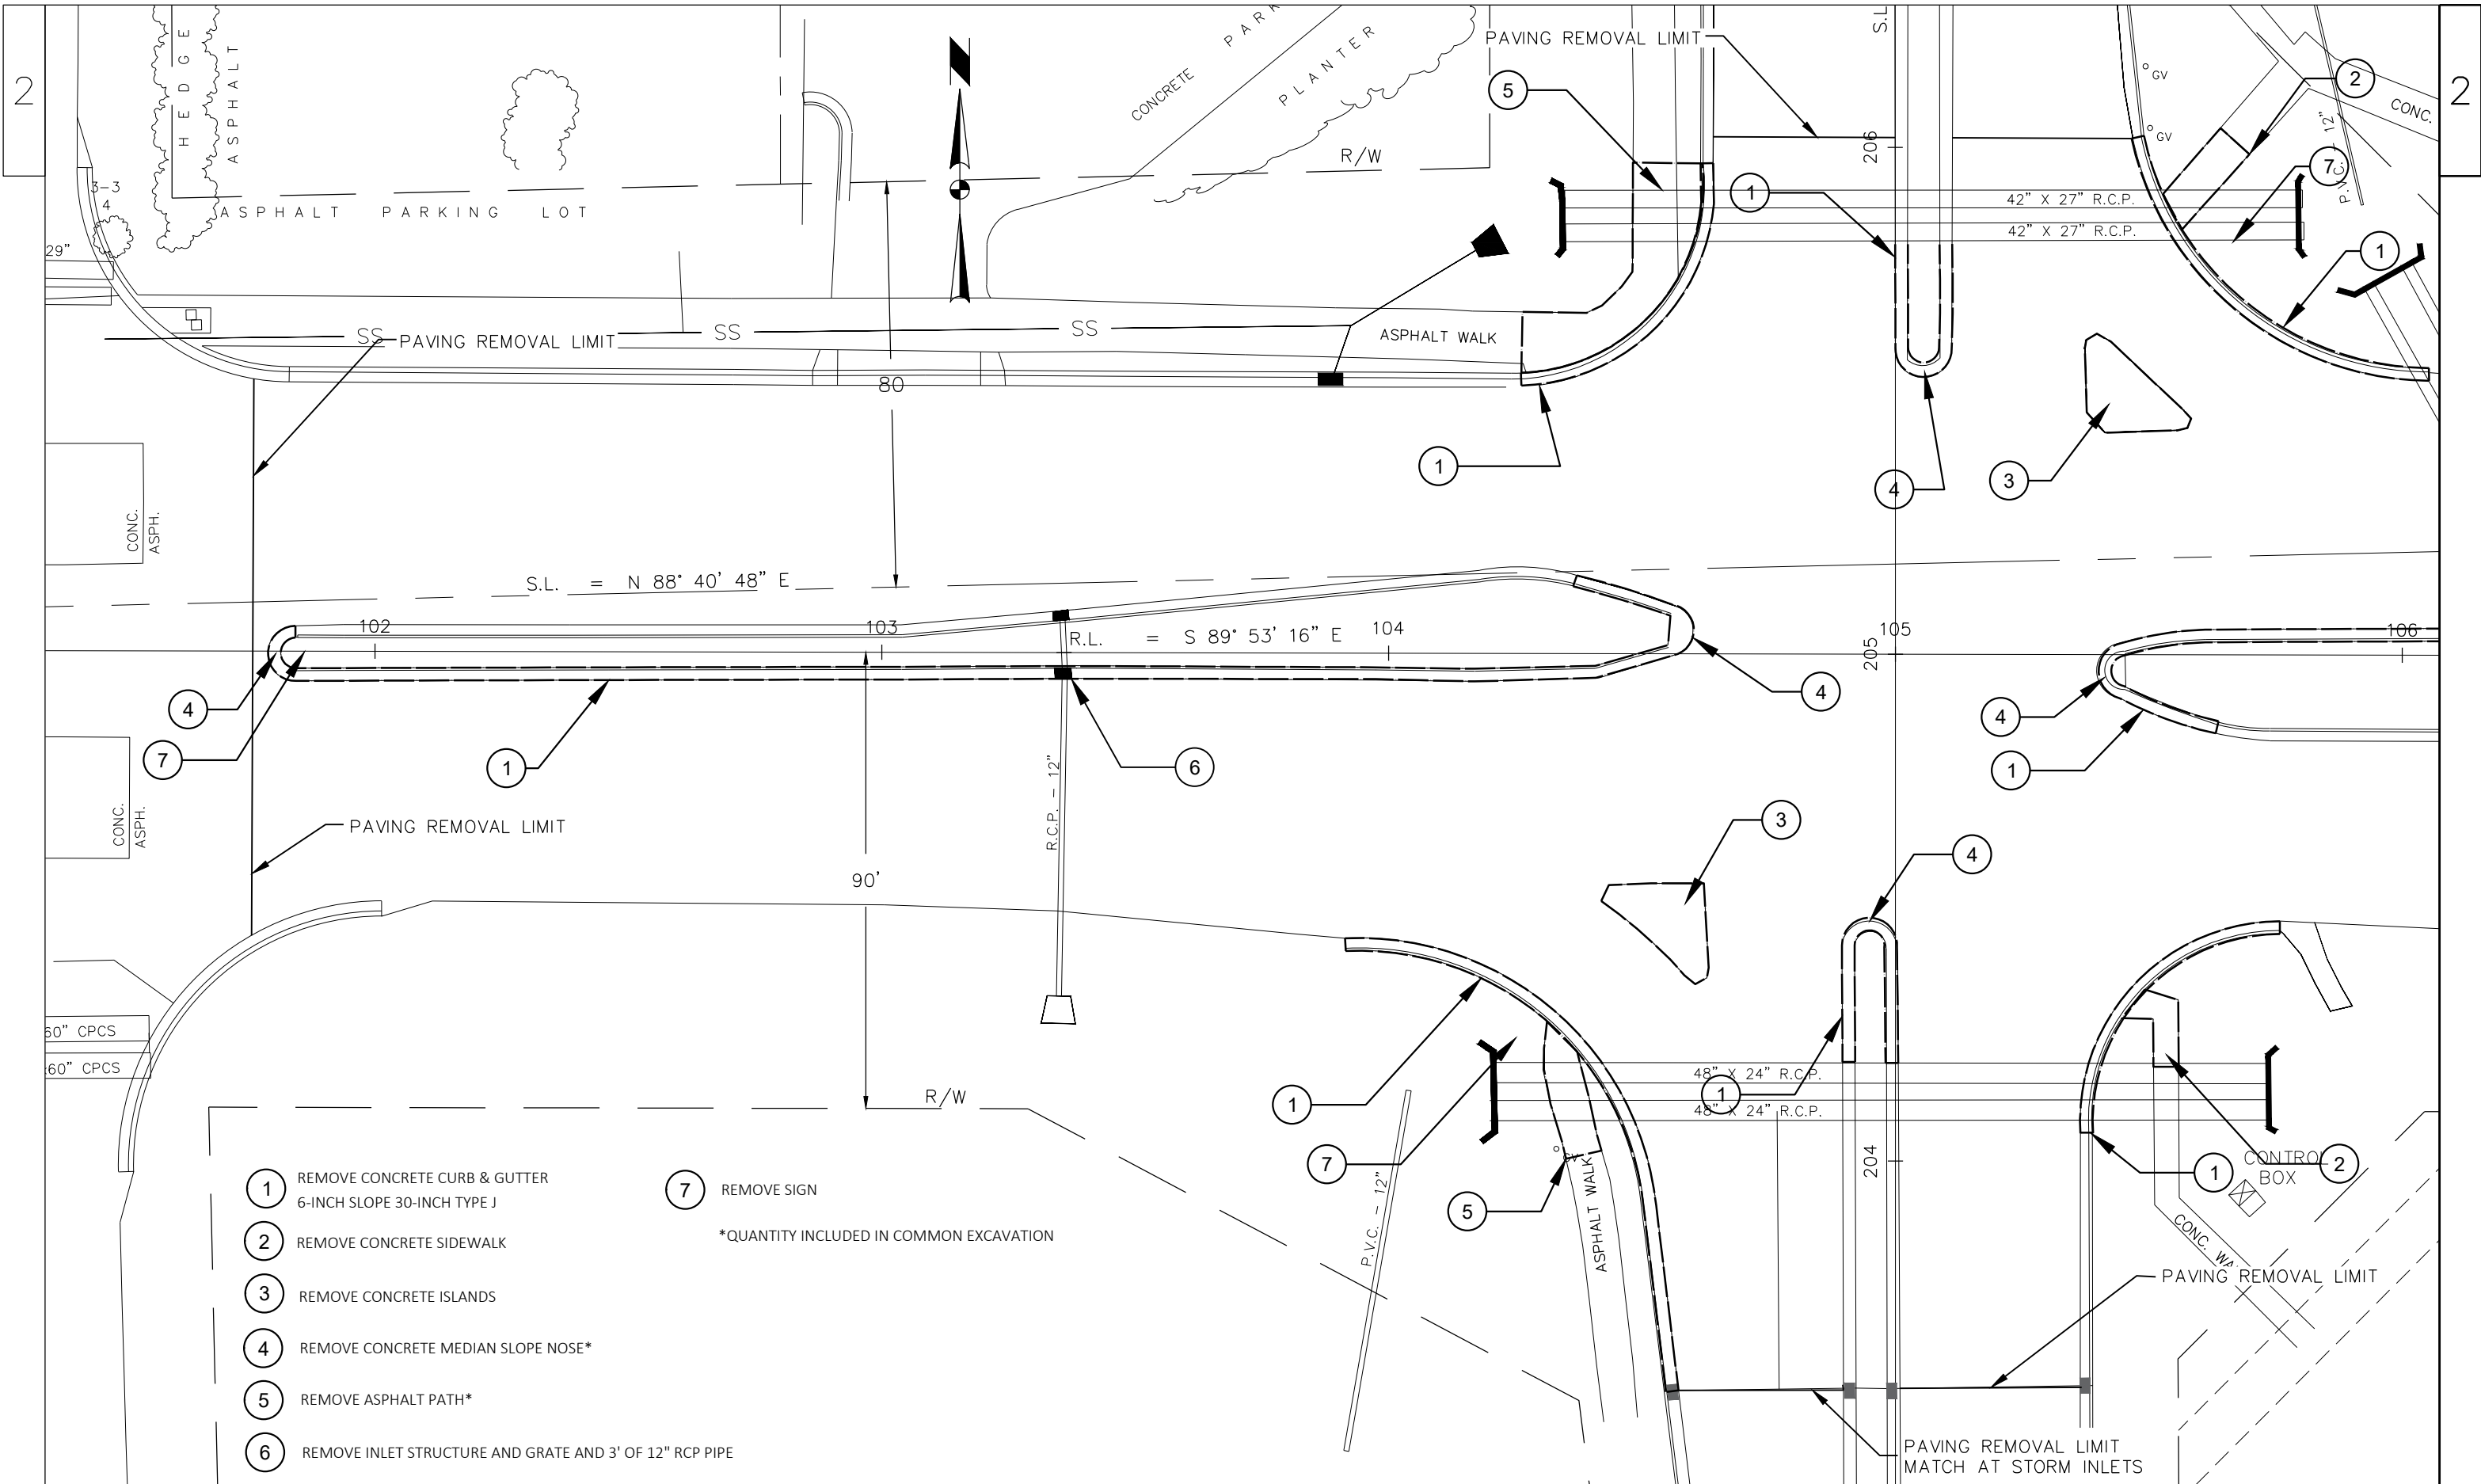


- ① REMOVE CONCRETE CURB & GUTTER
6-INCH SLOPE 30-INCH TYPE J
- ② REMOVE CONCRETE SIDEWALK
- ③ REMOVE CONCRETE ISLANDS
- ④ REMOVE CONCRETE MEDIAN SLOPE NOSE*
- ⑤ REMOVE ASPHALT PATH*
- ⑥ REMOVE INLET STRUCTURE AND GRATE AND 3' OF 12" RCP PIPE
- ⑦ REMOVE SIGN
*QUANTITY INCLUDED IN COMMON EXCAVATION

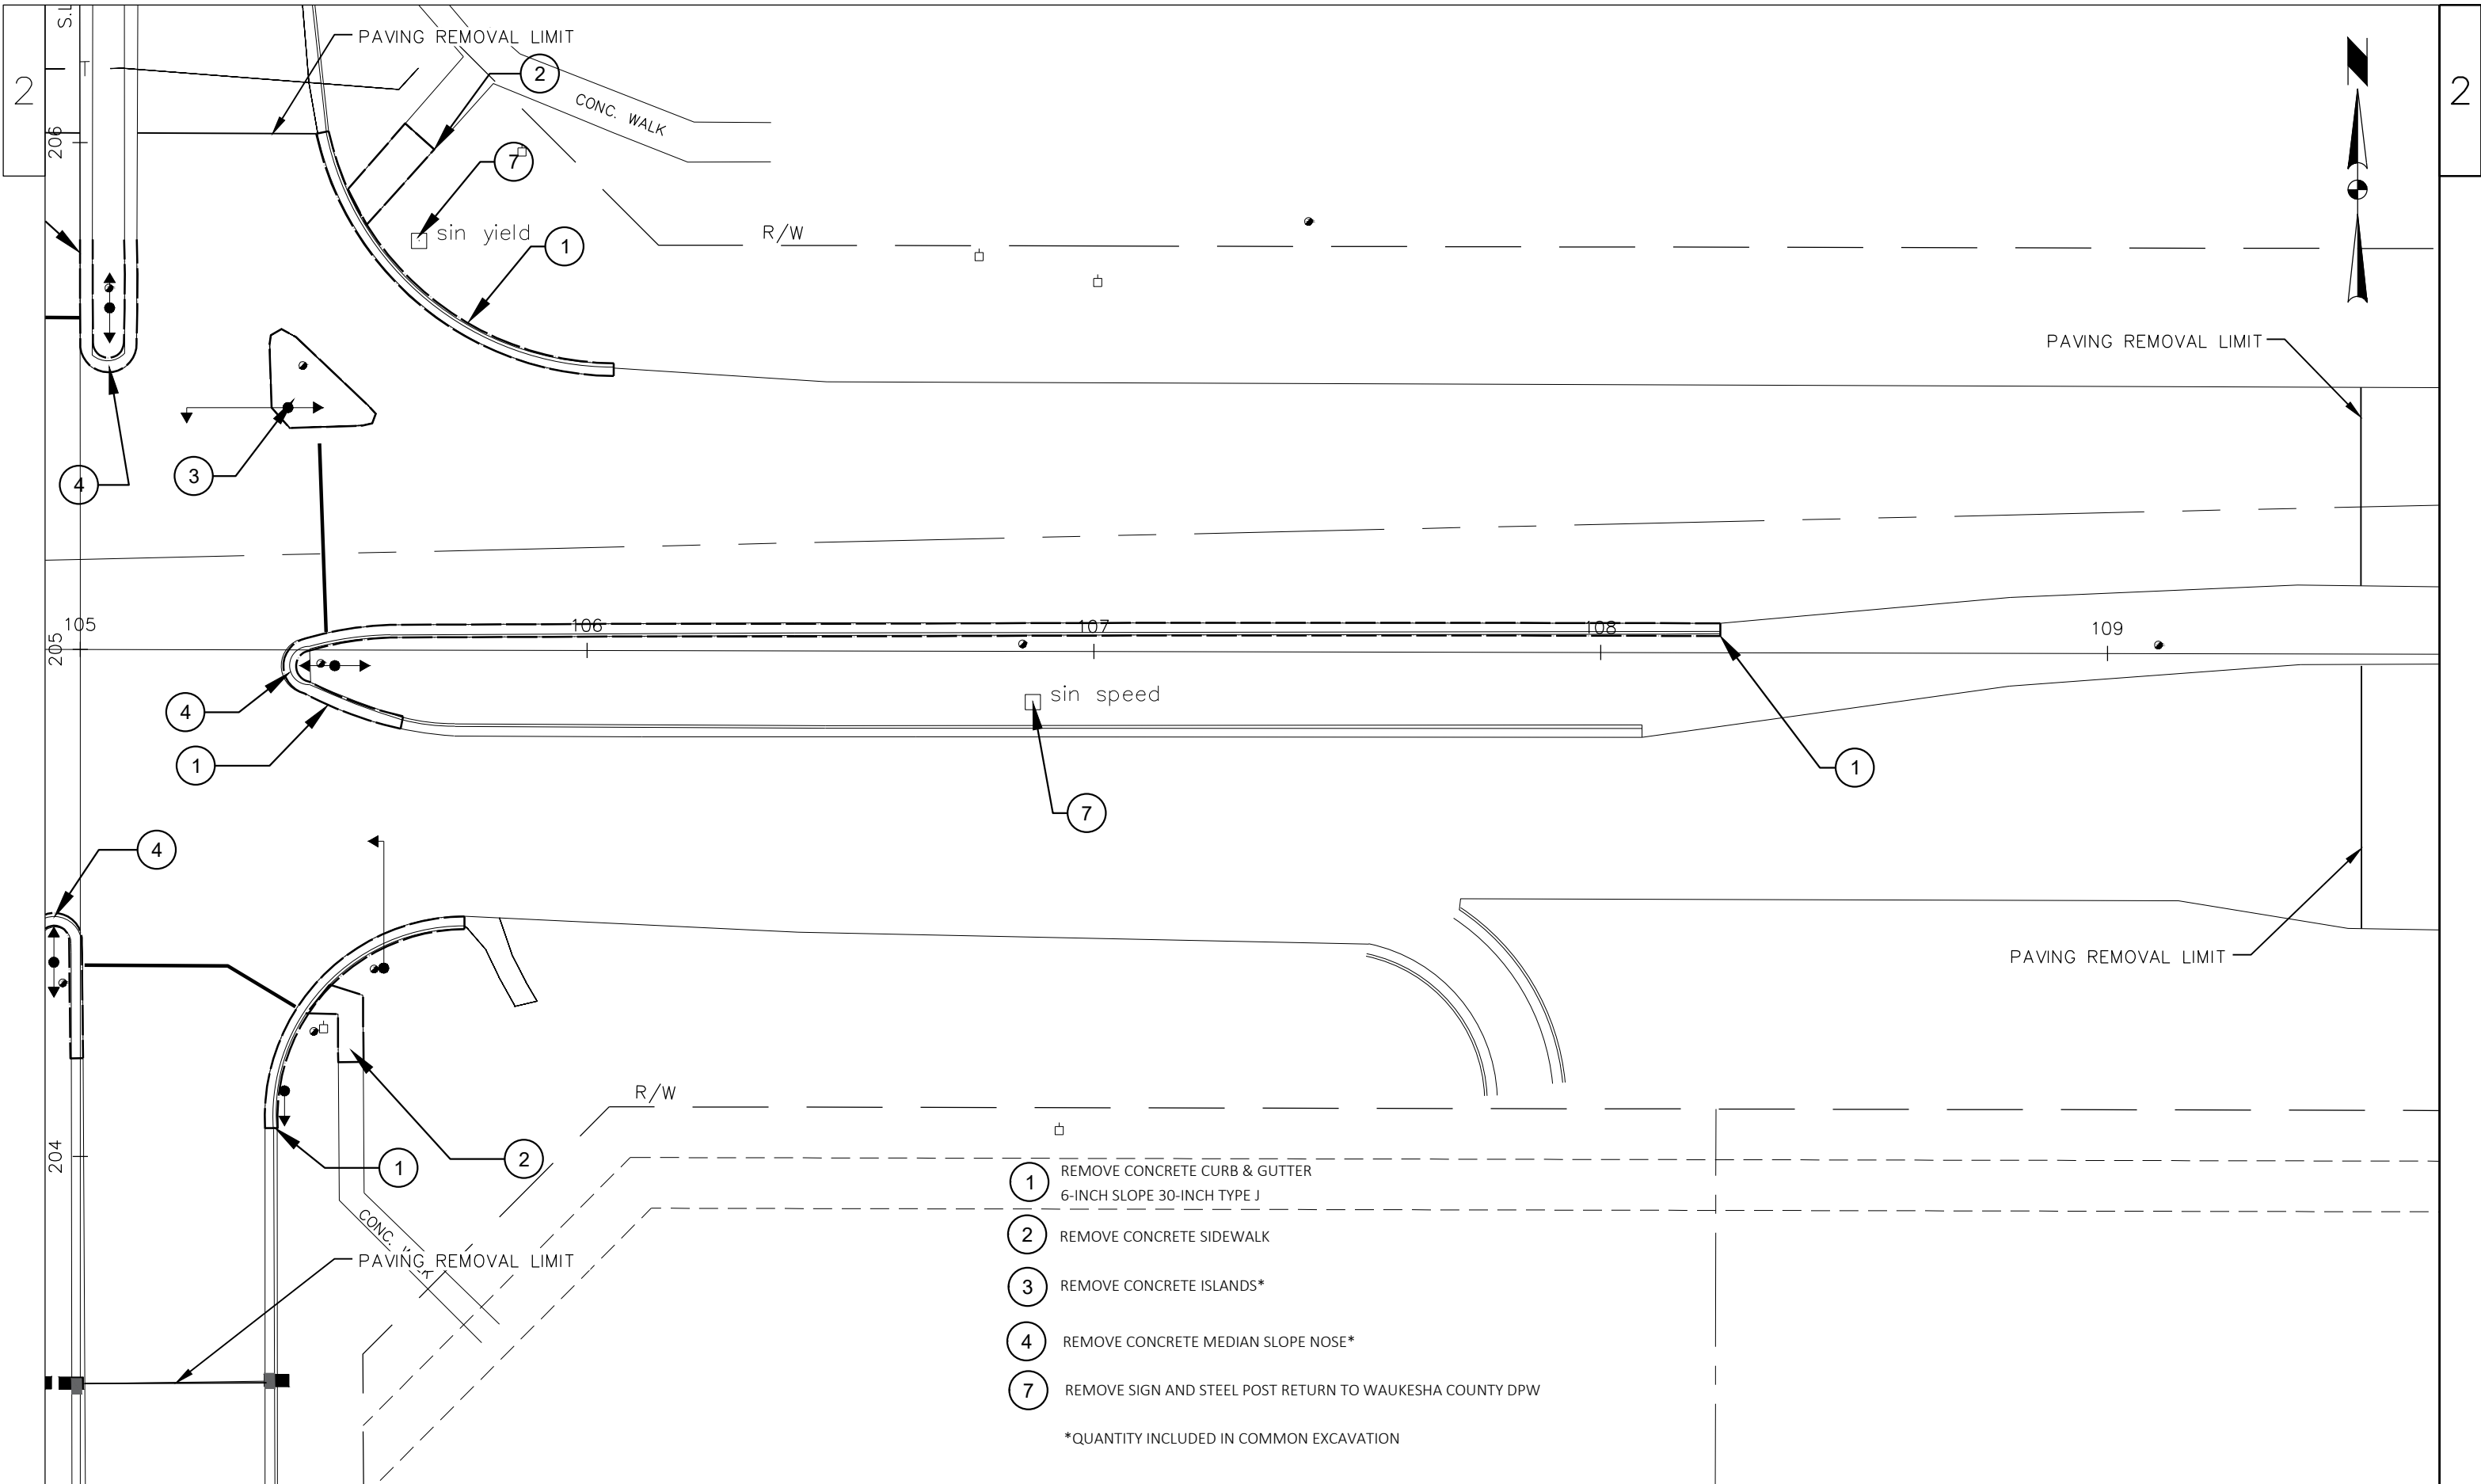


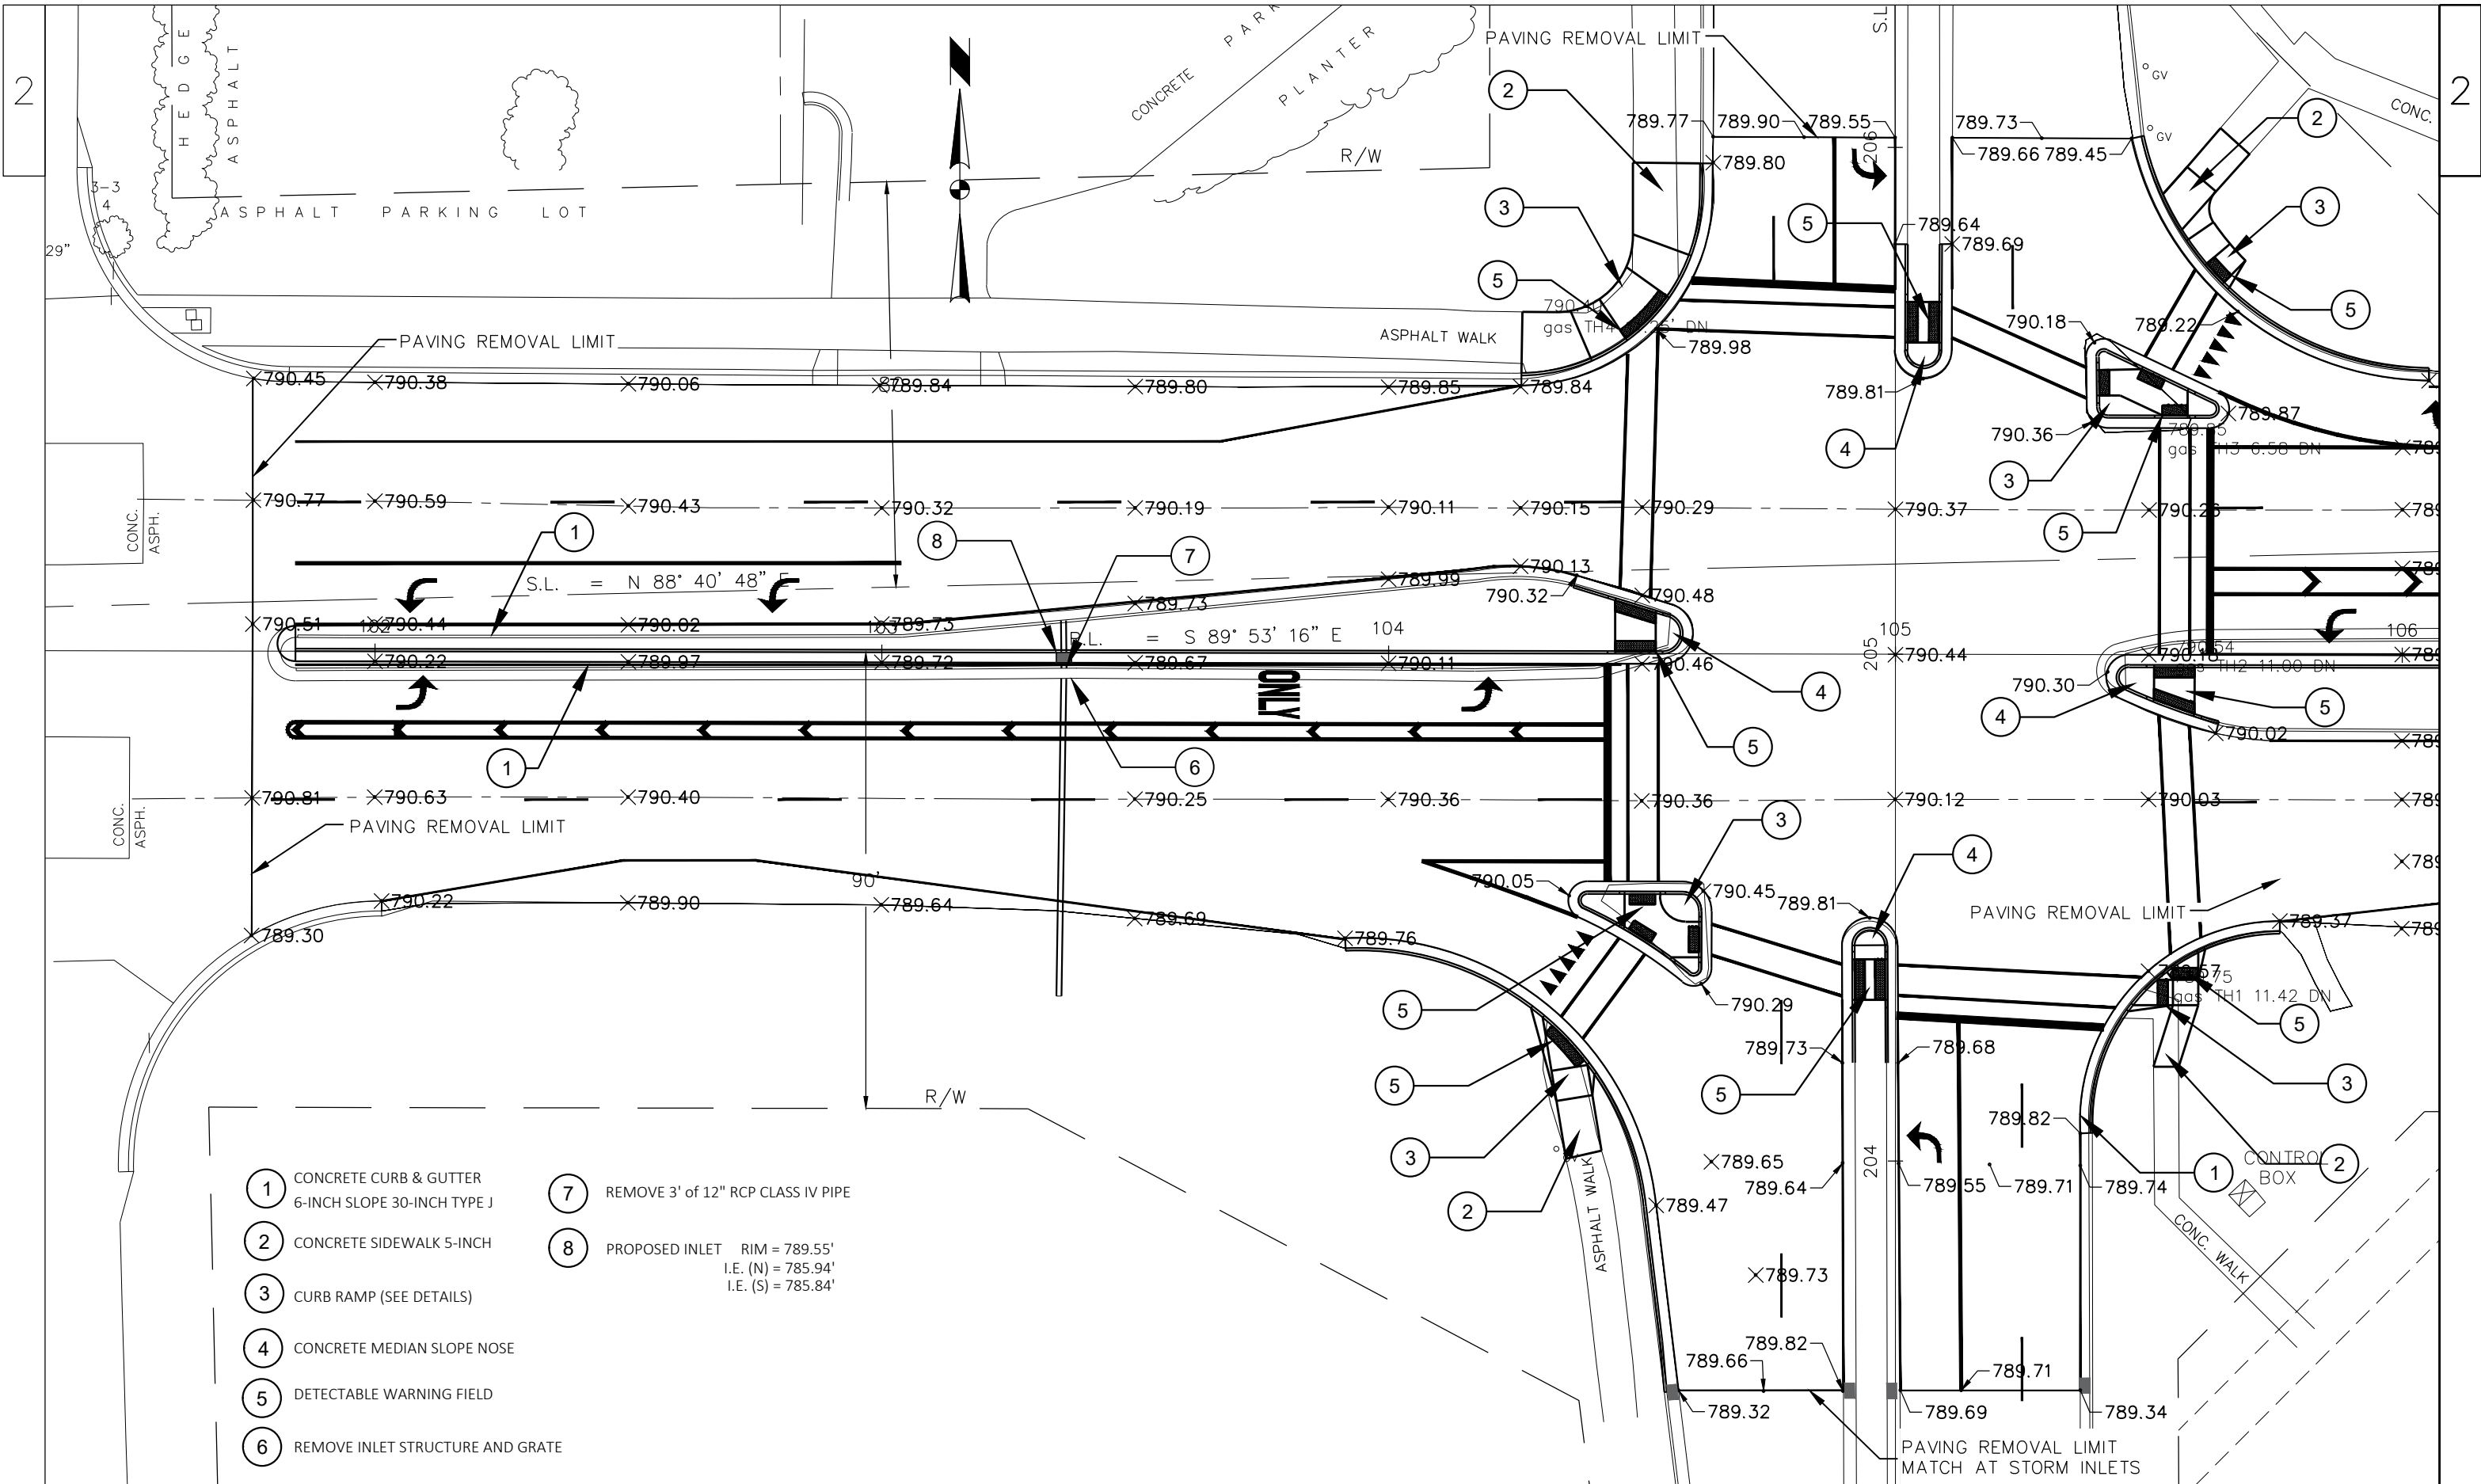


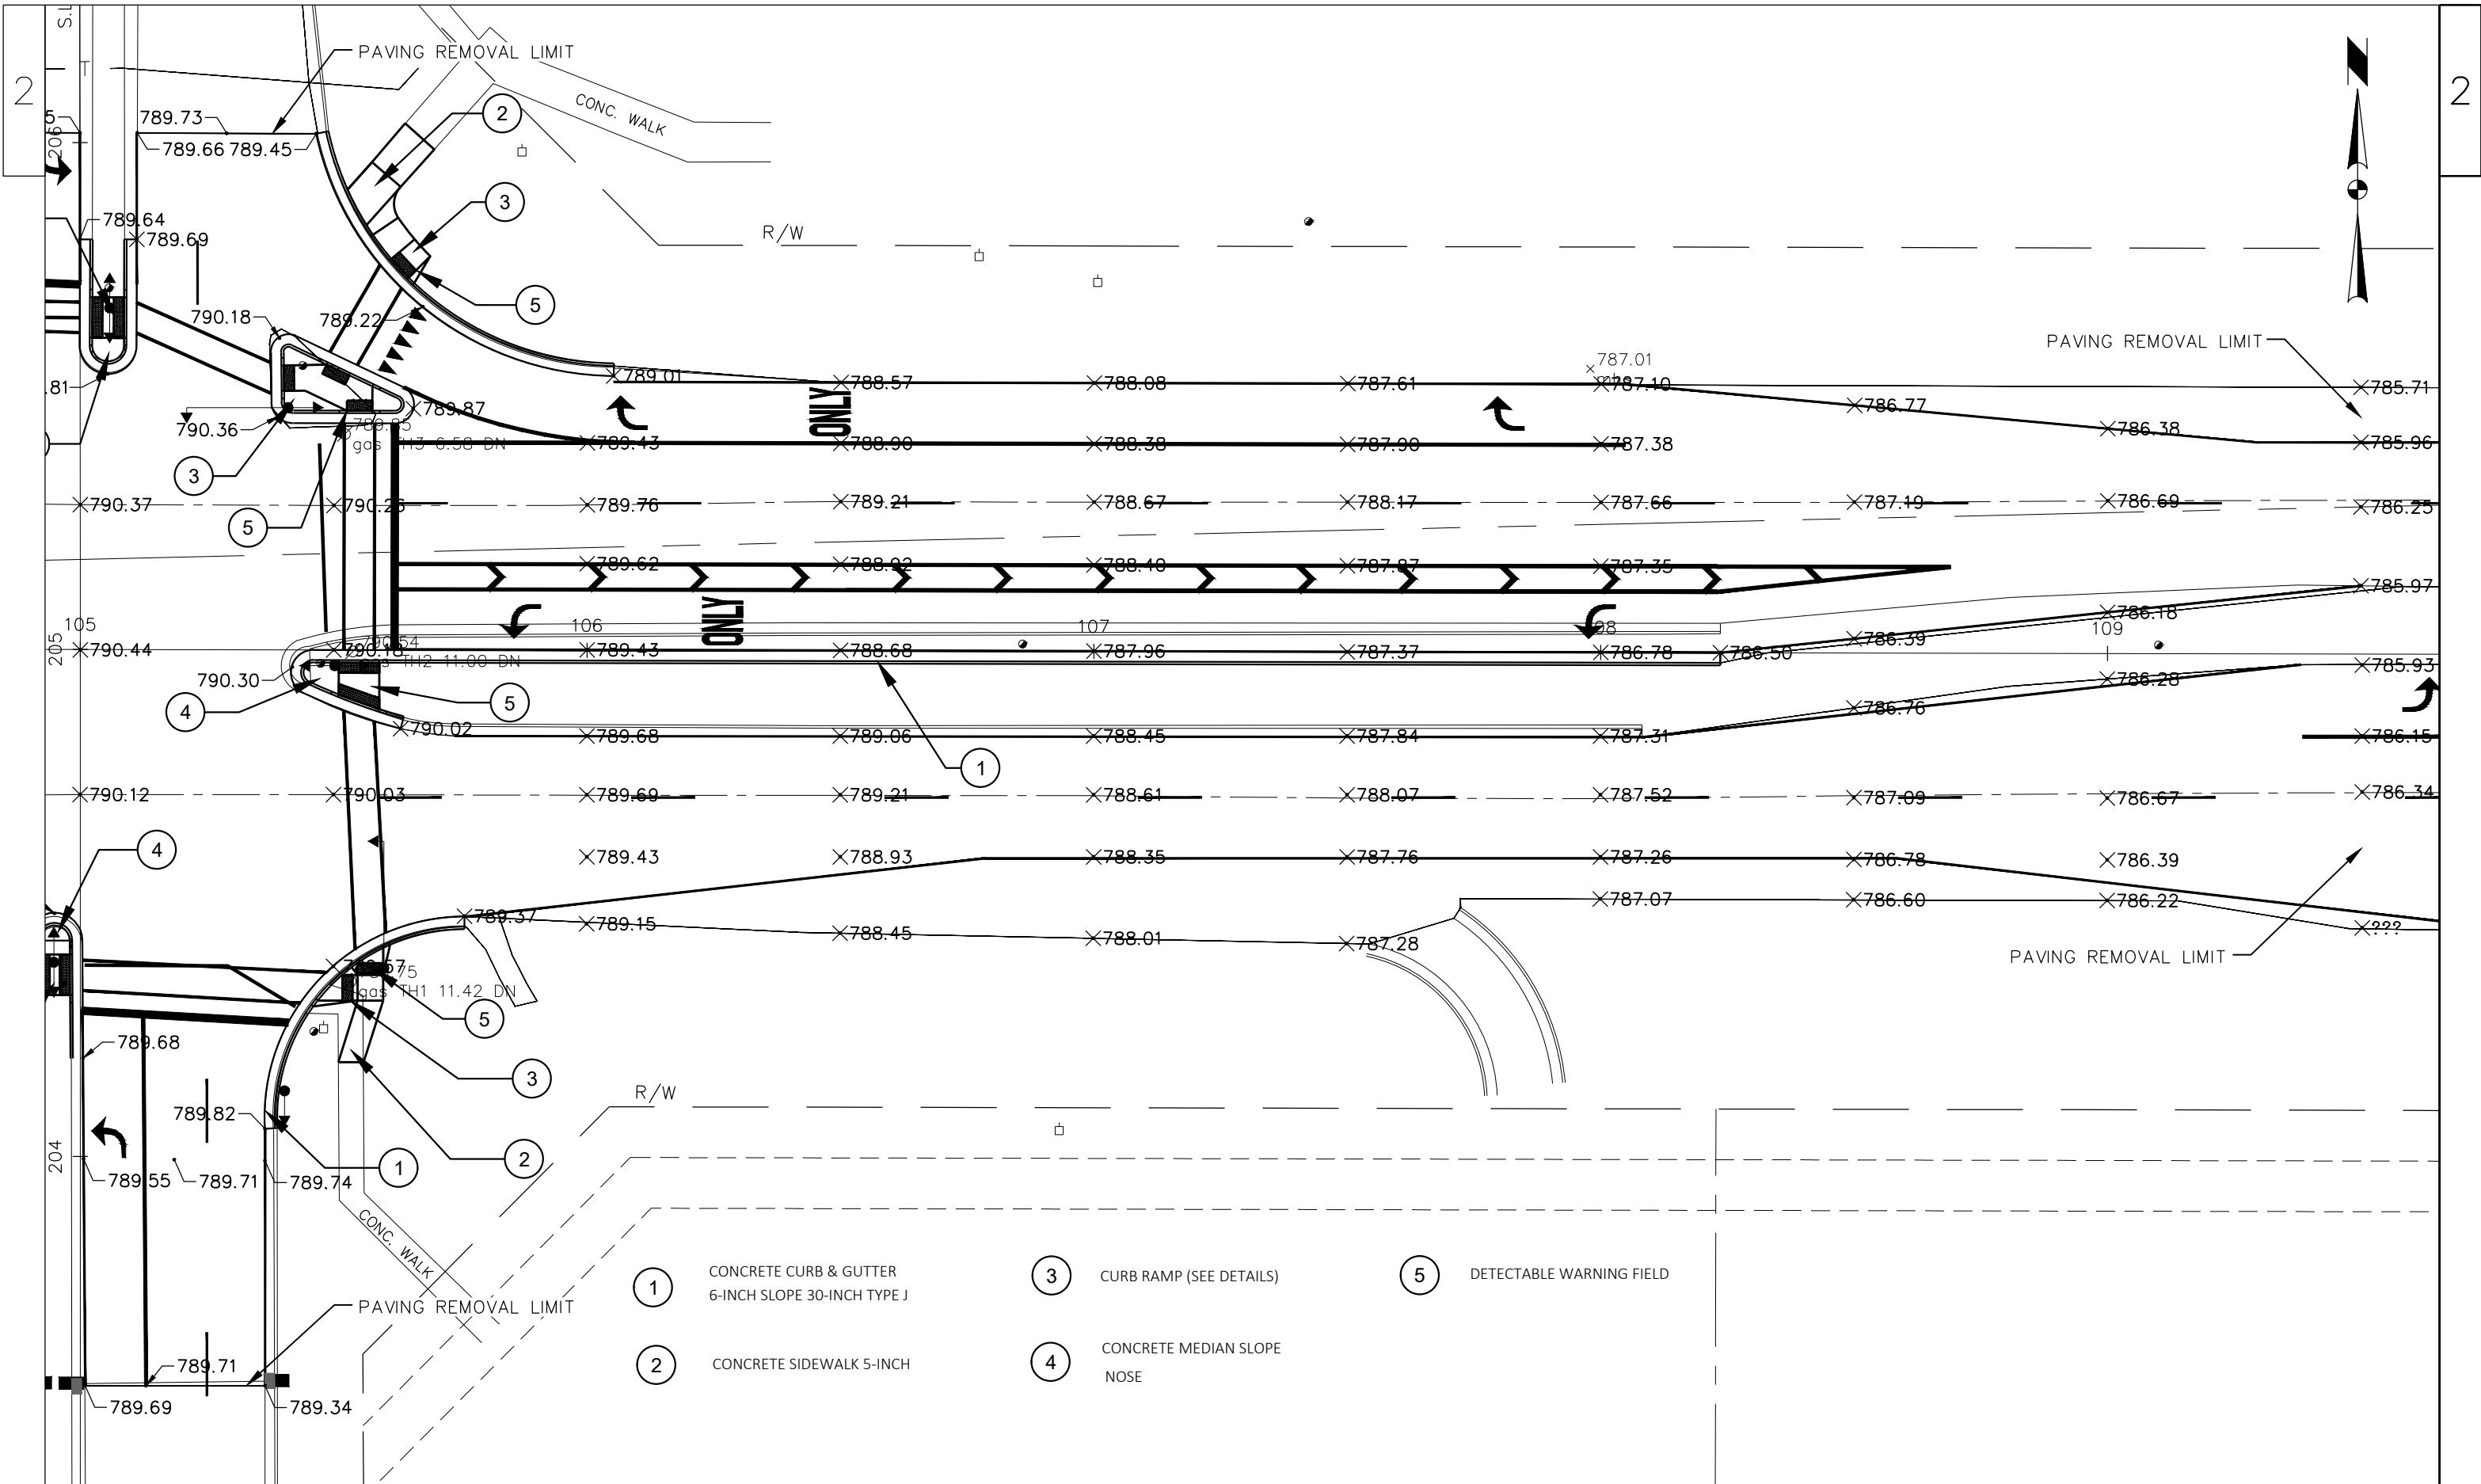

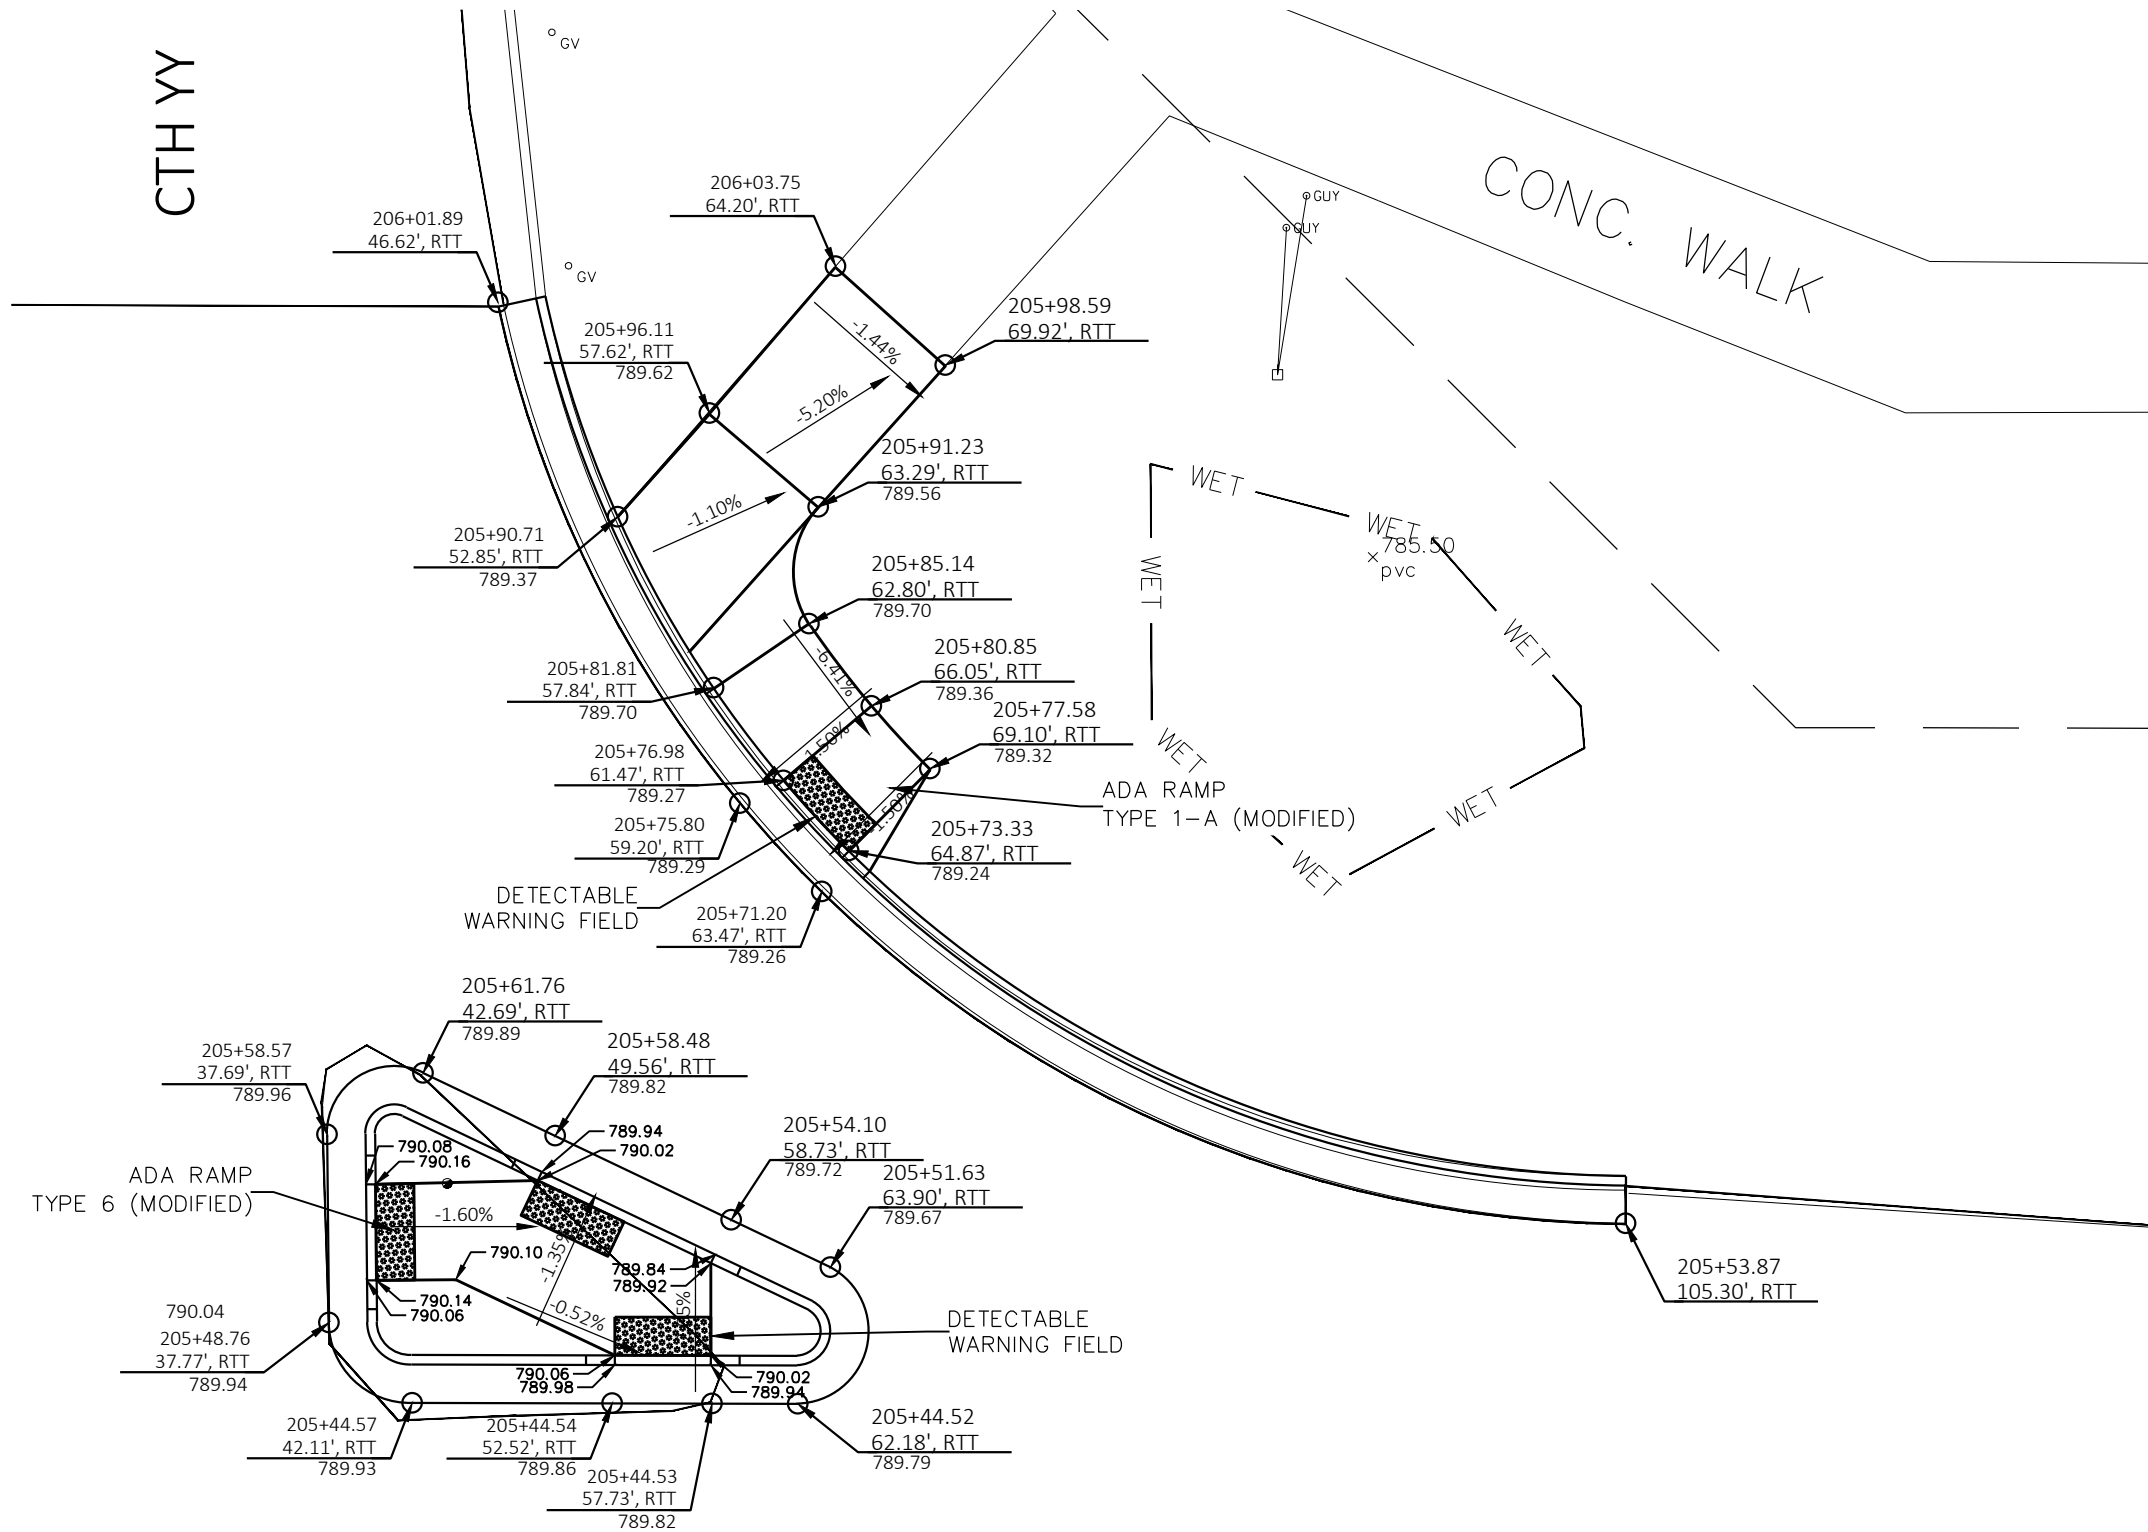


GENERAL NOTES

- AVOID PLACING DRAINAGE STRUCTURES, JUNCTION BOXES OR OTHER OBSTRUCTIONS IN FRONT OF RAMP ACCESS AREAS.
- RAMP SLOPES SHALL NOT BE STEEPER THAN 12:1
- SIDEWALK CROSS SLOPE SHALL BE 1.5%
- SLOPE SIDEWALK TOWARDS LANDING AS SHOWN WHERE THERE IS NO TERRACE OR WHERE THE TERRACE WIDTH IS LESS THAN 6 FEET WIDE.
- SEE DETAIL FOR SIDEWALK CLOSURE INFORMATION

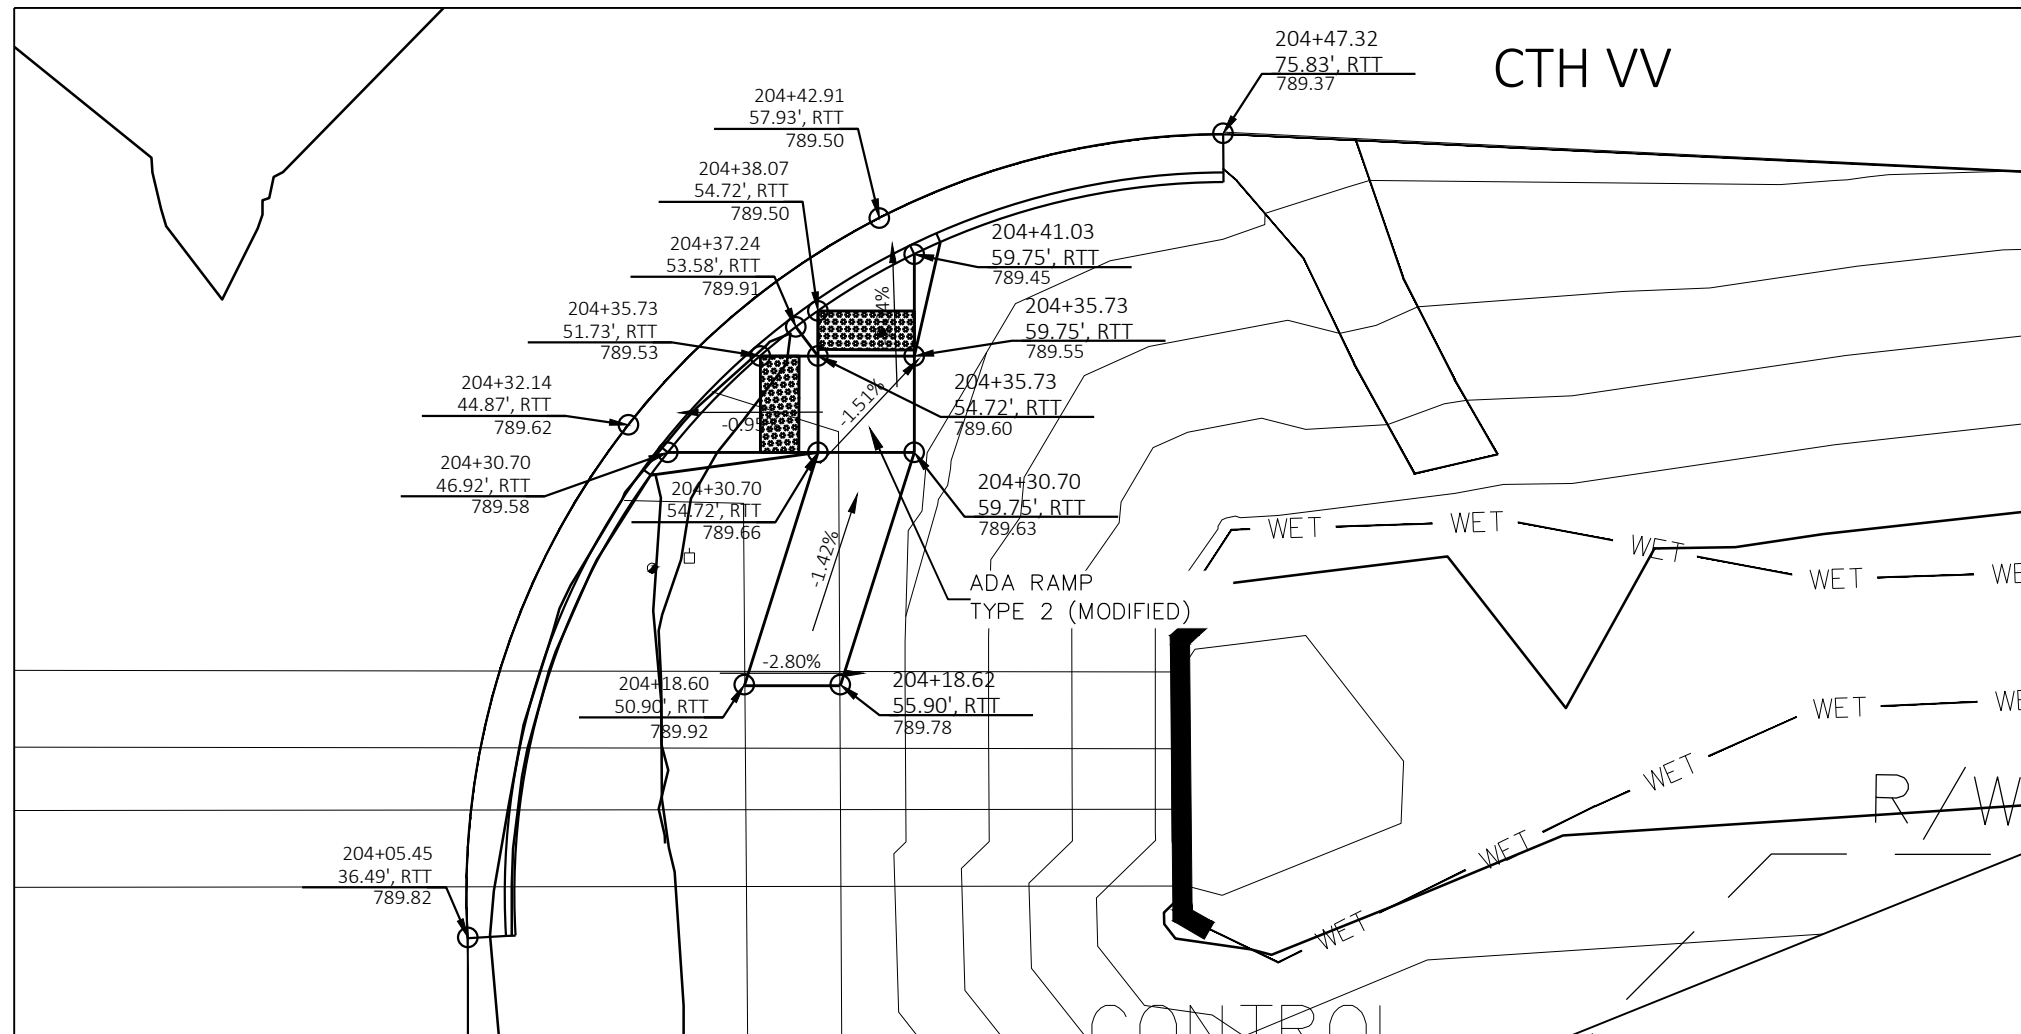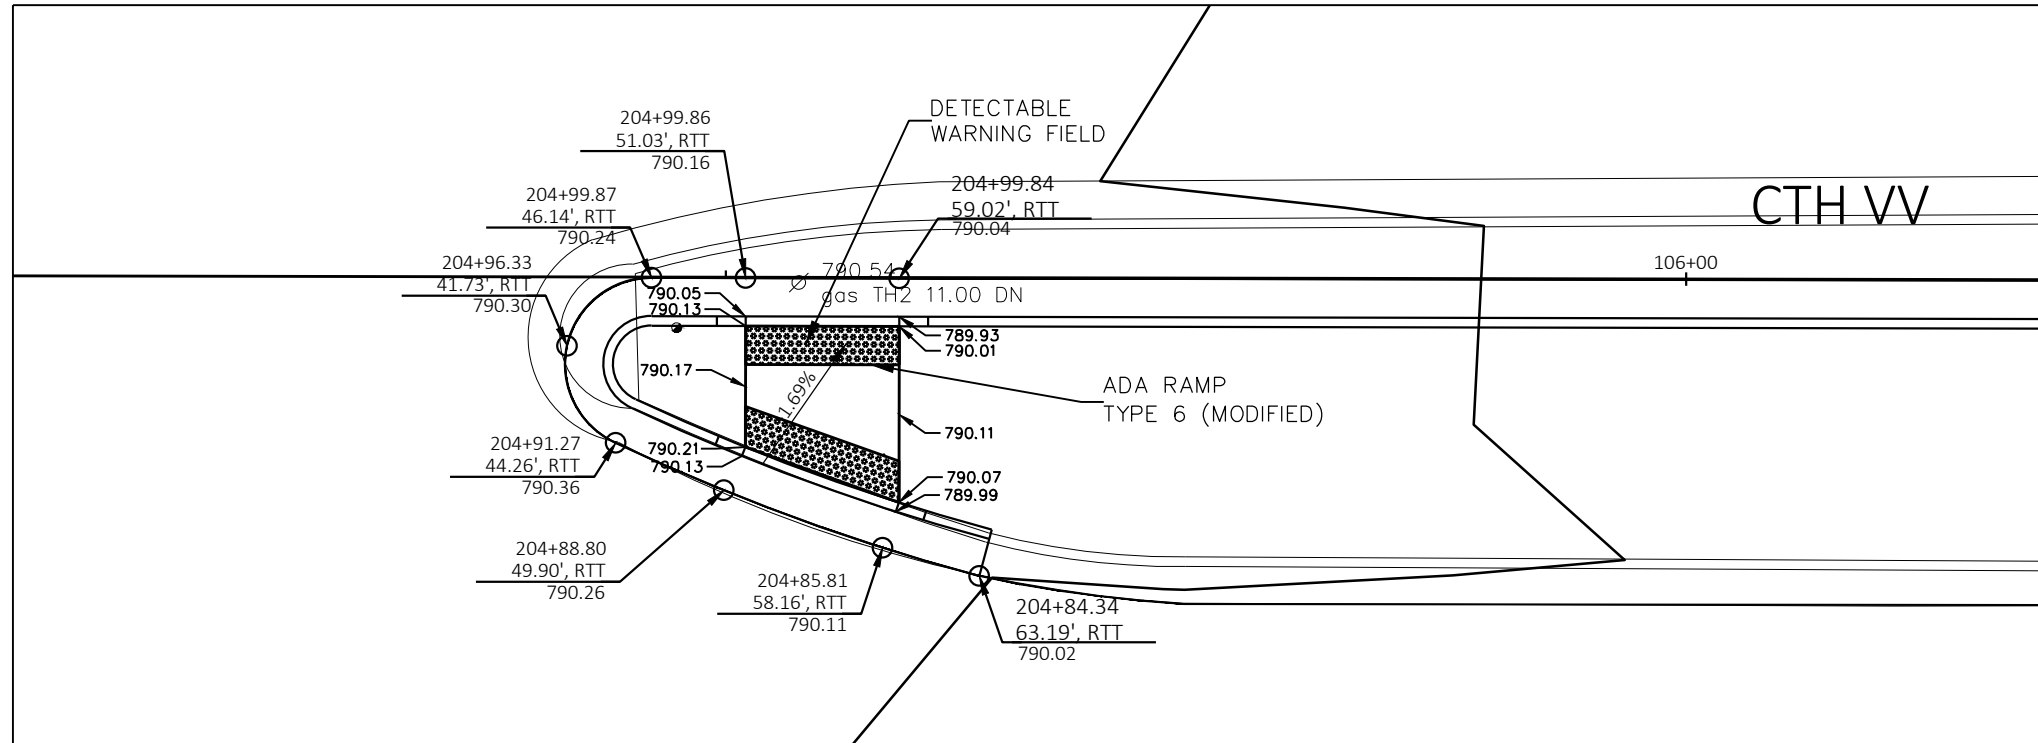

GENERAL NOTES




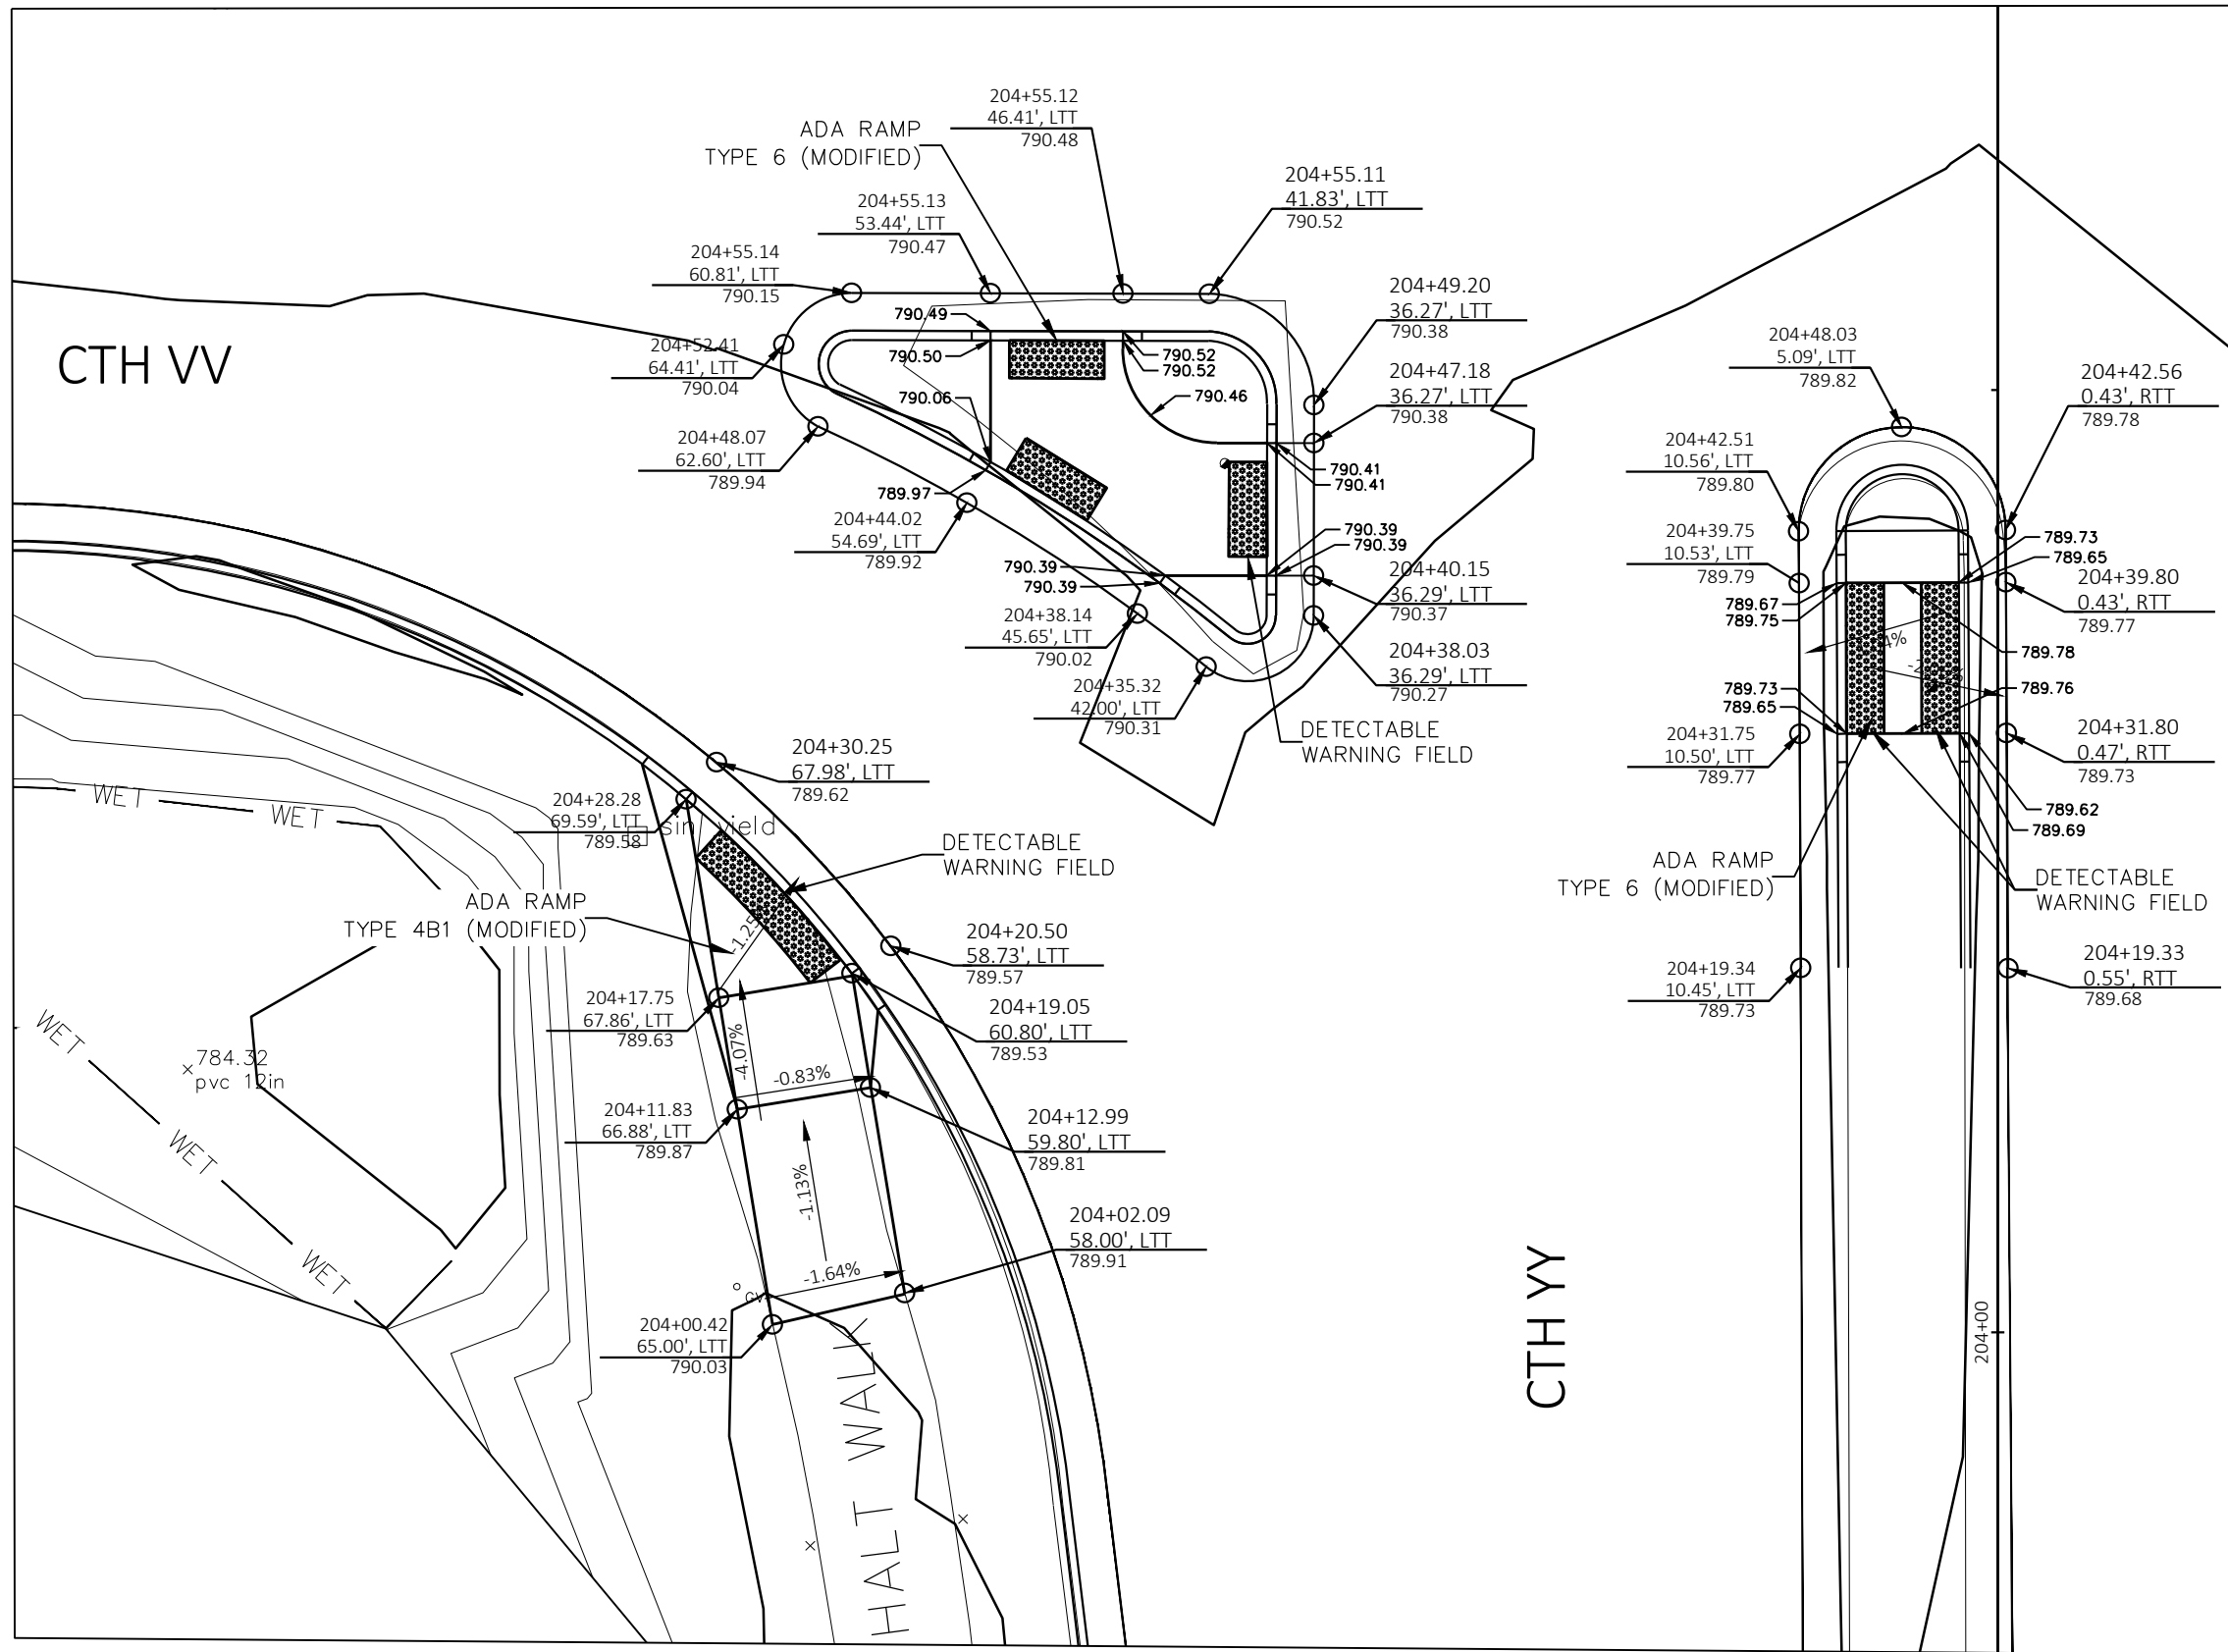




- AVOID PLACING DRAINAGE STRUCTURES, JUNCTION BOXES OR OTHER OBSTRUCTIONS IN FRONT OF RAMP ACCESS AREAS.
- RAMP SLOPES SHALL NOT BE STEEPER THAN 12:1
- SIDEWALK CROSS SLOPE SHALL BE 1.5%
- SLOPE SIDEWALK TOWARDS LANDING AS SHOWN WHERE THERE IS NO TERRACE OR WHERE THE TERRACE WIDTH IS LESS THAN 6 FEET WIDE.
- SEE DETAIL FOR SIDEWALK CLOSURE INFORMATION




GENERAL NOTES

- AVOID PLACING DRAINAGE STRUCTURES, JUNCTION BOXES OR OTHER OBSTRUCTIONS IN FRONT OF RAMP ACCESS AREAS.
- RAMP SLOPES SHALL NOT BE STEEPER THAN 12:1
- SIDEWALK CROSS SLOPE SHALL BE 1.5%
- SLOPE SIDEWALK TOWARDS LANDING AS SHOWN WHERE THERE IS NO TERRACE OR WHERE THE TERRACE WIDTH IS LESS THAN 6 FEET WIDE.
- SEE DETAIL FOR SIDEWALK CLOSURE INFORMATION

LEGEND


-  SILT FENCE 
-  INLET PROTECTION TYPE C 
-  HYDROSEED
-  CULVERT PIPE CHECK 
-  DIRECTION OF FLOW

ALL DISTURBED AREAS TO BE RESTORED WITH 4-INCH TOPSOIL AND HYDROSEED UNLESS NOTED AS SOD.

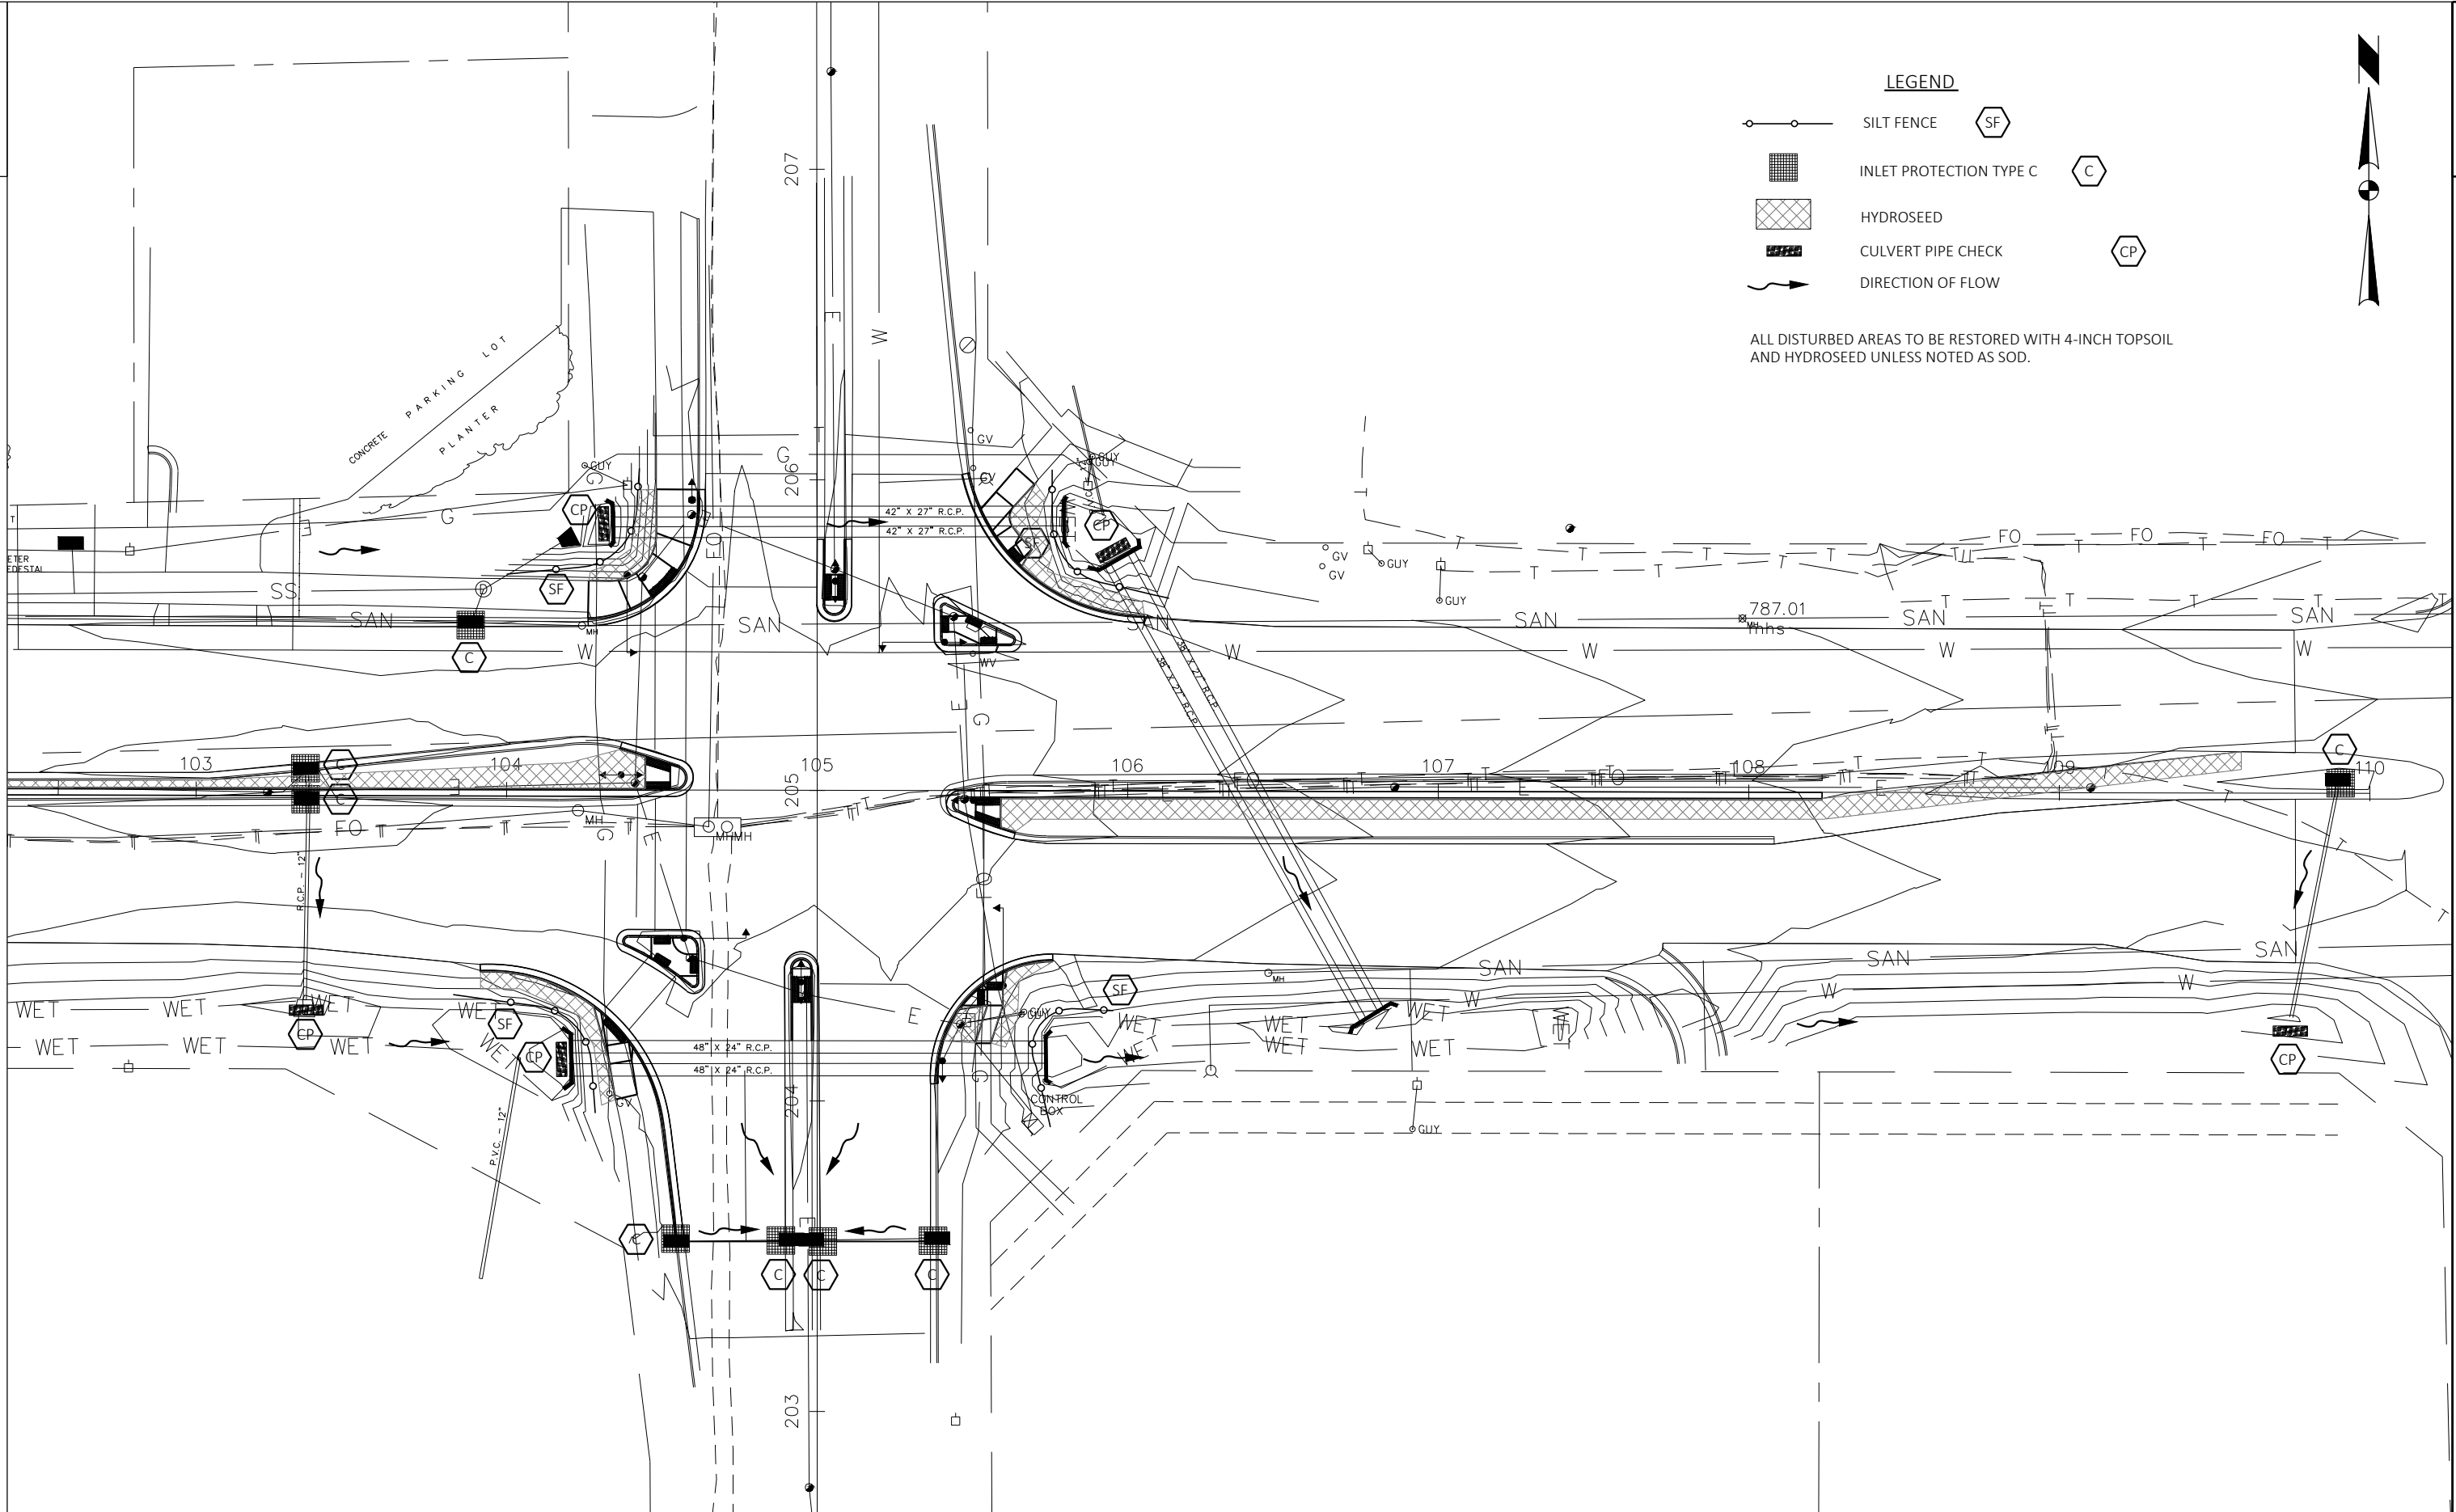


NOTES

1. All Signs Type II - Type H Reflective
2. Color:
 - Background - Green
 - Message - White
3. Message Series - D

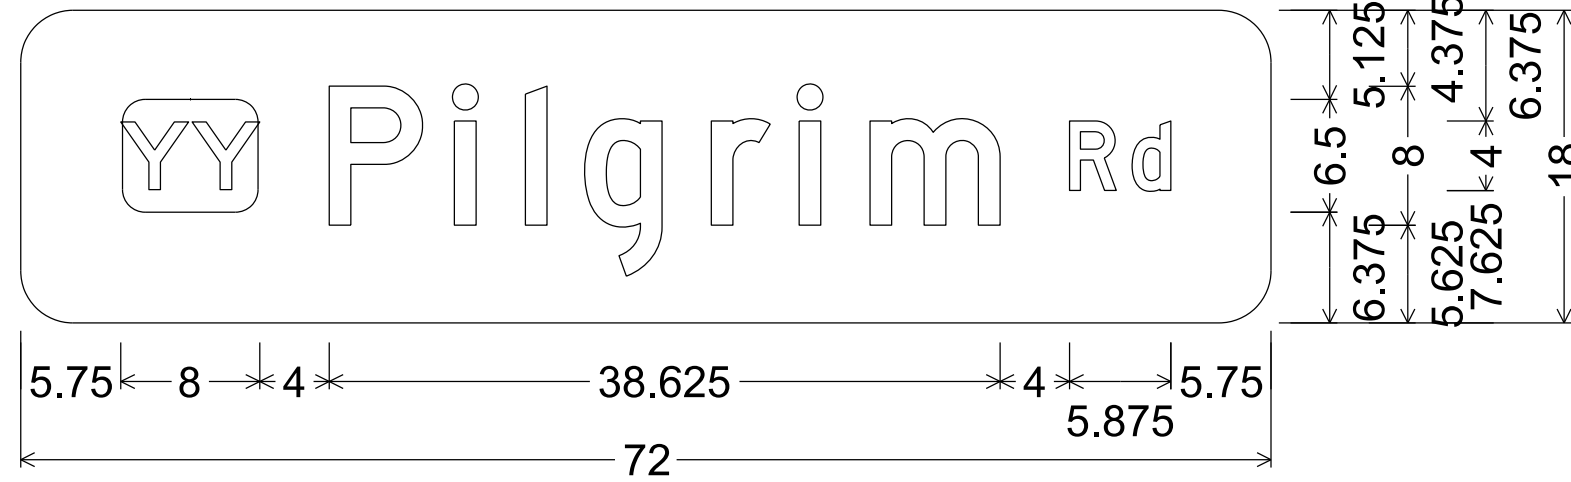

M1-94S; 3.000" Radius, No border

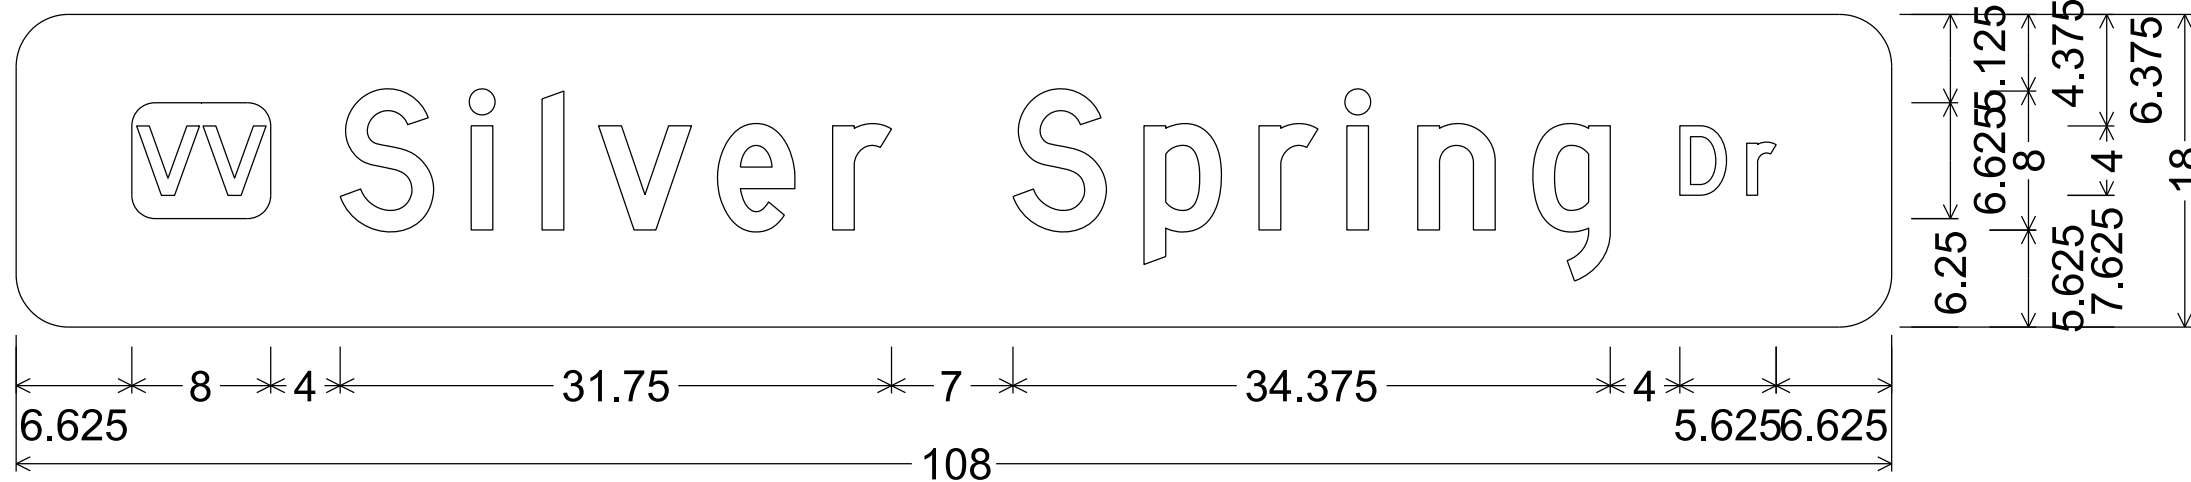

M1-94S; 3.000" Radius, No border

7

7


LEGEND

- CONTROL CABINET
- NONMETALLIC CONDUIT 2", UNLESS OTHERWISE NOTED
- LOOP DETECTOR CONDUIT 1" NONMETALLIC
- SIGNAL HEAD, TRAFFIC SIGNAL STANDARD, PEDESTAL BASE
- SIGNAL HEAD, TRAFFIC SIGNAL POLE, TRANSFORMER BASE
- PEDESTRIAN HEAD WITH PUSH BUTTON
- LUMINAIRE, TRAFFIC POLE, TRANSFORMER BASE
- LOOP DETECTOR IN 1" NONMETALLIC CONDUIT
- PULL BOX, 24" X 36"
- COMMUNICATIONS ANTENNA

LEGEND - CONTINUED

- SIGNAL HEAD NUMBER
- RED CIRCULAR INDICATOR
- YELLOW CIRCULAR INDICATOR
- GREEN CIRCULAR INDICATOR
- YELLOW ARROW
- GREEN ARROW
- WALK/DON'T WALK INDICATOR 12"

BOLD REPRESENTS ITEMS TO BE REMOVED OR ABANDONED
GRAYSHADE REPRESENTS EXISTING TO REMAIN

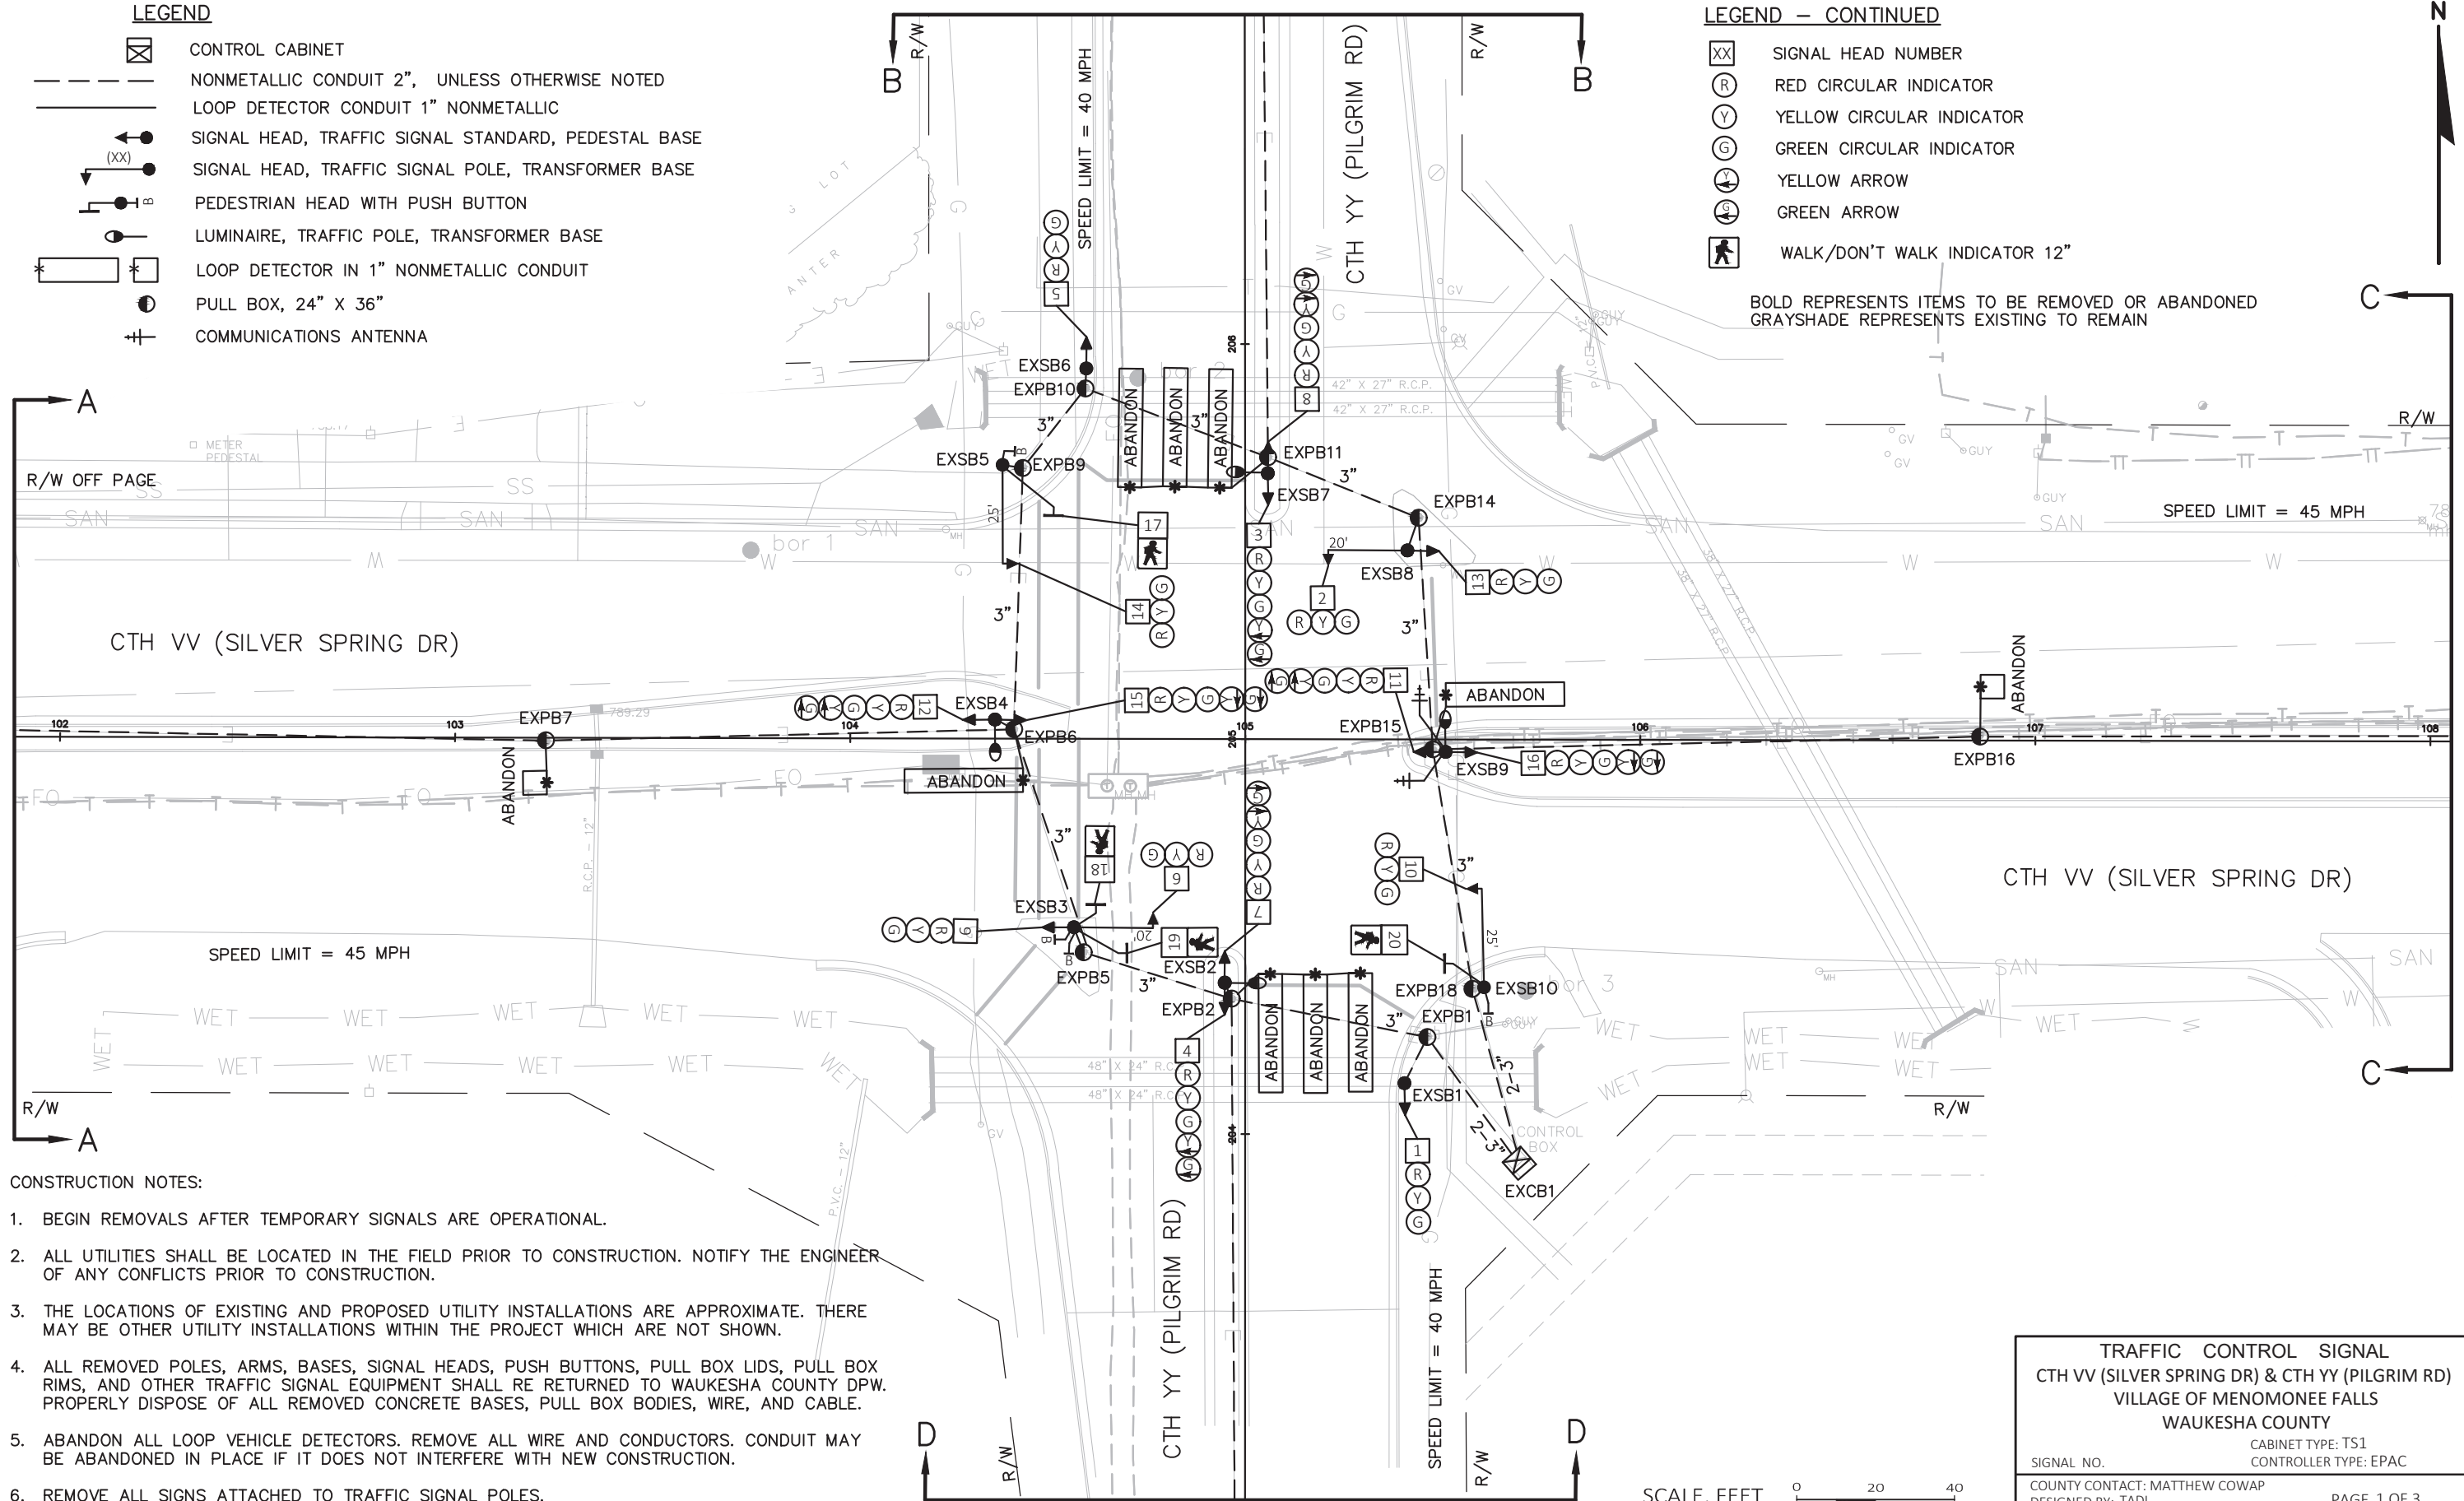

CONSTRUCTION NOTES:

1. BEGIN REMOVALS AFTER TEMPORARY SIGNALS ARE OPERATIONAL.
2. ALL UTILITIES SHALL BE LOCATED IN THE FIELD PRIOR TO CONSTRUCTION. NOTIFY THE ENGINEER OF ANY CONFLICTS PRIOR TO CONSTRUCTION.
3. THE LOCATIONS OF EXISTING AND PROPOSED UTILITY INSTALLATIONS ARE APPROXIMATE. THERE MAY BE OTHER UTILITY INSTALLATIONS WITHIN THE PROJECT WHICH ARE NOT SHOWN.
4. ALL REMOVED POLES, ARMS, BASES, SIGNAL HEADS, PUSH BUTTONS, PULL BOX RIMS, AND OTHER TRAFFIC SIGNAL EQUIPMENT SHALL BE RETURNED TO WAUKESHA COUNTY DPW. PROPERLY DISPOSE OF ALL REMOVED CONCRETE BASES, PULL BOX BODIES, WIRE, AND CABLE.
5. ABANDON ALL LOOP VEHICLE DETECTORS. REMOVE ALL WIRE AND CONDUCTORS. CONDUIT MAY BE ABANDONED IN PLACE IF IT DOES NOT INTERFERE WITH NEW CONSTRUCTION.
6. REMOVE ALL SIGNS ATTACHED TO TRAFFIC SIGNAL POLES.



TRAFFIC CONTROL SIGNAL
CTH VV (SILVER SPRING DR) & CTH YY (PILGRIM RD)
VILLAGE OF MENOMONEE FALLS
WAUKESHA COUNTY

CABINET TYPE: TS1
 CONTROLLER TYPE: EPAC

SIGNAL NO. _____
 COUNTY CONTACT: MATTHEW COWAP
 DESIGNED BY: TADI
 REVISED BY: _____

PAGE 1 OF 3

SCALE, FEET 0 20 40

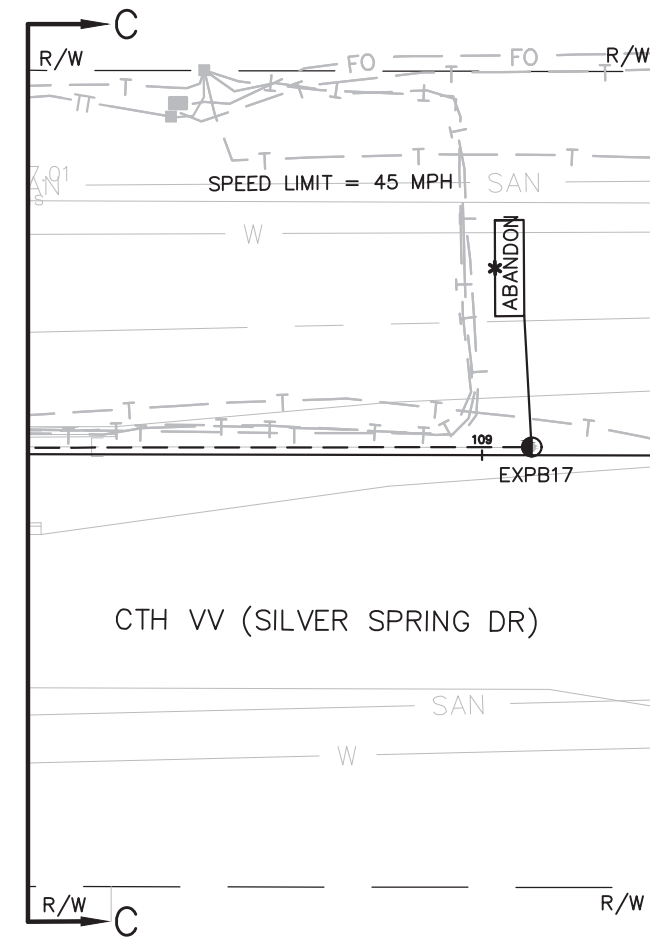
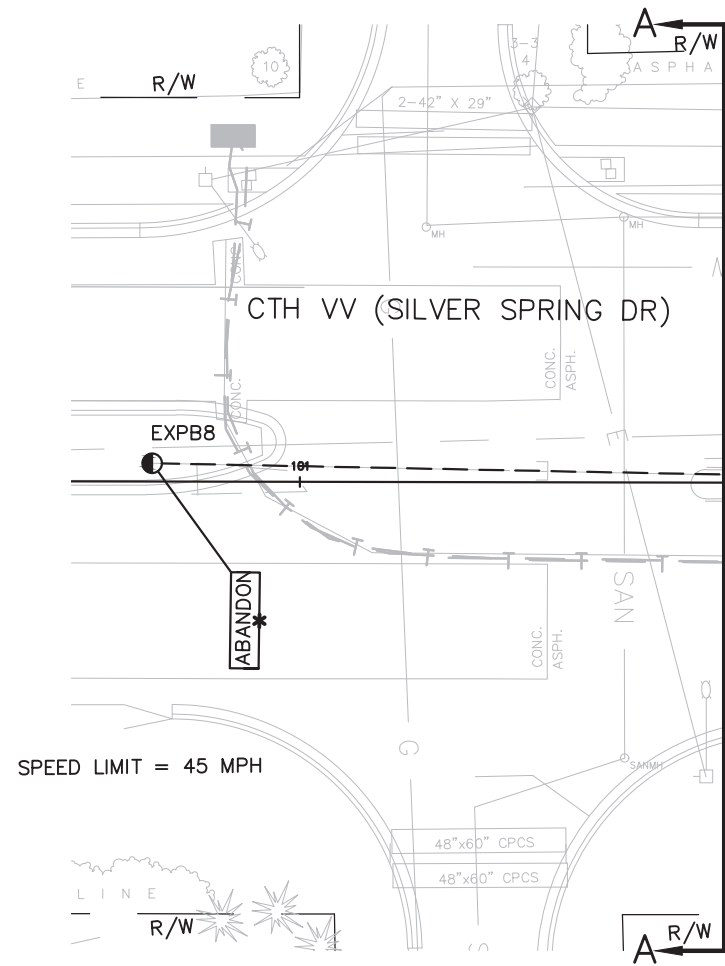


TRAFFIC CONTROL SIGNAL
 CTH VV (SILVER SPRING DR) & CTH YY (PILGRIM RD)
 VILLAGE OF MENOMONEE FALLS
 WAUKESHA COUNTY

SIGNAL NO. _____
 COUNTY CONTACT: MATTHEW COWAP
 DESIGNED BY: TADI
 REVISED BY: _____

PAGE 2 OF 3



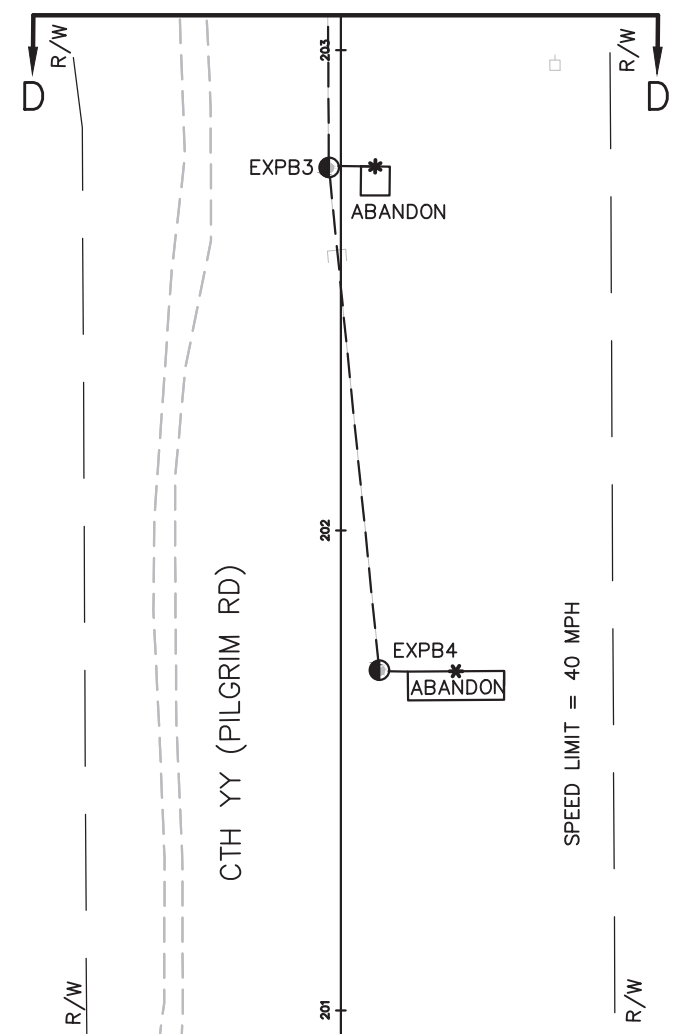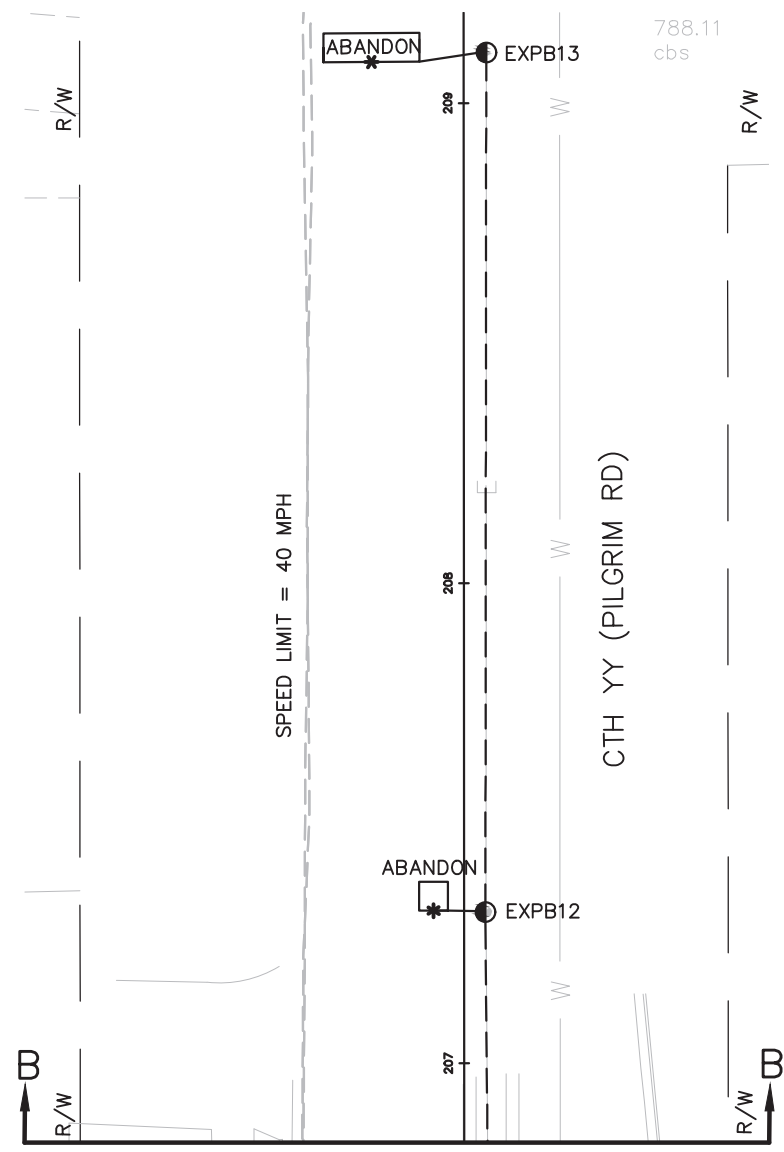

TRAFFIC CONTROL SIGNAL
 CTH VV (SILVER SPRING DR) & CTH YY (PILGRIM RD)
 VILLAGE OF MENOMONEE FALLS
 WAUKESHA COUNTY

SIGNAL NO. _____
 COUNTY CONTACT: MATTHEW COWAP
 DESIGNED BY: TADI
 REVISED BY: _____

PAGE 3 OF 3



LEGEND

- TEMPORARY CONTROL CABINET
- TEMPORARY OVERHEAD SPAN WIRE
- TEMPORARY SIGNAL HEAD
- WOOD POLE CLASS IV
- SKID MOUNTED TEMPORARY POLE
- PEDESTRIAN PUSH BUTTON
- TEMPORARY LUMINAIRE AND ARM
- VEHICLE DETECTION AREA

- SIGNAL HEAD NUMBER
- RED CIRCULAR INDICATOR
- YELLOW CIRCULAR INDICATOR
- GREEN CIRCULAR INDICATOR
- YELLOW ARROW
- GREEN ARROW
- PEDESTRIAN INDICATOR 16" W/ COUNTDOWN TIMER

ALL LENSES ARE 12-INCH GRAYSHADE REPRESENTS EXISTING

POLE LOCATIONS:


- WP1: STA 105+71.7, 65.5' RT
- WP2: STA 104+93.7, 71.8' RT
- WP3: STA 104+23.0, 69.7' RT
- WP4: STA 104+23.0, 9.1' LT
- WP5: STA 104+22.8, 69.1' LT
- WP6: STA 104+45.0, 76.5' LT
- WP7: STA 105+73.4, 77.1' LT
- WP8: STA 105+71.1, 8.2' RT
- WP9: SKID MOUNTED
- WP10: SKID MOUNTED

FOR INFORMATION ONLY

8	EA	WOOD POLES CLASS 4
675	L.F.	OVERHEAD SPAN WIRE
4	EA	LUMINAIRES 250 HPS
1	L.S.	TEMPORARY VEHICLE DETECTION SYSTEM
1	L.S.	TEMPORARY TRAFFIC SIGNAL CABINET

CONSTRUCTION NOTES - CONTINUED:

- PEDESTRIAN HEADS AND BUTTONS ON EAST LEG SHALL BE COVERED DURING CONSTRUCTION STAGE 2A.
- PEDESTRIAN HEADS AND BUTTONS ON WEST LEG SHALL BE COVERED DURING CONSTRUCTION STAGE 2B.

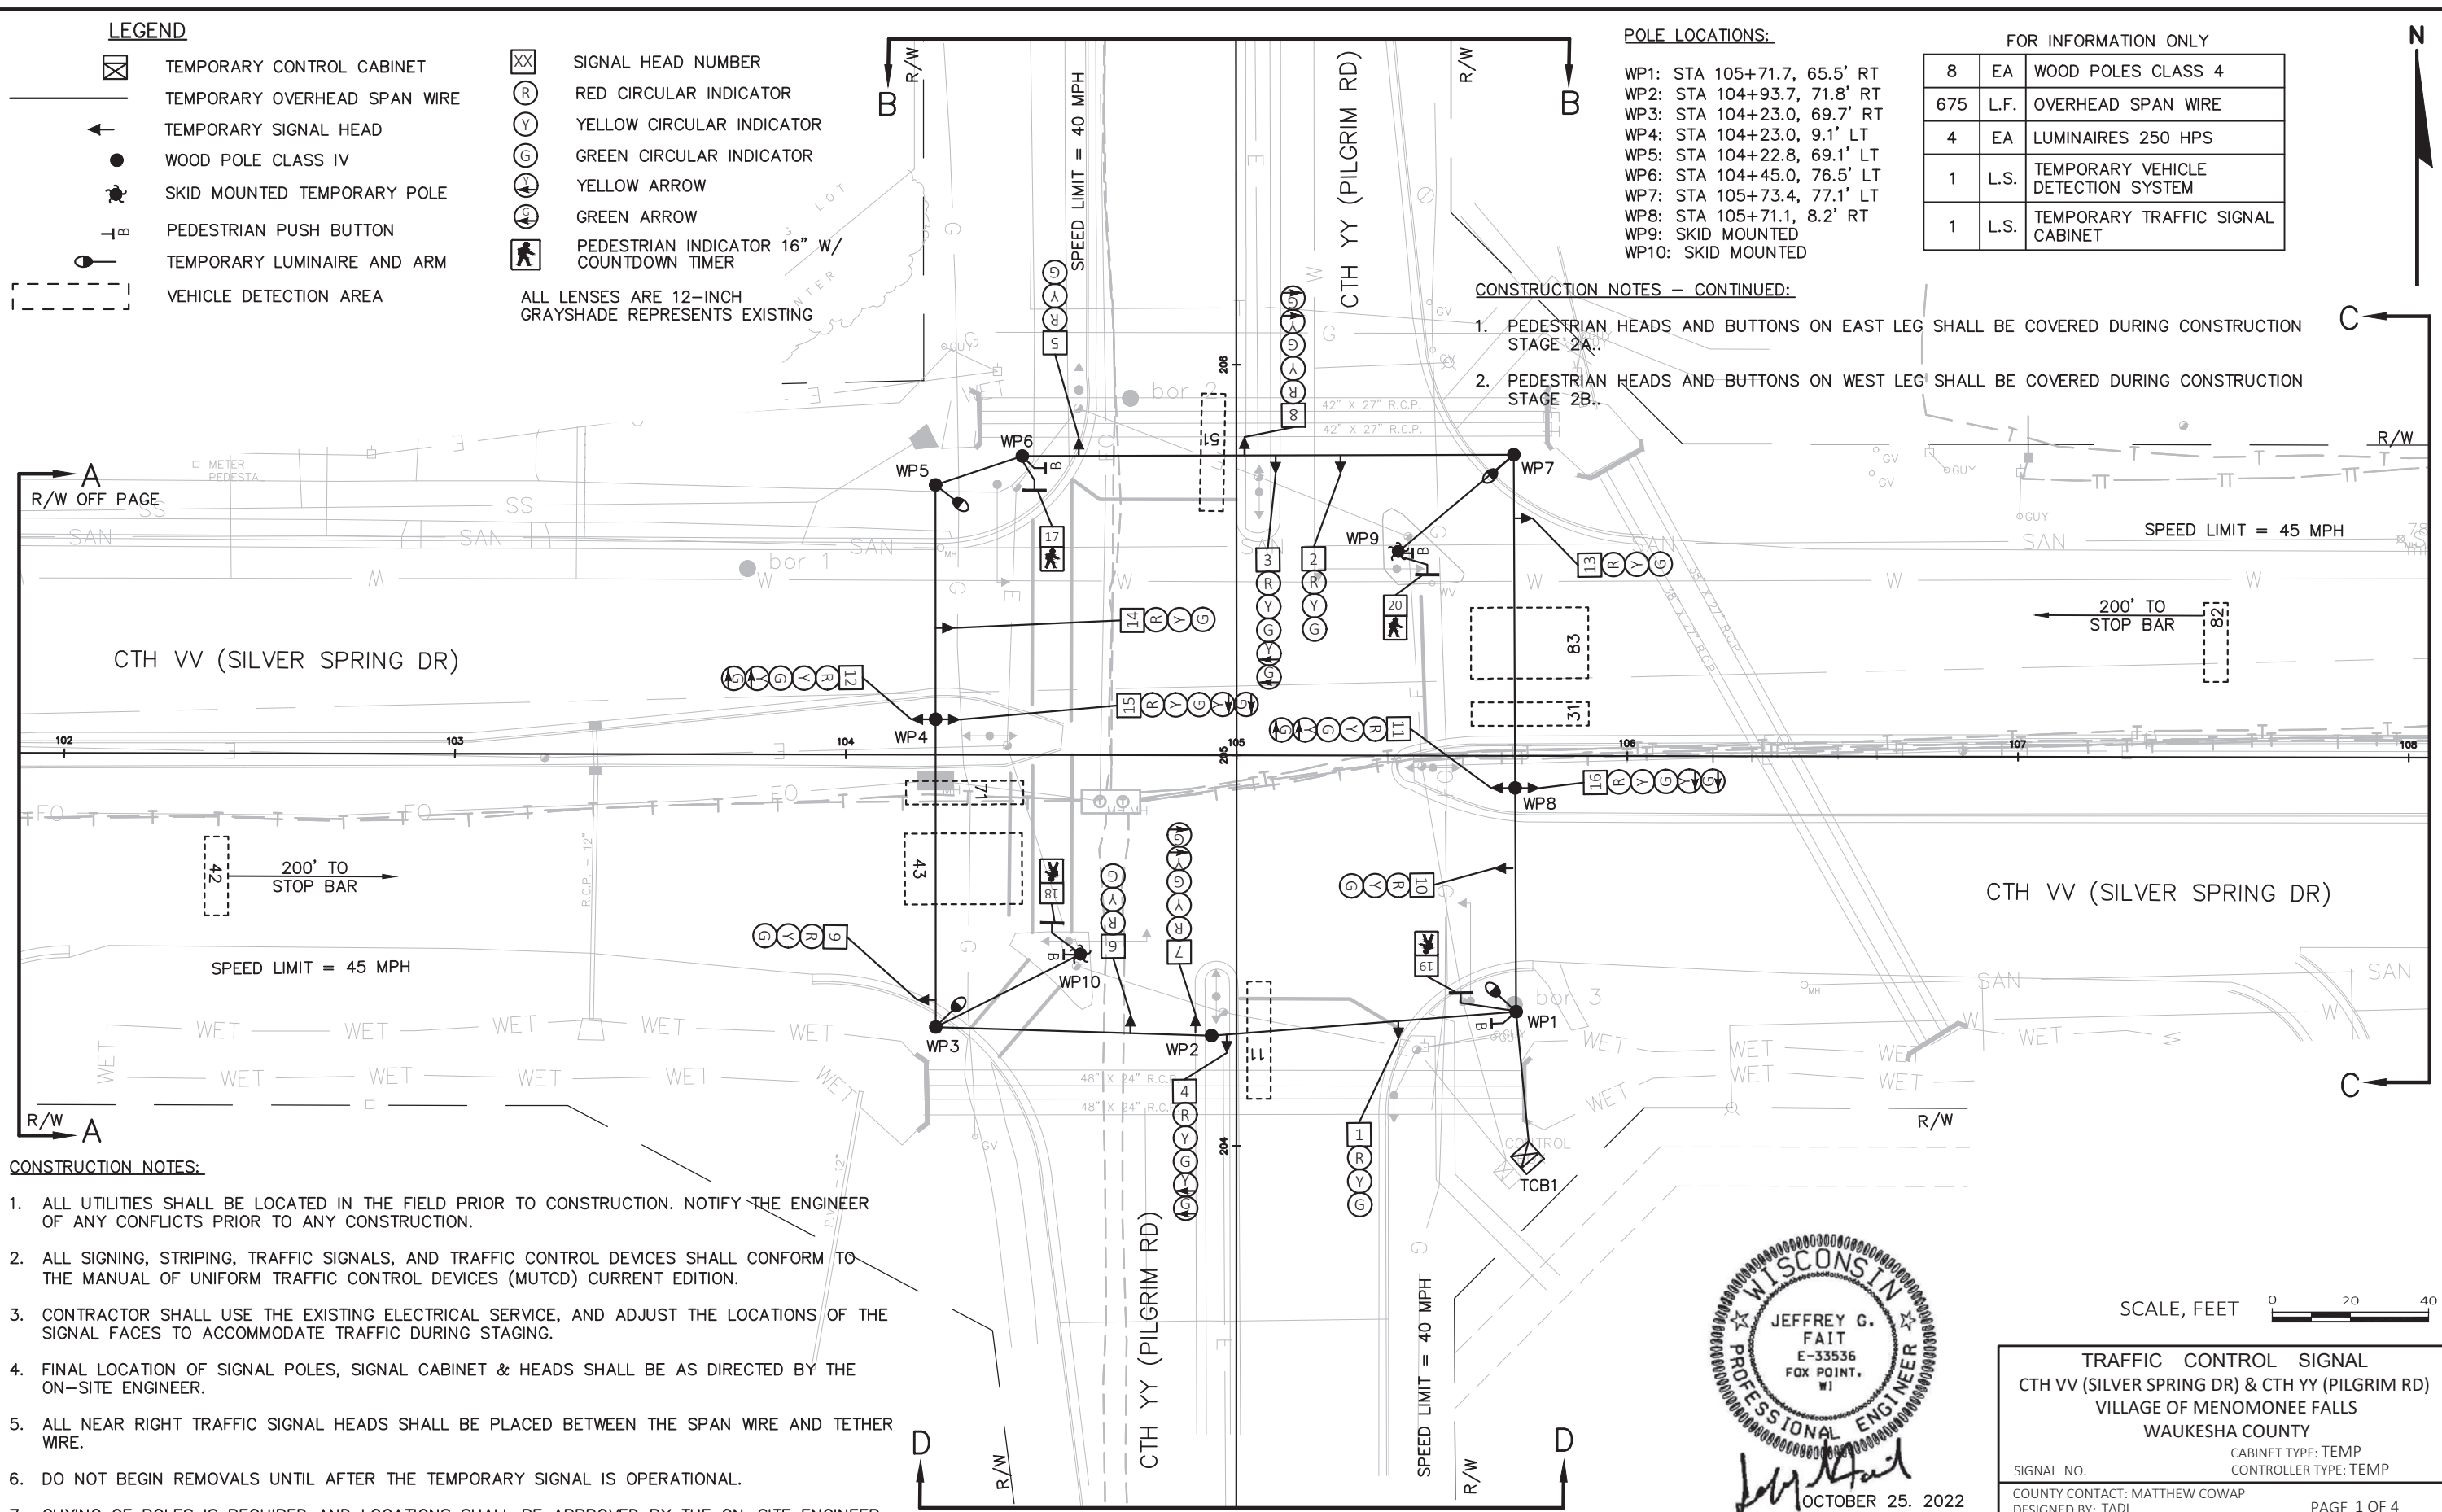

CONSTRUCTION NOTES:

- ALL UTILITIES SHALL BE LOCATED IN THE FIELD PRIOR TO CONSTRUCTION. NOTIFY THE ENGINEER OF ANY CONFLICTS PRIOR TO ANY CONSTRUCTION.
- ALL SIGNING, STRIPING, TRAFFIC SIGNALS, AND TRAFFIC CONTROL DEVICES SHALL CONFORM TO THE MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES (MUTCD) CURRENT EDITION.
- CONTRACTOR SHALL USE THE EXISTING ELECTRICAL SERVICE, AND ADJUST THE LOCATIONS OF THE SIGNAL FACES TO ACCOMMODATE TRAFFIC DURING STAGING.
- FINAL LOCATION OF SIGNAL POLES, SIGNAL CABINET & HEADS SHALL BE AS DIRECTED BY THE ON-SITE ENGINEER.
- ALL NEAR RIGHT TRAFFIC SIGNAL HEADS SHALL BE PLACED BETWEEN THE SPAN WIRE AND TETHER WIRE.
- DO NOT BEGIN REMOVALS UNTIL AFTER THE TEMPORARY SIGNAL IS OPERATIONAL.
- GUYING OF POLES IS REQUIRED AND LOCATIONS SHALL BE APPROVED BY THE ON-SITE ENGINEER.



OCTOBER 25, 2022



SCALE, FEET 0 20 40

TRAFFIC CONTROL SIGNAL
 CTH VV (SILVER SPRING DR) & CTH YY (PILGRIM RD)
 VILLAGE OF MENOMONEE FALLS
 WAUKESHA COUNTY

SIGNAL NO. _____ CABINET TYPE: TEMP
 CONTROLLER TYPE: TEMP

COUNTY CONTACT: MATTHEW COWAP
 DESIGNED BY: TADI
 REVISED BY: _____

PAGE 1 OF 4

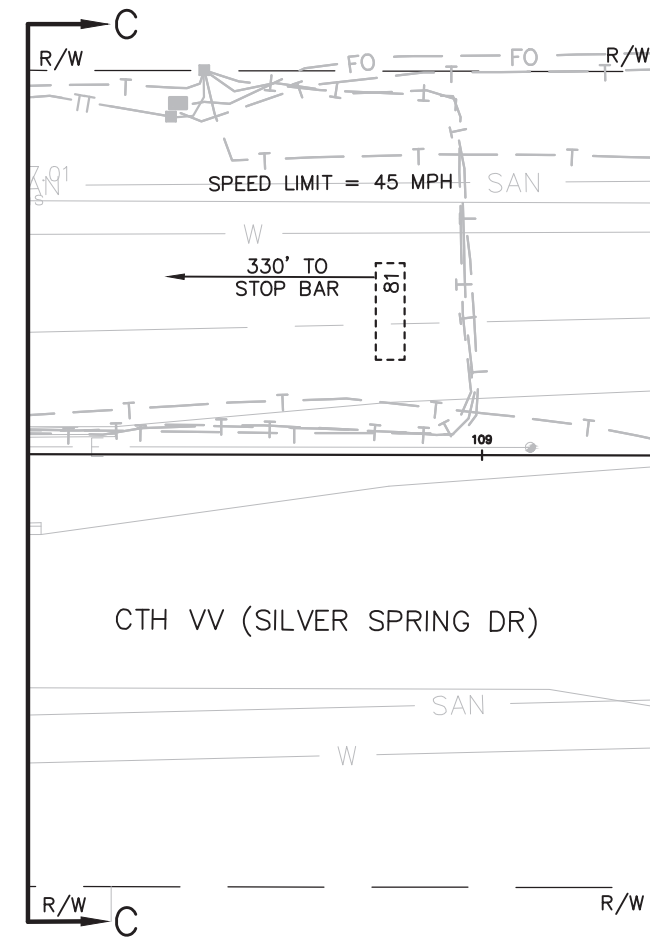
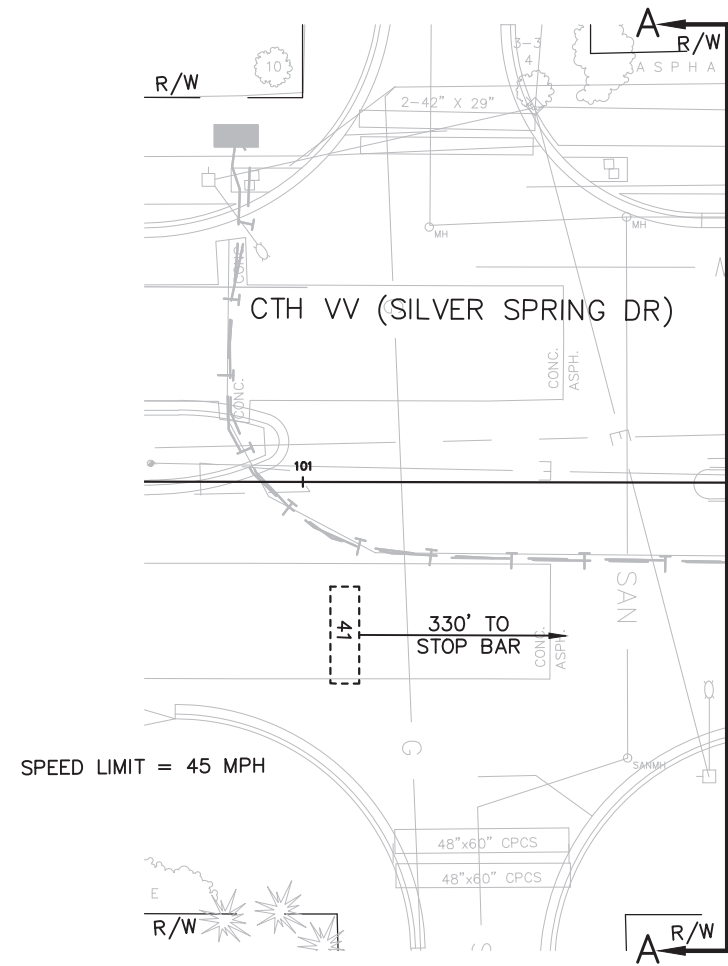


SCALE, FEET

TRAFFIC CONTROL SIGNAL
 CTH VV (SILVER SPRING DR) & CTH YY (PILGRIM RD)
 VILLAGE OF MENOMONEE FALLS
 WAUKESHA COUNTY

SIGNAL NO.
 COUNTY CONTACT: MATTHEW COWAP
 DESIGNED BY: TADI
 REVISED BY:

PAGE 2 OF 4

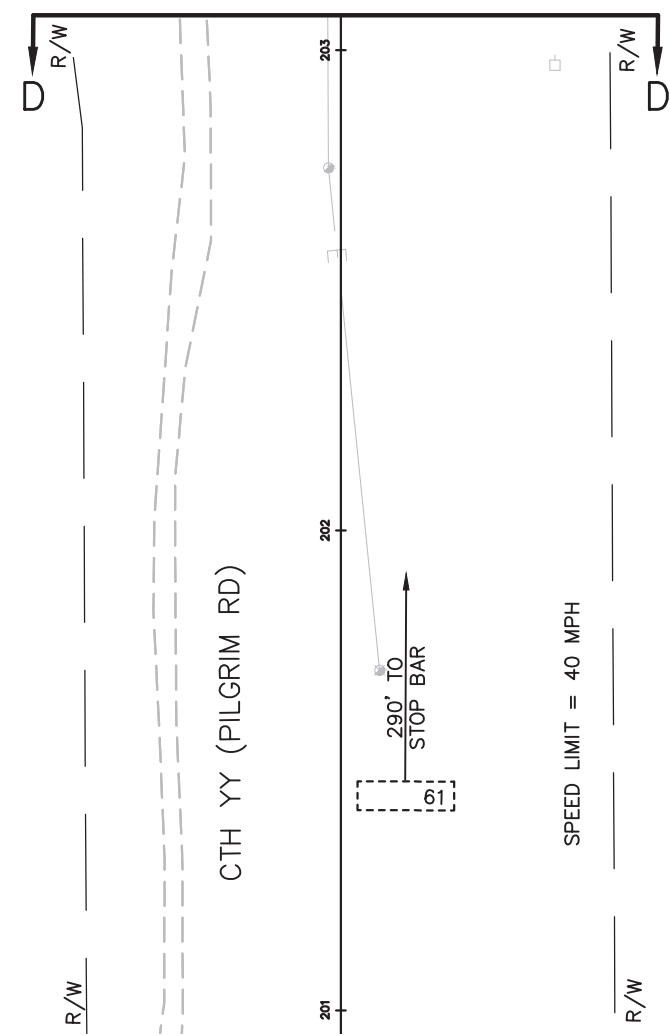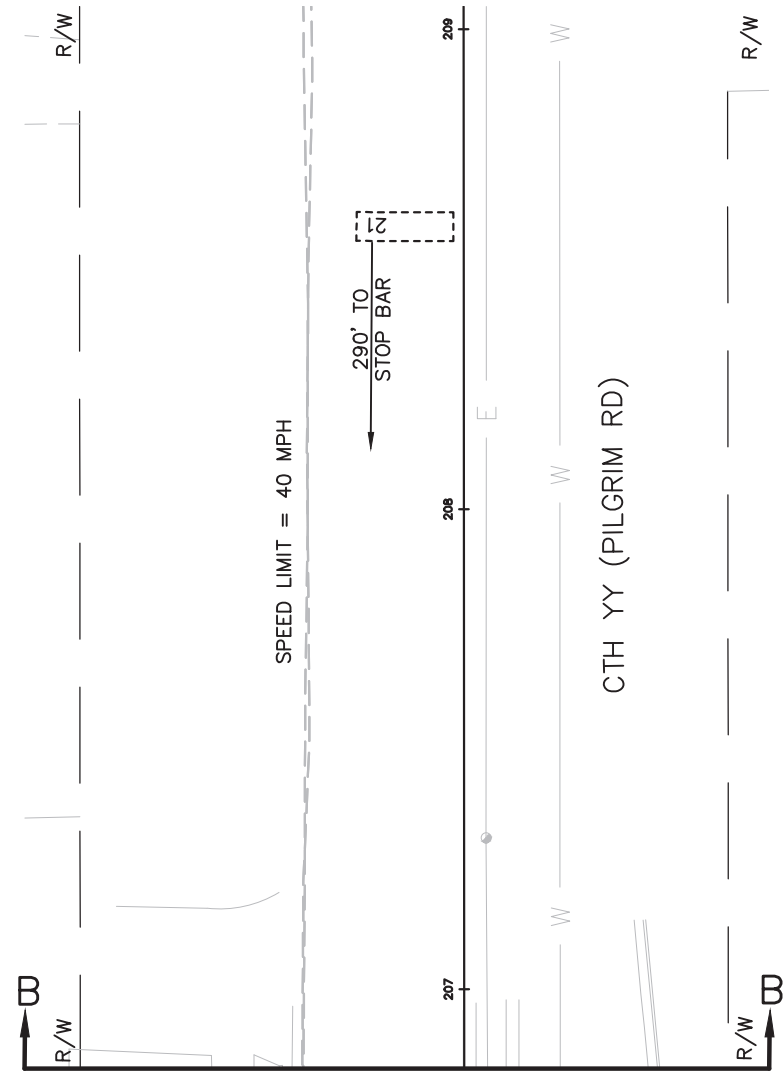


TRAFFIC CONTROL SIGNAL
 CTH VV (SILVER SPRING DR) & CTH YY (PILGRIM RD)
 VILLAGE OF MENOMONEE FALLS
 WAUKESHA COUNTY

SIGNAL NO. _____
 COUNTY CONTACT: MATTHEW COWAP
 DESIGNED BY: TADI
 REVISED BY: _____

PAGE 3 OF 4

	HEAD NUMBERS	FLASH
Ø1	3,4	-
Ø2	5,6,7,8	R
Ø3	15,16	-
Ø4	9,10,11,12	R
Ø5	7,8	-
Ø6	1,2,3,4	R
Ø7	11,12	-
Ø8	13,14,15,16	R
Ø2P	17,18	
Ø4P		
Ø6P	19,20	
Ø8P		
OLA		
OLB		
OLC		
OLD		

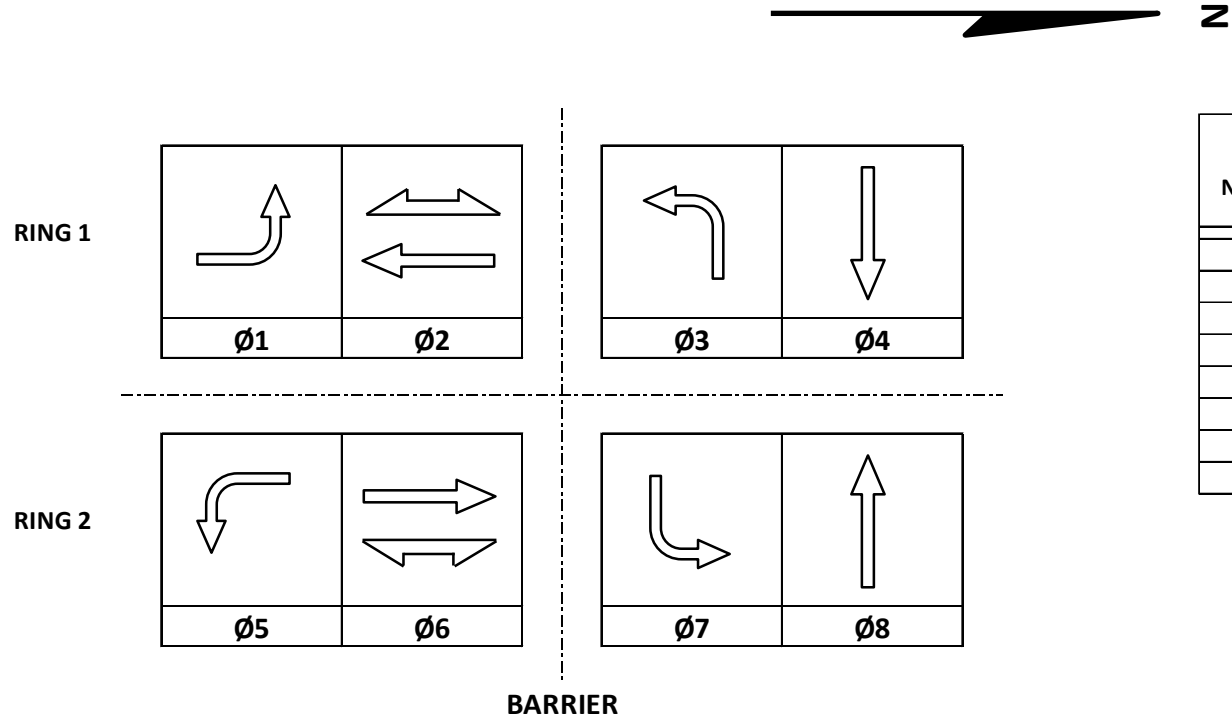

CONTROLLER LOGIC

PHASE NUMBER	PHASE LOCKING	DUAL ENTRY W / Ø	PHASE RECALL	PHASE ACTIVE
1		6		X
2	X	6	MIN	X
3		8		X
4		8		X
5		2		X
6	X	2	MIN	X
7		4		X
8		4		X

TYPE OF INTERCONNECT/COMMUNICATION	
NONE	X
CLOSED LOOP	
TWISTED PAIR	
FIBER OPTIC*	
FIBER OPTIC (ETHERNET)	
RADIO	
CELL MODEM	

TYPE OF COORDINATION	
NONE	
TBC	X
TRAFFIC RESPONSIVE	
ADAPTIVE	
*LOCATION OF MASTER CONTROLLER NO:	S-
SIGNAL SYSTEM NO:	SS-

TYPE OF LIGHTING	
BY OTHER AGENCY	
IN TRAFFIC CABINET	X
IN SEPARATE DOT LIGHTING CABINET	

TYPE OF PRE-EMPT	
NONE	X
RAILROAD	
EMERGENCY VEHICLE	
GTT	
TOMAR	
HARDWIRE	
OTHER	
CONFIRMATION LIGHTS	
LIFT BRIDGE	
QUEUE DETECTION	

GENERAL NOTES:

1. PEDESTRIAN HEADS ON BUTTONS ON EAST LEG (PHASE 6) SHALL BE COVERED DURING CONSTRUCTION STAGE 2A.
2. PEDESTRIAN HEADS ON BUTTONS ON WEST LEG (PHASE 2) SHALL BE COVERED DURING CONSTRUCTION STAGE 2B.

DETECTOR LOGIC

DETECTOR INPUT	3	1	7	5	11	9	15	13
PLAN LOOP DETECTOR*(S)	11	31	42	61	81			
ASSIGNED PHASE	1	3	4	6	8			
OPERATION MODE	VEH	VEH	VEH	VEH	VEH	VEH	VEH	VEH
SWITCH								
EXTEND	X	X	X	X	X			
DELAY								

DETECTOR INPUT	4	2	8	6	12	10	16	14
PLAN LOOP DETECTOR*(S)	21	41	51	71	82			
ASSIGNED PHASE	2	4	5	7	8			
OPERATION MODE	VEH	VEH	VEH	VEH	VEH	VEH	VEH	VEH
SWITCH								
EXTEND	X	X	X	X	X			
DELAY								

DETECTOR INPUT	19	17	23	21	27	25	31	29
PLAN LOOP DETECTOR*(S)								
ASSIGNED PHASE								
OPERATION MODE	VEH	VEH	VEH	VEH	VEH	VEH	VEH	VEH
SWITCH								
EXTEND								
DELAY								

DETECTOR INPUT	20	18	24	22	28	26	32	30
PLAN LOOP DETECTOR*(S)								
ASSIGNED PHASE								
OPERATION MODE	VEH	VEH	VEH	VEH	VEH	VEH	VEH	VEH
SWITCH								
EXTEND								
DELAY								


CTH VV & CTH YY VILLAGE OF MENOMONEE FALLS WAUKESHA COUNTY	
SIGNAL NO:	CABINET TYPE: TEMP
	CONTROLLER TYPE: TEMP
DATE: 10/2022	PAGE NUMBER: 4 OF 4

LEGEND

- CONTROL CABINET
- NONMETALLIC CONDUIT 2", UNLESS OTHERWISE NOTED
- SIGNAL HEAD, TRAFFIC SIGNAL STANDARD, PEDESTAL BASE
- MONOTUBE BASE, POLE, 35'-55' ARM
- MONOTUBE BASE, POLE SPECIAL, 35'-45' ARM
- PEDESTRIAN HEAD WITH PUSH BUTTON
- LED-C LUMINAIRE, SINGLE MEMBER ARM
- VIDEO DETECTION AREA
- VIDEO DETECTION CAMERA
- COMMUNICATIONS ANTENNA
- PULL BOX, NON-CONDUCTIVE, 24" X 42"

LEGEND - CONTINUED

- SIGNAL HEAD NUMBER
 - RED CIRCULAR INDICATOR
 - YELLOW CIRCULAR INDICATOR
 - GREEN CIRCULAR INDICATOR
 - RED ARROW
 - YELLOW ARROW
 - GREEN ARROW
 - WALK/DON'T WALK INDICATOR 16" W/ COUNTDOWN TIMER
- ALL LENSES ARE 12-INCH
GRAYSHADE REPRESENTS EXISTING

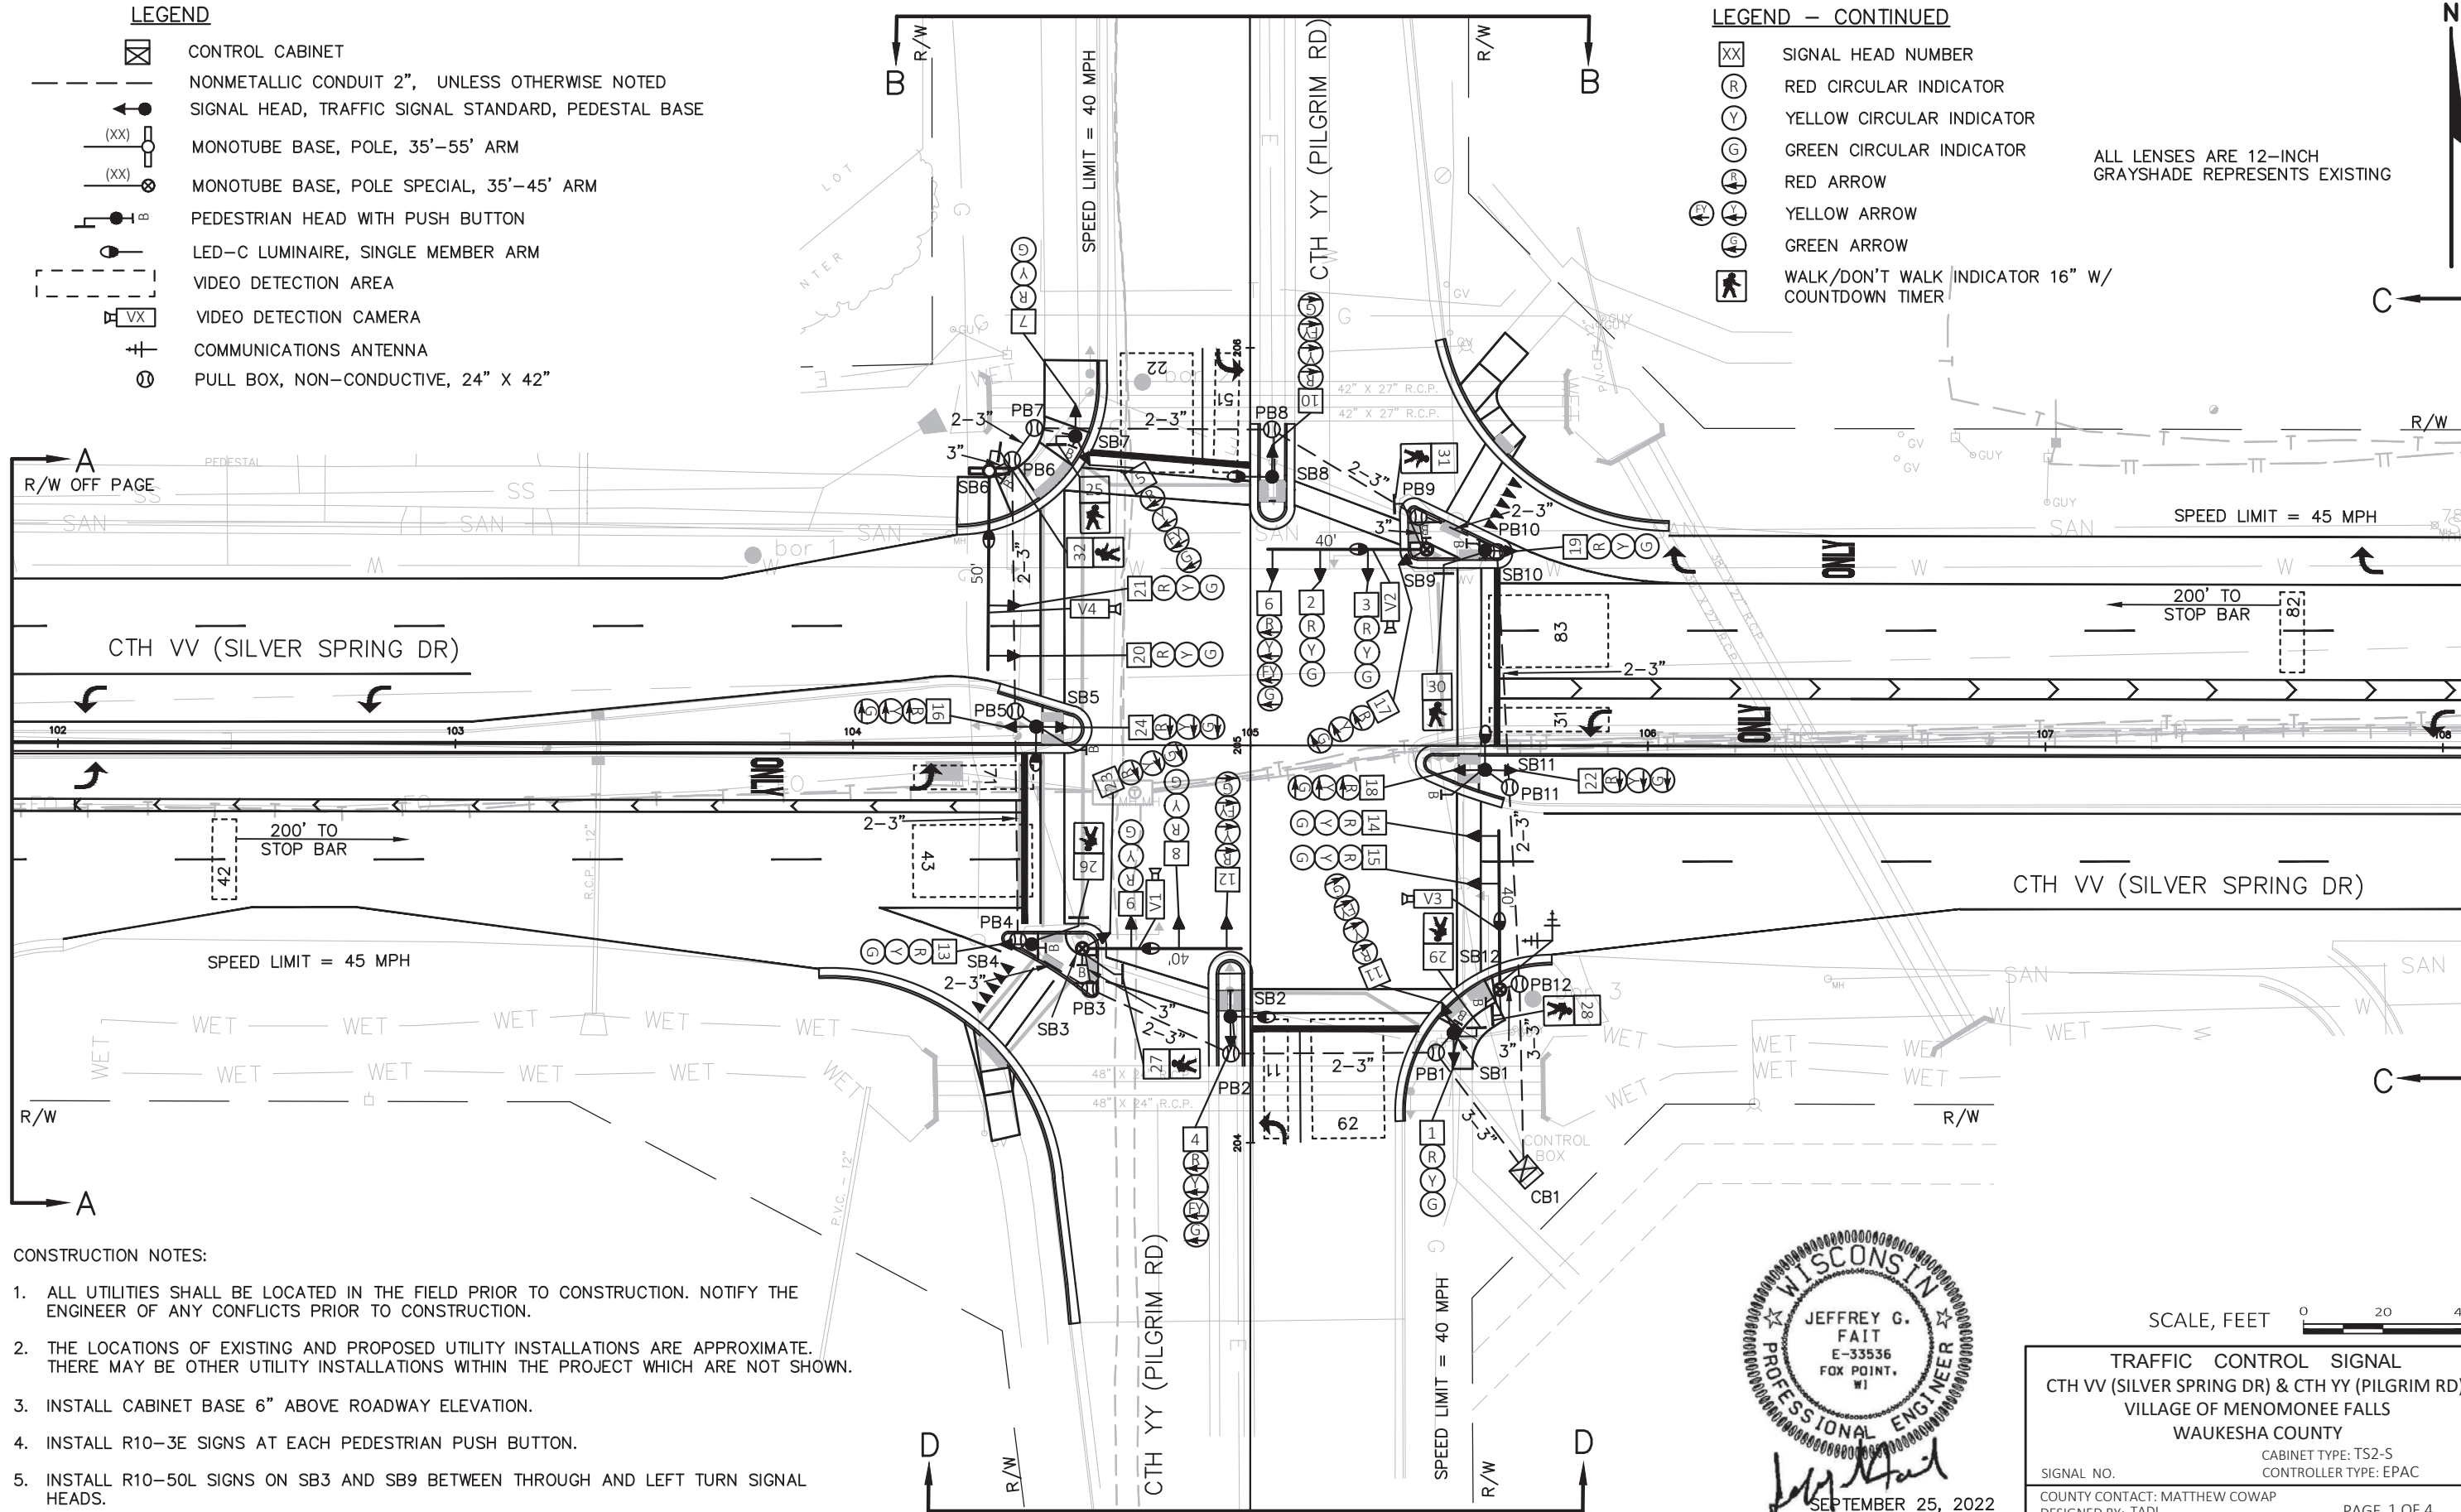



CONSTRUCTION NOTES:

1. ALL UTILITIES SHALL BE LOCATED IN THE FIELD PRIOR TO CONSTRUCTION. NOTIFY THE ENGINEER OF ANY CONFLICTS PRIOR TO CONSTRUCTION.
2. THE LOCATIONS OF EXISTING AND PROPOSED UTILITY INSTALLATIONS ARE APPROXIMATE. THERE MAY BE OTHER UTILITY INSTALLATIONS WITHIN THE PROJECT WHICH ARE NOT SHOWN.
3. INSTALL CABINET BASE 6" ABOVE ROADWAY ELEVATION.
4. INSTALL R10-3E SIGNS AT EACH PEDESTRIAN PUSH BUTTON.
5. INSTALL R10-50L SIGNS ON SB3 AND SB9 BETWEEN THROUGH AND LEFT TURN SIGNAL HEADS.



SCALE, FEET 0 20 40

TRAFFIC CONTROL SIGNAL
 CTH VV (SILVER SPRING DR) & CTH YY (PILGRIM RD)
 VILLAGE OF MENOMONEE FALLS
 WAUKESHA COUNTY
 SIGNAL NO. _____ CABINET TYPE: TS2-S
 COUNTY CONTACT: MATTHEW COWAP CONTROLLER TYPE: EPAC
 DESIGNED BY: TADI PAGE 1 OF 4
 REVISED BY: _____

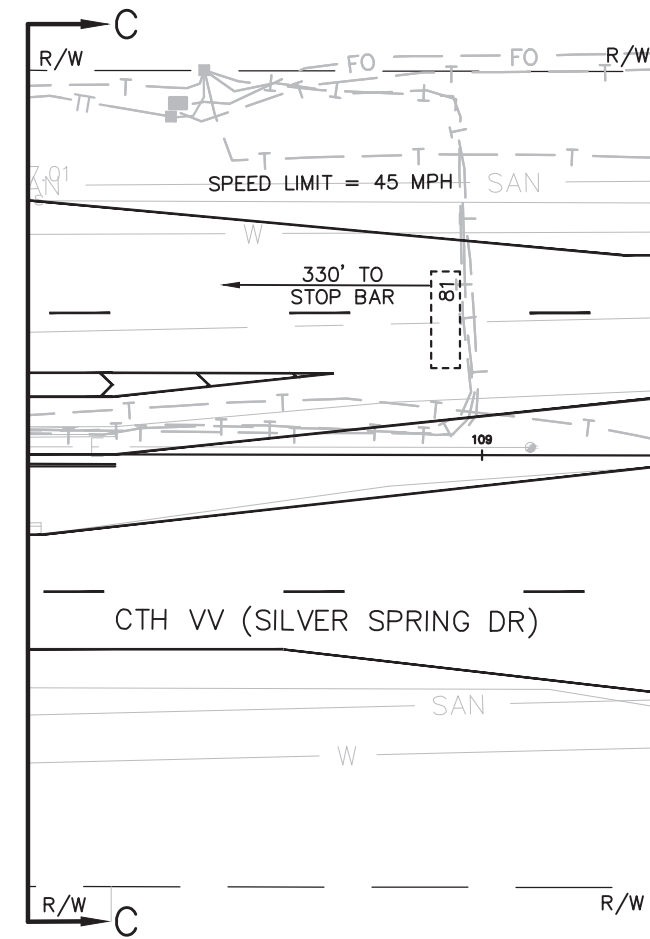
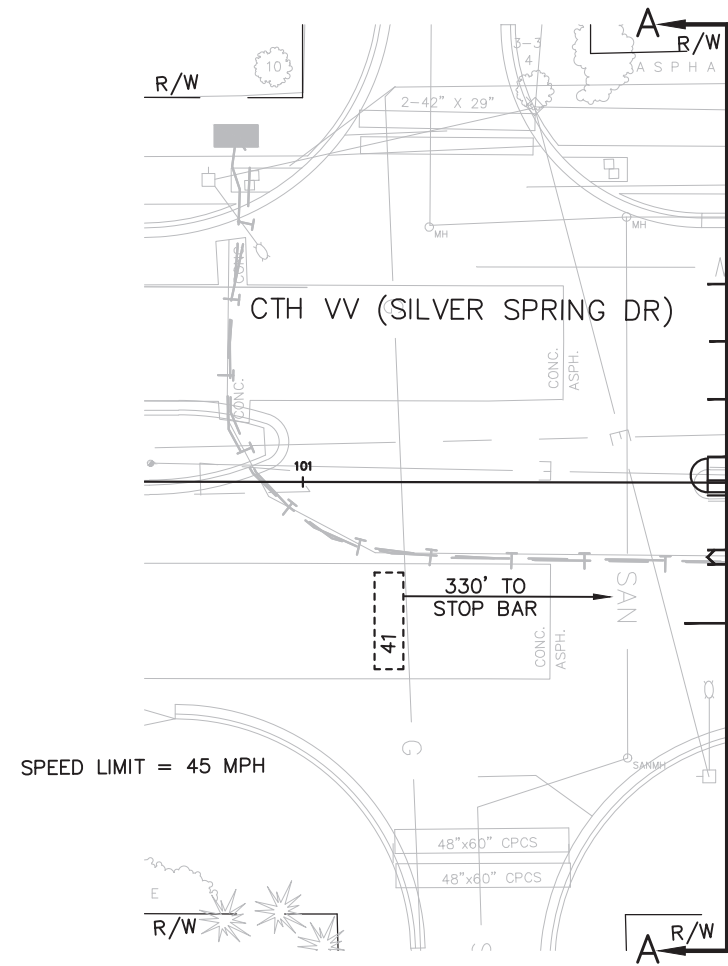


SCALE, FEET

TRAFFIC CONTROL SIGNAL
 CTH VV (SILVER SPRING DR) & CTH YY (PILGRIM RD)
 VILLAGE OF MENOMONEE FALLS
 WAUKESHA COUNTY

SIGNAL NO.
 COUNTY CONTACT: MATTHEW COWAP
 DESIGNED BY: TADI
 REVISED BY:

PAGE 2 OF 4

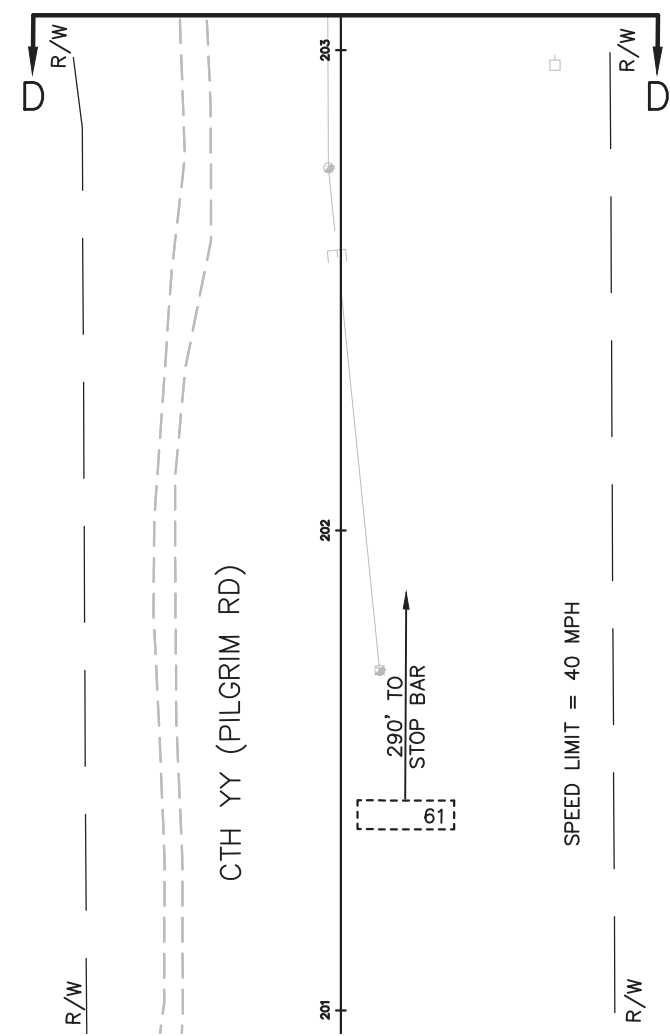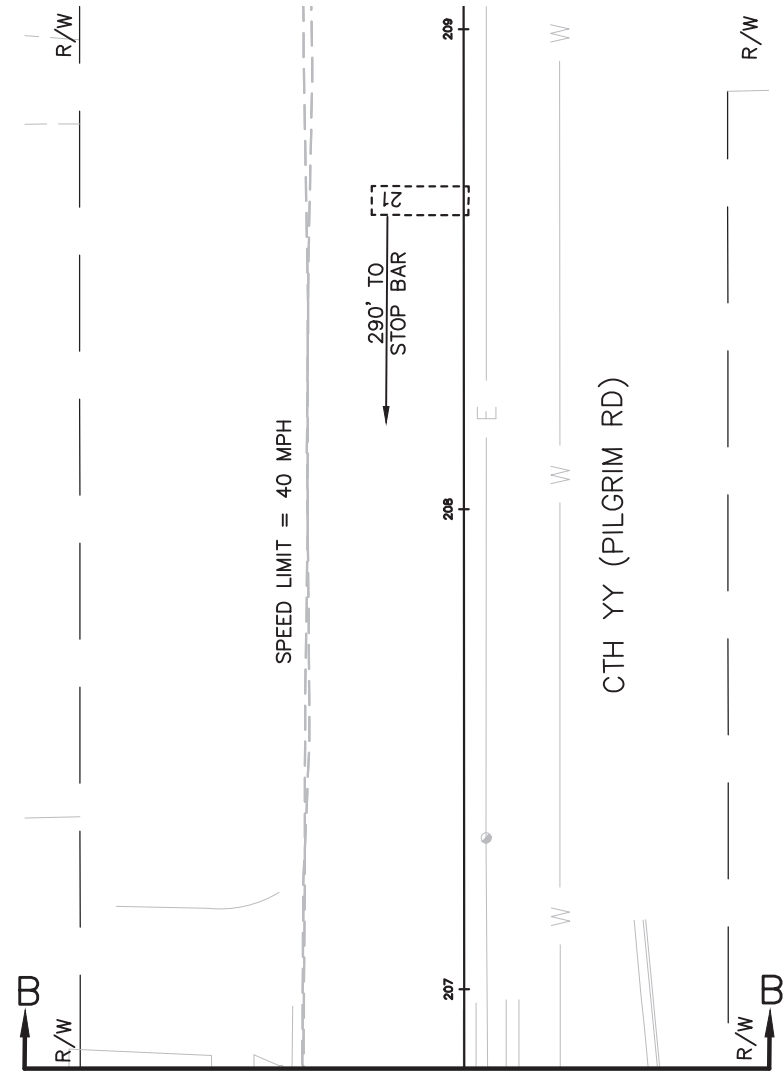


SCALE, FEET

TRAFFIC CONTROL SIGNAL
 CTH VV (SILVER SPRING DR) & CTH YY (PILGRIM RD)
 VILLAGE OF MENOMONEE FALLS
 WAUKESHA COUNTY

SIGNAL NO.
 COUNTY CONTACT: MATTHEW COWAP
 DESIGNED BY: TADI
 REVISED BY:

PAGE 3 OF 4

	HEAD NUMBERS	FLASH
Ø1	4,5,6	-
Ø2	7,8,9	R
Ø3	22,23,24	R
Ø4	13,14,15	R
Ø5	10,11,12	-
Ø6	1,2,3	R
Ø7	16,17,18	R
Ø8	19,20,21	R
Ø2P	25,26	
Ø4P	27,28	
Ø6P	29,30	
Ø8P	31,32	
OLA	4,5,6	R
OLB		
OLC	10,11,12	R
OLD		

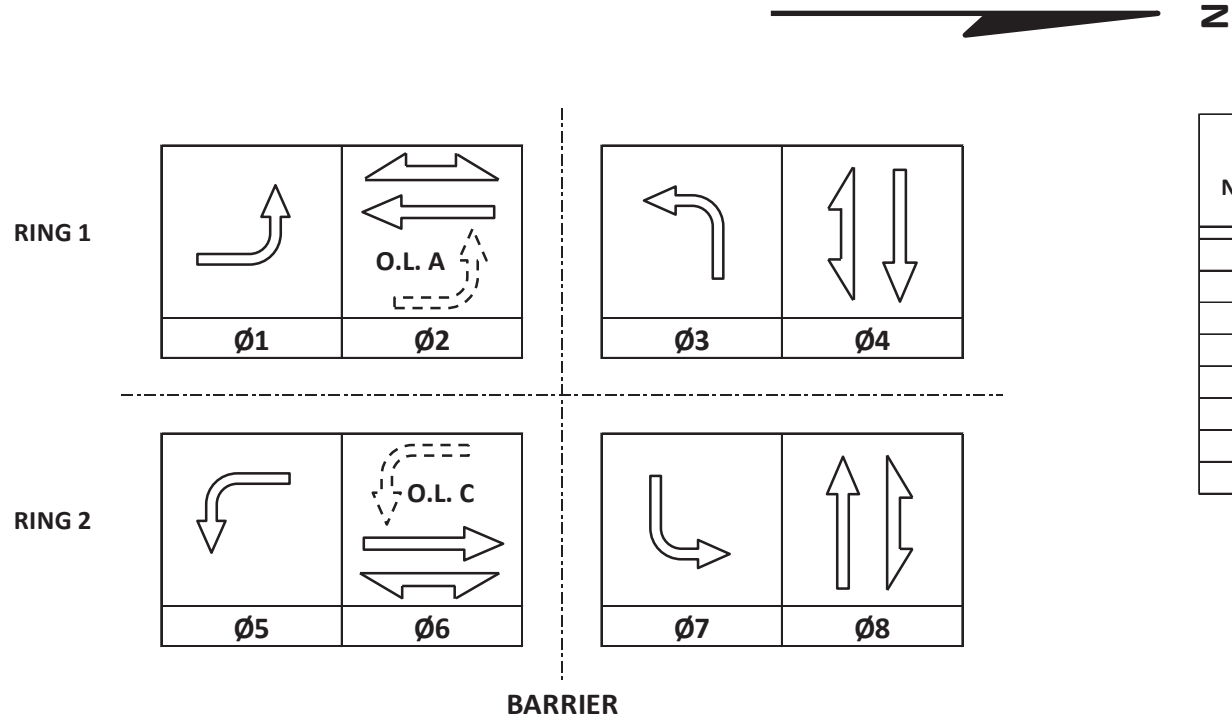

CONTROLLER LOGIC

PHASE NUMBER	PHASE LOCKING	DUAL ENTRY W / Ø	PHASE RECALL	PHASE ACTIVE
1		6		X
2	X	6	MIN	X
3		8		X
4		8		X
5		2		X
6	X	2	MIN	X
7		4		X
8		4		X

TYPE OF INTERCONNECT/COMMUNICATION	
NONE	
CLOSED LOOP	
TWISTED PAIR	
FIBER OPTIC*	
FIBER OPTIC (ETHERNET)	
RADIO	X
CELL MODEM	

TYPE OF COORDINATION	
NONE	
TBC	X
TRAFFIC RESPONSIVE	
ADAPTIVE	
*LOCATION OF MASTER	
CONTROLLER NO:	S-
SIGNAL SYSTEM NO:	SS-

TYPE OF LIGHTING	
BY OTHER AGENCY	
IN TRAFFIC CABINET	X
IN SEPARATE DOT LIGHTING CABINET	

TYPE OF PRE-EMPT	
NONE	X
RAILROAD	
EMERGENCY VEHICLE	
GTT	
TOMAR	
HARDWIRE	
OTHER	
CONFIRMATION LIGHTS	
LIFT BRIDGE	
QUEUE DETECTION	

DETECTOR LOGIC

DETECTOR INPUT	3	1	7	5	11	9	15	13
PLAN LOOP DETECTOR*(S)	11	22	41	43	61	71	82	
ASSIGNED PHASE	1	2	4	4	6	7	8	
OPERATION MODE	VEH	VEH	VEH	VEH	VEH	VEH	VEH	VEH
SWITCH								
EXTEND	X	X	X	X	X	X	X	
DELAY								

DETECTOR INPUT	19	17	23	21	27	25	31	29
PLAN LOOP DETECTOR*(S)								
ASSIGNED PHASE								
OPERATION MODE	VEH	VEH	VEH	VEH	VEH	VEH	VEH	VEH
SWITCH								
EXTEND								
DELAY								

DETECTOR INPUT	4	2	8	6	12	10	16	14
PLAN LOOP DETECTOR*(S)	21	31	42	51	62	81	83	
ASSIGNED PHASE	2	3	4	5	6	8	8	
OPERATION MODE	VEH	VEH	VEH	VEH	VEH	VEH	VEH	VEH
SWITCH								
EXTEND	X	X	X	X	X	X	X	
DELAY								

DETECTOR INPUT	20	18	24	22	28	26	32	30
PLAN LOOP DETECTOR*(S)								
ASSIGNED PHASE								
OPERATION MODE	VEH	VEH	VEH	VEH	VEH	VEH	VEH	VEH
SWITCH								
EXTEND								
DELAY								

CTH VV & CTH YY	
VILLAGE OF MENOMONEE FALLS	
WAUKESHA COUNTY	
SIGNAL NO:	CABINET TYPE: TS2-S
	CONTROLLER TYPE: EPAC
DATE: 9/2022	PAGE NUMBER: 4 OF 4

PROJECT ID: 2753-08-70
 INTERSECTION: CTH VV & CTH YY

SIGNAL WIRE COLOR CODING
 BLK-BLACK WHT-WHITE
 RED-RED BLU-BLUE
 GRN-GREEN ORG-ORANGE

CB1 TO	JUMPER	# OF COND. AWG 14	HEAD NO.	SIGNAL INDICATION WIRE COLOR								D/WALK	WALK	PED BUTTON	PED BUTTON 2
				RED	YELLOW	GREEN	<RED	<YELLOW>	<FL YELLOW>	<GREEN>					
SB1		12	1	RED	ORG	GRN									
			11				RED/BLK	ORG/BLK	BLU/BLK	GRN/BLK					
			29								BLK	BLK/WHT			
SB2		12	B										WHT/BLK		
			4				RED	ORG	BLU	GRN					
			8	RED	ORG	GRN									
SB3		15	9	RED	ORG	GRN									
			12				RED/BLK	ORG/BLK	BLU/BLK	GRN/BLK					
			23				RED/WHT	BLU/WHT		GRN/WHT					
SB4		12	27								BLK	BLK/WHT			
			B										WHT/BLK		
			13	RED	ORG	GRN									
SB5		12	26								BLK	BLK/WHT			
			B										WHT/BLK		
			16				RED	ORG		GRN					
SB6		12	24				RED/BLK	ORG/BLK		GRN					
			B										WHT/BLK		
			20	RED	ORG	GRN									
SB7		12	21	RED	ORG	GRN									
			32								BLK	BLK/WHT			
			B										WHT/BLK		
SB8		12	5				RED	ORG	BLU	GRN					
			7	RED/BLK	ORG/BLK	GRN/BLK									
			25								BLK	BLK/WHT			
SB9		15	B										WHT/BLK		
			10				RED	ORG	BLU	GRN					
			2	RED	ORG	GRN									
SB10		12	3	RED	ORG	GRN									
			6				RED/BLK	ORG/BLK	BLU/BLK	GRN/BLK					
			17				RED/WHT	BLU/WHT		GRN/WHT					
SB11		12	31								BLK	BLK/WHT			
			B										WHT/BLK		
			19	RED	ORG	GRN									
SB12		12	30								BLK	BLK/WHT			
			B										WHT/BLK		
			18				RED	ORG		GRN					
SB12		12	22				RED/BLK	ORG/BLK		GRN					
			B										WHT/BLK		
			14	RED	ORG	GRN									
			15	RED	ORG	GRN									
			28									BLK	BLK/WHT		
			B										WHT/BLK		

FROM	TO
CB1	SB1
SB1	SB2
SB2	SB3
SB3	SB4
SB4	SB5
SB5	SB6
SB6	SB7
SB7	SB8
SB8	SB9
SB9	SB10
SB10	SB11
SB11	SB12
SB12	CB1


FROM	TO
SB1	PB1
SB2	PB2
SB3	PB3
SB3	PB4
SB5	PB5
SB6	PB6
SB6	PB7
SB8	PB8
SB9	PB9
SB10	PB10
SB11	PB11
SB12	PB12

FROM	TO
CB1	SB2
SB2	SB3
SB3	SB5
SB5	SB6
CB1	SB12
SB12	SB11
SB11	SB9
SB9	SB8

FROM	TO
CB1	SB3 (V1)
CB1	SB9 (V2)
CB1	SB12 (V3)
CB1	SB6 (V4)

NOTES:


1. USE WHITE CONDUCTOR IN THE SIGNAL CABLE AS THE GROUNDED CONDUCTOR FOR ALL TRAFFIC SIGNAL INDICATIONS.
2. ENSURE THE GROUNDED CONDUCTOR IN THE FEEDER CABLE AND THE POLE CABLES ARE BOTH 18" LONGER THAN THE UNGROUNDED CONDUCTORS.
3. AT THE SIGNAL BASES, CONNECT ONE TERMINAL FROM THE PEDESTRIAN PUSH BUTTONS TO THE COLOR INDICATED IN THE CHART. CONNECT THE OTHER TERMINAL TO THE GROUNDED CONDUCTOR.

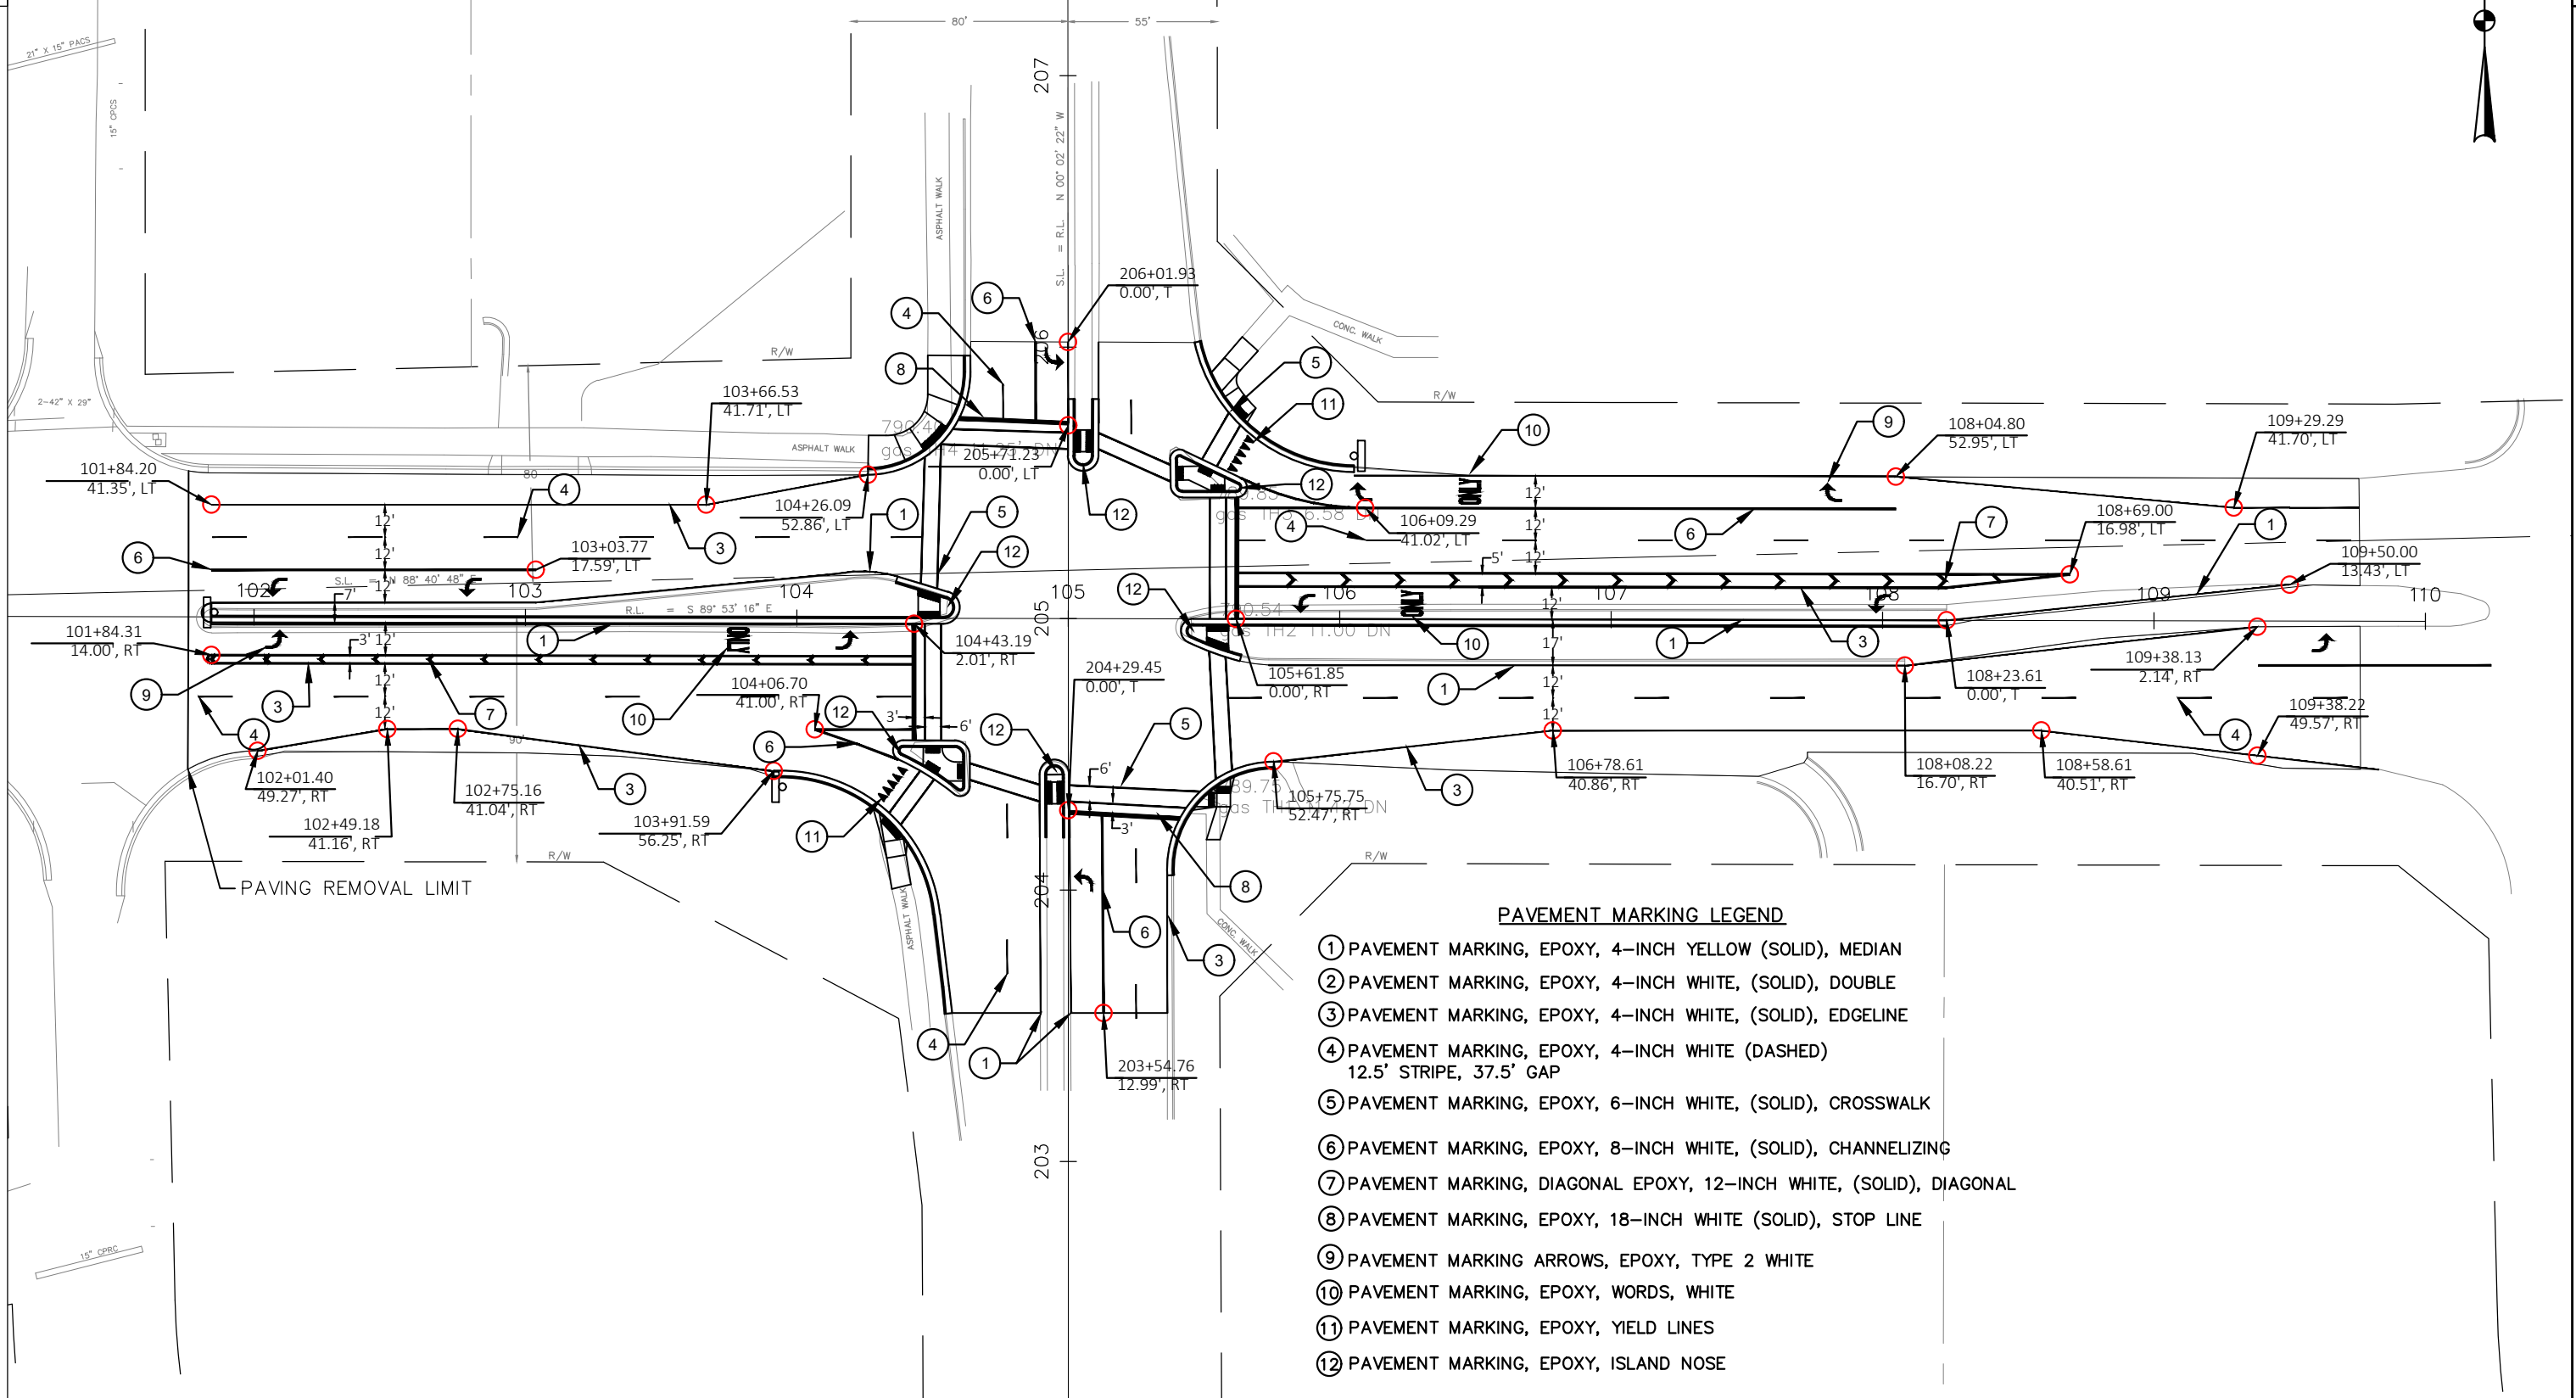

- PAVEMENT MARKING LEGEND**
- ① PAVEMENT MARKING, EPOXY, 4-INCH YELLOW (SOLID), MEDIAN
 - ② PAVEMENT MARKING, EPOXY, 4-INCH WHITE, (SOLID), DOUBLE
 - ③ PAVEMENT MARKING, EPOXY, 4-INCH WHITE, (SOLID), EDGELINE
 - ④ PAVEMENT MARKING, EPOXY, 4-INCH WHITE (DASHED) 12.5' STRIPE, 37.5' GAP
 - ⑤ PAVEMENT MARKING, EPOXY, 6-INCH WHITE, (SOLID), CROSSWALK
 - ⑥ PAVEMENT MARKING, EPOXY, 8-INCH WHITE, (SOLID), CHANNELIZING
 - ⑦ PAVEMENT MARKING, DIAGONAL EPOXY, 12-INCH WHITE, (SOLID), DIAGONAL
 - ⑧ PAVEMENT MARKING, EPOXY, 18-INCH WHITE (SOLID), STOP LINE
 - ⑨ PAVEMENT MARKING ARROWS, EPOXY, TYPE 2 WHITE
 - ⑩ PAVEMENT MARKING, EPOXY, WORDS, WHITE
 - ⑪ PAVEMENT MARKING, EPOXY, YIELD LINES
 - ⑫ PAVEMENT MARKING, EPOXY, ISLAND NOSE


CONSTRUCTION STAGING NOTES

1. THE CONTRACTOR SHALL COVER ANY SIGN CONFLICTING WITH THE TRAFFIC CONTROL OPERATION AS NEEDED OR AS DIRECTED BY THE ENGINEER. THIS SHALL BE INCIDENTAL TO ITEM OF TRAFFIC CONTROL.
2. THE CONTRACTOR SHALL PROVIDE AND MAINTAIN ALL NECESSARY BARRICADES, DIRECTION ARROWS, LIGHTS, TEMPORARY MARKINGS, FLAG MEN, AND SAFETY DEVICES AS CALLED FOR ON THE PLANS OR AS DIRECTED BY THE ENGINEER.
3. REFER TO WISDOT SDD 15D12-b : SINGLE LANE CLOSURE, SPEED REDUCTION DETAIL FOR REQUIRED ADVANCED SIGNING AND PLACEMENT
4. LANE CLOSURES DURING PHASES 1-3 ON VV SHALL BE LIMITED TO THE HOURS OF 9:00AM - 3:00PM (MON-FRI) OR AS APPROVED BY ENGINEER
5. PHASE 4 MILLING AND PAVING OPERATIONS ON VV SHALL BE LIMITED TO THE HOURS OF 10:00PM - 6:00AM (MON-FRI) OR AS APPROVED BY ENGINEER.
6. WARNING SIGNAGE FOR MILLED SURFACE SHALL REFER TO SDD 15D44, TRAFFIC CONTROL, SIGNING ON ROADWAYS WITH MILLED SURFACE

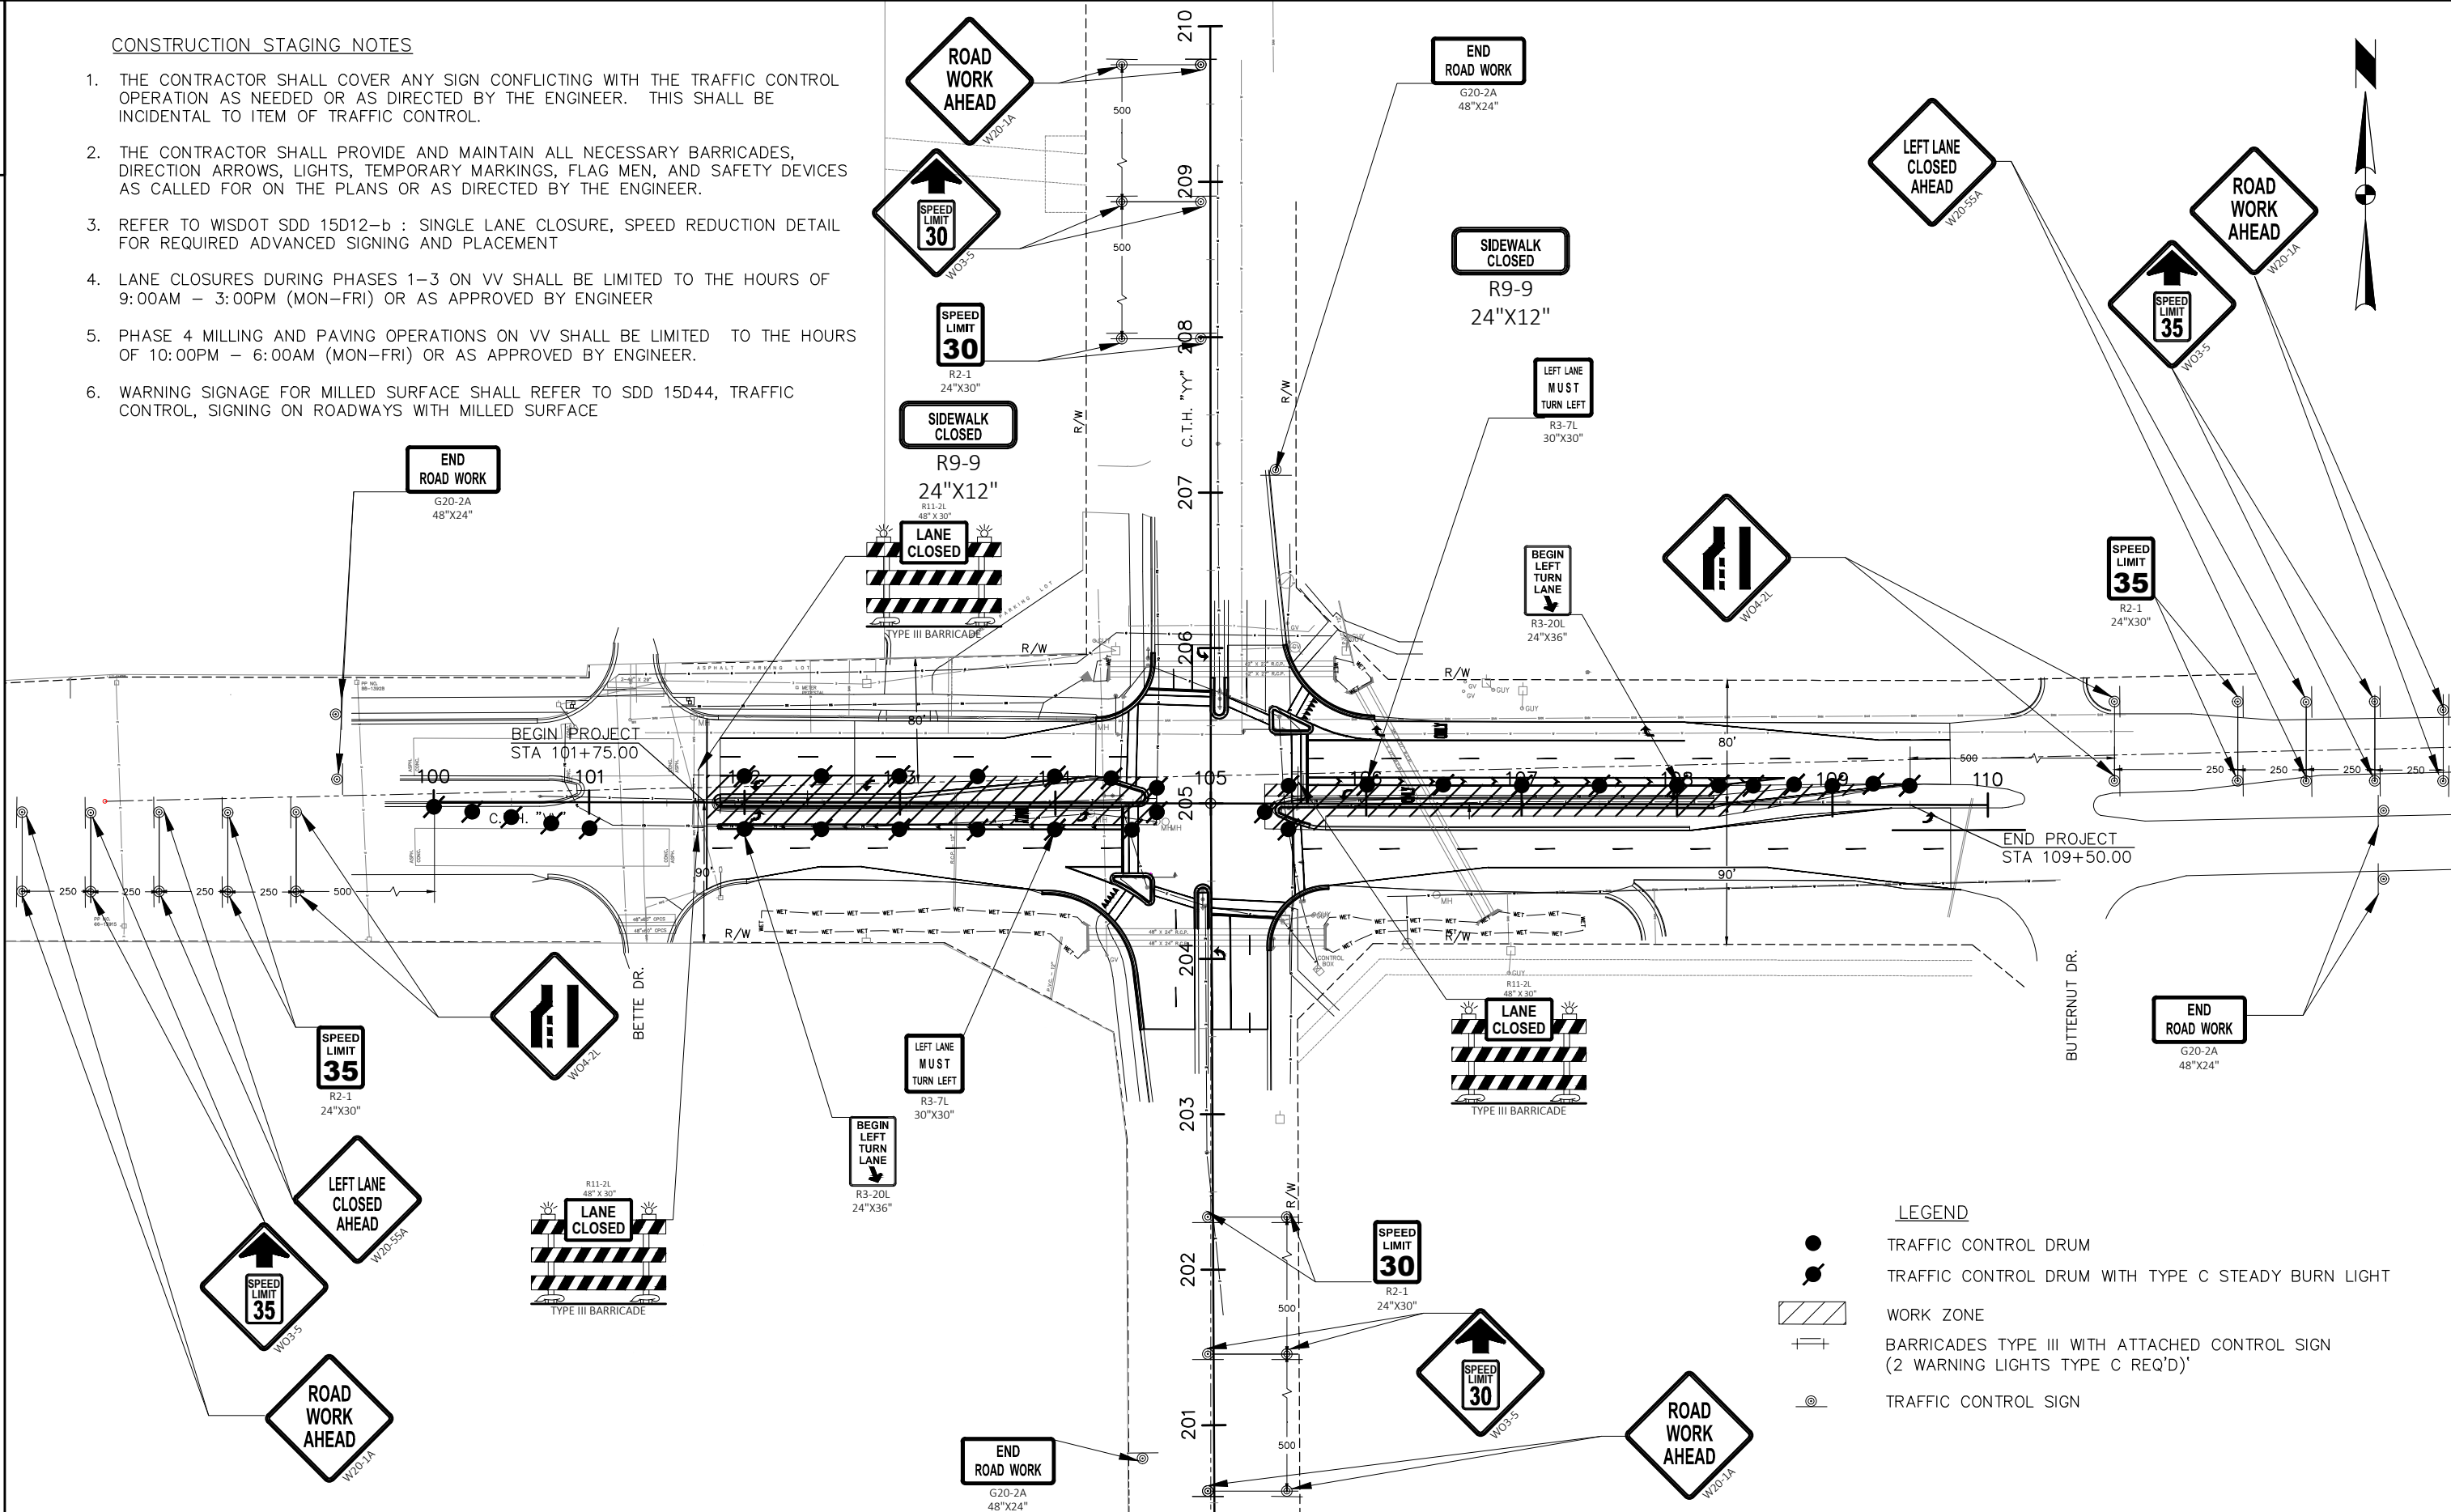


CONSTRUCTION STAGING NOTES

1. THE CONTRACTOR SHALL COVER ANY SIGN CONFLICTING WITH THE TRAFFIC CONTROL OPERATION AS NEEDED OR AS DIRECTED BY THE ENGINEER. THIS SHALL BE INCIDENTAL TO ITEM OF TRAFFIC CONTROL.
2. THE CONTRACTOR SHALL PROVIDE AND MAINTAIN ALL NECESSARY BARRICADES, DIRECTION ARROWS, LIGHTS, TEMPORARY MARKINGS, FLAG MEN, AND SAFETY DEVICES AS CALLED FOR ON THE PLANS OR AS DIRECTED BY THE ENGINEER.
3. REFER TO WISDOT SDD 15D12-b : SINGLE LANE CLOSURE, SPEED REDUCTION DETAIL FOR REQUIRED ADVANCED SIGNING AND PLACEMENT.
4. LANE CLOSURES DURING PHASES 1-3 ON VV SHALL BE LIMITED TO THE HOURS OF 9:00AM - 3:00PM (MON-FRI) OR AS APPROVED BY ENGINEER
5. PHASE 4 MILLING AND PAVING OPERATIONS ON VV SHALL BE LIMITED TO THE HOURS OF 10:00PM - 6:00AM (MON-FRI) OR AS APPROVED BY ENGINEER.
6. WARNING SIGNAGE FOR MILLED SURFACE SHALL REFER TO SDD 15D44, TRAFFIC CONTROL, SIGNING ON ROADWAYS WITH MILLED SURFACE

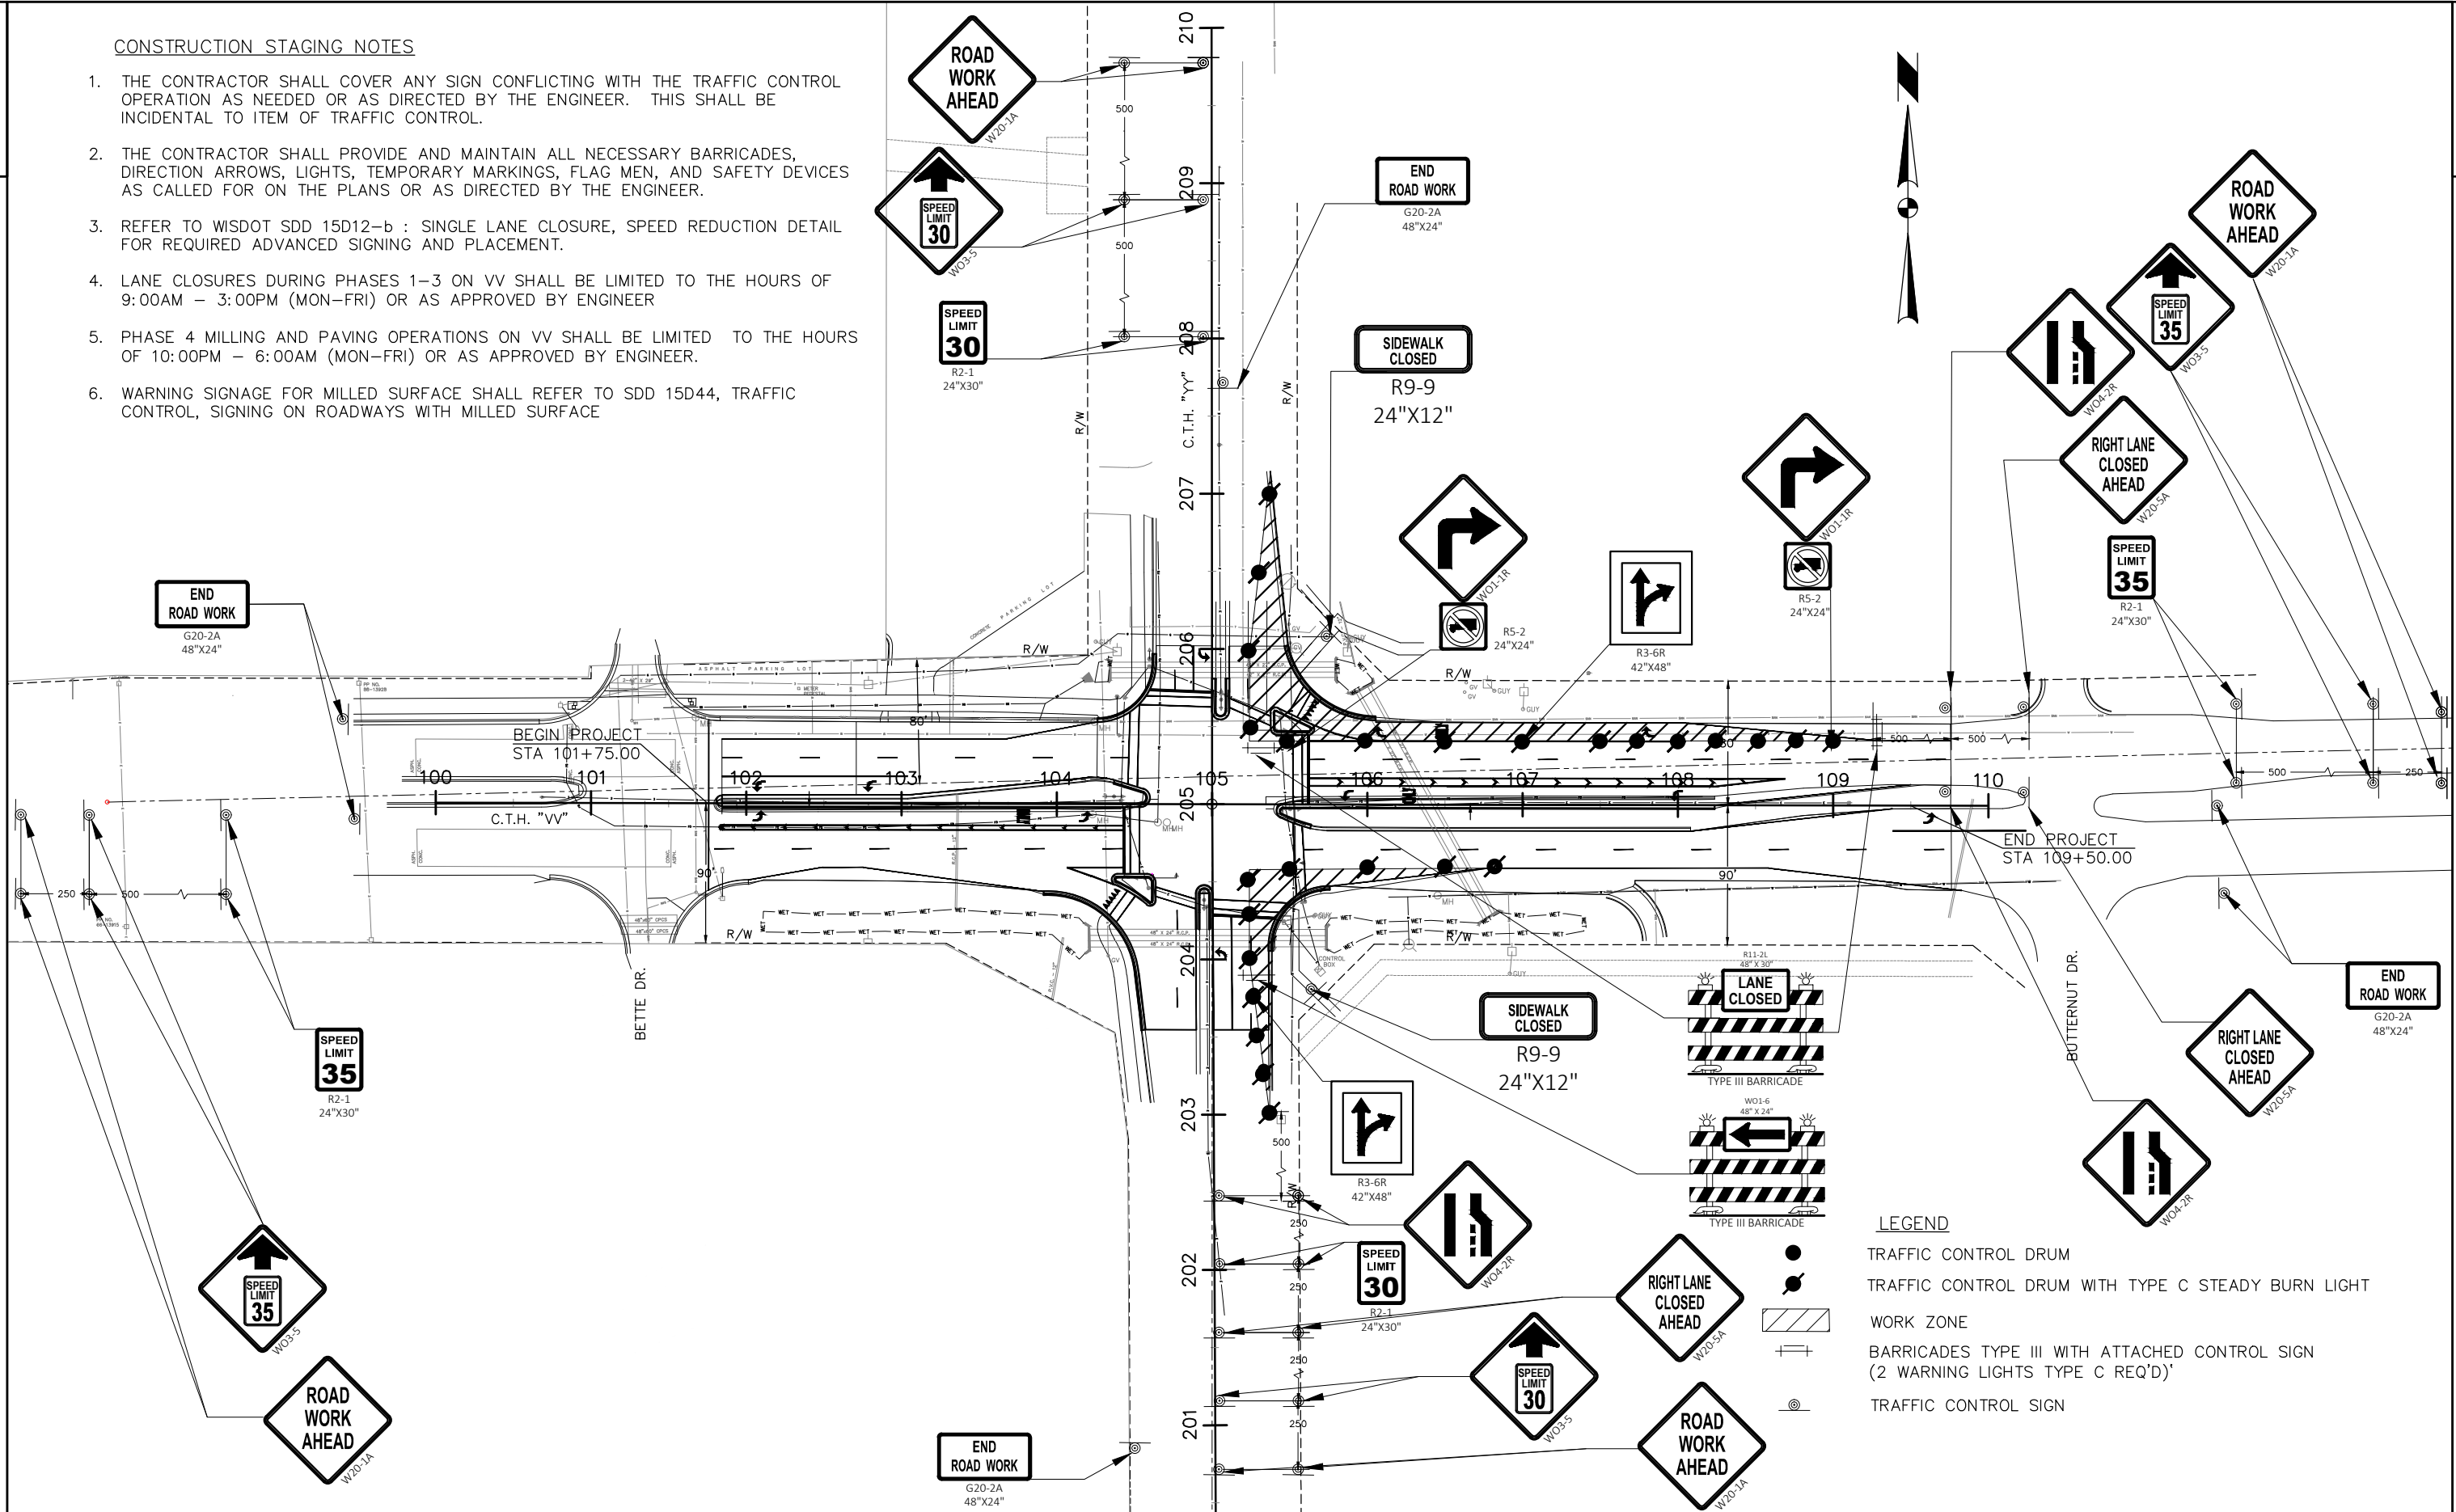


CONSTRUCTION STAGING NOTES

1. THE CONTRACTOR SHALL COVER ANY SIGN CONFLICTING WITH THE TRAFFIC CONTROL OPERATION AS NEEDED OR AS DIRECTED BY THE ENGINEER. THIS SHALL BE INCIDENTAL TO ITEM OF TRAFFIC CONTROL.
2. THE CONTRACTOR SHALL PROVIDE AND MAINTAIN ALL NECESSARY BARRICADES, DIRECTION ARROWS, LIGHTS, TEMPORARY MARKINGS, FLAG MEN, AND SAFETY DEVICES AS CALLED FOR ON THE PLANS OR AS DIRECTED BY THE ENGINEER.
3. REFER TO WISDOT SDD 15D12-b : SINGLE LANE CLOSURE, SPEED REDUCTION DETAIL FOR REQUIRED ADVANCED SIGNING AND PLACEMENT
4. LANE CLOSURES DURING PHASES 1-3 ON VV SHALL BE LIMITED TO THE HOURS OF 9:00AM - 3:00PM (MON-FRI) OR AS APPROVED BY ENGINEER
5. PHASE 4 MILLING AND PAVING OPERATIONS ON VV SHALL BE LIMITED TO THE HOURS OF 10:00PM - 6:00AM (MON-FRI) OR AS APPROVED BY ENGINEER.
6. WARNING SIGNAGE FOR MILLED SURFACE SHALL REFER TO SDD 15D44, TRAFFIC CONTROL, SIGNING ON ROADWAYS WITH MILLED SURFACE

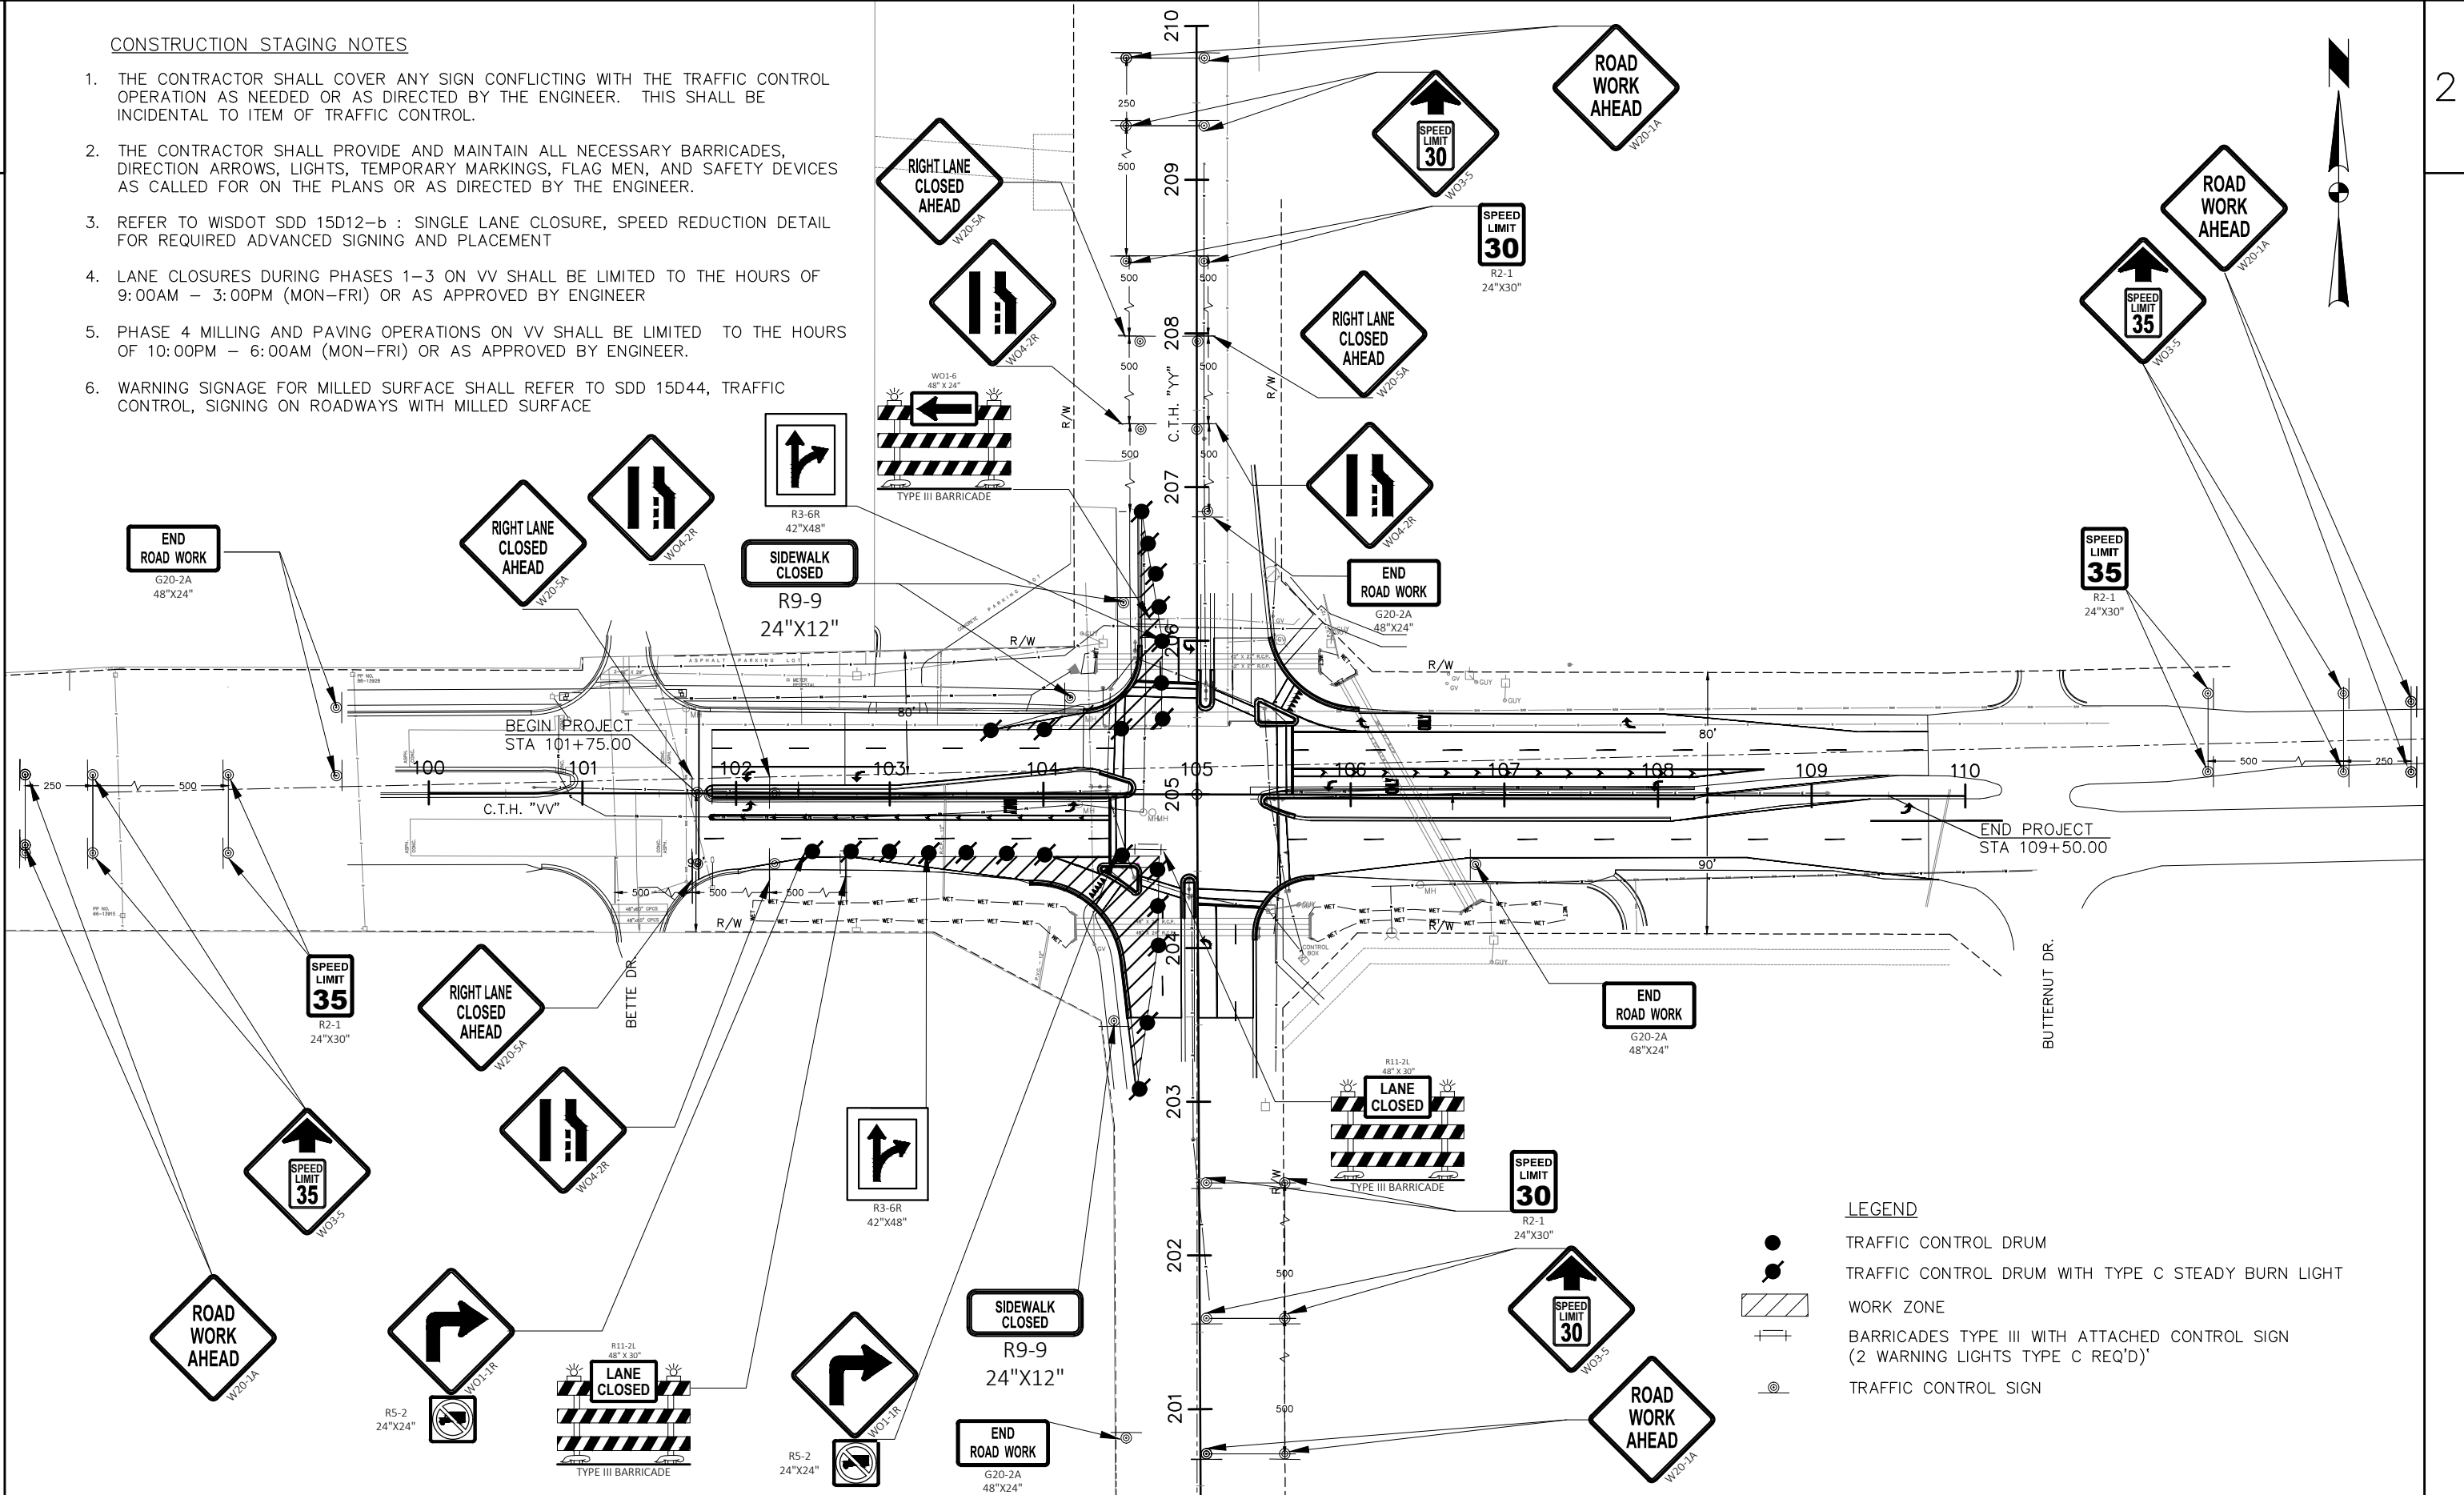


CONSTRUCTION STAGING NOTES

1. THE CONTRACTOR SHALL COVER ANY SIGN CONFLICTING WITH THE TRAFFIC CONTROL OPERATION AS NEEDED OR AS DIRECTED BY THE ENGINEER. THIS SHALL BE INCIDENTAL TO ITEM OF TRAFFIC CONTROL.
2. THE CONTRACTOR SHALL PROVIDE AND MAINTAIN ALL NECESSARY BARRICADES, DIRECTION ARROWS, LIGHTS, TEMPORARY MARKINGS, FLAG MEN, AND SAFETY DEVICES AS CALLED FOR ON THE PLANS OR AS DIRECTED BY THE ENGINEER.
3. REFER TO WSDOT SDD 15D12-b : SINGLE LANE CLOSURE, SPEED REDUCTION DETAIL FOR REQUIRED ADVANCED SIGNING AND PLACEMENT
4. LANE CLOSURES DURING PHASES 1-3 ON VV SHALL BE LIMITED TO THE HOURS OF 9:00AM - 3:00PM (MON-FRI) OR AS APPROVED BY ENGINEER
5. PHASE 4 MILLING AND PAVING OPERATIONS ON VV SHALL BE LIMITED TO THE HOURS OF 10:00PM - 6:00AM (MON-FRI) OR AS APPROVED BY ENGINEER.
6. WARNING SIGNAGE FOR MILLED SURFACE SHALL REFER TO SDD 15D44, TRAFFIC CONTROL, SIGNING ON ROADWAYS WITH MILLED SURFACE

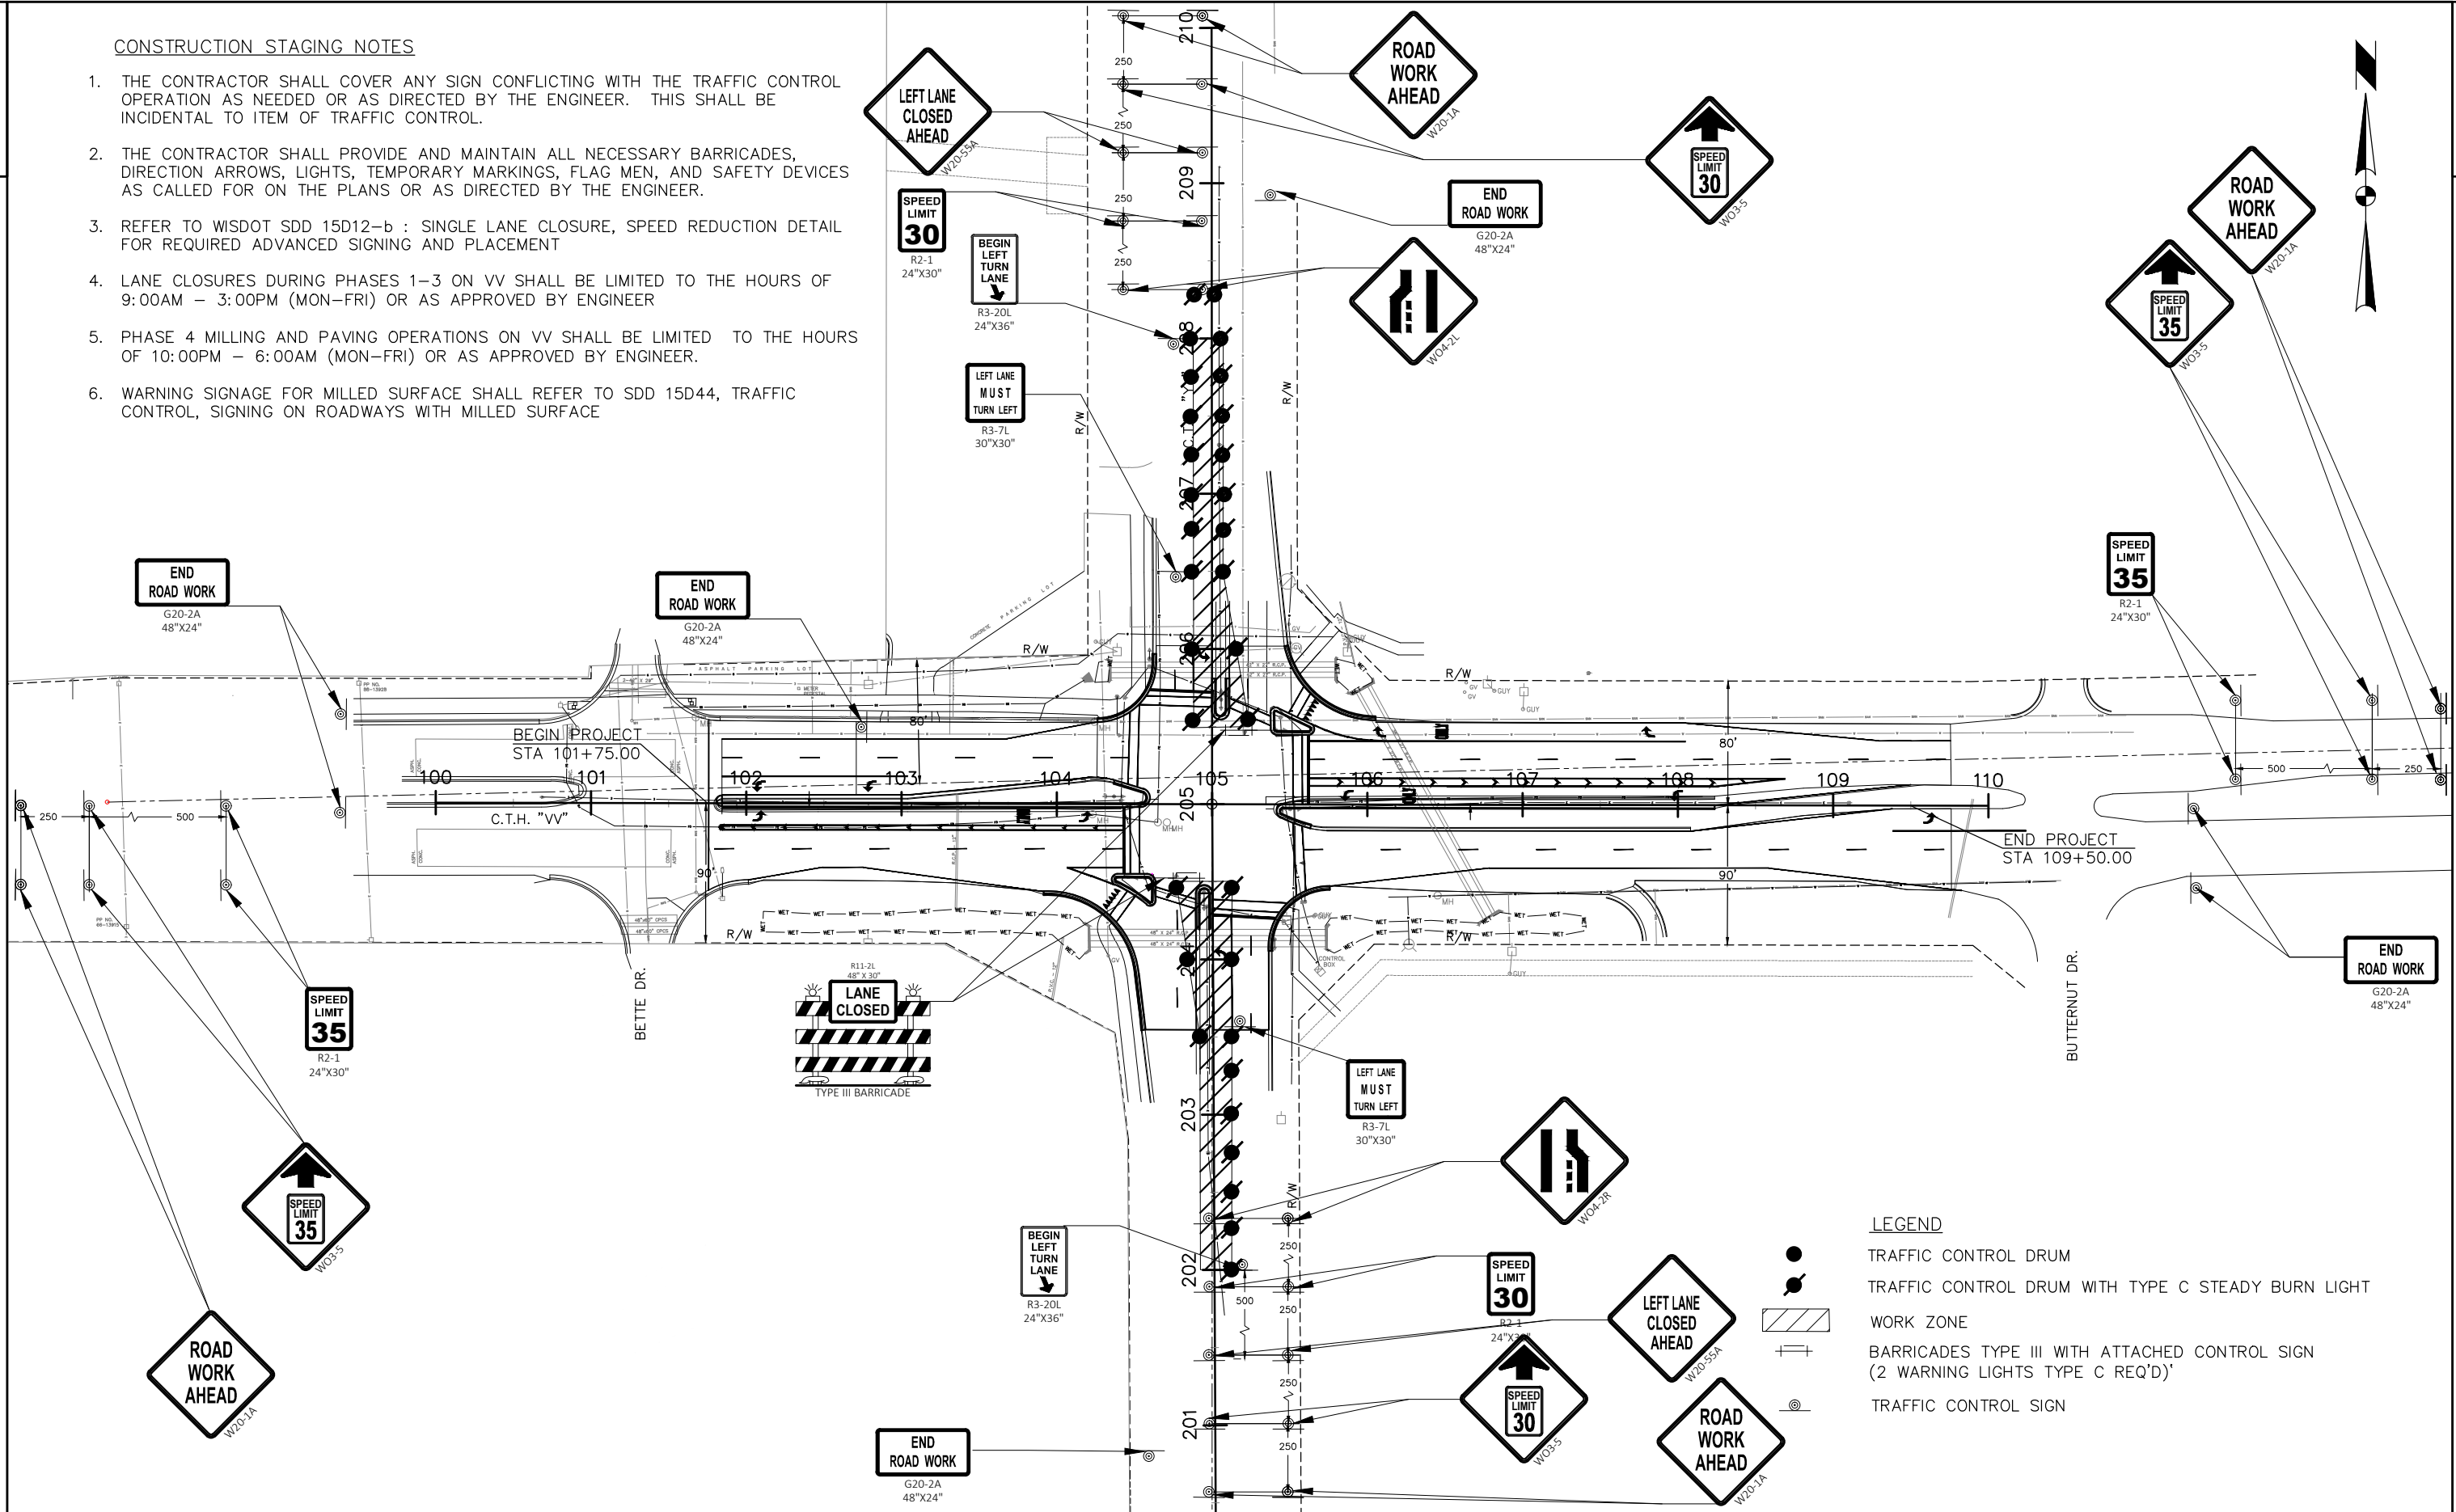

CONSTRUCTION STAGING NOTES

1. THE CONTRACTOR SHALL COVER ANY SIGN CONFLICTING WITH THE TRAFFIC CONTROL OPERATION AS NEEDED OR AS DIRECTED BY THE ENGINEER. THIS SHALL BE INCIDENTAL TO ITEM OF TRAFFIC CONTROL.
2. THE CONTRACTOR SHALL PROVIDE AND MAINTAIN ALL NECESSARY BARRICADES, DIRECTION ARROWS, LIGHTS, TEMPORARY MARKINGS, FLAG MEN, AND SAFETY DEVICES AS CALLED FOR ON THE PLANS OR AS DIRECTED BY THE ENGINEER.
3. REFER TO WSDOT SDD 15D12-b : SINGLE LANE CLOSURE, SPEED REDUCTION DETAIL FOR REQUIRED ADVANCED SIGNING AND PLACEMENT
4. LANE CLOSURES DURING PHASES 1-3 ON VV SHALL BE LIMITED TO THE HOURS OF 9:00AM - 3:00PM (MON-FRI) OR AS APPROVED BY ENGINEER
5. PHASE 4 MILLING AND PAVING OPERATIONS ON VV SHALL BE LIMITED TO THE HOURS OF 10:00PM - 6:00AM (MON-FRI) OR AS APPROVED BY ENGINEER.
6. WARNING SIGNAGE FOR MILLED SURFACE SHALL REFER TO SDD 15D44, TRAFFIC CONTROL, SIGNING ON ROADWAYS WITH MILLED SURFACE

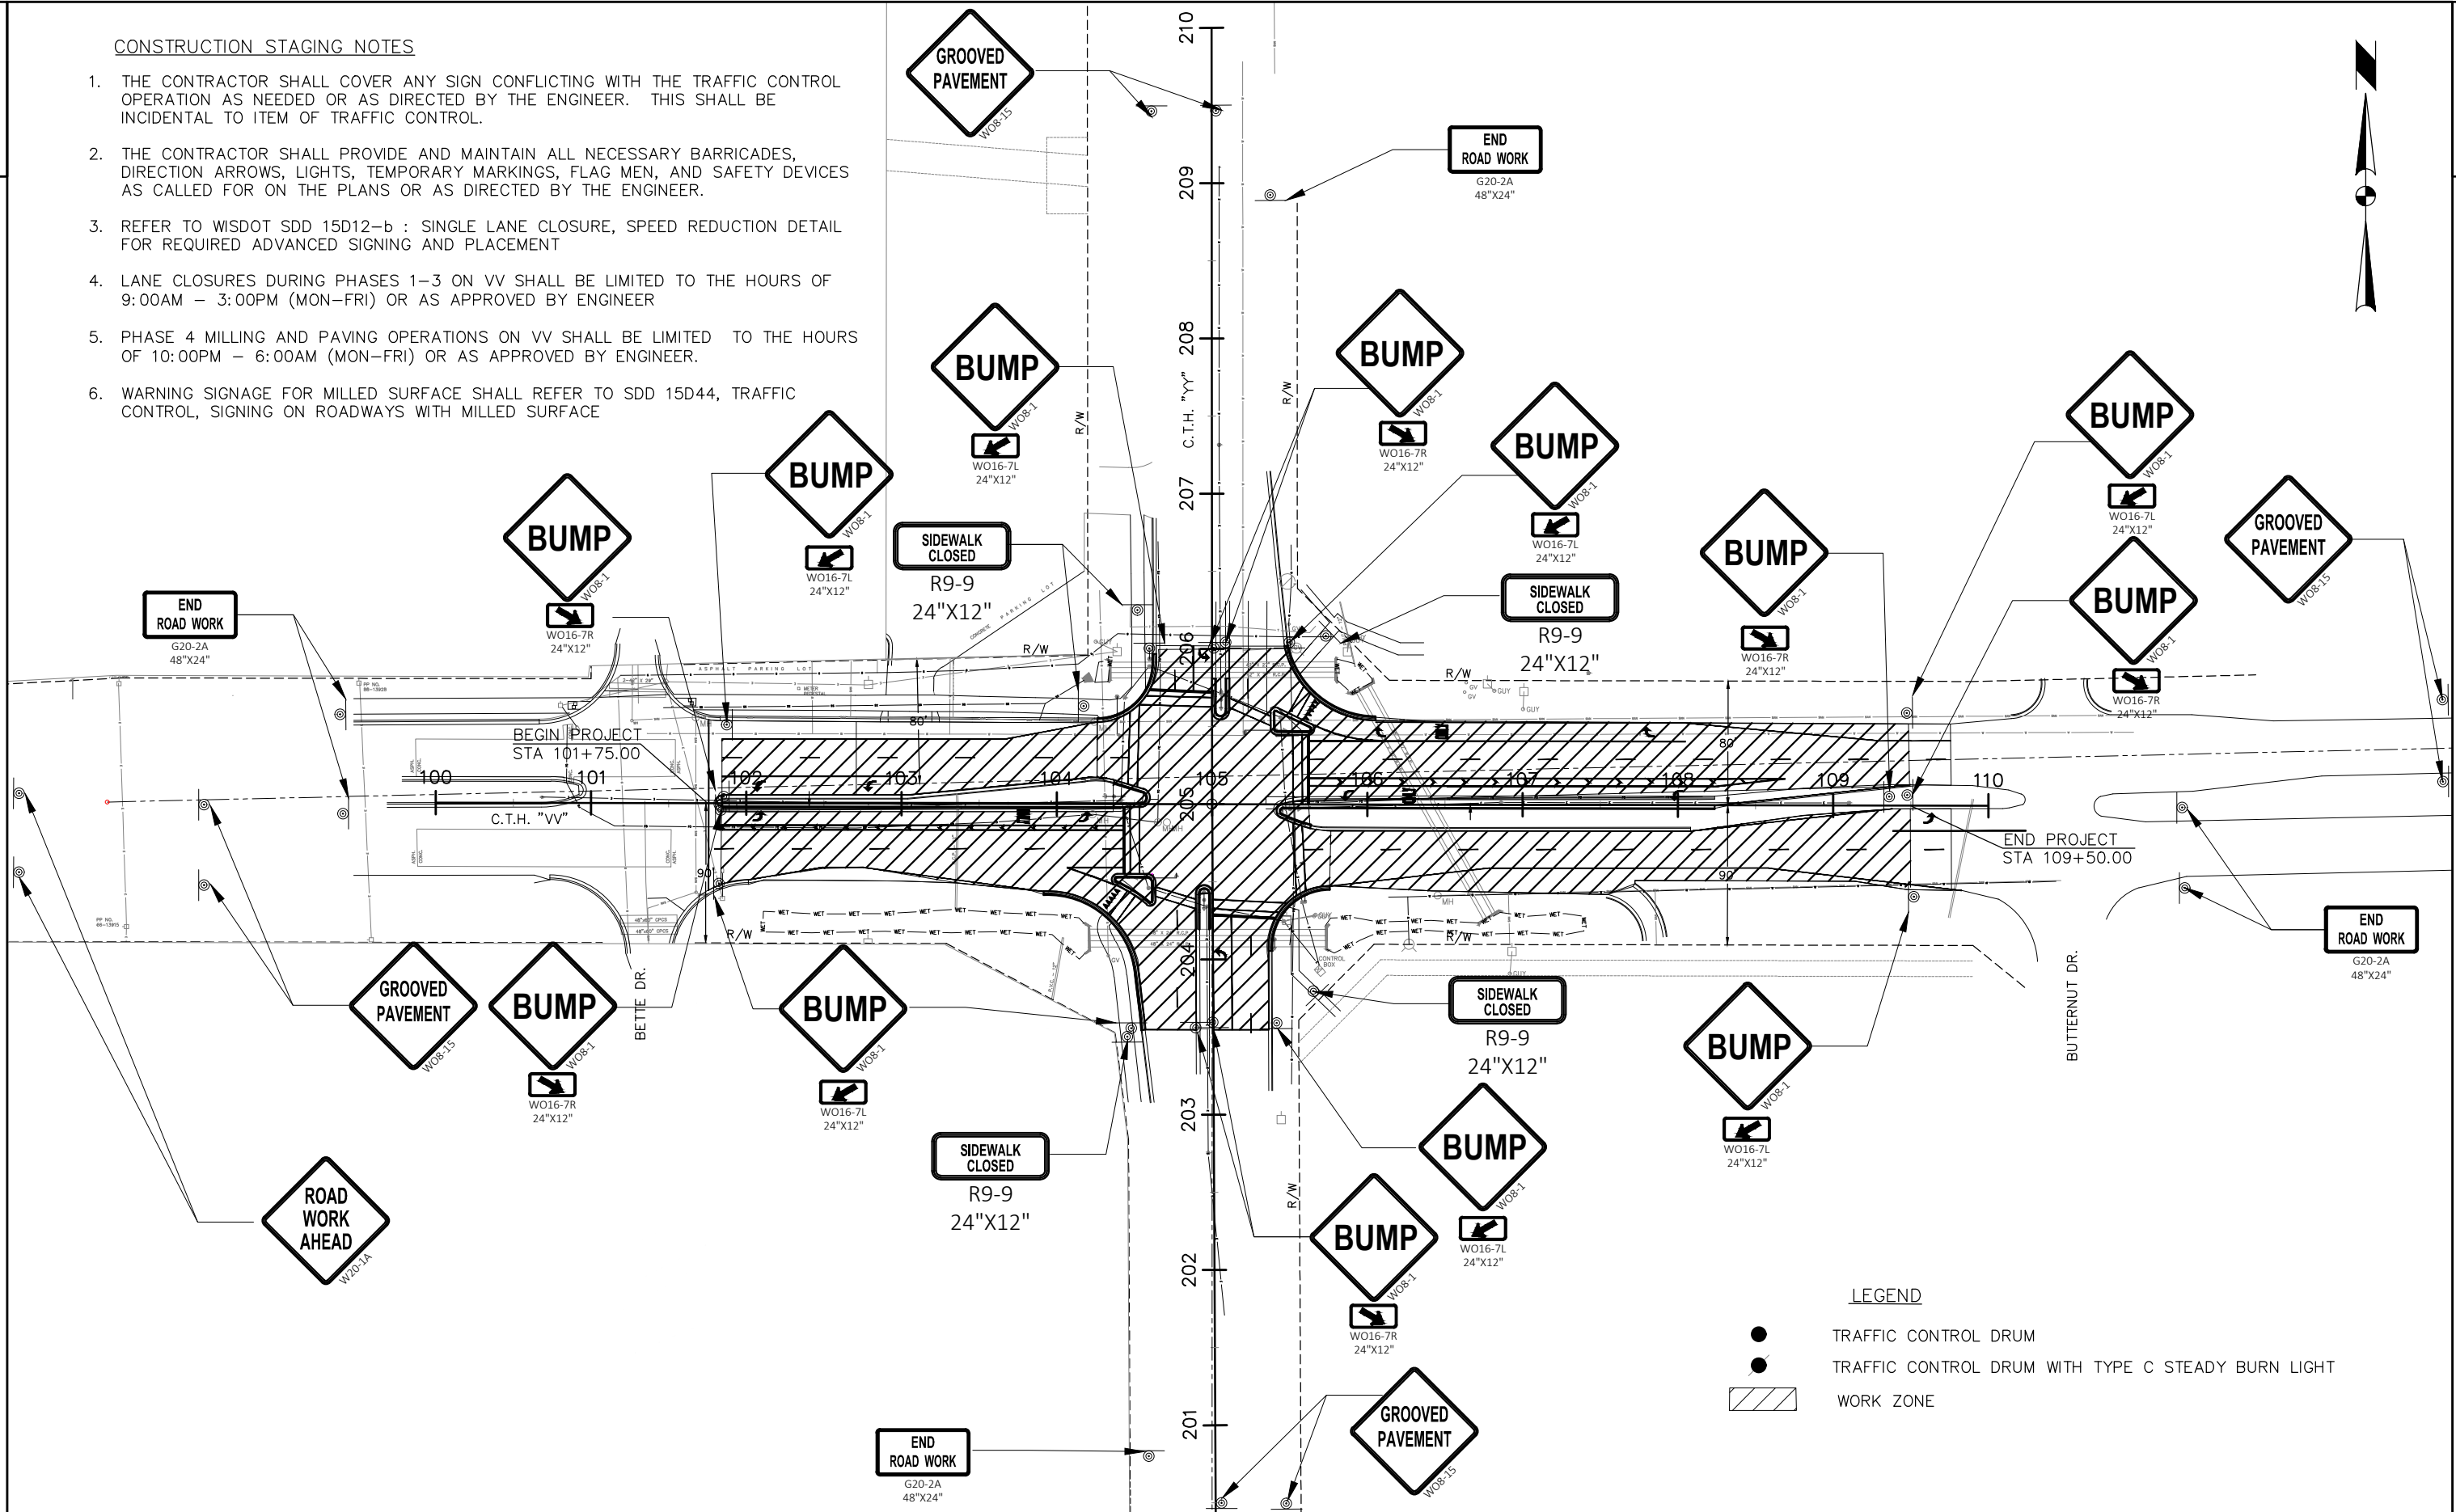



LEGEND

- TRAFFIC CONTROL DRUM
- TRAFFIC CONTROL DRUM WITH TYPE C STEADY BURN LIGHT
- ▨ WORK ZONE

CTH W/GOOD HOPE RD

2

2

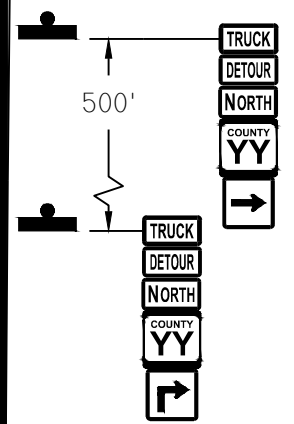

CTH Y/LANNON RD

CTH YY/PILGRIM RD

LEGEND

- SIGN MOUNTED ON POSTS
- DETOUR ROUTE

 M1-5A 24"x24"	 M4-4 24"x12"	 M3-1 24"x12"
 M5-1R 21"x21"	 M6-1 21"x21"	 M4-8 24"x12"
	 M4-6 24"x12"	

W20-2A

DETOUR PLAN NOTES :



PORTABLE CHANGEABLE MESSAGE BOARDS MUST BE PLACED ALONG WESTBOUND CTH VV APPROACH TO PROJECT AREA 7 DAYS PRIOR TO DETOUR. LOCATIONS AS DIRECTED BY ENGINEER. USE THE FOLLOWING MESSAGE.

1ST FRAME	2ND FRAME
TRUCK	BEGINNING
DETOUR	<DATE>
START	


DETOUR MARKER PLAN WILL BE ADJUSTED TO CORRESPOND WITH EXISTING ROUTE MARKERS. ANY SIGNS, TEMPORARY OR EXISTING, THAT CONFLICT WITH TRAFFIC CONTROL "IN USE" SHALL BE COVERED. THE COVERING OF POST MOUNTED SIGNS IS INCLUDED UNDER TRAFFIC CONTROL ITEM. THE CONTRACTOR MAY CHOOSE TO REMOVE AND REINSTALL EXISTING POST MOUNTED SIGNS IN LIEU OF COVERING THEM.

ALL "W" SERIES SIGNS SHALL BE 48" X 48" UNLESS OTHERWISE NOTED

IMMEDIATELY RE-ESTABLISH "STOP" SIGNS THAT ARE REMOVED FOR A CONSTRUCTION OPERATION

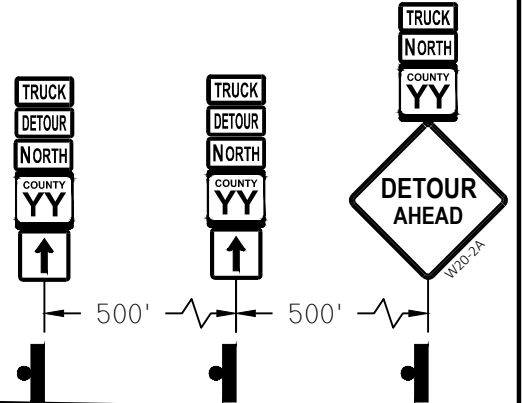

CTH VV/SILVER SPRING DR

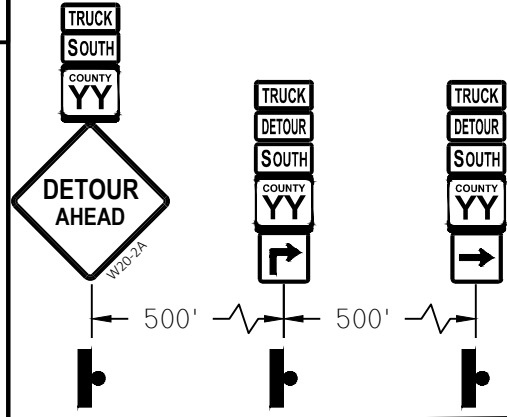

CTH VV/SILVER SPRING DR

LEGEND

- SIGN MOUNTED ON POSTS
- DETOUR ROUTE

DETOUR PLAN NOTES :


PORTABLE CHANGEABLE MESSAGE BOARDS MUST BE PLACED ALONG EASTBOUND CTH VV APPROACH TO PROJECT AREA 7 DAYS PRIOR TO DETOUR. LOCATIONS AS DIRECTED BY ENGINEER. USE THE FOLLOWING MESSAGE.

<u>1ST FRAME</u>	<u>2ND FRAME</u>
TRUCK DETOUR START	BEGINNING <DATE>

DETOUR MARKER PLAN WILL BE ADJUSTED TO CORRESPOND WITH EXISTING ROUTE MARKERS. ANY SIGNS, TEMPORARY OR EXISTING, THAT CONFLICT WITH TRAFFIC CONTROL "IN USE" SHALL BE COVERED. THE COVERING OF POST MOUNTED SIGNS IS INCLUDED UNDER TRAFFIC CONTROL ITEM. THE CONTRACTOR MAY CHOOSE TO REMOVE AND REINSTALL EXISTING POST MOUNTED SIGNS IN LIEU OF COVERING THEM.

ALL "W" SERIES SIGNS SHALL BE 48" X 48" UNLESS OTHERWISE NOTED

IMMEDIATELY RE-ESTABLISH "STOP" SIGNS THAT ARE REMOVED FOR A CONSTRUCTION OPERATION

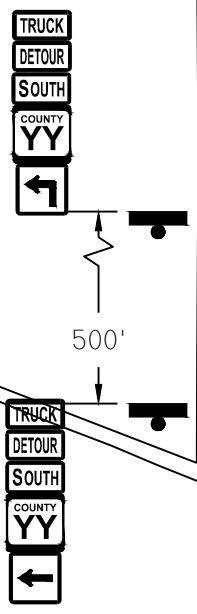

CTH Y/LANNON RD

CTH K/LISBON RD

CTH YY/PILGRIM RD



Estimate Of Quantities

2753-08-70

Line	Item	Item Description	Unit	Total	Qty
0002	204.0110	Removing Asphaltic Surface	SY	20.000	20.000
0004	204.0115	Removing Asphaltic Surface Butt Joints	SY	110.000	110.000
0006	204.0120	Removing Asphaltic Surface Milling	SY	9,500.000	9,500.000
0008	204.0150	Removing Curb & Gutter	LF	1,160.000	1,160.000
0010	204.0155	Removing Concrete Sidewalk	SY	90.000	90.000
0012	204.0195	Removing Concrete Bases	EACH	11.000	11.000
0014	204.0215	Removing Catch Basins	EACH	1.000	1.000
0016	204.0245	Removing Storm Sewer (size) 01. 12" Class IV Pipe	LF	3.000	3.000
0018	204.9060.S	Removing (item description) 01. Existing Traffic Signal	EACH	1.000	1.000
0020	204.9060.S	Removing (item description) 02. Loop Detector Wire and Lead-In Cable	EACH	1.000	1.000
0022	205.0100	Excavation Common	CY	400.000	400.000
0024	205.0501.S	Excavation, Hauling, and Disposal of Petroleum Contaminated Soil	TON	20.000	20.000
0026	213.0100	Finishing Roadway (project) 01. 2753-08-70	EACH	1.000	1.000
0028	305.0110	Base Aggregate Dense 3/4-Inch	TON	35.000	35.000
0030	305.0120	Base Aggregate Dense 1 1/4-Inch	TON	550.000	550.000
0032	390.0203	Base Patching Asphaltic	SY	1,030.000	1,030.000
0034	455.0605	Tack Coat	GAL	675.000	675.000
0036	460.2000	Incentive Density HMA Pavement	DOL	780.000	780.000
0038	460.6223	HMA Pavement 3 MT 58-28 S	TON	110.000	110.000
0040	460.6225	HMA Pavement 5 MT 58-28 S	TON	1,100.000	1,100.000
0042	601.0415	Concrete Curb & Gutter 6-Inch Sloped 30-Inch Type J	LF	1,160.000	1,160.000
0044	602.0410	Concrete Sidewalk 5-Inch	SF	1,560.000	1,560.000
0046	602.0505	Curb Ramp Detectable Warning Field Yellow	SF	192.000	192.000
0048	602.0605	Curb Ramp Detectable Warning Field Radial Yellow	SF	70.000	70.000
0050	602.2400	Concrete Safety Islands	SF	230.000	230.000
0052	611.0660	Inlet Covers Type WM	EACH	1.000	1.000
0054	611.1253	Catch Basins 2.5x3-FT	EACH	1.000	1.000
0056	611.3225	Inlets 2x2.5-FT	EACH	1.000	1.000
0058	619.1000	Mobilization	EACH	1.000	1.000
0060	620.0300	Concrete Median Sloped Nose	SF	100.000	100.000
0062	624.0100	Water	MGAL	5.000	5.000
0064	625.0100	Topsoil	SY	600.000	600.000
0066	628.1504	Silt Fence	LF	375.000	375.000
0068	628.1520	Silt Fence Maintenance	LF	375.000	375.000
0070	628.1905	Mobilizations Erosion Control	EACH	1.000	1.000
0072	628.1910	Mobilizations Emergency Erosion Control	EACH	2.000	2.000
0074	628.7015	Inlet Protection Type C	EACH	10.000	10.000
0076	628.7555	Culvert Pipe Checks	EACH	7.000	7.000
0078	630.0200	Seeding Temporary	LB	15.000	15.000
0080	637.2230	Signs Type II Reflective F	SF	143.150	143.150
0082	637.2235	Signs Type II Reflective F Folding	SF	50.000	50.000
0084	638.2602	Removing Signs Type II	EACH	3.000	3.000
0086	642.5201	Field Office Type C	EACH	1.000	1.000
0088	643.0300	Traffic Control Drums	DAY	1,300.000	1,300.000
0090	643.0420	Traffic Control Barricades Type III	DAY	135.000	135.000
0092	643.0715	Traffic Control Warning Lights Type C	DAY	1,550.000	1,550.000
0094	643.0900	Traffic Control Signs	DAY	3,400.000	3,400.000
0096	643.1050	Traffic Control Signs PCMS	DAY	42.000	42.000
0098	643.3105	Temporary Marking Line Paint 4-Inch	LF	425.000	425.000

Estimate Of Quantities

2753-08-70

Line	Item	Item Description	Unit	Total	Qty
0100	643.5000	Traffic Control	EACH	1.000	1.000
0102	646.1020	Marking Line Epoxy 4-Inch	LF	4,300.000	4,300.000
0104	646.3020	Marking Line Epoxy 8-Inch	LF	670.000	670.000
0106	646.5020	Marking Arrow Epoxy	EACH	10.000	10.000
0108	646.5120	Marking Word Epoxy	EACH	3.000	3.000
0110	646.6120	Marking Stop Line Epoxy 18-Inch	LF	170.000	170.000
0112	646.6220	Marking Yield Line Epoxy 18-Inch	EACH	10.000	10.000
0114	646.7120	Marking Diagonal Epoxy 12-Inch	LF	160.000	160.000
0116	646.7420	Marking Crosswalk Epoxy Transverse Line 6-Inch	LF	750.000	750.000
0118	646.8220	Marking Island Nose Epoxy	EACH	10.000	10.000
0120	650.5500	Construction Staking Curb Gutter and Curb & Gutter	LF	1,160.000	1,160.000
0122	650.6501	Construction Staking Structure Layout (structure) 01. Catch Basin 2.5x3 FT	EACH	1.000	1.000
0124	650.8501	Construction Staking Electrical Installations (project) 01. 2753-08-70	EACH	1.000	1.000
0126	650.9000	Construction Staking Curb Ramps	EACH	19.000	19.000
0128	650.9500	Construction Staking Sidewalk (project) 01. 2753-08-70	EACH	1.000	1.000
0130	650.9911	Construction Staking Supplemental Control (project) 01. 2753-08-70	EACH	1.000	1.000
0132	652.0225	Conduit Rigid Nonmetallic Schedule 40 2-Inch	LF	60.000	60.000
0134	652.0235	Conduit Rigid Nonmetallic Schedule 40 3-Inch	LF	350.000	350.000
0136	652.0615	Conduit Special 3-Inch	LF	860.000	860.000
0138	653.0140	Pull Boxes Steel 24x42-Inch	EACH	12.000	12.000
0140	653.0905	Removing Pull Boxes	EACH	18.000	18.000
0142	654.0101	Concrete Bases Type 1	EACH	4.000	4.000
0144	654.0102	Concrete Bases Type 2	EACH	4.000	4.000
0146	654.0113	Concrete Bases Type 13	EACH	1.000	1.000
0148	654.0120	Concrete Bases Type 10-Special	EACH	3.000	3.000
0150	654.0217	Concrete Control Cabinet Bases Type 9 Special	EACH	1.000	1.000
0152	655.0230	Cable Traffic Signal 5-14 AWG	LF	860.000	860.000
0154	655.0240	Cable Traffic Signal 7-14 AWG	LF	220.000	220.000
0156	655.0260	Cable Traffic Signal 12-14 AWG	LF	2,835.000	2,835.000
0158	655.0305	Cable Type UF 2-12 AWG Grounded	LF	1,215.000	1,215.000
0160	655.0515	Electrical Wire Traffic Signals 10 AWG	LF	1,575.000	1,575.000
0162	655.0610	Electrical Wire Lighting 12 AWG	LF	1,152.000	1,152.000
0164	656.0201	Electrical Service Meter Breaker Pedestal (location) 01. CTH VV (Silver Spring Rd) & CTH YY (Pilgrim Rd)	EACH	1.000	1.000
0166	657.0100	Pedestal Bases	EACH	4.000	4.000
0168	657.0255	Transformer Bases Breakaway 11 1/2-Inch Bolt Circle	EACH	4.000	4.000
0170	657.0310	Poles Type 3	EACH	4.000	4.000
0172	657.0352	Poles Type 10-Special	EACH	3.000	3.000
0174	657.0360	Poles Type 13	EACH	1.000	1.000
0176	657.0420	Traffic Signal Standards Aluminum 13-FT	EACH	2.000	2.000
0178	657.0425	Traffic Signal Standards Aluminum 15-FT	EACH	2.000	2.000
0180	657.0541	Monotube Arms 40-FT-Special	EACH	3.000	3.000
0182	657.0550	Monotube Arms 50-FT	EACH	1.000	1.000
0184	657.0610	Luminaire Arms Single Member 4 1/2-Inch Clamp 6-FT	EACH	4.000	4.000
0186	657.0815	Luminaire Arms Steel 15-FT	EACH	4.000	4.000
0188	658.0173	Traffic Signal Face 3S 12-Inch	EACH	18.000	18.000
0190	658.0174	Traffic Signal Face 4S 12-Inch	EACH	6.000	6.000
0192	658.0416	Pedestrian Signal Face 16-Inch	EACH	8.000	8.000
0194	658.0500	Pedestrian Push Buttons	EACH	10.000	10.000

Estimate Of Quantities

2753-08-70

Line	Item	Item Description	Unit	Total	Qty
0196	658.5070	Signal Mounting Hardware (location) 01. CTH VV (Silver Spring Rd) & CTH YY (Pilgrim Rd)	EACH	1.000	1.000
0198	659.1125	Luminaires Utility LED C	EACH	8.000	8.000
0200	661.0201	Temporary Traffic Signals for Intersections (location) 01. CTH VV (Silver Spring Rd) & CTH YY (Pilgrim Rd)	EACH	1.000	1.000
0202	690.0150	Sawing Asphalt	LF	1,300.000	1,300.000
0204	ASP.1T0A	On-the-Job Training Apprentice at \$5.00/HR	HRS	300.000	300.000
0206	ASP.1T0G	On-the-Job Training Graduate at \$5.00/HR	HRS	200.000	200.000
0208	SPV.0060	Special 01. Traffic Signal Controller and Cabinet	EACH	1.000	1.000
0210	SPV.0060	Special 02. Temporary Vehicle Detection	EACH	1.000	1.000
0212	SPV.0060	Special 03. Video Vehicle Detection	EACH	1.000	1.000
0214	SPV.0060	Special 04. Spread Spectrum Radio System	EACH	2.000	2.000
0216	SPV.0060	Special 05. Post Tubular Steel 1 3/4" x 1 3/4" x 12"	EACH	3.000	3.000
0218	SPV.0060	Special 06. Section Corner Monuments	EACH	1.000	1.000
0220	SPV.0180	Special 01. Hydroseed	SY	600.000	600.000

3

3

REMOVALS							
LOCATION	204.0110 REMOVING ASPHALTIC SURFACE SY	204.0115 REMOVING ASPHALTIC SURFACE BUTT JOINTS SY	204.0120 REMOVING ASPHALTIC SURFACE MILLING SY	204.0150 REMOVING CURB & GUTTER LF	204.0155 REMOVING CONCRETE SIDEWALK SY	204.0215 REMOVING CATCH BASIN EACH	204.0245 REMOVING STORM SEWER LF
PROJECT	20	--	9500	1160	90	--	--
STA 101+75	--	25	--	--	--	--	--
STA 103+36	--	--	--	--	--	1	3
STA 104+26	--	13	--	--	--	--	--
STA 140+57 TO 105+46	--	47	--	--	--	--	--
STA 105+76	--	12	--	--	--	--	--
STA 109+50	--	13	--	--	--	--	--
TOTAL	20	110	9,500	1,160	90	1	3

SAWING	
LOCATION	690.0150 SAWING ASPHALT LF
PROJECT	1,300
TOTAL	1,300

BASE AGGREGATE DENSE			
LOCATION	305.0110 BASE AGGREGATE DENSE 3/4-INCH TON	305.0120 BASE AGGREGATE DENSE 1 1/4-INCH TON	624.0100 WATER MGAL
PROJECT	30	530	5
UNDISTRIBUTED	5	20	0
TOTAL	35	550	5

MOBILIZATION	
LOCATION	619.1000 EACH
2753-08-70	1
TOTAL	1

EXCAVATION		
LOCATION	205.0100 COMMON CY	205.0501.S EXCAVATION, HAULING AND DISPOSAL OF PETROLEUM CONTAMINATED SOIL TON
PROJECT	400	20
TOTAL	400	20

SIDEWALK					
LOCATION	602.0410 CONCRETE SIDEWALK 5-INCH SF	602.0505 CURB RAMP DETECTABLE WARNING FIELD YELLOW SF	602.0605 CURB RAMP DETECTABLE WARNING FIELD RADIAL YELLOW SF	602.2400 CONCRETE SAFETY ISLANDS SF	620.0300 CONCRETE MEDIAN SLOPED NOSE SF
PROJECT	1560	192	70	230	100
TOTAL	1,560	192	70	230	100

CONSTRUCTION STAKING						
LOCATION	650.5500 CURB GUTTER and CURB & GUTTER LF	650.6501 STRUCTURE LAYOUT EACH	650.8501 ELECTRICAL INSTALLATIONS EACH	650.9000 CURB RAMPS EACH	650.9500 SIDEWALK EACH	650.9911 SUPPLEMENTAL CONROL EACH
PROJECT	1160	1	1	19	1	1
TOTAL	1,160	1	1	19	1	1

FIELD OFFICE - TYPE C	
LOCATION	642.5201 EACH
2753-08-70	1
TOTAL	1

EROSION CONTROL									
LOCATION	625.0100 TOPSOIL SY	628.1504 SILT FENCE LF	628.1520 SILT FENCE MAINTENANCE LF	628.1905 EROSION CONTROL EACH	628.1910 EROSION EMERGENCY CONTROL EACH	628.7015 PROTECTION INLET TYPE C EACH	628.7555 CULVERT PIPE CHECKS EACH	630.0200 SEEDING TEMPORARY LB	SPV.0180.01 HYDROSEED SY
PROJECT	600	300	300	1	2	10	7	15	600
UNDISTRIBUTED	--	75	75	--	--	--	--	--	--
TOTAL	600	375	375	1	2	10	7	15	600

ASPHALT					
LOCATION	213.0100 FINISHING ROADWAY EACH	390.0203 PATCHING ASPHALTIC SY	455.0605 TACK COAT GAL	460.6223 HMA PAVEMENT 3 MT 58-28 S TON	460.6225 HMA PAVEMENT 5 MT 58-28 S TON
PROJECT	1	1030	675	--	1100
STA 101+75 TO 104+46	--	--	--	23	--
STA 105+60 TO 108+24	--	--	--	37	--
STA 108+24 TO 109+50	--	--	--	9	--
UNDISTRIBUTED	--	--	--	41	--
TOTAL	1	1,030	675	110	1,100

STORM SEWER			
LOCATION	611.0660 INLET COVER TYPE WM EACH	611.1253 CATCH BASINS 2.5 x3-FT EACH	611.3225 INLETS 2x2.5-FT EACH
STA103+36	1	1	1
TOTAL	1	1	1

CONCRETE CURB & GUTTER	
LOCATION	601.0415 CONCRETE CURB & GUTTER 6-INCH SLOPED 30-INCH TYPE J LF
PROJECT	1160
TOTAL	1,160

3

3

MARKING												
LOCATION	646.1020 LINE EPOXY 4-INCH YELLOW		646.3020 LINE EPOXY 8-INCH WHITE		646.5020 ARROW EPOXY TYPE 2 EACH	646.5120 WORD EPOXY EACH	646.6120 STOP LINE EPOXY WHITE 18-INCH LF	646.6220 MARKING YIELD LINE EPOXY 18-INCH WHITE EACH	646.7120 DIAGONAL EPOXY 12-INCH WHITE LF	646.7420 MARKING CROSSWALK EPOXY TRANSVERSE LINE 6-INCH WHITE LF	646.8220 ISLAND NOSE EPOXY YELLOW EACH	643.3105 TEMPORARY MARKING LINE 4-INCH YELLOW EACH
	SOLID	SOLID	12.5' LINE	LF	EACH	EACH	LF	EACH	LF	LF	EACH	EACH
	LF	LF	LF	LF	EACH	EACH	LF	EACH	LF	LF	EACH	EACH
PROJECT	1479	2327	425	652	10	3	170	10	152	740	10	425
UNDISTRIBUTED	34	35	--	18	--	--	--	--	8	10	--	--
SUBTOTAL	1,513	2,362	425	670	10	3	170	10	160	750	10	425
TOTAL	4,300			670	10	3	170	10	160	750	10	425

TRAFFIC CONTROL												
STAGE	643.0300 DRUMS		643.0420 BARRICADES TYPE III		643.0715 WARNING LIGHTS TYPE C		643.0900 SIGNS		643.1050 SIGNS PCMS		643.5000 TRAFFIC CONTROL	
	EACH	DAY	EACH	DAY	EACH	DAY	EACH	DAY	EACH	DAY		
	STAGE 1	33	495	3	45	39	585	48	720	4	28	-
STAGE 2A	26	338	3	39	32	416	86	1,118	1	7	-	
STAGE 2B	23	230	3	30	29	290	81	810	1	7	-	
STAGE 3	32	224	2	14	36	252	48	336	--	--	-	
STAGE 4	--	--	--	--	--	--	65	390	--	--	-	
UNDISTRIBUTED		13		7		7		26			1	
TOTAL		1,300		135		1,550		3,400		42	1	

PERMANENT SIGNAGE					
LOCATION	637.2230 SIGN TYPE II REFLECTIVE F SF	637.2235 SIGN TYPE II REFLECTIVE F FOLDING SF	SPV.0060.05 POST TUBULAR STEEL 1 3/4"x1 3/4"x12' EACH	638.2602 REMOVING SIGNS TYPE II EACH	
	STA 101+85	5.00	-	1	1
	STA 103+95	6.25	-	1	1
STA 104+34	10.88	6.25	-	-	
STA 104+46	13.00	6.25	-	-	
STA 104+57	16.88	6.25	-	-	
STA 104+95	19.56	6.25	-	-	
STA 105+05	19.56	6.25	-	-	
STA 105+44	16.88	6.25	-	-	
STA 105+59	13.00	6.25	-	-	
STA 105+62	10.88	6.25	-	-	
STA 106+05	6.25	-	1	1	
STA 106+87	5.00	-	-	-	
TOTAL	143.14	50.00	3	3	

SECTION CORNER MONUMENTS		
LOCATION	SPV.0060.06 SECTION CORNER MONUMENTS EACH	
	CTH VV AT CTH YY	1
	TOTAL	1

3

REMOVE PULL BOXES	
PULL BOX NO.	REMOVING PULL BOXES EACH
EXPB1	1
EXPB2	1
EXPB3	1
EXPB4	1
EXPB5	1
EXPB6	1
EXPB7	1
EXPB8	1
EXPB9	1
EXPB10	1
EXPB11	1
EXPB12	1
EXPB13	1
EXPB14	1
EXPB15	1
EXPB16	1
EXPB17	1
EXPB18	1
TOTAL	18

REMOVING CONCRETE BASES	
SIGNAL BASE NO.	REMOVING CONCRETE BASES EACH
EXCB1	1
EXSB1	1
EXSB2	1
EXSB3	1
EXSB4	1
EXSB5	1
EXSB6	1
EXSB7	1
EXSB8	1
EXSB9	1
EXSB10	1
TOTAL	11

PULL BOXES				
PULL BOX NO.	LOCATION STA	OFFSET	STEEL 24x42-INCH	EACH
PB1	105+46.8	77.2 RT		1
PB2	104+95.2	77.6 RT		1
PB3	104+59.8	61.4 RT		1
PB4	104+41.6	49.2 RT		1
PB5	104+40.8	8.5 LT		1
PB6	104+39.9	71.7 LT		1
PB7	104+45.5	79.7 LT		1
PB8	105+05.2	79.5 LT		1
PB9	105+42.2	57.5 LT		1
PB10	105+82.0	48.5 LT		1
PB11	105+65.2	10.4 RT		1
PB12	105+66.9	59.9 RT		1
TOTAL	TOTAL			12

CONDUIT					
FROM	TO	652.0225 CONDUIT RIGID NONMETALLIC SCHEDULE 40 2-INCH L.F.	652.0235 CONDUIT RIGID NONMETALLIC SCHEDULE 40 3-INCH L.F.	652.0615 CONDUIT SPECIAL 3-INCH L.F.	
CB1	PB1	--	120	--	
PB1	SB1	5	--	--	
PB1	PB2	--	--	100	
PB2	SB2	10	--	--	
PB2	PB3	--	--	80	
PB3	SB3	--	10	--	
PB3	PB4	--	40	--	
PB4	SB4	5	--	--	
PB4	PB5	--	--	120	
PB5	SB5	5	--	--	
PB5	PB6	--	--	130	
PB6	SB6	--	5	--	
PB6	PB7	--	20	--	
PB7	SB7	10	--	--	
PB7	PB8	--	--	120	
PB8	SB8	10	--	--	
PB8	PB9	--	--	90	
PB9	SB9	--	10	--	
PB9	PB10	--	40	--	
PB10	SB10	5	--	--	
PB10	PB11	--	--	120	
PB11	SB11	10	--	--	
PB11	PB12	--	--	100	
PB12	SB12	--	5	--	
PB12	CB1	--	100	--	
TOTAL		60	350	860	

3

TEMPORARY TRAFFIC SIGNALS FOR INTERSECTIONS	
LOCATION	661.0201.01 TEMPORARY TRAFFIC SIGNALS FOR INTERSECTIONS EACH
CTH VV AT CTH YY	1
TOTAL	1

REMOVE LOOP DETECTOR WIRE AND LEAD-IN CABLE	
LOCATION	204.9060.S.02 REMOVING LOOP DETECTOR WIRE AND LEAD-IN CABLE EACH
CTH VV AT CTH YY	1
TOTAL	1

TEMPORARY VEHICLE DETECTION	
LOCATION	SPV.0060.02 TEMPORARY VEHICLE DETECTION EACH
CTH VV AT CTH YY	1
TOTAL	1

REMOVING TRAFFIC SIGNALS	
LOCATION	204.9060.S.01 REMOVING TRAFFIC SIGNALS EACH
CTH VV AT CTH YY	1
TOTAL	1

3

CONCRETE BASES							
SIGNAL BASE NO.	LOCATION STA	OFFSET	654.0101	654.0102	654.0113	654.0120	654.0217
			CONCRETE BASES TYPE 1 EACH	CONCRETE BASES TYPE 2 EACH	CONCRETE BASES TYPE 13 EACH	CONCRETE BASES TYPE 10 SPECIAL EACH	CONCRETE CONTROL CABINET BASES TYPE 9 SPECIAL EACH
CB1	203+93.4	68.7 RT	--	--	--	--	1
SB1	105+51.3	71.8 RT	1	--	--	--	--
SB2	104+95.1	68.3 RT	--	1	--	--	--
SB3	104+57.8	51.2 RT	--	--	--	1	--
SB4	104+45.1	50.1 RT	1	--	--	--	--
SB5	104+46.1	4.6 LT	--	1	--	--	--
SB6	104+34.2	68.9 LT	--	--	1	--	--
SB7	104+55.8	77.6 LT	1	--	--	--	--
SB8	105+05.3	67.5 LT	--	1	--	--	--
SB9	105+44.3	49.4 LT	--	--	--	1	--
SB10	105+58.9	49.4 LT	1	--	--	--	--
SB11	105+59.0	6.1 RT	--	1	--	--	--
SB12	105+62.9	61.3 RT	--	--	--	1	--
TOTAL		TOTAL	4	4	1	3	1

TRAFFIC SIGNAL CABLE AND WIRE			
FROM	TO	655.0305	655.0610
		CABLE TYPE UF 2-12 AWG GROUNDED L.F.	ELECTRICAL WIRE LIGHTING 12 AWG L.F.
CB1	SB2	175	--
SB2	LUMINAIRE 1	--	144
SB2	SB3	135	--
SB3	LUMINAIRE 1	--	144
SB3	SB5	170	--
SB5	LUMINAIRE 1	--	144
SB5	SB6	150	--
SB6	LUMINAIRE 1	--	144
CB1	SB12	130	--
SB12	LUMINAIRE 1	--	144
SB12	SB11	140	--
SB11	LUMINAIRE 1	--	144
SB11	SB9	175	--
SB9	LUMINAIRE 1	--	144
SB9	SB8	140	--
SB8	LUMINAIRE 1	--	144
	TOTAL	1215	1152

3

TRAFFIC SIGNAL CABLE AND WIRE		
655.0260 CABLE TRAFFIC SIGNAL 12-14 AWG		
FROM	TO	L.F.
CB1	SB1	120
CB1	SB2	175
CB1	SB3	215
CB1	SB4	230
CB1	SB5	290
CB1	SB6	355
CB1	SB7	370
CB1	SB8	260
CB1	SB9	265
CB1	SB10	240
CB1	SB11	185
CB1	SB12	130
TOTAL		2835

TRAFFIC SIGNAL CABINET	
LOCATION	SPV.0060.01 TRAFFIC SIGNAL CONTROLLER AND CABINET EACH
CTH VV AT CTH YY	1
TOTAL	1

VIDEO VEHICLE DETECTION SYSTEM	
LOCATION	SPV.0060.03 VIDEO VEHICLE DETECTION SYSTEM EACH
CTH VV AT CTH YY	1
TOTAL	1

3

TRAFFIC SIGNAL CABLE AND WIRE		
655.0515 ELECTRICAL WIRE TRAFFIC SIGNALS 10 AWG		
FROM	TO	L.F.
CB1	SB1	85
SB1	SB2	105
SB2	SB3	100
SB3	SB4	75
SB4	SB5	110
SB5	SB6	115
SB6	SB7	65
SB7	SB8	120
SB8	SB9	105
SB9	SB10	75
SB10	SB11	115
SB11	SB12	105
SB12	CB1	95
SB1	PB1	55
SB2	PB2	25
SB3	PB3	25
SB3	PB4	20
SB5	PB5	20
SB6	PB6	20
SB6	PB7	25
SB8	PB8	25
SB9	PB9	25
SB10	PB10	20
SB11	PB11	25
SB12	PB12	20
TOTAL		1575

TRAFFIC SIGNAL CABLE AND WIRE				
655.0230 655.0240				
CABLE CABLE				
TRAFFIC SIGNAL TRAFFIC SIGNAL				
5-14 AWG 7-14 AWG				
FROM	TO	TRAFFIC SIGNAL	TRAFFIC SIGNAL	
NUMBER	HEAD	5-14 AWG	7-14 AWG	
L.F.	L.F.	L.F.	L.F.	
SB1	1	20	--	
SB1	11	--	20	
SB1	29	20	--	
SB2	4	--	20	
SB3	8	60	--	
SB3	9	50	--	
SB3	12	--	70	
SB3	23	20	--	
SB3	27	20	--	
SB4	13	20	--	
SB4	26	20	--	
SB5	16	20	--	
SB5	24	20	--	
SB6	20	80	--	
SB6	21	70	--	
SB6	32	20	--	
SB7	7	20	--	
SB7	5	--	20	
SB7	25	20	--	
SB8	10	--	20	
SB9	2	60	--	
SB9	3	50	--	
SB9	6	--	70	
SB9	17	20	--	
SB9	31	20	--	
SB10	19	20	--	
SB10	30	20	--	
SB11	18	20	--	
SB11	22	20	--	
SB12	14	70	--	
SB12	15	60	--	
SB12	28	20	--	
TOTAL		860	220	

FACES				
658.0173 658.0174 658.0416				
TRAFFIC TRAFFIC PEDESTRIAN				
SIGNAL SIGNAL SIGNAL				
FACE FACE FACE				
3S-12 INCH 4S-12 INCH 16-INCH				
SIGNAL	SIGNAL	3S-12 INCH	4S-12 INCH	16-INCH
BASE NO.	HEAD NO.	EACH	EACH	EACH
SB1	1	1	--	--
SB1	11	--	1	--
SB1	29	--	--	1
SB2	4	--	1	--
SB3	8	1	--	--
SB3	9	1	--	--
SB3	12	--	1	--
SB3	23	1	--	--
SB3	27	--	--	1
SB4	13	1	--	--
SB4	26	--	--	1
SB5	16	1	--	--
SB5	24	1	--	--
SB6	20	1	--	--
SB6	21	1	--	--
SB6	32	--	--	1
SB7	7	1	--	--
SB7	5	--	1	--
SB7	25	--	--	1
SB8	10	--	1	--
SB9	2	1	--	--
SB9	3	1	--	--
SB9	6	--	1	--
SB9	17	1	--	--
SB9	31	--	--	1
SB10	19	1	--	--
SB10	30	--	--	1
SB11	18	1	--	--
SB11	22	1	--	--
SB12	14	1	--	--
SB12	15	1	--	--
SB12	28	--	--	1
TOTAL		18	6	8

3

3



3

POLES														
	657.0100	657.0255	657.0310	657.0420	657.0425	657.0610	657.0352	657.0360	657.0541	657.0550	657.0815	658.0500	659.1125	
	TRANSFORMER BASES BREAKAWAY			TRAFFIC SIGNAL STANDARDS			TRAFFIC SIGNAL STANDARDS		LUMINAIRE ARMS POLES		MONOTUBE		PEDESTRIAN LUMINAIRES	
SIGNAL	PEDESTAL BASES	11 1/2-INCH BOLT CIRCLE	POLES TYPE 3	ALUMINUM 13-FT	ALUMINUM 15-FT	LUMINAIRE ARMS SINGLE MEMBER 4 1/2-INCH CLAMP 6-FT	POLES TYPE 10 SPECIAL	POLES TYPE 13	MONOTUBE ARMS 40-FT SPECIAL	MONOTUBE ARMS 50-FT	LUMINAIRE ARMS STEEL 15-FT	PEDESTRIAN PUSH BUTTONS	LUMINAIRES UTILITY LED C	
BASE NO.	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	
SB1	1	-	--	--	1	--	--	--	--	--	--	1	--	
SB2	--	1	1	--	--	1	--	--	--	--	--	--	1	
SB3	--	--	--	--	--	--	1	--	1	--	1	1	1	
SB4	1	--	--	1	--	--	--	--	--	--	--	1	--	
SB5	--	1	1	--	--	1	--	--	--	--	--	1	1	
SB6	--	--	--	--	--	--	--	1	--	1	1	1	1	
SB7	1	--	--	--	1	--	--	--	--	--	--	1	--	
SB8	--	1	1	--	--	1	--	--	--	--	--	--	1	
SB9	--	--	--	--	--	--	1	--	1	--	1	1	1	
SB10	1	--	--	1	--	--	--	--	--	--	--	1	--	
SB11	--	1	1	--	--	1	--	--	--	--	--	1	1	
SB12	--	--	--	--	--	--	1	--	1	--	1	1	1	
TOTAL	4	4	4	2	2	4	3	1	3	1	4	10	8	

TRAFFIC SIGNAL MOUNTING HARDWARE	
	658.5070.01
	SIGNAL
	MOUNTING
	HARDWARE
LOCATION	EACH
CTH VV AT CTH YY	1
TOTAL	1

ELECTRICAL SERVICE METER BREAKER PEDESTAL	
	656.0201.01
	ELECTRICAL SERVICE
	METER BREAKER
	PEDESTAL
LOCATION	EACH
CTH VV AT CTH YY	1
TOTAL	1

RADIO COMMUNICATIONS EQUIPMENT		
		SPV.0060.04
		SPREAD SPECTRUM
		RADIO SYSTEM
LOCATION	LOCATION	EACH
CTH VV AT CTH YY	SB12	2
TOTAL		2

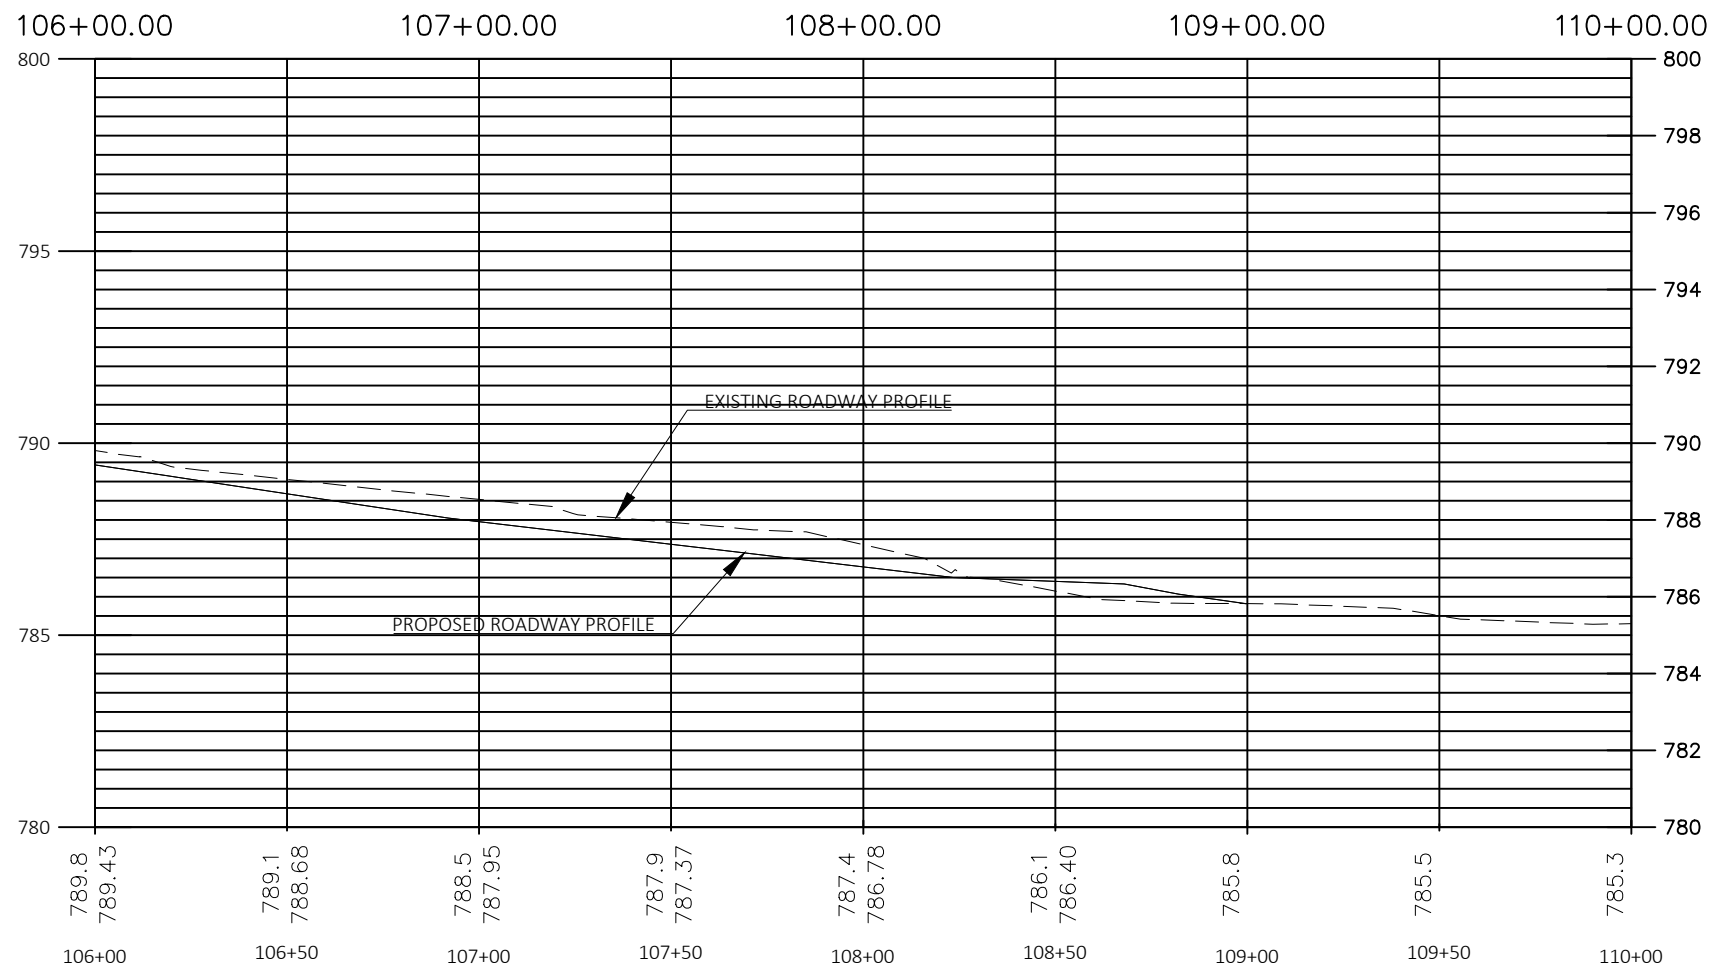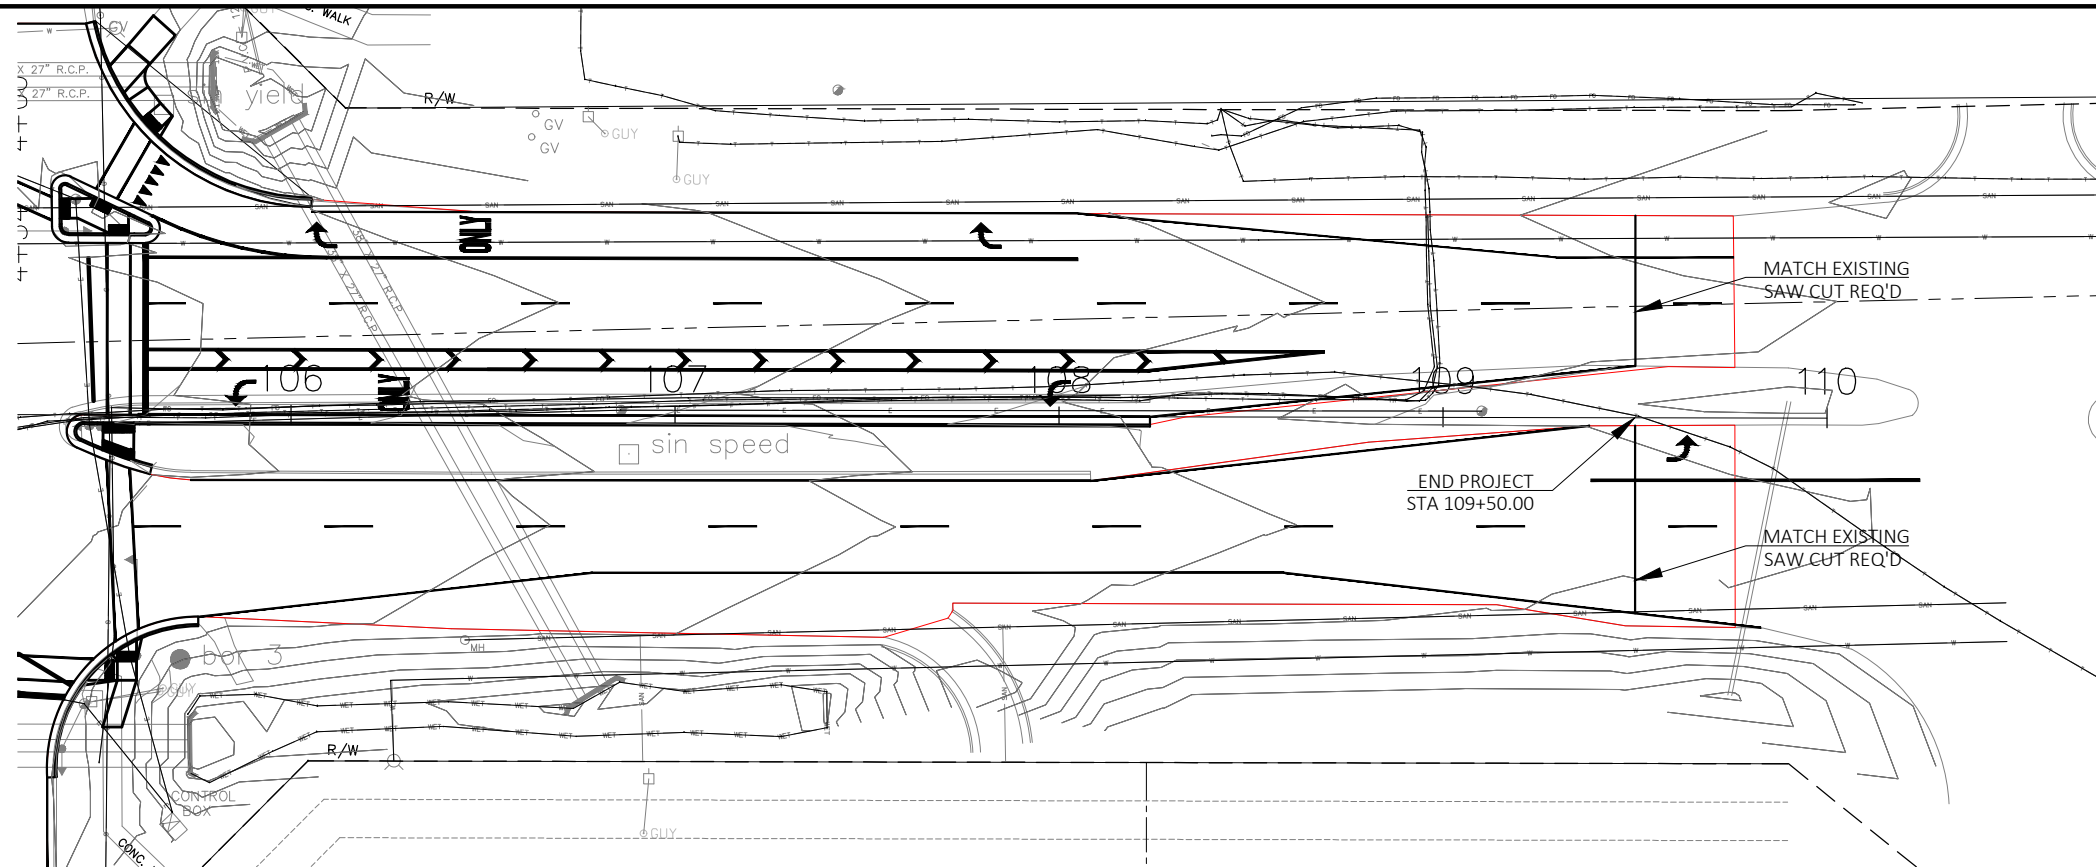

PROJECT NO: 2753-08-70

HWY: CTH VV

COUNTY: WAUKESHA



PLAN & PROFILE

SHEET 50


E

Standard Detail Drawing List

08A05-19B	INLET COVERS TYPE B, B-A, C, MS, MS-A, & WM
08A09-02	CATCH BASINS 2X3-FT AND 2.5X3-FT
08C07-02	INLETS 2X2-FT, 2X2.5-FT, 2X3-FT AND 2.5X3-FT
08D01-22A	CONCRETE CURB & GUTTER
08D01-22B	CONCRETE CURB, TIES AND CURB AND GUTTER APPLICATIONS
08D05-20A	CURB RAMPS TYPES 1 AND 1-A
08D05-20B	CURB RAMPS TYPES 2 AND 3
08D05-20C	CURB RAMPS TYPES 4A AND 4A1
08D05-20D	CURB RAMPS TYPE 4B AND 4B1
08D05-20E	CURB RAMPS TYPES 5, 6, 7A, 7B & 8
08D05-20F	CURB RAMPS RADIAL DETECTABLE WARNING FIELD APPLICATIONS
08D05-20G	CURB RAMPS RECTANGULAR AND RADIAL DETECTABLE WARNING PLATES
08D16-11	CONCRETE GUTTER, CURB AND GUTTER AND PAVEMENT TIES
08E09-06	SILT FENCE
08E10-02	INLET PROTECTION TYPE A, B, C AND D
08E15-01	CULVERT PIPE CHECK
09B02-10	CONDUIT
09B04-12	PULL BOX
09C03-04	TRANSFORMER/PEDESTAL BASES
09C06-07	CONCRETE CONTROL CABINET BASE, TYPE 9, SPECIAL
09C12-09A	CONCRETE BASE TYPE 13
09C12-09B	CONCRETE BASE TYPE 13
09C15-01	CONCRETE BASE TYPE 10 SPECIAL
09D01-05	CABINET SERVICE INSTALLATION (METER BREAKER PEDESTAL)
09D02-03	SIGNAL CONTROL CABINET
09E01-15B	POLE MOUNTINGS FOR TRAFFIC SIGNALS AND LIGHTING UNITS, TYPE 3 (HEAVY DUTY)
09E01-15G	HARDWARE DETAILS FOR POLE MOUNTINGS
09E03-06	NON-FREEWAY LIGHTING UNIT POLE WIRING
09E08-09G	TYPE 10 SPECIAL POLE 40' MONOTUBE ARM
09E08-09J	TYPE 13 POLE 35' -55' MONOTUBE ARM
09E08-09K	GENERAL NOTES, HARDWARE DETAILS FOR TYPE 9/10, 9/10 SPECIAL, 12 & 13 POLES W/MONOTUBE ARMS
09G01-04A	SPAN WIRE TEMPORARY TRAFFIC SIGNAL
09G01-04B	SPAN WIRE TEMPORARY TRAFFIC SIGNAL
09G01-04C	SPAN WIRE TEMPORARY TRAFFIC SIGNAL
09G01-04D	SPAN WIRE TEMPORARY TRAFFIC SIGNAL
09G01-04E	SPAN WIRE TEMPORARY TRAFFIC SIGNAL
09G01-04F	SPAN WIRE TEMPORARY TRAFFIC SIGNAL
09G01-04G	SPAN WIRE TEMPORARY TRAFFIC SIGNAL
15C02-08B	BARRICADES AND SIGNS FOR VARIOUS CLOSURES
15C02-08C	DETOUR SIGNING FOR MAINLINE CLOSURES
15C07-15B	PAVEMENT MARKING WORDS
15C07-15C	PAVEMENT MARKING ARROWS
15C08-22A	LONGITUDINAL MARKING (MAINLINE)
15C08-22C	PAVEMENT MARKING (TURN LANES)
15C08-22D	PAVEMENT MARKING (TURN LANES)
15C11-09B	CHANNELIZING DEVICES DRUMS, CONES, BARRICADES AND VERTICAL PANELS
15C18-06A	MEDIAN ISLAND MARKING PAVEMENT MARKINGS
15C18-06B	MEDIAN ISLAND MARKING MEDIAN ISLAND NOSE
15C20-02	YIELD MARKING
15C33-04	STOP LINE AND CROSSWALK PAVEMENT MARKING
15D12-10B	TRAFFIC CONTROL, LANE CLOSURE, SPEED REDUCTION
15D44-02	TRAFFIC CONTROL, SIGNING ON ROADWAYS WITH MILLED SURFACES



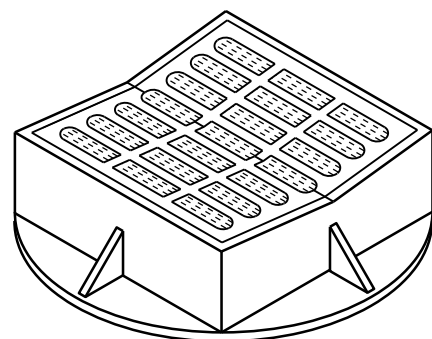
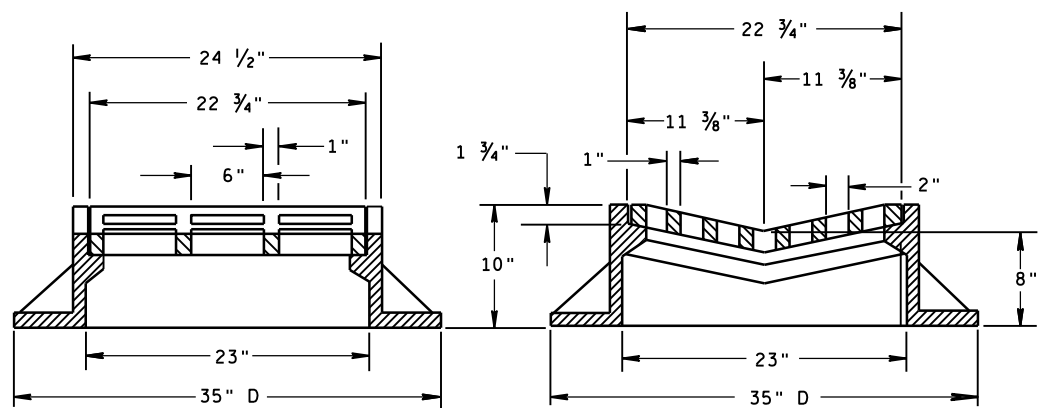


TYPE "B"

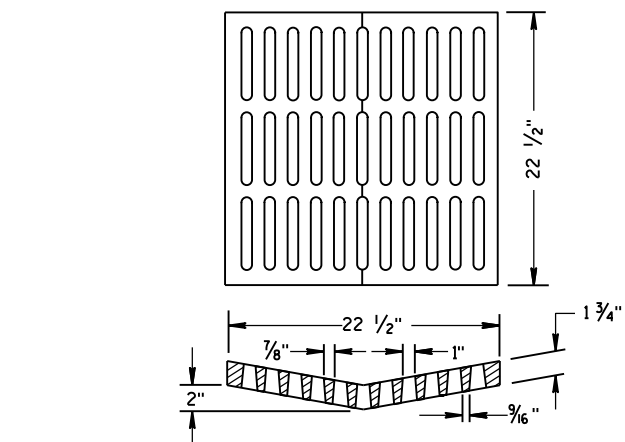

ALTERNATIVE GRATE FOR TYPE "B" COVER

USE WHERE PEDESTRIAN OR BICYCLE TRAFFIC IS POSSIBLE.
NOTED AS TYPE B-A ON THE DRAINAGE TABLE

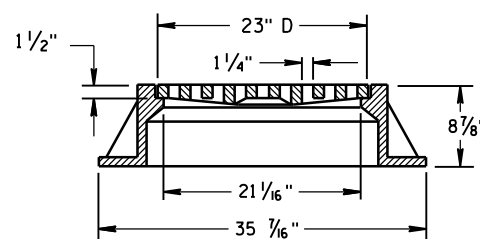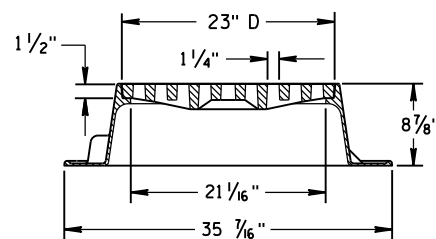

TYPE "C"


NOTE: EITHER CASTING IS ACCEPTABLE

GENERAL NOTES

DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND THE APPLICABLE SPECIAL PROVISIONS.


DETAIL DRAWINGS FOR PROPOSED ALTERNATE DESIGNS FOR CATCH BASIN, MANHOLE AND INLET COVERS SHALL BE SUBMITTED TO THE ENGINEER FOR APPROVAL PROVIDING THAT SUCH ALTERNATE DESIGNS MAKE PROVISION FOR EQUIVALENT CAPACITY AND STRENGTH.

ROUND FRAMES AND COVERS SHALL HAVE CONTINUOUSLY MACHINED BEARING SURFACES TO PREVENT ROCKING AND RATTLING.

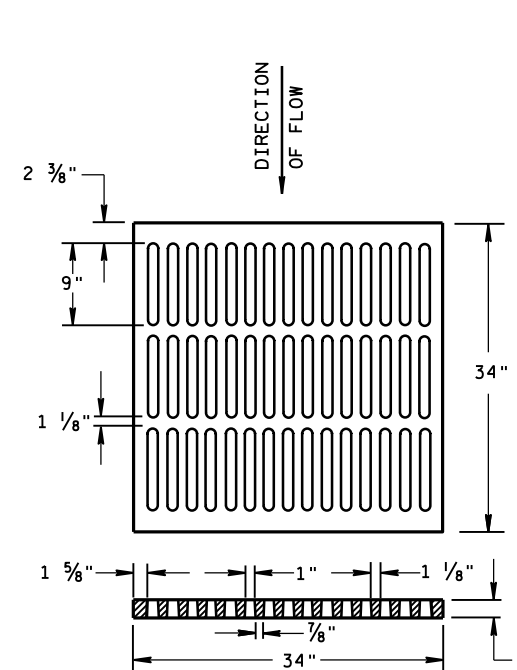



ALTERNATIVE TYPE "MS"

USE WHERE PEDESTRIAN OR BICYCLE TRAFFIC IS PERMITTED
NOTED AS TYPE MS-A ON THE DRAINAGE TABLE

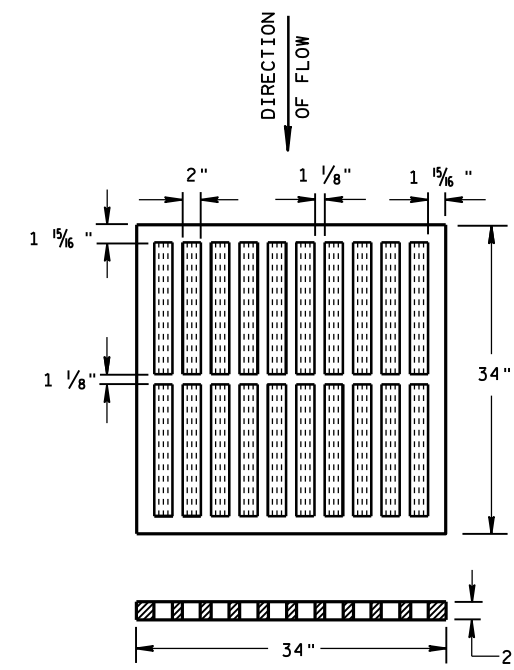

TYPE "MS"

USE ON FREEWAYS AND EXPRESSWAYS
NOTED AS TYPE MS ON DRAINAGE TABLE

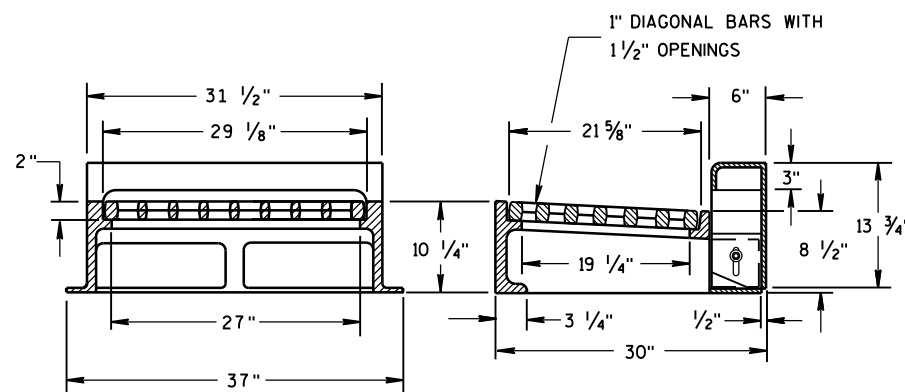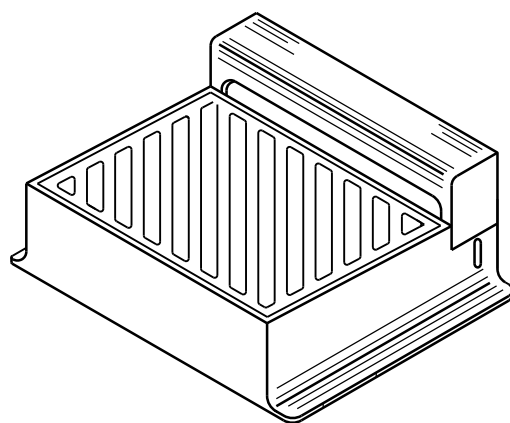

NOTE: CURB BOX HEIGHT ADJUSTABLE 6" TO 9"


TYPE "WM"

DIAGONAL SLOTS, SHALL BE ORIENTED TO THE DIRECTION OF FLOW AS ILLUSTRATED. GRATES ARE MANUFACTURED TO BE REVERSIBLE.


**INLET COVERS
TYPE B, B-A, C,
MS, MS-A, & WM**

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION


APPROVED
DATE 11/27/2013 /S/ Jerry H. Zogg
ROADWAY STANDARDS DEVELOPMENT ENGINEER
FHWA

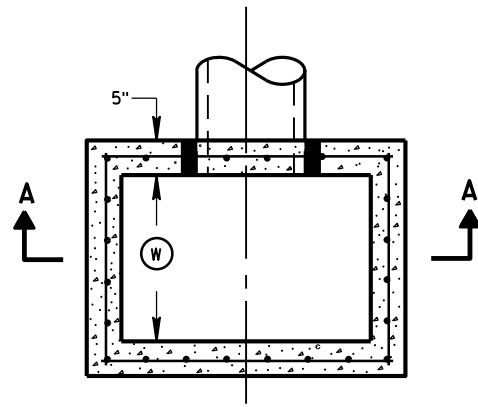


PLAN VIEW

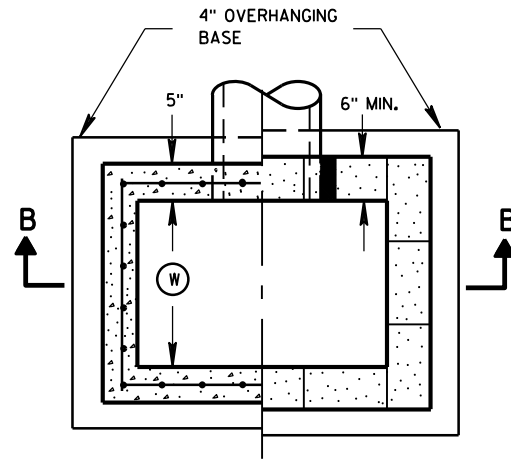

PLAN VIEW




RISER JOINTS TO BE SEALED WITH A BUTYL RUBBER SEAL PER SEALANT MANUFACTURERS RECOMMENDATIONS CONFORMING TO ASTM C 990 (TYP)

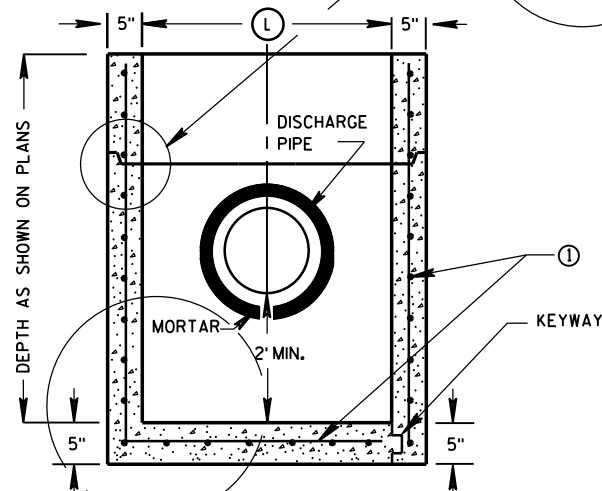

PRECAST REINFORCED CONCRETE WITH MONOLITHIC BASE


SECTION A-A

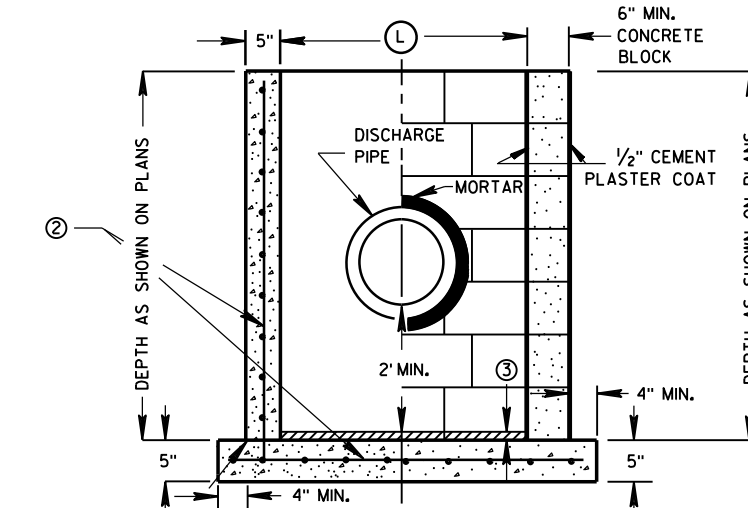

CAST-IN-PLACE REINFORCED CONCRETE

CONCRETE BLOCK ON CAST-IN-PLACE WITH PRECAST REINFORCED CONCRETE BASE

SECTION B-B

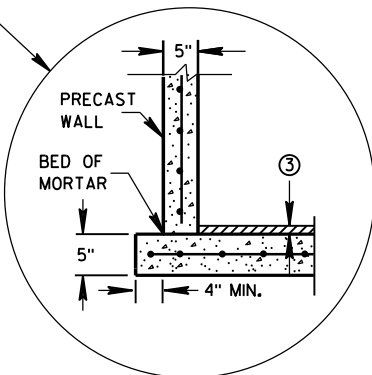

SEPARATE PRECAST REINFORCED CONCRETE BASE OPTION

GENERAL NOTES

DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND THE APPLICABLE SPECIAL PROVISIONS.

UNLESS OTHERWISE AUTHORIZED IN WRITING BY THE ENGINEER, THE CONTRACTOR SHALL NOT ORDER AND DELIVER PRECAST CATCH BASIN UNITS REQUIRED FOR THE PROJECT UNTIL A LIST OF SIZES IS FURNISHED BY THE ENGINEER.

DETAILED DRAWINGS FOR PROPOSED ALTERNATE DESIGNS FOR UNDERGROUND DRAINAGE STRUCTURES SHALL BE SUBMITTED TO THE ENGINEER FOR APPROVAL PROVIDING THAT SUCH ALTERNATE DESIGNS MAKE PROVISION FOR EQUIVALENT CAPACITY AND STRENGTH.

ALL PRECAST CATCH BASIN UNITS SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF ASTM C 913.

ALL DRAINAGE STRUCTURES ARE DESIGNATED ON THE PLANS AS "MANHOLES 3X3-L", "CATCH BASINS 4-B", "INLETS 2X3-H", ETC. THE FIRST NUMBERS DESIGNATES THE SIZE OF THE STRUCTURE, AND THE FOLLOWING LETTER DESIGNATES THE TYPE OF COVER TO BE USED TO COMPRISE THE COMPLETE UNIT.

BASES SHALL BE PLACED ON A BED OF MATERIAL AT LEAST 6 INCHES IN DEPTH, WHICH MEETS THE REQUIREMENTS OF FOUNDATION BACKFILL. THIS BEDDING SHALL BE COMPACTED AND PROVIDE UNIFORM SUPPORT FOR THE ENTIRE AREA OF THE BASE.

ALL BAR STEEL REINFORCEMENT SHALL BE EMBEDDED 2 INCHES CLEAR UNLESS OTHERWISE SHOWN OR NOTED.

PRECAST REINFORCED RISERS SHALL HAVE A TONGUE AND GROOVE JOINT WITH TONGUE UP OR DOWN.

4" OVERHANGING BASES ARE REQUIRED FOR CAST-IN-PLACE REINFORCED CONCRETE AND CONCRETE BLOCK INSTALLATIONS. 4" OVERHANG IS REQUIRED WHEN SEPARATE PRECAST BASE IS PROVIDED. OVERHANG IS NOT REQUIRED ON PRECAST STRUCTURES WITH AN INTEGRAL OR MONOLITHIC BASE.

MAXIMUM INSIDE PIPE DIAMETER DETERMINED BY 3" CLEARANCE ON EACH SIDE OF THE OUTSIDE WALL OF THE PIPE. SEE DETAIL "A". ASSUMES PIPE ENTERS PERPENDICULAR TO THE STRUCTURE.


- ① FOR PRECAST CATCH BASINS PROVIDE REINFORCING STEEL IN ACCORDANCE TO ASTM C 913.
- ② CONTRACTOR TO PROVIDE DRAWING(S) STAMPED BY A PROFESSIONAL ENGINEER FOR STEEL REINFORCING DESIGN FOR CAST-IN-PLACE STRUCTURES.
- ③ 1" CONCRETE KEY POURED AFTER INSTALLATION. 2" SUMP MEASURED FROM TOP OF KEY.

CATCH BASIN COVER MATRIX

CATCH BASIN SIZE	INLET COVER TYPE		F	ALL H'S
	WIDTH (W) (FT)	LENGTH (L) (FT)		
2X3-FT	2	3		X
2.5X3-FT	2.5	3	X	

PIPE MATRIX

CATCH BASIN SIZE	MAXIMUM INSIDE PIPE DIAMETER FOR TWO PIPES	
	WIDTH (IN)	LENGTH (IN)
2X3-FT	12	24
2.5X3-FT	18	24

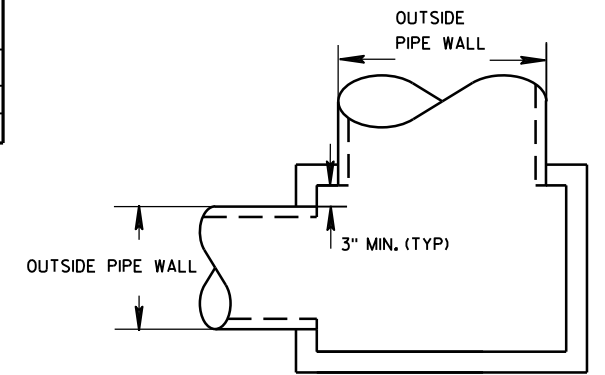


DETAIL "A"

CATCH BASINS 2X3-FT AND 2.5X3-FT


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
DATE: Sept., 2016 /S/ Rodney Taylor
ROADWAY STANDARDS DEVELOPMENT
UNIT SUPERVISOR


CATCH BASINS 2X3-FT AND 2.5X3-FT

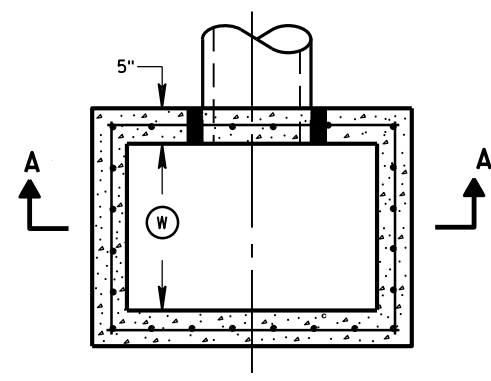


PLAN VIEW

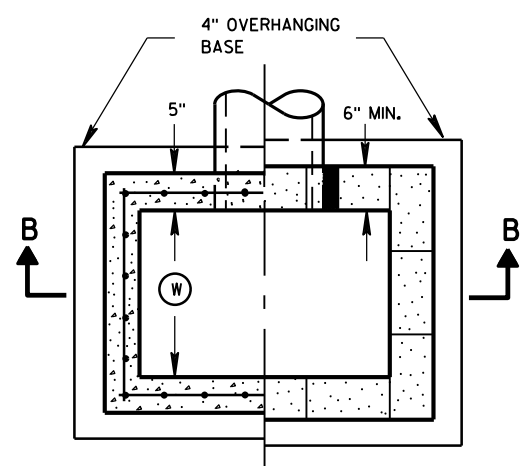


PLAN VIEW



RISER JOINTS TO BE SEALED WITH A BUTYL RUBBER SEAL PER SEALANT MANUFACTURERS RECOMMENDATIONS CONFORMING TO ASTM C 990 (TYP)

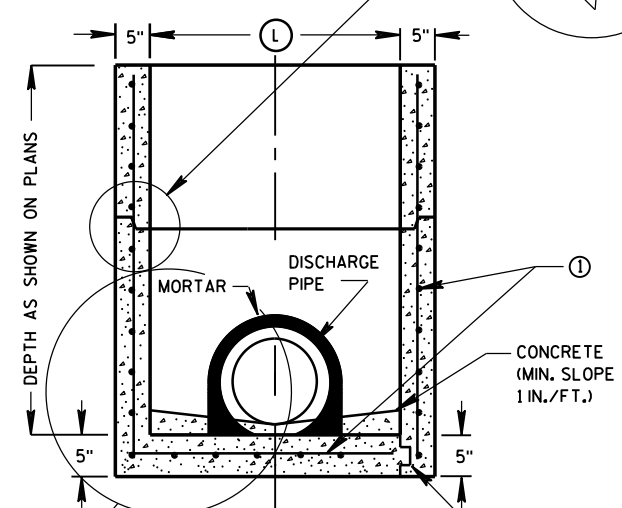


SECTION A-A

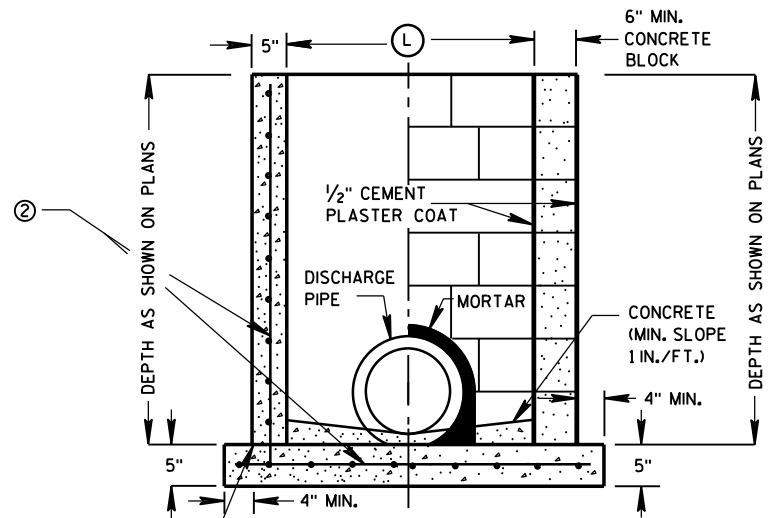

SECTION B-B

PRECAST REINFORCED CONCRETE WITH MONOLITHIC BASE
 PRECAST REINFORCED CONCRETE WITH INTEGRAL BASE
 KEYWAY

CAST-IN-PLACE REINFORCED CONCRETE
 CONCRETE BLOCK WITH CAST-IN-PLACE OR PRECAST REINFORCED CONCRETE BASE ①

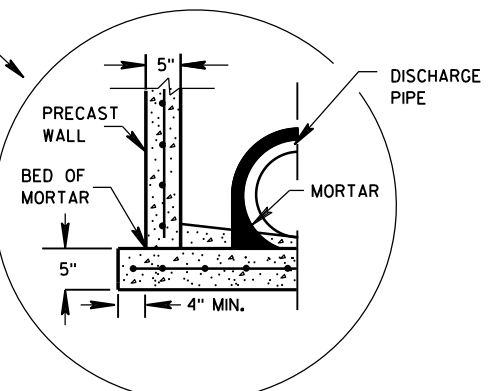

SEPARATE PRECAST REINFORCED CONCRETE BASE OPTION

GENERAL NOTES

DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND THE APPLICABLE SPECIAL PROVISIONS.

UNLESS OTHERWISE AUTHORIZED IN WRITING BY THE ENGINEER, THE CONTRACTOR SHALL NOT ORDER AND DELIVER PRECAST INLET UNITS REQUIRED FOR THE PROJECT UNTIL A LIST OF SIZES IS FURNISHED BY THE ENGINEER.

DETAILED DRAWINGS FOR PROPOSED ALTERNATE DESIGNS FOR UNDERGROUND DRAINAGE STRUCTURES SHALL BE SUBMITTED TO THE ENGINEER FOR APPROVAL PROVIDING THAT SUCH ALTERNATE DESIGNS MAKE PROVISION FOR EQUIVALENT CAPACITY AND STRENGTH.

ALL PRECAST INLET UNITS SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF ASTM C 913.

ALL DRAINAGE STRUCTURES ARE DESIGNATED ON THE PLANS AS "MANHOLES 3X3-L", "CATCH BASINS 4-B", "INLETS 2X3-H", ETC. THE FIRST NUMBERS DESIGNATES THE SIZE OF THE STRUCTURE, AND THE FOLLOWING LETTER DESIGNATES THE TYPE OF COVER TO BE USED TO COMPRISE THE COMPLETE UNIT.

BASES SHALL BE PLACED ON A BED OF MATERIAL AT LEAST 6 INCHES IN DEPTH, WHICH MEETS THE REQUIREMENTS OF FOUNDATION BACKFILL. THIS BEDDING SHALL BE COMPACTED AND PROVIDE UNIFORM SUPPORT FOR THE ENTIRE AREA OF THE BASE.

ALL BAR STEEL REINFORCEMENT SHALL BE EMBEDDED 2 INCHES CLEAR UNLESS OTHERWISE SHOWN OR NOTED.

PRECAST REINFORCED RISERS SHALL HAVE A TONGUE AND GROOVE JOINT WITH TONGUE UP OR DOWN.

4" OVERHANGING BASES ARE REQUIRED FOR CAST-IN-PLACE REINFORCED CONCRETE AND CONCRETE BLOCK INSTALLATIONS. 4" OVERHANG IS REQUIRED WHEN SEPARATE PRECAST BASE IS PROVIDED. OVERHANG IS NOT REQUIRED ON PRECAST STRUCTURES WITH AN INTEGRAL OR MONOLITHIC BASE.

MAXIMUM INSIDE PIPE DIAMETER DETERMINED BY 3 INCH CLEARANCE ON EACH SIDE OF THE OUTSIDE WALL OF THE PIPE. SEE DETAIL "A". ASSUMES PIPE ENTERS PERPENDICULAR TO THE STRUCTURE.

① FOR PRECAST INLETS PROVIDE REINFORCING STEEL IN ACCORDANCE TO ASTM C 913.


② CONTRACTOR TO PROVIDE DRAWING(S) STAMPED BY A PROFESSIONAL ENGINEER FOR STEEL REINFORCING DESIGN FOR CAST-IN-PLACE STRUCTURES.

INLET COVER MATRIX

INLET SIZE	INLET COVER TYPE		ALL A'S	ALL B'S	BW	F	ALL H'S	S	T	V	WM
	WIDTH ① (FT)	LENGTH ② (FT)									
2X2-FT	2	2	X	X				X		X	
2X2.5-FT	2	2.5			X			X	X	X	X
2X3-FT	2	3					X				
2.5X3-FT	2.5	3				X					

PIPE MATRIX

INLET SIZE	MAXIMUM INSIDE PIPE DIAMETER	
	WIDTH (IN)	LENGTH (IN)
2X2-FT	12	12
2X2.5-FT	12	18
2X3-FT	12	24
2.5X3-FT	18	24

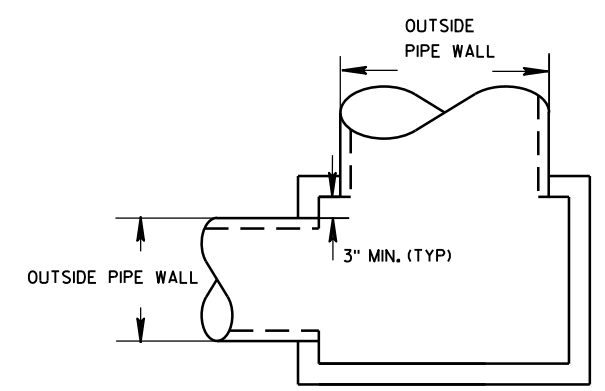


DETAIL "A"

INLETS 2X2-FT, 2X2.5-FT, 2X3-FT AND 2.5X3-FT


**INLETS 2X2-FT, 2X2.5-FT,
2X3-FT AND 2.5X3-FT**

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION


APPROVED
 Sep 1, 2016 /S/ Rodney Taylor
 DATE ROADWAY STANDARDS DEVELOPMENT
 FHWA UNIT SUPERVISOR

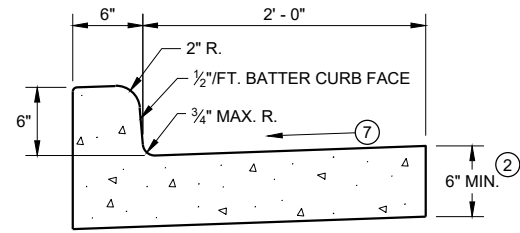


TYPES A^① & D

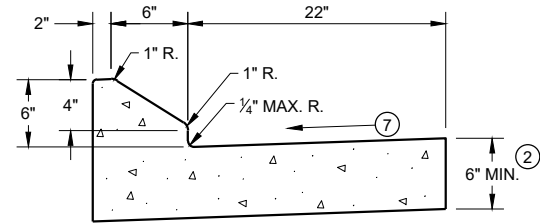


6" SLOPED CURB TYPES G^① & J

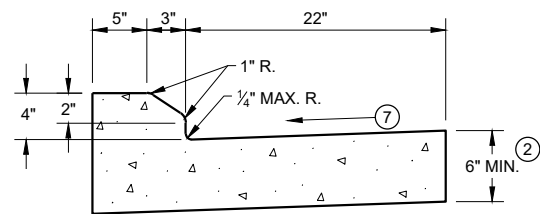


4" SLOPED CURB TYPES G^① & J

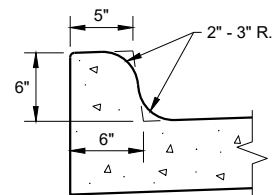

TYPES K^① & L
(OPTIONAL CURB SHAPE)

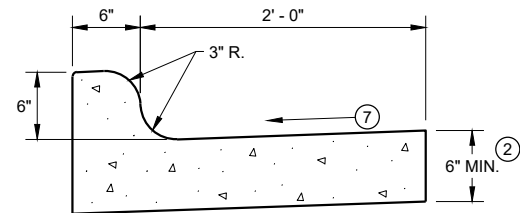


TYPES K^① & L
CONCRETE CURB AND GUTTER 30"

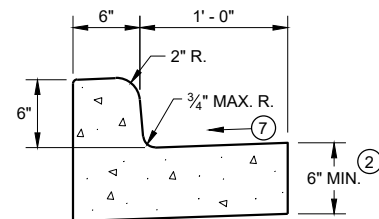


TYPES A^① & D

CONCRETE CURB AND GUTTER 18"

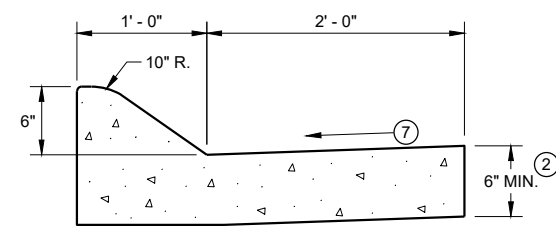


6" SLOPED CURB TYPES A^① & D

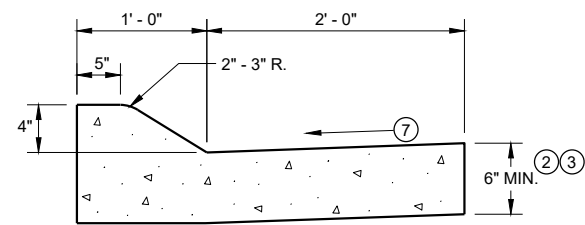


4" SLOPED CURB TYPES A^① & D

CONCRETE CURB AND GUTTER 36"

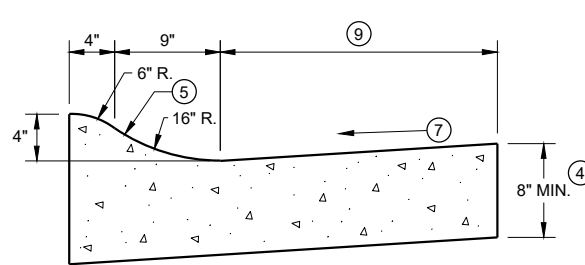

4" SLOPED CURB TYPES R^① & T

TBT & TBTT	X
30"	22"
36"	28"

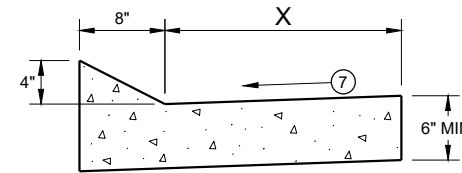


TYPES TBT & TBTT^①

CONCRETE CURB AND GUTTER


PAVEMENT THICKNESS
AND MAXIMUM CONCRETE
PANEL WIDTH TABLE

PAVEMENT THICKNESS	MAXIMUM PANEL WIDTH
LESS THAN 10"	12'
10" & ABOVE	15'

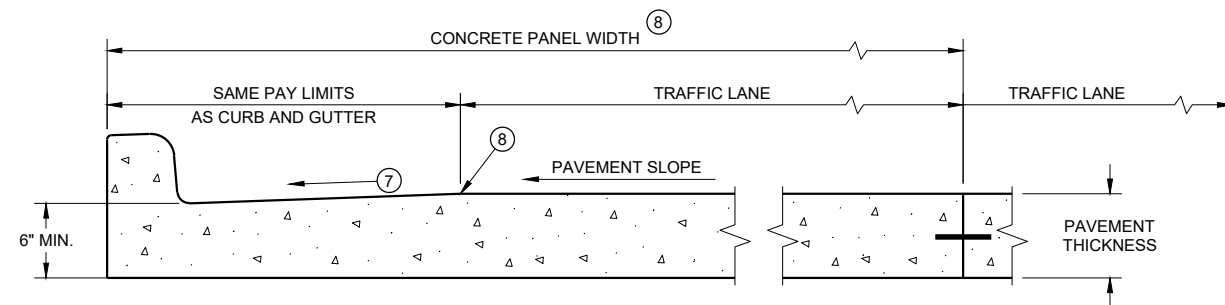

PARTIAL SECTION OF PAVEMENT *
WITH INTEGRAL CURB AND GUTTER

* BIKE LANE IS NOT SHOWN

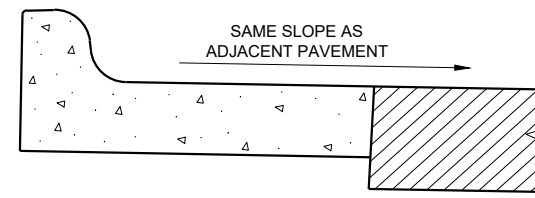

REVERSE SLOPE GUTTER^⑥
(TYPICAL FOR ALL CURB & GUTTER TYPES)

GENERAL NOTES


DETAILS OF CONSTRUCTION AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE CONTRACT.

PAVEMENT TIES AND TIE BARS SHALL BE EPOXY COATED IN CONFORMANCE WITH SUBSECTION 505.2.6.2 OF THE STANDARD SPECIFICATIONS.


INTEGRAL CURB AND GUTTER SHALL CONFORM TO THE DETAILS SHOWN FOR CONCRETE CURB AND GUTTER INCLUDING THE TRANSVERSE GUTTER SLOPE.

UNLESS OTHERWISE SHOWN ON THE TYPICAL CROSS SECTIONS, THE BASE AGGREGATE AND COMMON EXCAVATION LIMITS ARE 2' - 0" BEHIND THE BACK OF CURBS.

- ① TIE BARS ARE REQUIRED FOR CURB AND GUTTERS TYPES A, G, K, R, AND TBTT.
- ② THE BOTTOM OF CURB AND GUTTER MAY BE CONSTRUCTED EITHER LEVEL OR PARALLEL TO THE SLOPE OF THE SUBGRADE OR BASE AGGREGATE PROVIDED A 6" MINIMUM GUTTER THICKNESS IS MAINTAINED.
- ③ USE 8" MINIMUM GUTTER THICKNESS WHEN USED WITH AN ADJACENT CONCRETE TRUCK APRON PLACED BEHIND BACK OF CURB.
- ④ THE BOTTOM OF CURB AND GUTTER MAY BE CONSTRUCTED EITHER LEVEL OR PARALLEL TO THE SLOPE OF THE SUBGRADE OR BASE AGGREGATE PROVIDED A 8" MINIMUM GUTTER THICKNESS IS MAINTAINED.
- ⑤ UNLESS OTHERWISE NOTED, FOR STAKING PURPOSES THE FACE OF CURB IS 6" FROM THE BACK OF CURB.
- ⑥ WHEN REVERSE SLOPE GUTTER IS REQUIRED, THE LOCATION(S) WILL BE SHOWN ELSEWHERE IN THE PLAN.
- ⑦ USE 4% GUTTER CROSS SLOPE UNLESS OTHERWISE NOTED IN THE PLANS.
- ⑧ INCLUDE LONGITUDINAL JOINT AND TIE BARS ALONG LANE EDGE WHEN CONCRETE PANEL WIDTH EXCEEDS THE MAXIMUM WIDTH PER TABLE BELOW. LONGITUDINAL JOINT(S) ARE NOT ALLOWED WITHIN TRAFFIC LANES AND BIKE LANES. LONGITUDINAL JOINT MAY BE SAWED.
- ⑨ CONCRETE CURB AND GUTTER 4-INCH SLOPED 30-INCH TYPE "R" AND "T" = 17 INCHES
CONCRETE CURB AND GUTTER 4-INCH SLOPED 36-INCH TYPE "R" AND "T" = 23 INCHES

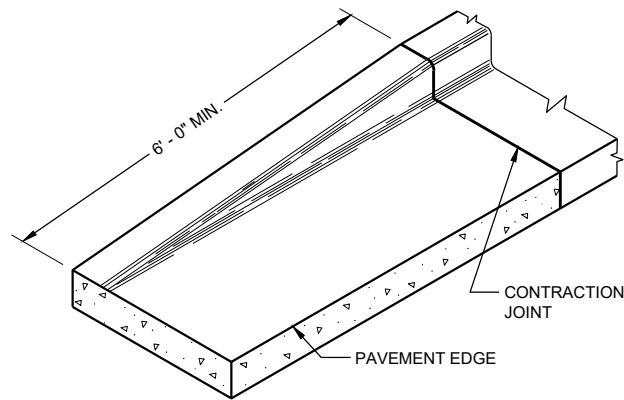

END SECTION CURB AND GUTTER

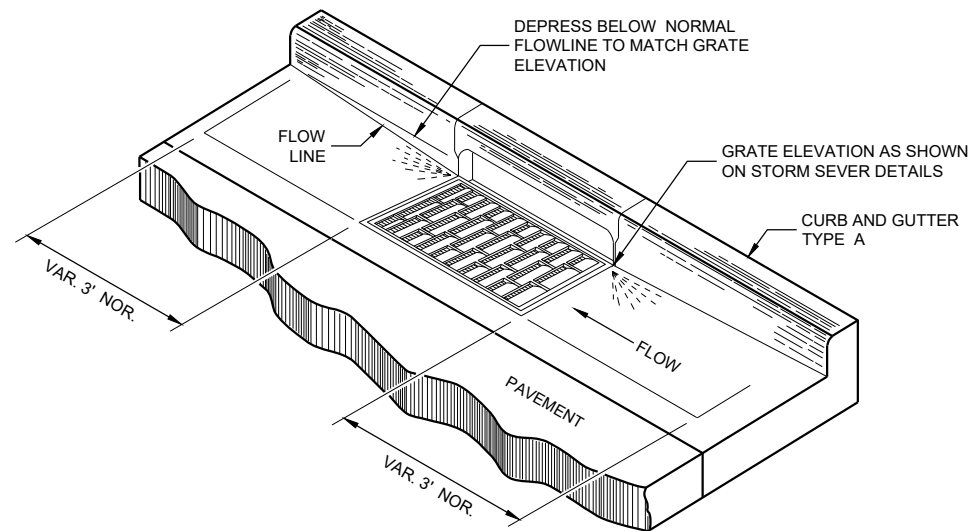

DETAIL OF CURB AND GUTTER AT INLETS
(TYPICAL H INLET COVER SHOWN)


GENERAL NOTES

DETAILS OF CONSTRUCTION AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE CONTRACT.


PAVEMENT TIES AND TIE BARS SHALL BE EPOXY COATED IN CONFORMANCE WITH SUBSECTION 505.2.6.2 OF THE STANDARD SPECIFICATIONS.

UNLESS OTHERWISE SHOWN ON THE TYPICAL CROSS SECTIONS, THE BASE AGGREGATE AND COMMON EXCAVATION LIMITS ARE 2' - 0" BEHIND THE BACK OF CURBS.


- ① TIE BARS ARE REQUIRED FOR CURB AND GUTTERS TYPES A, G, K, R, AND TBTT.
- ② THE BOTTOM OF CURB AND GUTTER MAY BE CONSTRUCTED EITHER LEVEL OR PARALLEL TO THE SLOPE OF THE SUBGRADE OR BASE AGGREGATE PROVIDED A 6" MINIMUM GUTTER THICKNESS IS MAINTAINED.
- ⑨ REFER TO SDD 08D18 AND 08D19 FOR ADDITIONAL DRIVEWAY ENTRANCE CURB DETAILS.

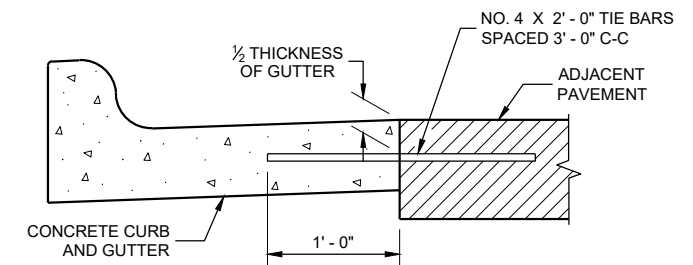

TYPICAL TIE BAR LOCATION ①

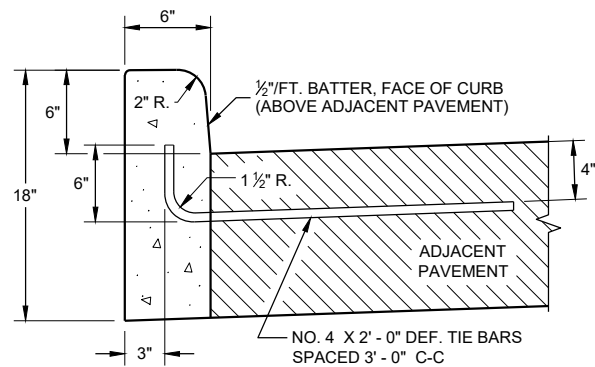


TYPES A ① & D

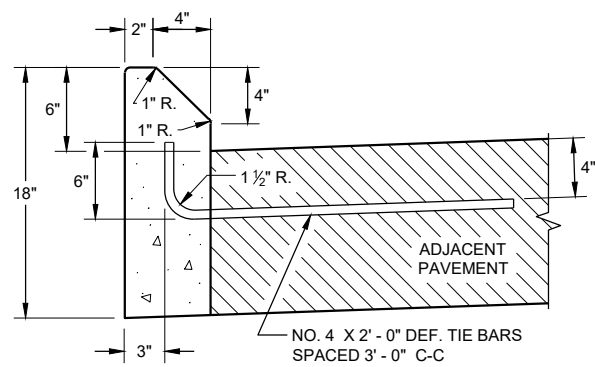


TYPES G ① & J

CONCRETE CURB

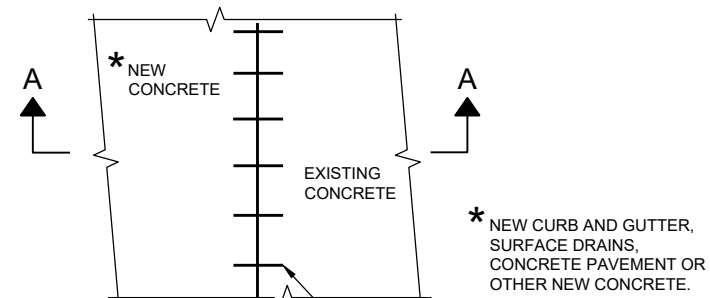


PLAN VIEW

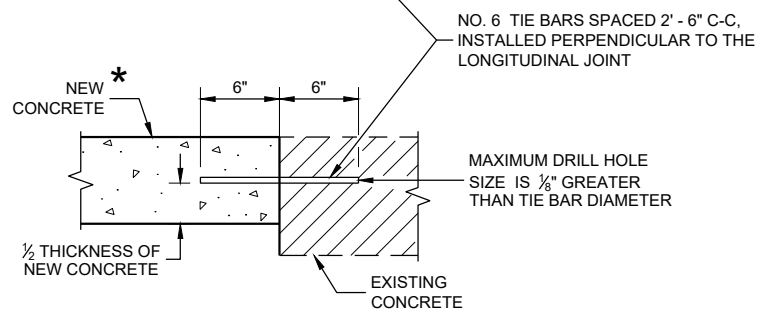

SECTION A - A

TIE BARS DRILLED INTO EXISTING PAVEMENT

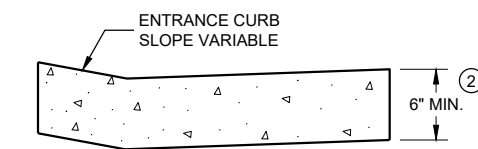


DRIVEWAY ENTRANCE CURB ⑨
(WHEN DIRECTED BY THE ENGINEER)

CONCRETE CURB, TIES AND CURB AND GUTTER APPLICATIONS


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
February 2021 /S/ Rodney Taylor
DATE ROADWAY STANDARDS DEVELOPMENT
ENGINEER


FHWA

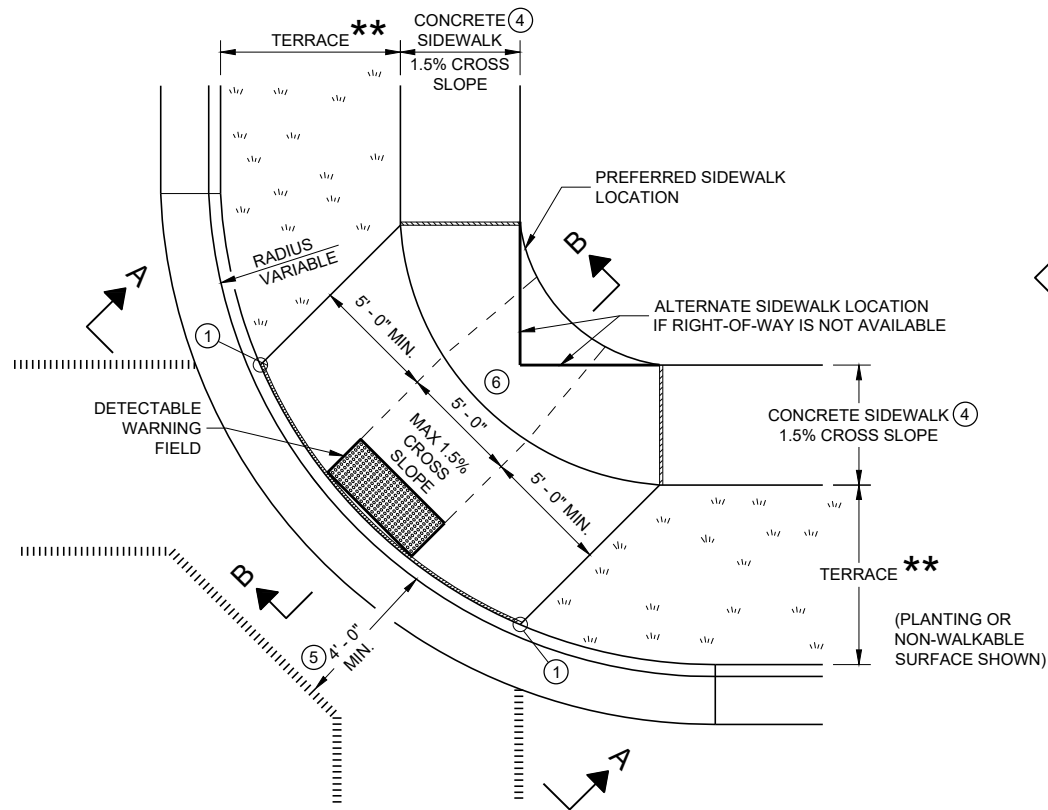

**PLAN VIEW
CURB RAMP TYPE 1
(CENTER OF CORNER RADIUS)**

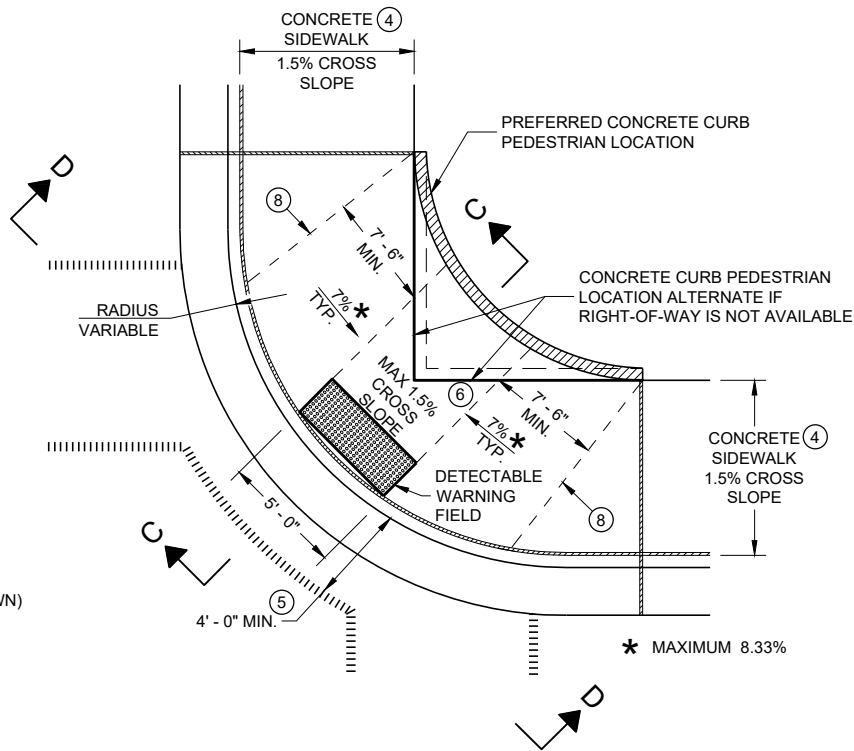


**PLAN VIEW
CURB RAMP TYPE 1 - A
(NO TERRACE)**

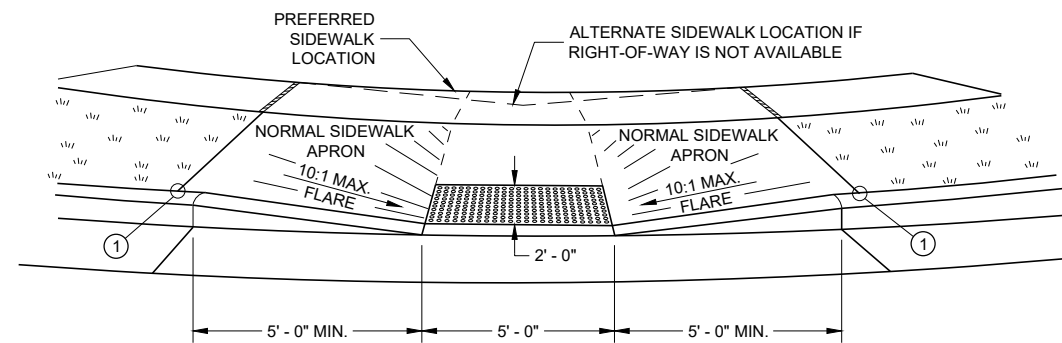


VIEW A - A FOR TYPE 1


** WIDTH SHOWN ELSEWHERE
IN THE PLANS

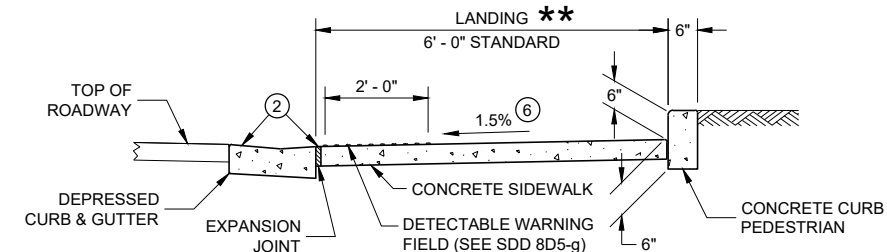

SECTION C - C FOR TYPE 1 - A

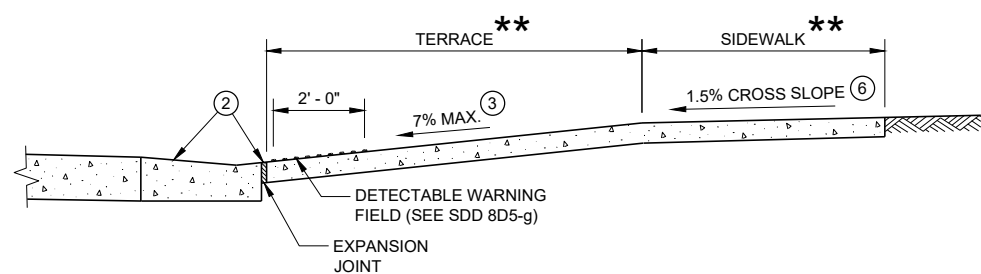

SECTION B - B FOR TYPE 1

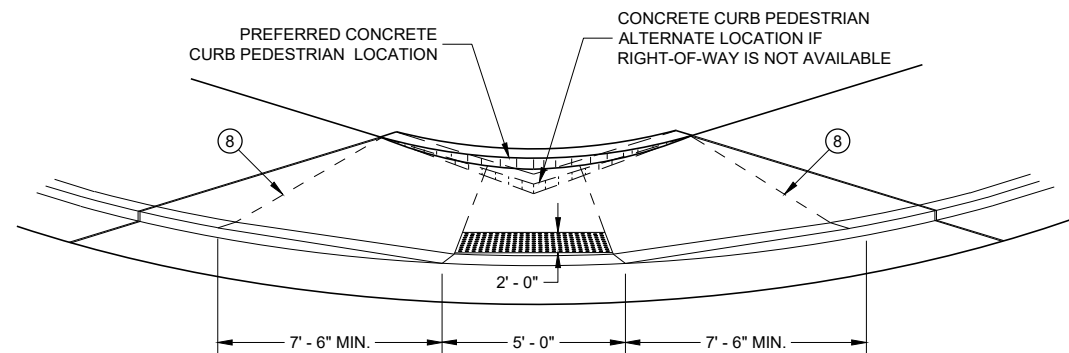

VIEW D - D FOR TYPE 1 - A

GENERAL NOTES

AVOID PLACING DRAINAGE STRUCTURES, JUNCTION BOXES OR OTHER OBSTRUCTIONS IN FRONT OF RAMP ACCESS AREAS.
 DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND THE APPLICABLE SPECIAL PROVISIONS.

WHEN NECESSARY, THE SIDEWALK ELEVATION MAY BE LOWERED TO MEET THE HIGH POINT ON THE RAMP.
 TYPE 1 CURB RAMPS SHALL HAVE A NORMAL SIDEWALK APRON AND CURB ON BOTH SIDES OF RAMP.

DETECTABLE WARNING FIELD SHALL BE MEASURED AND PAID BY THE SQUARE FOOT AS "CURB RAMP DETECTABLE WARNING FIELD". THE CONCRETE PEDESTRIAN CURB, IF NEEDED, SHALL BE MEASURED AND PAID BY THE LINEAR FOOT AS "CONCRETE CURB PEDESTRIAN". CONCRETE SIDEWALK IN THE CURB RAMP AREA SHALL BE MEASURED AND PAID BY THE SQUARE FOOT AS CONCRETE SIDEWALK, INCLUDING THE AREA UNDER THE DETECTABLE WARNING FIELD.

SELECT CURB RAMP DETECTABLE WARNING FIELD MATERIALS AND DEVICES FROM THE DEPARTMENT'S APPROVED MATERIALS LIST. THE COLOR OF THE DETECTABLE WARNING FIELD IS SPECIFIED ELSEWHERE AND IS INCIDENTAL TO THE BID ITEM OF "CURB RAMP DETECTABLE WARNING FIELD"

DETECTABLE WARNING FIELDS THAT ARE INSTALLED AS A GROUP OR SIDE BY SIDE, SHALL BE FROM THE SAME MANUFACTURER.

SURFACE TEXTURE OF THE RAMP SHALL BE OBTAINED BY COARSE BROOMING TRANSVERSE TO THE SLOPE OF THE RAMP.


- ① THIS POINT IS AN EXTENSION OF OUTSIDE EDGE OF APPROACHING SIDEWALK WHERE IT MEETS THE BACK OF CONCRETE CURB. POINT LOCATION MAY BE ADJUSTED TO ALIGN WITH BEGINNING OF FULL-HEIGHT CURB IF THIS DISTANCE IS SHORT.
- ② GRADE CHANGE BETWEEN GUTTER FLAG SLOPE AND THE CURB RAMP SLOPE SHALL NOT EXCEED 11%. MAXIMUM GUTTER FLAG SLOPE IS 4%. PROVIDE LONGITUDINAL DRAINAGE AROUND CURB AND AWAY FROM CURB RAMP. NO VERTICAL LIPS OR DISCONTINUITIES GREATER THAN 1/4 - INCH ARE ALLOWED. SLOPE OF CURB HEAD OPENING SHALL MATCH THE RAMP SLOPE, MINIMALLY 1.5% AND NOT TO EXCEED 7%. WHEN ADJACENT TO 1.5% LANDING, CONSTRUCT CURB HEAD OPENING AT 1.5% IN THE DIRECTION OF PEDESTRIAN TRAVEL.
- ③ MAXIMUM 8.33% CURB RAMP SLOPE IS ALLOWABLE WITH FLATTENED GUTTER FLAG SLOPE AND NOT TO EXCEED 11% GRADE CHANGE.
- ④ ±0.5% CONSTRUCTION TOLERANCE IN SIDEWALK CROSS SLOPE. THE SIDEWALK CROSS SLOPE SHALL NOT EXCEED 2% WITHOUT PRIOR APPROVAL FROM THE ENGINEER.
- ⑤ PROVIDE A LEVEL LANDING IN THE STREET AND GUTTER AREA (2% MAXIMUM SLOPE IN ANY DIRECTION). WHEN THE GUTTER SLOPE EXCEEDS 2%, CONSTRUCT THE LEVEL LANDING IN THE STREET AREA.
- ⑥ PROVIDE A LEVEL LANDING (MAXIMUM 2% SLOPE) IN ANY DIRECTION OF PEDESTRIAN TRAVEL. STANDARD LEVEL LANDING SIZE IS 5 FEET BY 5 FEET.
- ⑧ PROVIDE GRADE BREAK PERPENDICULAR TO DIRECTION OF WHEELCHAIR TRAVEL.

LEGEND


- 1/2" EXPANSION JOINT SIDEWALK
- - - - - CONTRACTION JOINT FIELD LOCATED
- ||||||| PAVEMENT MARKING CROSSWALK (WHITE)

**CURB RAMPS
TYPE 1 AND 1-A**


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

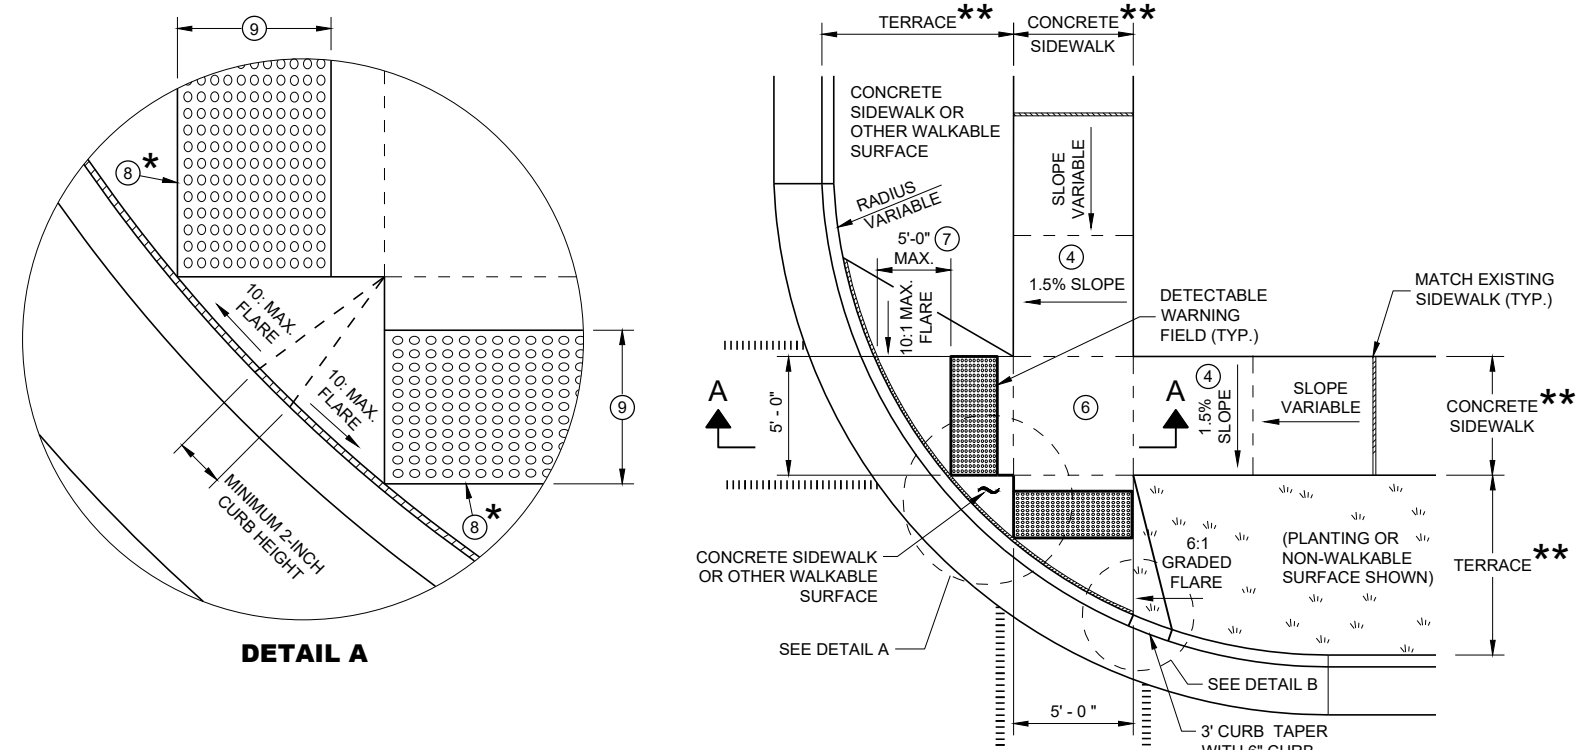

PLAN VIEW CURB RAMP TYPE 2 (CENTER OF CORNER RADIUS)

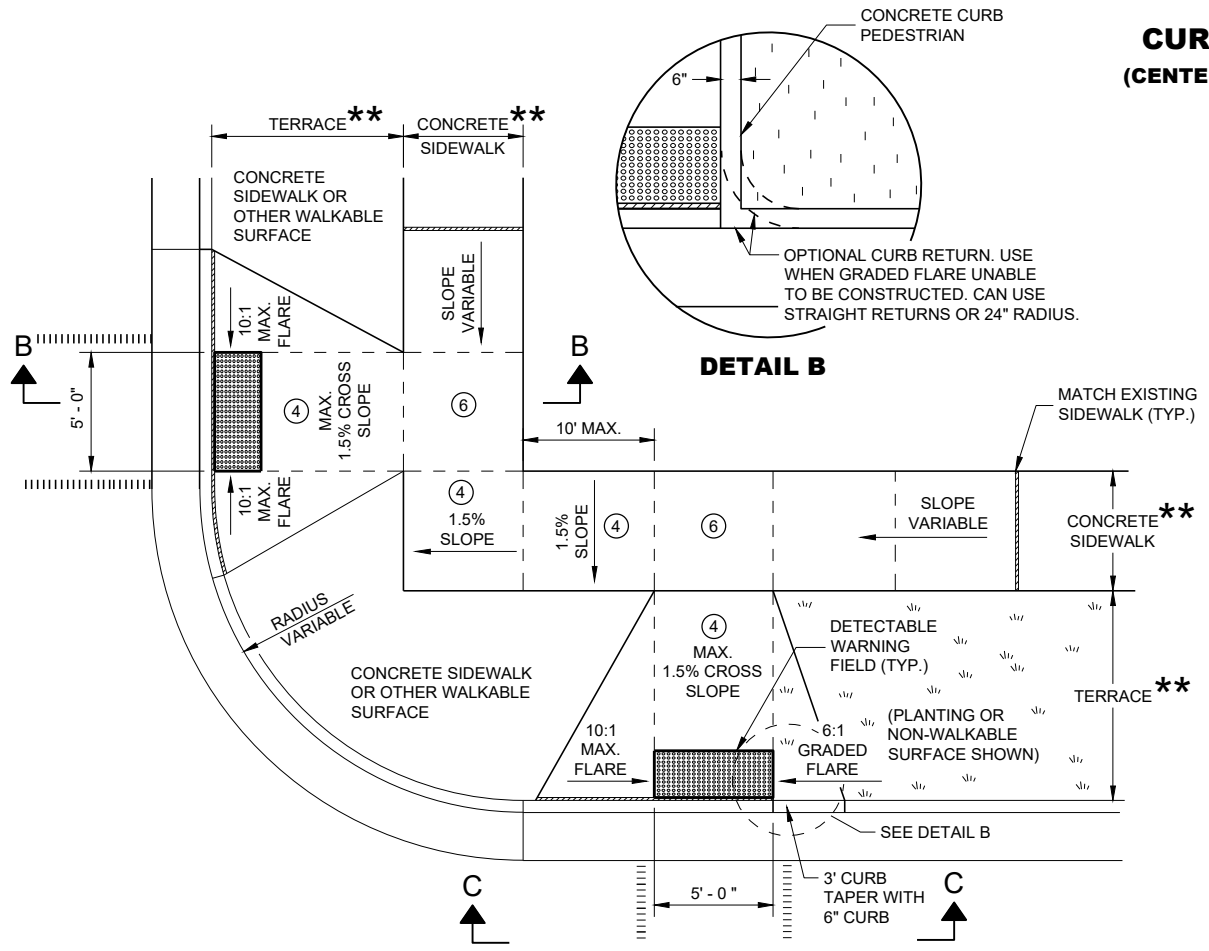


PLAN VIEW CURB RAMP TYPE 3 (OUTSIDE OF CROSSWALK AREA)




DETAIL B

GENERAL NOTES


- AVOID PLACING DRAINAGE STRUCTURES, JUNCTION BOXES OR OTHER OBSTRUCTIONS IN FRONT OF RAMP ACCESS AREAS.
- DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND THE APPLICABLE SPECIAL PROVISIONS.
- DETECTABLE WARNING FIELDS THAT ARE INSTALLED AS A GROUP OR SIDE BY SIDE SHALL BE FROM THE SAME MANUFACTURER.
- ② GRADE CHANGE BETWEEN GUTTER FLAG SLOPE AND THE CURB RAMP SLOPE SHALL NOT EXCEED 11%. MAXIMUM GUTTER FLAG SLOPE IS 4%. PROVIDE LONGITUDINAL DRAINAGE AROUND CURB AND AWAY FROM CURB RAMP. NO VERTICAL LIPS OR DISCONTINUITIES GREATER THAN 1/4 - INCH ARE ALLOWED. SLOPE OF CURB HEAD OPENING SHALL MATCH THE RAMP SLOPE, MINIMALLY 1.5% AND NOT TO EXCEED 7%. WHEN ADJACENT TO 1.5% LANDING, CONSTRUCT CURB HEAD OPENING AT 1.5% IN THE DIRECTION OF PEDESTRIAN TRAVEL.
- ③ AN 8.33% CURB RAMP SLOPE IS ALLOWABLE WITH FLATTENED GUTTER FLAG SLOPE (2.67% OR LESS) AND NOT TO EXCEED 11% GRADE CHANGE.
- ④ ±0.5% CONSTRUCTION TOLERANCE IN SIDEWALK CROSS SLOPE. THE SIDEWALK CROSS SLOPE SHALL NOT EXCEED 2% WITHOUT PRIOR APPROVAL FROM THE ENGINEER.
- ⑥ PROVIDE A LEVEL LANDING (MAXIMUM 2% SLOPE) IN ANY DIRECTION OF PEDESTRIAN TRAVEL. STANDARD LEVEL LANDING SIZE IS 5 FEET X 5 FEET.
- ⑦ WHEN GRADE BREAK DISTANCE EXCEEDS 5 FEET, USE RADIAL DETECTABLE WARNING FIELD PER SDD 8D5-f.
- ⑧ PROVIDE GRADE BREAK PERPENDICULAR TO DIRECTION OF WHEELCHAIR TRAVEL.
- ⑨ WHEN DISTANCE IS LESS THAN 6' - 0", IT MAY BE DIFFICULT TO ACHIEVE A 7% SLOPE OR FLATTER ALONG THE RAMP. REDUCE CURB HEIGHT IN TRIANGLE AREA TO ACHIEVE 7% SLOPE OR FLATTER ON RAMP. CONSTRUCT 2-INCH MINIMUM CURB HEIGHT BETWEEN 10:1 FLARES.

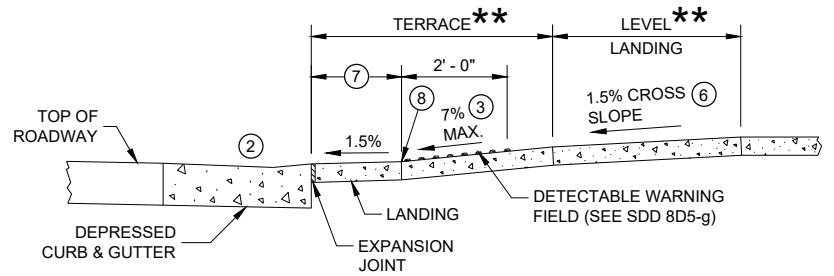

SECTION A - A FOR TYPE 2

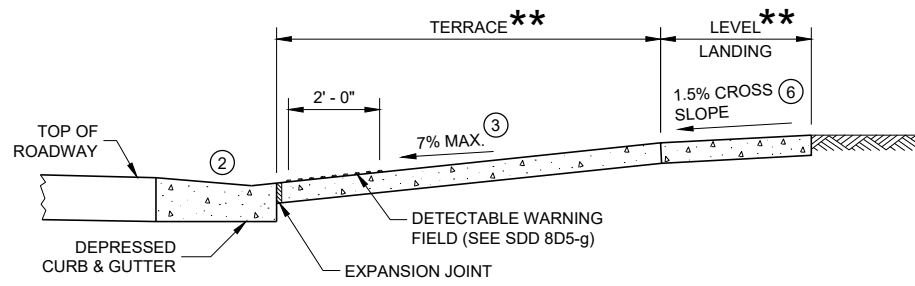

SECTION B - B FOR TYPE 3

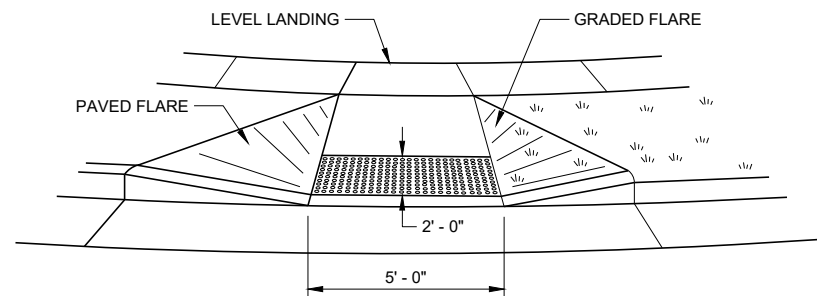

VIEW C - C FOR TYPE 3


- * MAXIMUM 2.0% SLOPE IN ALL DIRECTIONS IN FRONT OF GRADE BREAK
- ** WIDTH SHOWN ELSEWHERE IN THE PLANS

LEGEND

- 1/2" EXPANSION JOINT SIDEWALK
- - - - - CONTRACTION JOINT SIDEWALK
- ||||| PAVEMENT MARKING CROSSWALK (WHITE)

**CURB RAMPS
TYPE 2 AND 3**


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

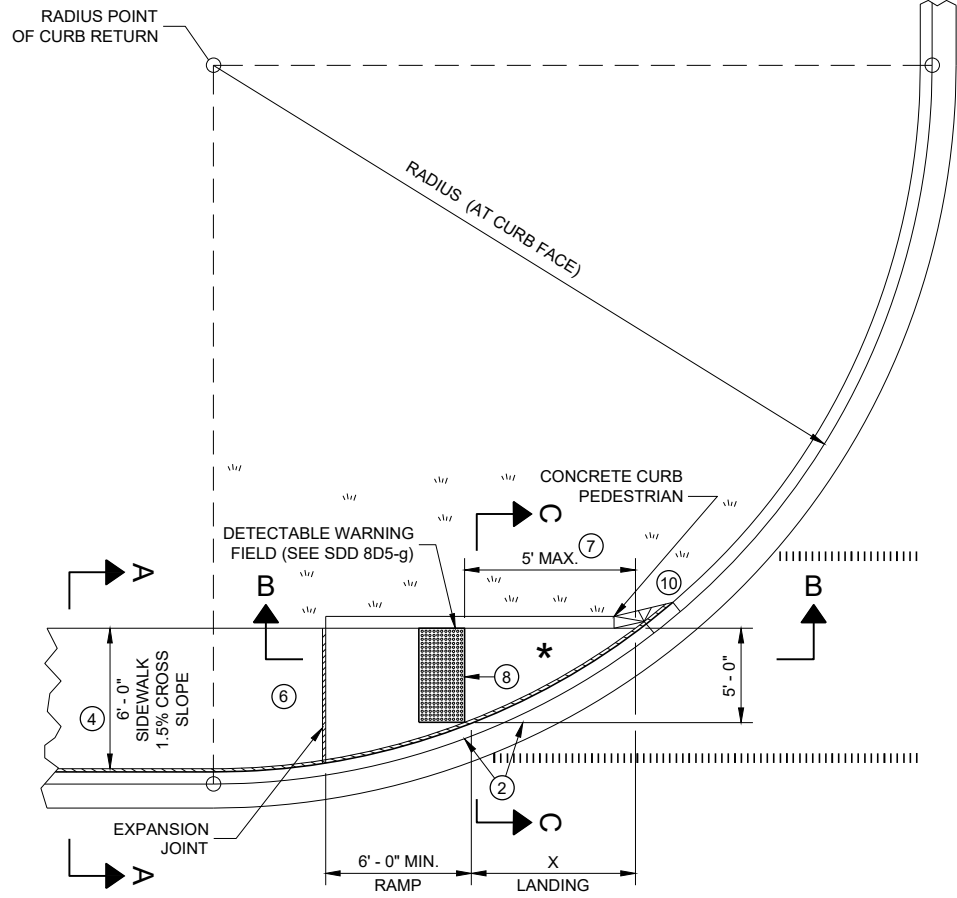

PLAN VIEW CURB RAMP TYPE 4A

RADIUS (AT CURB FACE)	X
10 FEET	4' - 7"
15 FEET	6' - 5 1/2"

INTERMEDIATE RADII CAN BE INTERPOLATED

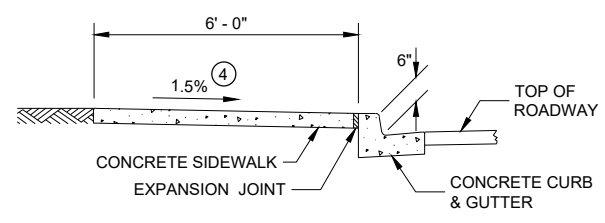


SECTION A - A FOR TYPE 4A

GENERAL NOTES


- AVOID PLACING DRAINAGE STRUCTURES, JUNCTION BOXES OR OTHER OBSTRUCTIONS IN FRONT OF RAMP ACCESS AREAS.
- DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND THE APPLICABLE SPECIAL PROVISIONS.
- DETECTABLE WARNING FIELDS THAT ARE INSTALLED AS A GROUP OR SIDE BY SIDE, SHALL BE FROM THE SAME MANUFACTURER.
- ② GRADE CHANGE BETWEEN GUTTER FLAG SLOPE AND THE CURB RAMP SLOPE SHALL NOT EXCEED 11%. MAXIMUM GUTTER FLAG SLOPE IS 4%. PROVIDE LONGITUDINAL DRAINAGE AROUND CURB AND AWAY FROM CURB RAMP. NO VERTICAL LIPS OR DISCONTINUITIES GREATER THAN 1/4" INCH ARE ALLOWED. SLOPE OF CURB HEAD OPENING SHALL MATCH THE RAMP SLOPE, MINIMALLY 1.5% AND NOT TO EXCEED 7%. WHEN ADJACENT TO 1.5% LANDING, CONSTRUCT CURB HEAD OPENING AT 1.5% IN THE DIRECTION OF PEDESTRIAN TRAVEL.
- ③ AN 8.33% CURB RAMP SLOPE IS ALLOWABLE WITH FLATTENED GUTTER FLAG SLOPE AND NOT TO EXCEED 11% GRADE CHANGE.
- ④ ±0.5% CONSTRUCTION TOLERANCE IN SIDEWALK CROSS SLOPE. THE SIDEWALK CROSS SLOPE SHALL NOT EXCEED 2% WITHOUT PRIOR APPROVAL FROM THE ENGINEER.
- ⑥ PROVIDE A LEVEL LANDING (MAXIMUM 2% SLOPE) IN ANY DIRECTION OF PEDESTRIAN TRAVEL. STANDARD LEVEL LANDING SIZE IS 5 FEET BY 5 FEET.
- ⑦ WHEN THIS GRADE BREAK DISTANCE EXCEEDS 5 FEET, USE RADIAL DETECTABLE WARNING FIELD PER SDD 8D5-f.
- ⑧ PROVIDE GRADE BREAK PERPENDICULAR TO DIRECTION OF WHEELCHAIR TRAVEL.
- ⑩ INSTALL TRANSITION NOSE (INCIDENTAL TO OTHER PAY ITEMS). DO NOT MARK TRANSITION NOSE.

LEGEND


- 1/2" EXPANSION JOINT SIDEWALK
- CONTRACTION JOINT SIDEWALK
- PAVEMENT MARKING CROSSWALK (WHITE)

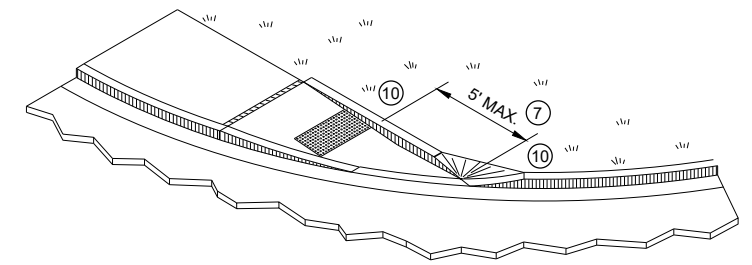

ISOMETRIC VIEW FOR TYPE 4A

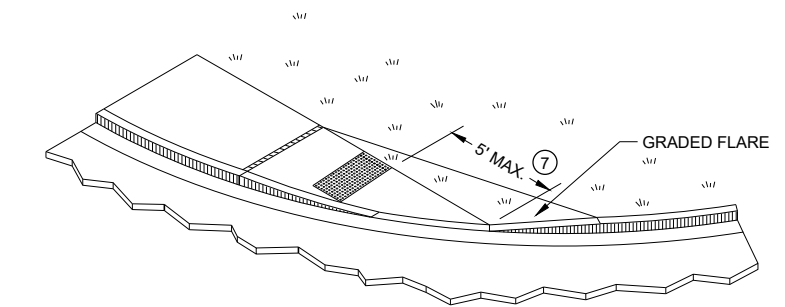


ISOMETRIC VIEW FOR TYPE 4A1

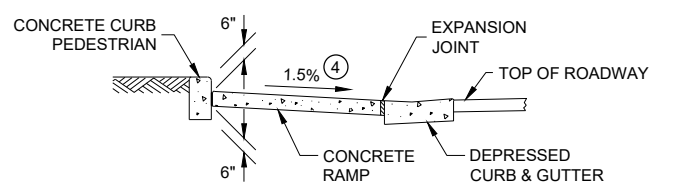


SECTION C - C FOR TYPE 4A

* MAXIMUM 2.0% SLOPE IN ALL DIRECTIONS IF FRONT OF GRADE BREAK

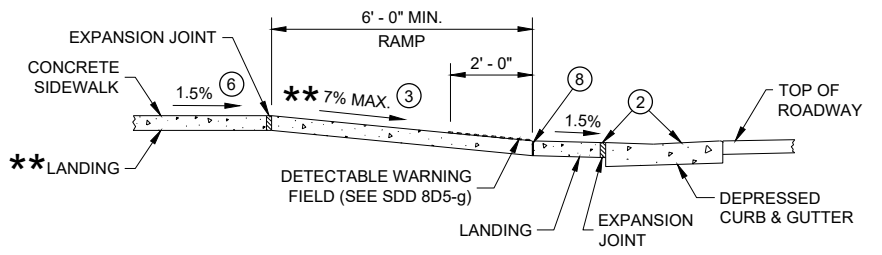

SECTION B - B FOR TYPE 4A AND TYPE 4A1


** IF RAMP SLOPE IS LESS THAN 5.0%, THEN NO ADJACENT UPHILL LANDING IS REQUIRED

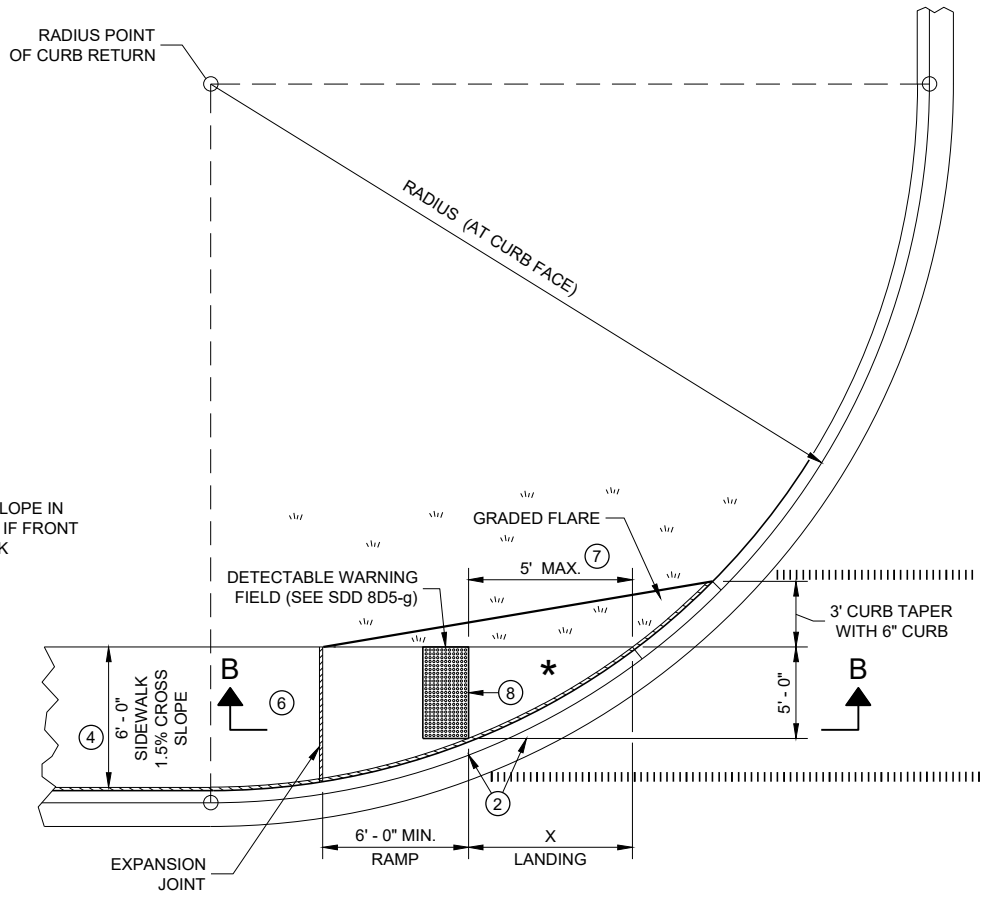

PLAN VIEW CURB RAMP TYPE 4A1

**CURB RAMPS
TYPE 4A AND 4A1**

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

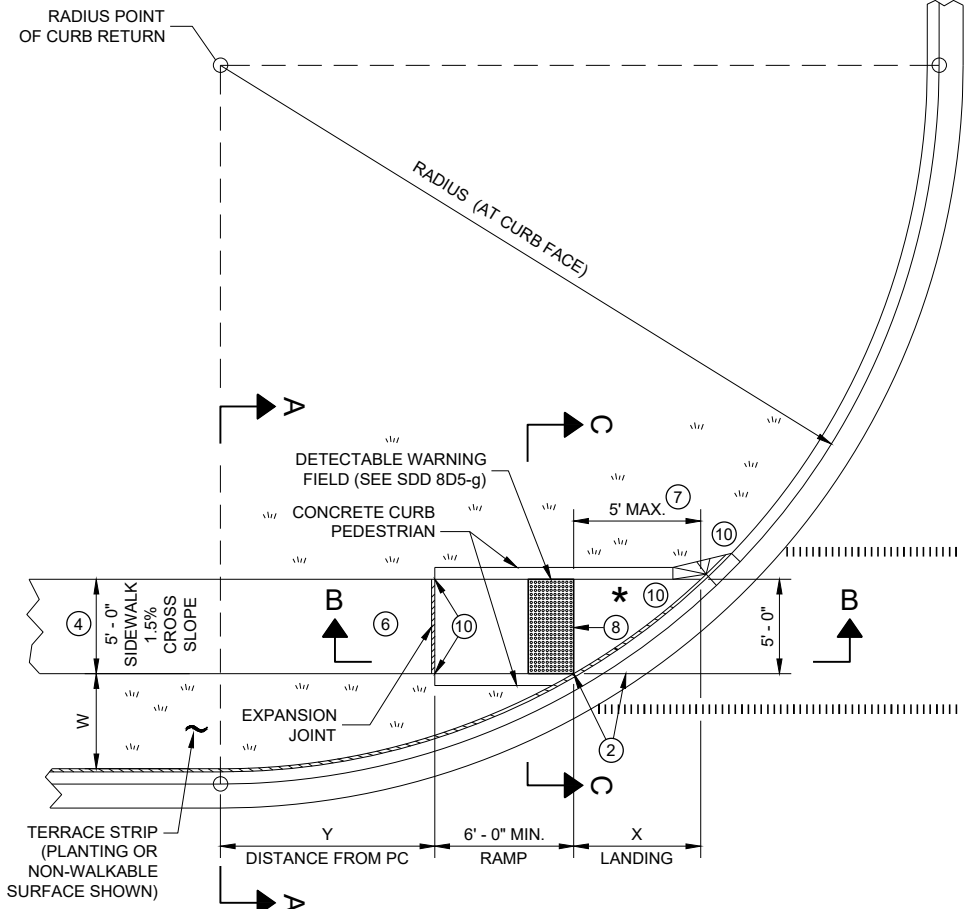

PLAN VIEW CURB RAMP TYPE 4B

RADIUS (AT CURB FACE)	W = 3' - 0"		W = 4' - 0"		W = 5' - 0"		W = 6' - 0"		W = 7' - 0"		W = 8' - 0"		W = 9' - 0"		W = 10' - 0"	
	X	Y	X	Y	X	Y	X	Y	X	Y	X	Y	X	Y	X	Y
10 FEET	2' - 10 1/4"	0' - 5"	2' - 1"	1' - 4 1/2"	1' - 5"	2' - 1"	0' - 10"	2' - 7 1/2"	0' - 3 1/4"	3' - 0 1/4"						
15 FEET	4' - 6 3/4"	2' - 1 3/4"	3' - 9"	3' - 5 3/4"	3' - 1 1/4"	4' - 6"	2' - 6 3/4"	5' - 4 1/2"	2' - 1"	6' - 1"	1' - 8"	6' - 8 1/2"	1' - 3 1/4"	7' - 2 1/2"	0' - 10 3/4"	7' - 7 1/4"
20 FEET	5' - 9 3/4"	3' - 6 1/2"	4' - 11 1/2"	5' - 1 3/4"	4' - 3 1/4"	6' - 5 1/2"	3' - 8 3/4"	7' - 7"	3' - 3"	8' - 6 1/2"	2' - 10"	9' - 4 1/2"	2' - 5 1/2"	10' - 1 1/4"	2' - 1 1/4"	10' - 9"
30 FEET			6' - 9 1/4"	7' - 11 1/4"	6' - 0 1/4"	9' - 8"	5' - 5"	11' - 1 3/4"	4' - 10 3/4"	12' - 5 3/4"	4' - 5 1/2"	13' - 7 3/4"	4' - 0 3/4"	14' - 8 1/2"	3' - 8 1/2"	15' - 8 1/4"
40 FEET									6' - 1 3/4"	15' - 8 1/2"	5' - 8"	17' - 2"	5' - 3"	18' - 5 3/4"	4' - 10 3/4"	19' - 8 1/4"
50 FEET															5' - 10 1/4"	23' - 2"


INTERMEDIATE RADII CAN BE INTERPOLATED
 DIMENSION "Y" IS CALCULATED BASED ON 6'-0" RAMP LENGTH
 DIMENSION "X" IS CALCULATED BASED ON 5'-0" SIDEWALK WIDTH

LEGEND


- 1/2" EXPANSION JOINT SIDEWALK
- CONTRACTION JOINT SIDEWALK
- PAVEMENT MARKING CROSSWALK (WHITE)

GENERAL NOTES

- AVOID PLACING DRAINAGE STRUCTURES, JUNCTION BOXES OR OTHER OBSTRUCTIONS IN FRONT OF RAMP ACCESS AREAS.
- DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND THE APPLICABLE SPECIAL PROVISIONS.
- DETECTABLE WARNING FIELDS THAT ARE INSTALLED AS A GROUP OR SIDE BY SIDE, SHALL BE FROM THE SAME MANUFACTURER.
- ② GRADE CHANGE BETWEEN GUTTER FLAG SLOPE AND THE CURB RAMP SLOPE SHALL NOT EXCEED 11%. MAXIMUM GUTTER FLAG SLOPE IS 4%. PROVIDE LONGITUDINAL DRAINAGE AROUND CURB AND AWAY FROM CURB RAMP. NO VERTICAL LIPS OR DISCONTINUITIES GREATER THAN 1/2 - INCH ARE ALLOWED. SLOPE OF CURB HEAD OPENING SHALL MATCH THE RAMP SLOPE, MINIMALLY 1.5% AND NOT TO EXCEED 7%. WHEN ADJACENT TO 1.5% LANDING, CONSTRUCT CURB HEAD OPENING AT 1.5% IN THE DIRECTION OF PEDESTRIAN TRAVEL.
- ③ AN 8.33% CURB RAMP SLOPE IS ALLOWABLE WITH FLATTENED GUTTER FLAG SLOPE AND NOT TO EXCEED 11% GRADE CHANGE.
- ④ ±0.5% CONSTRUCTION TOLERANCE IN SIDEWALK CROSS SLOPE. THE SIDEWALK CROSS SLOPE SHALL NOT EXCEED 2% WITHOUT PRIOR APPROVAL FROM THE ENGINEER.
- ⑥ PROVIDE A LEVEL LANDING (MAXIMUM 2% SLOPE) IN ANY DIRECTION OF PEDESTRIAN TRAVEL. STANDARD LEVEL LANDING SIZE IS 5 FEET BY 5 FEET.
- ⑦ WHEN THIS GRADE BREAK DISTANCE EXCEEDS 5 FEET, USE RADIAL DETECTABLE WARNING FIELD PER SDD 8D5-f.
- ⑧ PROVIDE GRADE BREAK PERPENDICULAR TO DIRECTION OF WHEELCHAIR TRAVEL.
- ⑩ INSTALL TRANSITION NOSE (INCIDENTAL TO OTHER PAY ITEMS). DO NOT MARK TRANSITION NOSE.

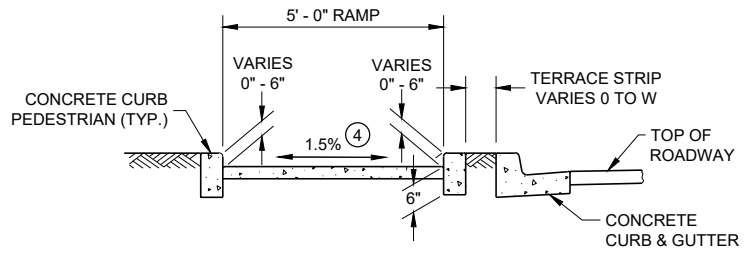


SECTION C - C FOR TYPE 4B

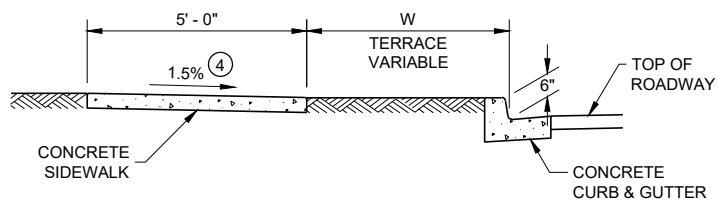


SECTION A - A FOR TYPE 4B

* MAXIMUM 2.0% SLOPE IN ALL DIRECTIONS IF FRONT OF GRADE BREAK

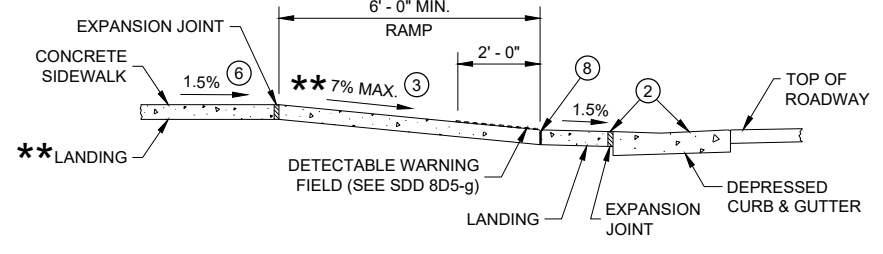


SECTION B - B FOR TYPE 4B AND TYPE 4B1


** IF RAMP SLOPE IS LESS THAN 5.0%, THEN NO ADJACENT UPHILL LANDING IS REQUIRED

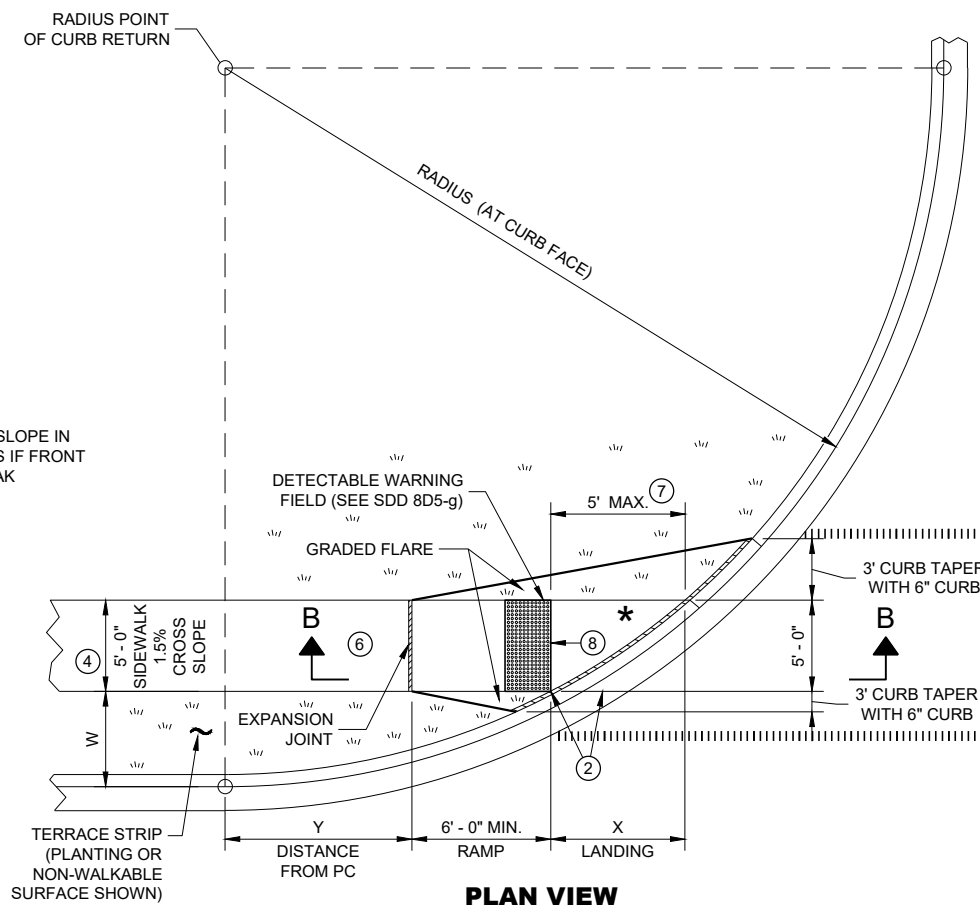

PLAN VIEW CURB RAMP TYPE 4B1

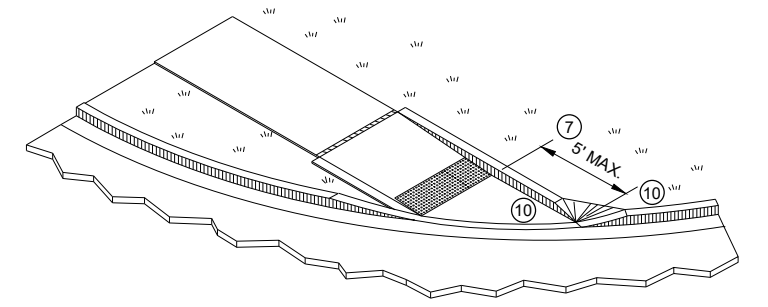

ISOMETRIC VIEW FOR TYPE 4B

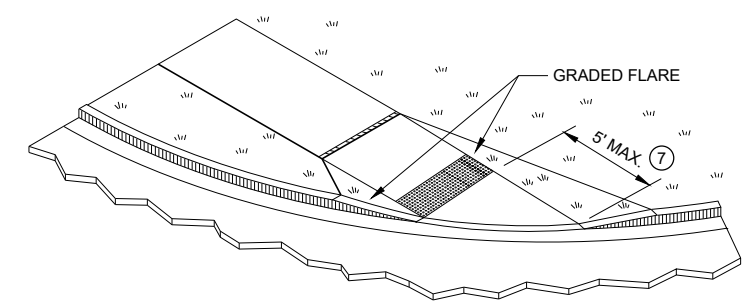


ISOMETRIC VIEW FOR TYPE 4B1

**CURB RAMPS
TYPE 4B AND 4B1**

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION


SDD 08D05 - 20d

SDD 08D05 - 20d

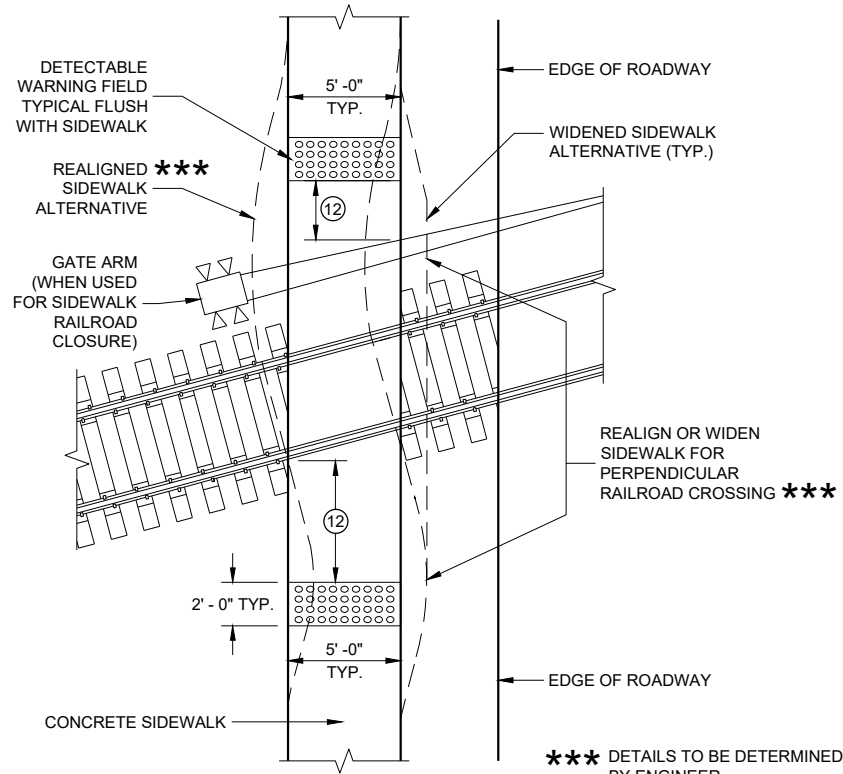

CURB RAMP TYPE 8


DETECTABLE WARNINGS AT RAILROAD CROSSING

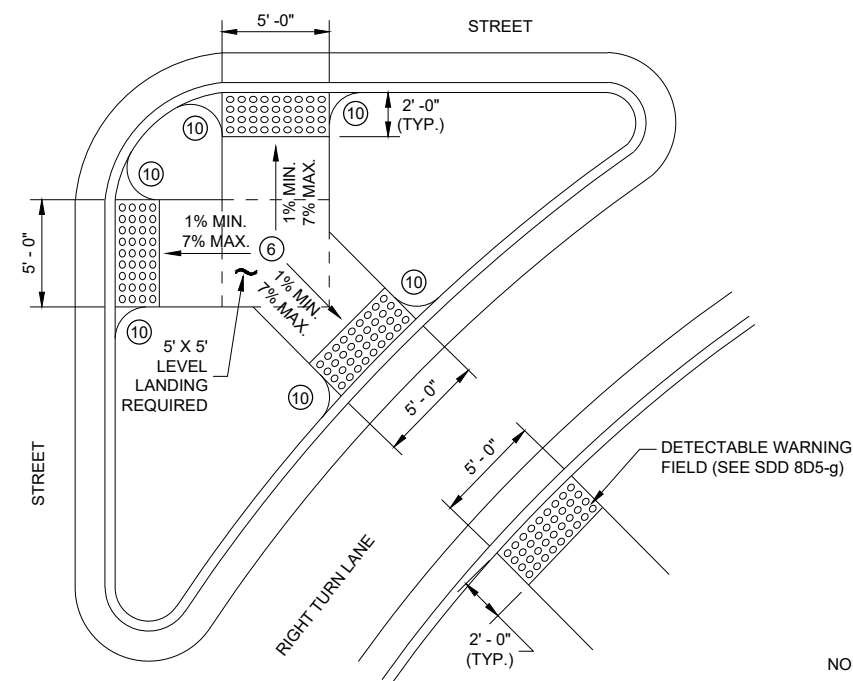

CURB RAMP TYPE 6

DETECTABLE WARNING AT ISLANDS


REFER TO GENERAL NOTES (2) AND (3) FOR ALL ISLAND CURB RAMPS

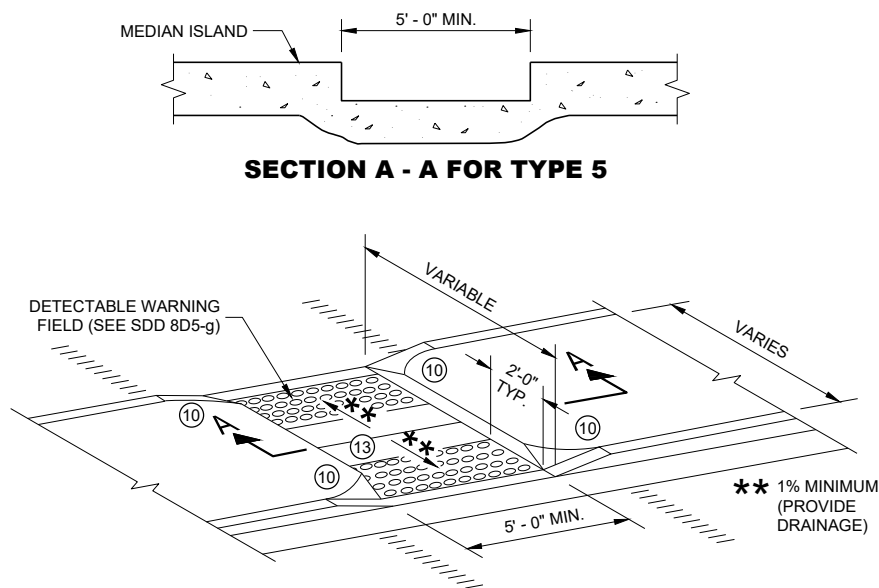

SECTION A - A FOR TYPE 5


CURB RAMP TYPE 5

**MEDIAN ISLAND
NON-ELEVATED PEDESTRIAN CROSSING**

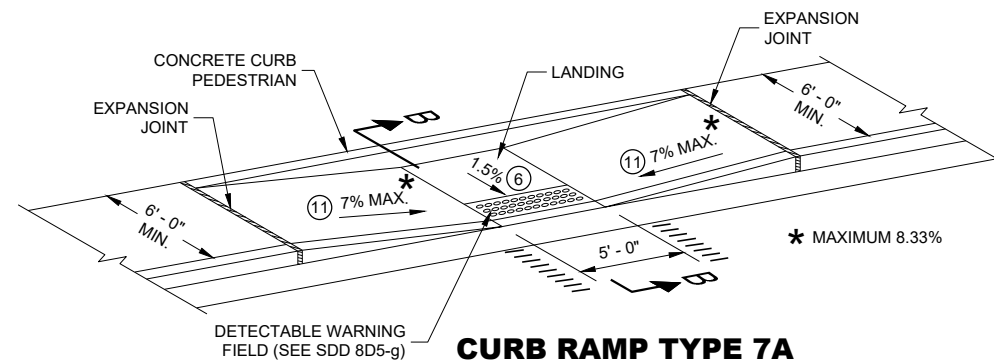

CURB RAMP TYPE 7A

MID BLOCK CROSSING

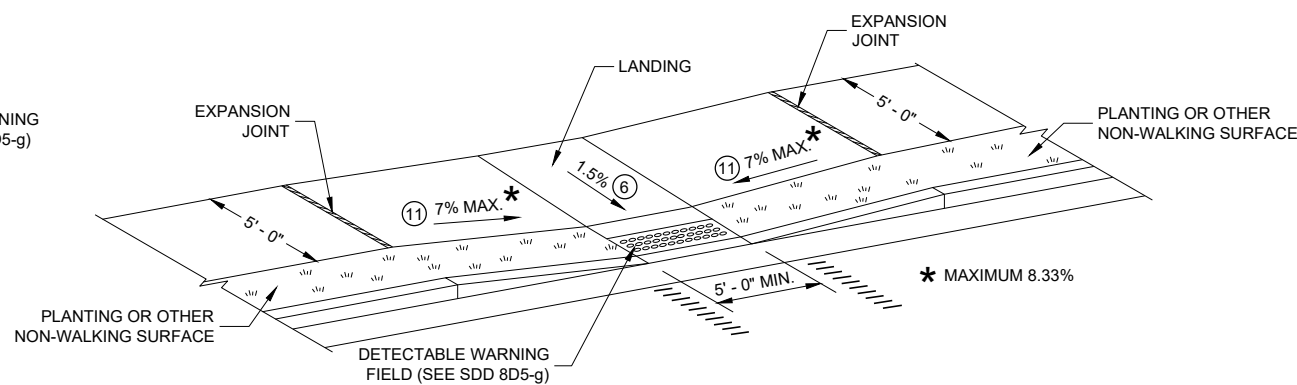

CURB RAMP TYPE 7B

MID BLOCK CROSSING

NOTE: THESE PARALLEL AND PARALLEL/PERPENDICULAR CURB RAMPS MAY BE USED AT INTERSECTIONS AND MID BLOCK LOCATIONS.

GENERAL NOTES

AVOID PLACING DRAINAGE STRUCTURES, JUNCTION BOXES OR OTHER OBSTRUCTIONS IN FRONT OF RAMP ACCESS AREAS.

DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND THE APPLICABLE SPECIAL PROVISIONS.


SIDEWALK CROSS SLOPE SHALL NOT EXCEED 2%.

DETECTABLE WARNING FIELDS THAT ARE INSTALLED AS A GROUP OR SIDE BY SIDE, SHALL BE FROM THE SAME MANUFACTURER.

- (2) GRADE CHANGE BETWEEN GUTTER FLAG SLOPE AND THE CURB RAMP SLOPE SHALL NOT EXCEED 11%. MAXIMUM GUTTER FLAG SLOPE IS 4%. PROVIDE LONGITUDINAL DRAINAGE AROUND CURB AND AWAY FROM CURB RAMP. NO VERTICAL LIPS OR DISCONTINUITIES GREATER THAN 1/4 - INCH ARE ALLOWED. SLOPE OF CURB HEAD OPENING SHALL MATCH THE RAMP SLOPE, MINIMALLY 1.5% AND NOT TO EXCEED 7%. WHEN ADJACENT TO 1.5% LANDING, CONSTRUCT CURB HEAD OPENING AT 1.5% IN THE DIRECTION OF PEDESTRIAN TRAVEL.
- (3) AN 8.33% CURB RAMP SLOPE IS ALLOWABLE WITH FLATTENED GUTTER FLAG SLOPE AND NOT TO EXCEED 11% GRADE CHANGE.
- (4) ±0.5% CONSTRUCTION TOLERANCE IN SIDEWALK CROSS SLOPE. THE SIDEWALK CROSS SLOPE SHALL NOT EXCEED 2% WITHOUT PRIOR APPROVAL FROM THE ENGINEER.
- (6) PROVIDE A LEVEL LANDING (MAXIMUM 2% SLOPE) IN ANY DIRECTION OF PEDESTRIAN TRAVEL. STANDARD LEVEL LANDING SIZE IS 5 FEET BY 5 FEET.
- (10) INSTALL TRANSITION NOSE (INCIDENTAL TO OTHER PAY ITEMS). DO NOT MARK TRANSITION NOSE.
- (11) SLOPE SIDEWALK TOWARD LANDING AS SHOWN WHERE THERE IS NO TERRACE OR WHERE THE TERRACE WIDTH IS LESS THAN 6 FEET WIDE.
- (12) THE EDGE OF THE DETECTABLE WARNING FIELD NEAREST TO A RAILROAD CROSSING SHALL BE 1.5 FEET ±0.1' FROM THE FACE OF THE GATE ARM IF THE GATE ARM EXTENDS ACROSS THE SIDEWALK. WHERE THERE IS NO PEDESTRIAN GATE, THE EDGE OF THE DETECTABLE WARNING FIELD NEAREST TO THE RAILROAD CROSSING SHALL BE 15 FEET FROM THE NEAREST RAIL.
- (13) DO NOT INSTALL DETECTABLE WARNING FIELDS AT THE EDGES OF STREET-LEVEL PEDESTRIAN REFUGE ISLANDS IF A MINIMUM 2 FOOT CONCRETE SURFACE WITHOUT DETECTABLE WARNINGS (MEASURED IN THE DIRECTION OF PEDESTRIAN TRAVEL) CANNOT BE ACHIEVED.

LEGEND

- ===== 1/2" EXPANSION JOINT SIDEWALK
- - - - - CONTRACTION JOINT FIELD LOCATED
- ||||||| PAVEMENT MARKING CROSSWALK (WHITE)

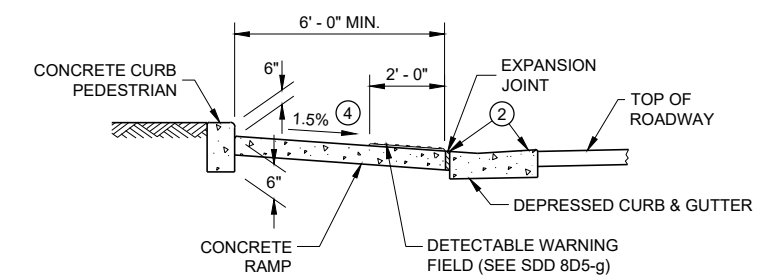


SECTION B - B FOR TYPE 7A


**CURB RAMPS
TYPE 5, 6, 7A, 7B & 8**

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

RADIAL DETECTABLE WARNING FIELD PLACEMENT WHEN 5 FOOT GRADE BREAK DISTANCE PER SDD 8D5-c IS EXCEEDED

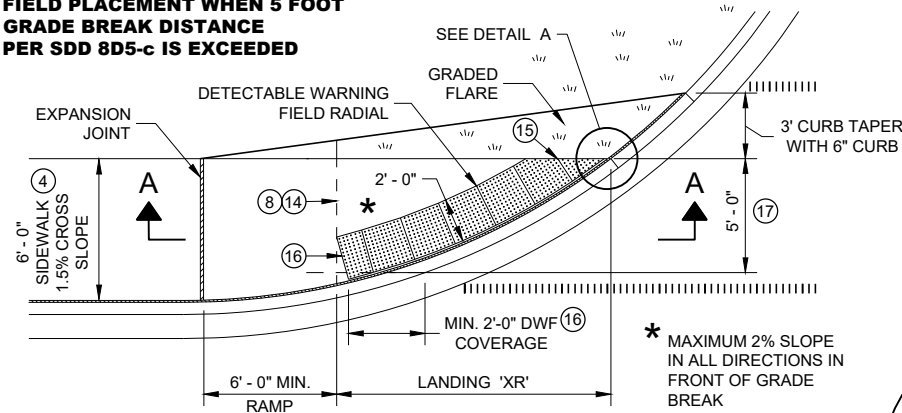

PLAN VIEW CURB RAMP TYPE 4A1 (GRADE BREAK DISTANCE GREATER THAN 5 FEET)

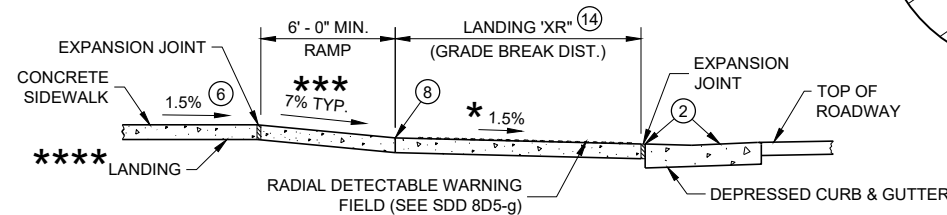


SECTION A - A FOR TYPE 4A1

**** IF RAMP SLOPE IS LESS THAN 5.0%, THEN NO ADJACENT UPHILL LANDING IS REQUIRED

*** MAXIMUM 8.33%

- LEGEND**
- 1/2" EXPANSION JOINT SIDEWALK
 - - - - - CONTRACTION JOINT SIDEWALK
 - ||||| PAVEMENT MARKING CROSSWALK (WHITE)




DETAIL A


GENERAL NOTES

- AVOID PLACING DRAINAGE STRUCTURES, JUNCTION BOXES OR OTHER OBSTRUCTIONS IN FRONT OF RAMP ACCESS AREAS.
- DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND THE APPLICABLE SPECIAL PROVISIONS.
- DETECTABLE WARNING FIELDS THAT ARE INSTALLED AS A GROUP OR SIDE BY SIDE, SHALL BE FROM THE SAME MANUFACTURER.
- APPLY RADIAL DETECTABLE WARNING PLACEMENT SIMILARLY FOR TYPE 4A AND 4A1 CURB RAMPS AND SIMILARLY FOR TYPE 4B AND 4B1 CURB RAMPS. TYPE 4A AND 4B RAMPS ARE NOT SHOWN.
- REFER TO SDD 8D5-g FOR ADDITIONAL RADIAL PLATE REQUIREMENTS.
- FIELD CUTS AT INTERMEDIATE JOINTS WITHIN THE RADIAL DETECTABLE WARNING FILED ARE PROHIBITED.
- DETERMINE FINAL RADIAL WARNING FIELD CONFIGURATION AND ITS INDIVIDUAL PLATE LOCATIONS. PERFORM PRE-LAYOUT PRIOR TO PLACEMENT IN PLASTIC CONCRETE. FOLLOW MANUFACTURER'S PRODUCT LIST AND INSTALLATION RECOMMENDATIONS.
- 2 GRADE CHANGE BETWEEN GUTTER FLAG SLOPE AND THE CURB RAMP SLOPE SHALL NOT EXCEED 11%. MAXIMUM GUTTER FLAG SLOPE IS 4%. PROVIDE LONGITUDINAL DRAINAGE AROUND CURB AND AWAY FROM CURB RAMP. NO VERTICAL LIPS OR DISCONTINUITIES GREATER THAN 1/4 - INCH ARE ALLOWED. SLOPE OF CURB HEAD OPENING SHALL MATCH THE RAMP SLOPE, MINIMALLY 1.5% AND NOT TO EXCEED 7%. WHEN ADJACENT TO 1.5% LANDING, CONSTRUCT CURB HEAD OPENING AT 1.5% IN THE DIRECTION OF PEDESTRIAN TRAVEL.
- 3 AN 8.33% CURB RAMP SLOPE IS ALLOWABLE WITH FLATTENED GUTTER FLAG SLOPE AND NOT TO EXCEED 11% GRADE CHANGE.
- 4 ±0.5% CONSTRUCTION TOLERANCE IN SIDEWALK CROSS SLOPE. THE SIDEWALK CROSS SLOPE SHALL NOT EXCEED 2% WITHOUT PRIOR APPROVAL FROM THE ENGINEER.
- 6 PROVIDE A LEVEL LANDING (MAXIMUM 2% SLOPE) IN ANY DIRECTION OF PEDESTRIAN TRAVEL. STANDARD LANDING SIZE IS 5 FEET BY 5 FEET.
- 8 PROVIDE GRADE BREAK PERPENDICULAR TO DIRECTION OF WHEELCHAIR TRAVEL.
- 14 CONSULT ENGINEER IF GRADE BREAK LOCATION (END OF LANDING DIMENSION "XR") REQUIRES FIELD ADJUSTMENT WHEN ESTABLISHING FINAL RADIAL DETECTABLE WARNING FIELD LOCATION.
- 15 FIELD SAW CUTS ALONG RADIAL DETECTABLE WARNING PLATES WILL BE NECESSARY TO MATCH EACH CURB RAMP EDGE. AVOID CUTTING THROUGH DOMES WHENEVER POSSIBLE. MAKE FIELD CUTS TRUE TO LINE AND WITHIN 1/8" DEVIATION. SMOOTH EDGES OF FIELD CUT PLATES.
- 16 USE 1' X 2" RECTANGULAR END PLATE AT END OF TYPE 4A1 RAMP AND PROVIDE MINIMUM 2' - 0" DETECTABLE WARNING FIELD COVERAGE (IN DIRECTION OF PEDESTRIAN TRAVEL) ALONG THE ENTIRE CURB RAMP WIDTH.
- 17 A MAXIMUM 3 INCH CONCRETE BORDER WITH IS ALLOWABLE IN FROM OF RADIAL DETECTABLE WARNING FIELD FOR CONSTRUCTABILITY PURPOSES. CONCRETE BORDER WIDTH MAY VARY UP TO 1 INCH.

RADIAL DETECTABLE WARNING FIELD PLACEMENT WHEN 5 FOOT GRADE BREAK DISTANCE PER SDD 8D5-d IS EXCEEDED

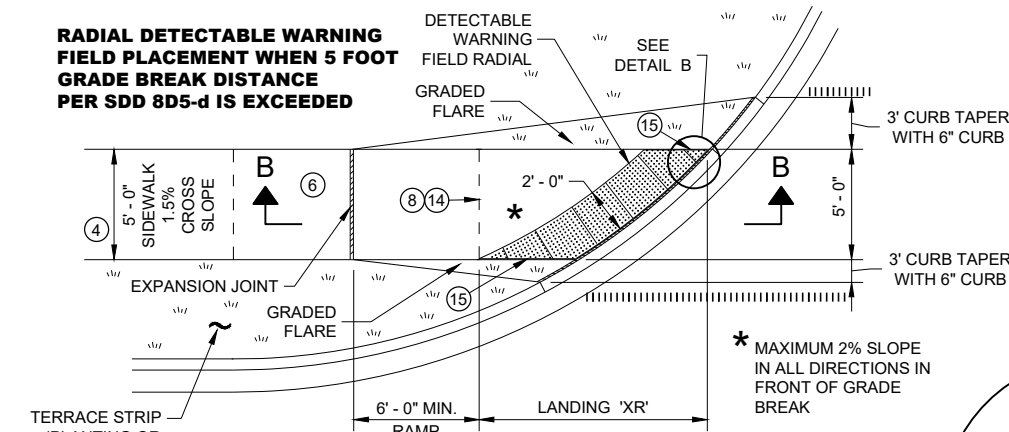


PLAN VIEW CURB RAMP TYPE 4B1 (GRADE BREAK DISTANCE GREATER THAN 5 FEET)

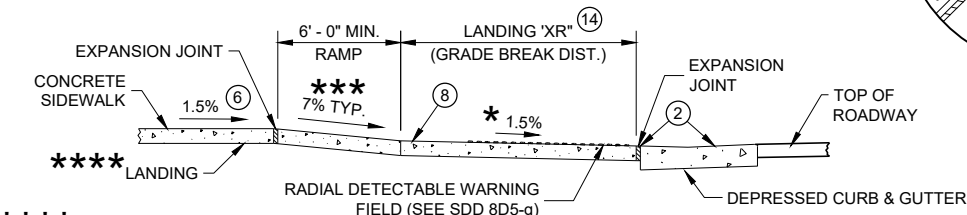

SECTION B - B FOR TYPE 4B1


**** IF RAMP SLOPE IS LESS THAN 5.0%, THEN NO ADJACENT UPHILL LANDING IS REQUIRED

*** MAXIMUM 8.33%




DETAIL B

RADIAL DETECTABLE WARNING FIELD PLACEMENT WHEN 5 FOOT GRADE BREAK DISTANCE PER SDD 8D5-b IS EXCEEDED

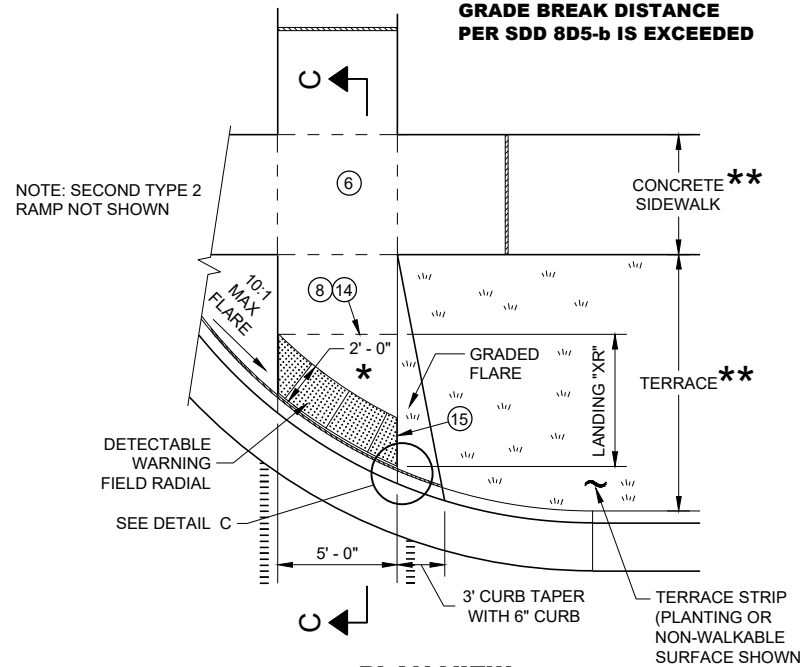


PLAN VIEW CURB RAMP TYPE 2 (GRADE BREAK DISTANCE GREATER THAN 5 FEET) (ON LINE WITH SIDEWALK)

NOTE: SECOND TYPE 2 RAMP NOT SHOWN

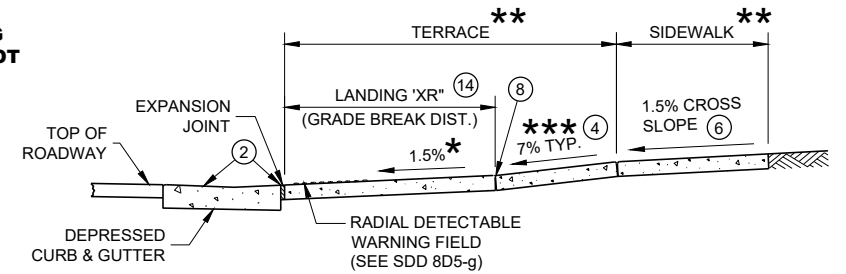

SECTION C - C FOR TYPE 2

- * MAXIMUM 2% SLOPE IN ALL DIRECTIONS IN FRONT OF GRADE BREAK
- ** WIDTH SHOWN ELSEWHERE IN THE PLANS
- *** MAXIMUM 8.33%




DETAIL C

CURB RAMPS RADIAL DETECTABLE WARNING FIELD APPLICATIONS


STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION

	MIN.	MAX.
A	1.6"	2.4"
B	0.65"	1.5"
C	*	*
D	0.9"	1.4"

* THE C DIMENSION IS 50% TO 65% OF THE D DIMENSION.

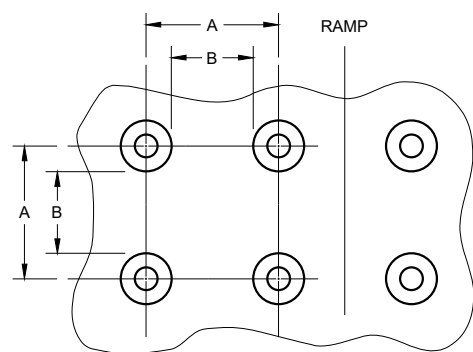


PLAN VIEW

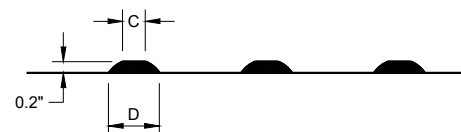


ELEVATION VIEW

**TRUNCATED DOMES
DETECTABLE WARNING PATTERN DETAIL**

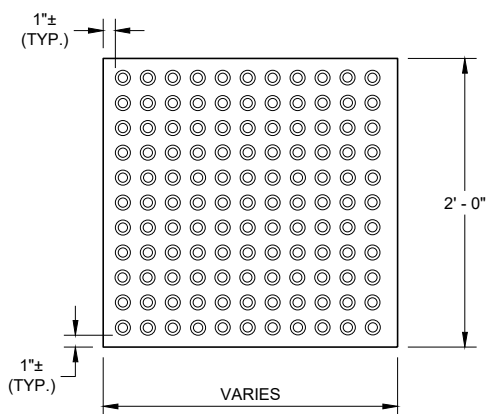


**RECTANGULAR
PLATES**

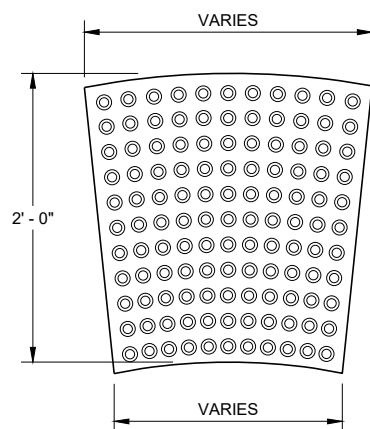


**RADIAL
PLATES**

**PLAN VIEW
DETECTABLE WARNING FIELDS (TYPICAL)**

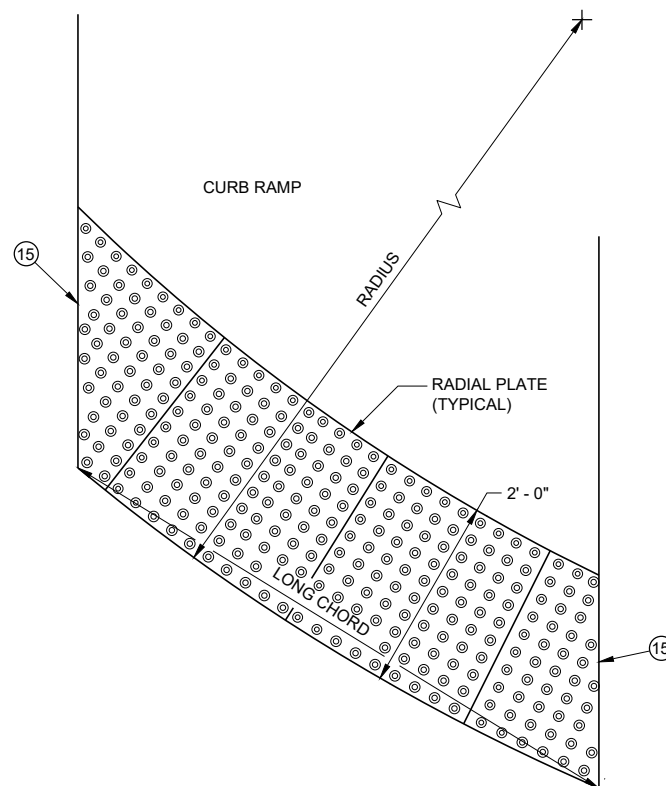

**PLAN VIEW
RADIAL DETECTABLE
WARNING FIELD ATTRIBUTES**

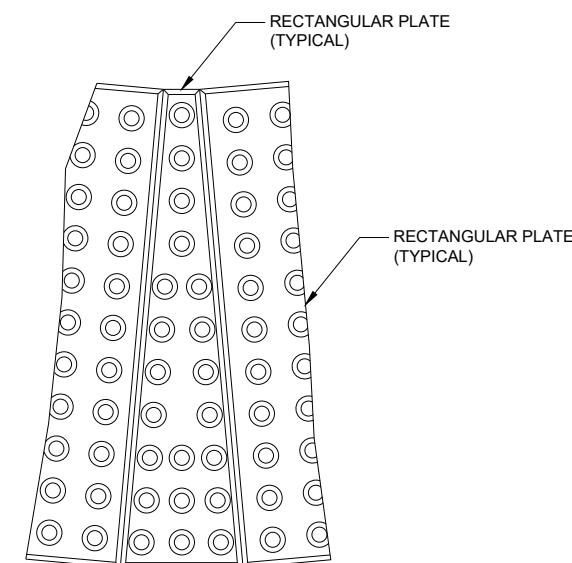

**PLAN VIEW
RADIAL WEDGE PLATE
CONNECTION DETAIL**

GENERAL NOTES

DETECTABLE WARNING FIELDS THAT ARE INSTALLED AT A CURB RAMP SHALL BE FROM THE SAME MANUFACTURER.

PLACE ALL DETECTABLE WARNING FIELD SYSTEMS IN ACCORDANCE TO THE MANUFACTURER'S RECOMMENDATION.

FIELD CUTS AT INTERMEDIATE JOINTS WITHIN THE RADIAL DETECTABLE WARNING FIELD ARE PROHIBITED.

DETERMINE FINAL RADIAL WARNING FIELD CONFIGURATION AND ITS INDIVIDUAL PLATE LOCATIONS. PERFORM PRE-LAYOUT PRIOR TO PLACEMENT IN PLASTIC CONCRETE. FOLLOW MANUFACTURER'S PRODUCT LIST AND INSTALLATION RECOMMENDATIONS.


FOR RADIAL DETECTABLE WARNING FIELD APPLICATIONS WHERE STANDARD RADIAL PLATES ARE NOT AVAILABLE AT AN INTERSECTION CURB RADIUS, A COMBINATION OF SQUARE OR RECTANGULAR PLATES AND RADIAL PLATES MAY BE USED TO FORM RADIAL CONFIGURATION. RADIAL WEDGE PLATES IN COMBINATION WITH SQUARE PLATES ARE ALSO ACCEPTABLE. FOLLOW MANUFACTURER'S RECOMMENDATIONS.

REFER TO CONTRACT AND STANDARD SPECIFICATIONS FOR FIELD CUTTING REQUIREMENTS.


DO NOT EMBED IN CONCRETE ANY FIELD-CUT PLATES WITH CUT EDGES SHORTER THAN 6 INCHES. CONSULT WITH MANUFACTURER FOR RE-DRILLING AND ANCHORING REQUIREMENTS OF FIELD-CUT PLATES.

(15) FIELD SAW CUTS ALONG RADIAL DETECTABLE WARNING PLATES WILL BE NECESSARY TO MATCH EACH CURB RAMP EDGE. AVOID CUTTING THROUGH DOMES WHENEVER POSSIBLE. MAKE FIELD CUTS TRUE TO LINE AND WITHIN 1/8" DEVIATION. SMOOTH EDGES OF FIELD CUT PLATES.


CURB RAMPS RECTANGULAR AND RADIAL DETECTABLE WARNING PLATES	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED May 2019 DATE	/S/ Rodney Taylor ROADWAY STANDARDS DEVELOPMENT UNIT SUPERVISOR
<small>FHWA</small>	

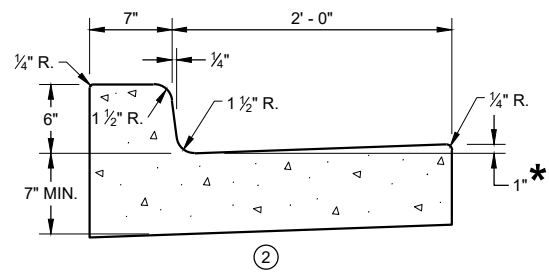


CONCRETE CURB AND GUTTER 31" ①

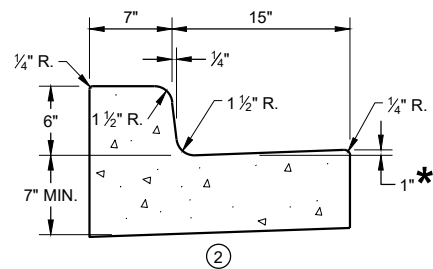

CONCRETE CURB AND GUTTER 22" ①

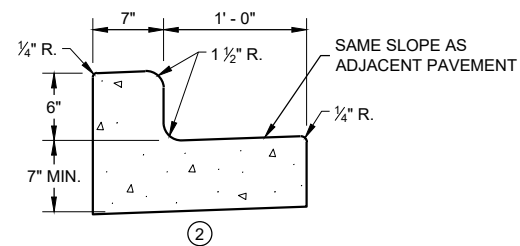


CONCRETE CURB AND GUTTER 19" ①

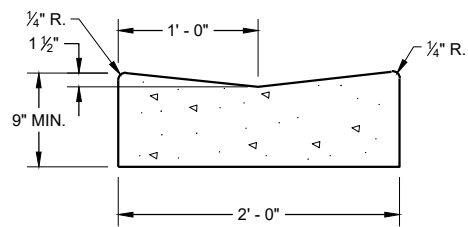


CONCRETE GUTTER 24" ①


* TO BE MEASURED TO A MAXIMUM OF 3" WHERE DRAINAGE PROBLEMS EXIST.

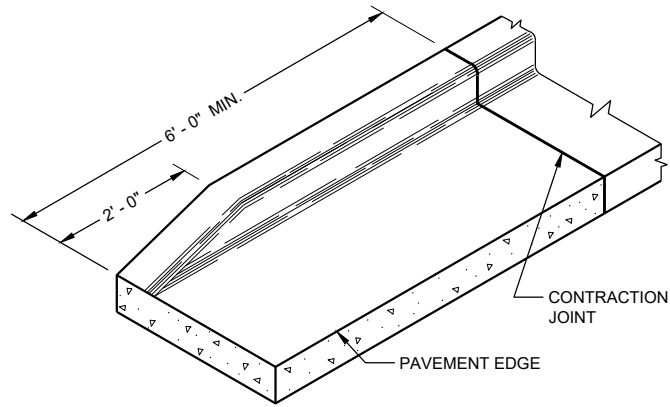


END SECTION CURB AND GUTTER

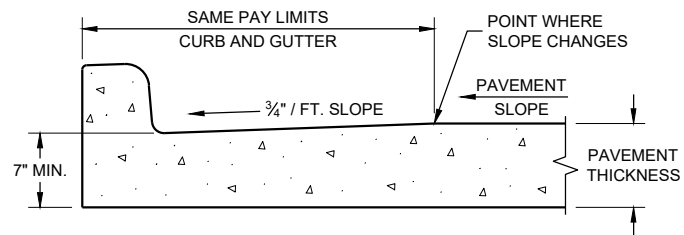

PARTIAL SECTION OF PAVEMENT WITH INTEGRAL CURB AND GUTTER

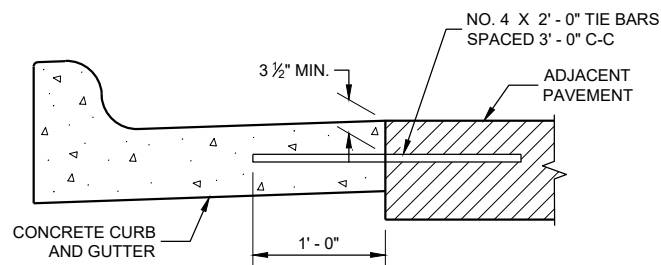

TYPICAL TIE BAR LOCATION ①

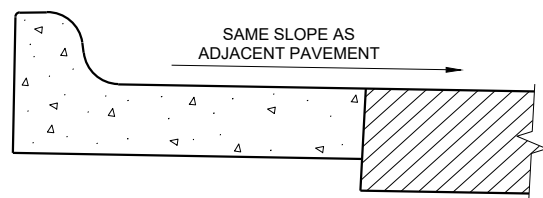

HIGH SIDE SECTION ③
(TYPICAL FOR ALL CURB & GUTTER TYPES)

GENERAL NOTES


DETAILS OF CONSTRUCTION AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE CONTRACT.

PAVEMENT TIES AND TIE BARS SHALL BE EPOXY COATED IN CONFORMANCE WITH SUBSECTION 505.2.6.2 OF THE STANDARD SPECIFICATIONS.


INTEGRAL CURB AND GUTTER SHALL CONFORM TO THE DETAILS SHOWN FOR CONCRETE CURB AND GUTTER INCLUDING THE TRANSVERSE GUTTER SLOPE. A LONGITUDINAL CONSTRUCTION JOINT IS NOT REQUIRED WITH INTEGRAL CURB AND GUTTER.

UNLESS OTHERWISE SHOWN ON THE TYPICAL CROSS SECTIONS, THE BASE COURSE AND UNCLASSIFIED EXCAVATION LIMITS ARE 2' - 0" BEHIND THE BACK OF CURBS.

- ① WHEN PLACED ADJACENT TO NEW CONCRETE, TIE BARS ARE REQUIRED FOR CURB AND GUTTER 31", 22", 19" AND CONCRETE GUTTER 24".
- ② THE BOTTOM OF CURB AND GUTTER MAY BE CONSTRUCTED EITHER LEVEL OR PARALLEL TO THE SLOPE OF THE SUBGRADE OR BASE COURSE PROVIDED A 7" MINIMUM GUTTER THICKNESS IS MAINTAINED.
- ③ WHEN HIGH SIDE CURB SECTION IS REQUIRED, THE LOCATION(S) WILL BE NOTED ON THE PLANS

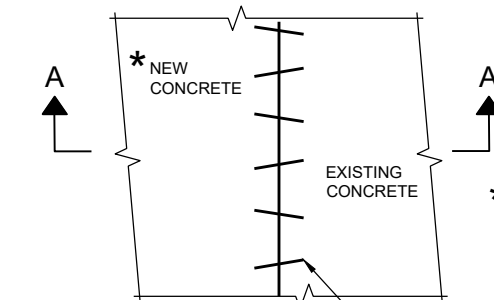

PLAN VIEW

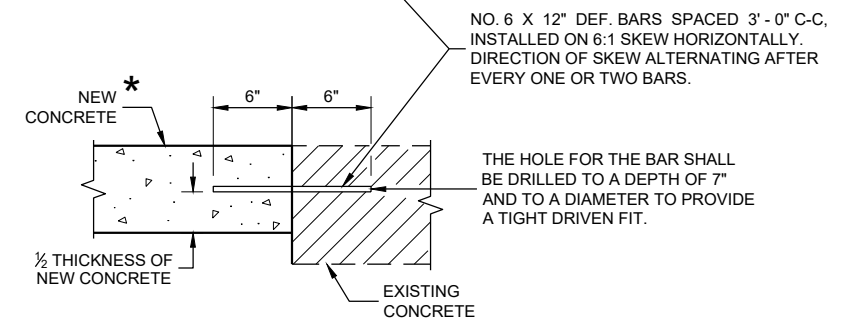


**SECTION A - A
PAVEMENT TIES**

**CONCRETE GUTTER,
CURB AND GUTTER AND
PAVEMENT TIES**
(For Optional use in Milwaukee Co. Only)


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
February 2020 DATE /S/ Rodney Taylor
ROADWAY STANDARDS DEVELOPMENT ENGINEER

FHWA

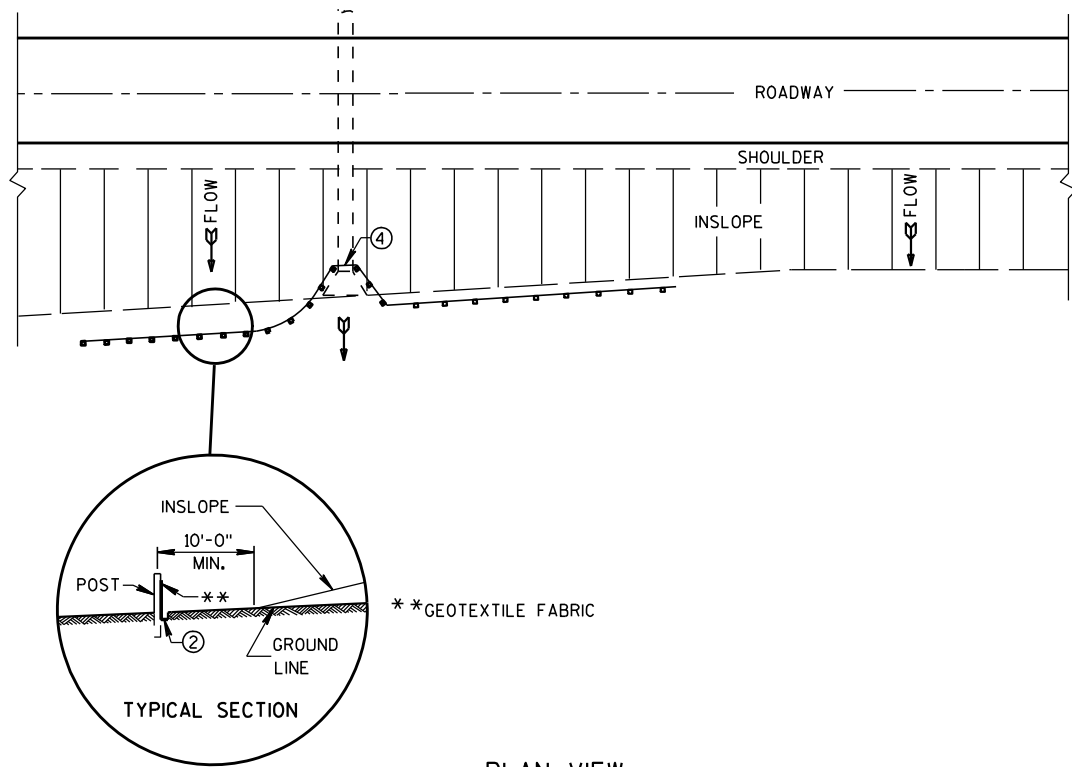

PLAN VIEW
TYPICAL APPLICATION OF SILT FENCE

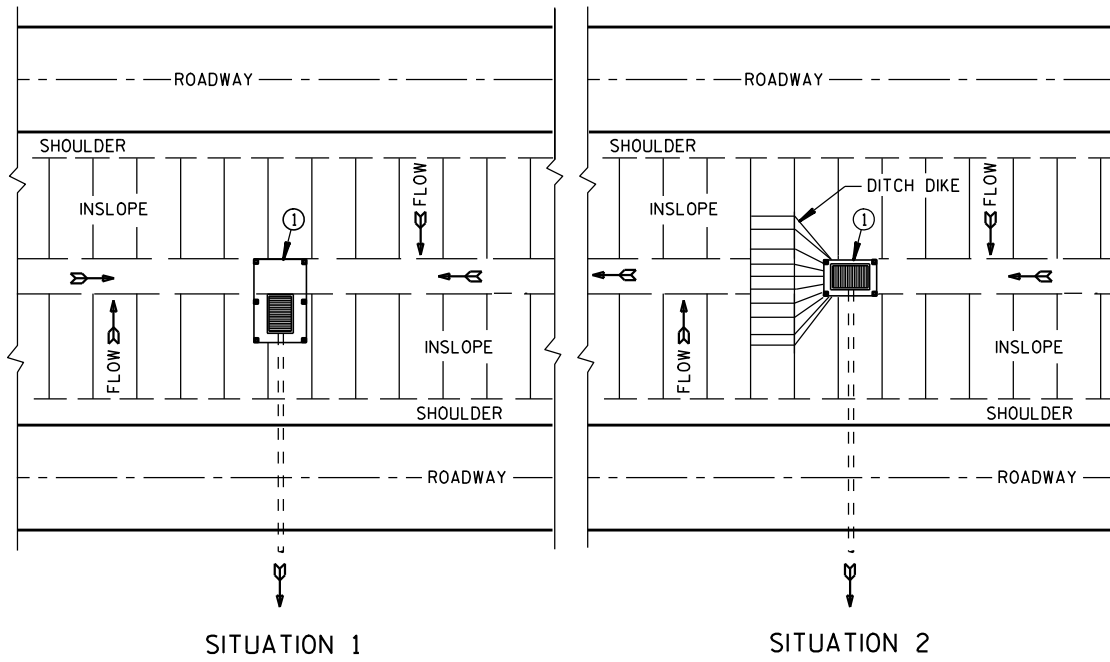


SITUATION 1 SITUATION 2
PLAN VIEW
SILT FENCE AT MEDIAN SURFACE DRAINS

GENERAL NOTES


DETAILS OF CONSTRUCTION NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND APPLICABLE SPECIAL PROVISIONS.

- ① HORIZONTAL BRACE REQUIRED WITH 2" X 4" WOODEN FRAME OR EQUIVALENT AT TOP OF POSTS.
- ② FOR MANUAL INSTALLATIONS THE TRENCH SHALL BE A MINIMUM OF 4" WIDE & 6" DEEP TO BURY AND ANCHOR THE GEOTEXTILE FABRIC. FOLD MATERIAL TO FIT TRENCH AND BACKFILL & COMPACT TRENCH WITH EXCAVATED SOIL.
- ③ WOOD POSTS SHALL BE A MINIMUM SIZE OF 1 1/8" X 1 1/8" OF OAK OR HICKORY.
- ④ SILT FENCE TO EXTEND ACROSS THE TOP OF THE PIPE.
- ⑤ CONSTRUCT SILT FENCE FROM A CONTINUOUS ROLL IF POSSIBLE BY CUTTING LENGTHS TO AVOID JOINTS. IF A JOINT IS NECESSARY USE ONE OF THE FOLLOWING TWO METHODS; A) OVERLAP THE END POSTS AND TWIST, OR ROTATE, AT LEAST 180 DEGREES, B) HOOK THE END OF EACH SILT FENCE LENGTH.

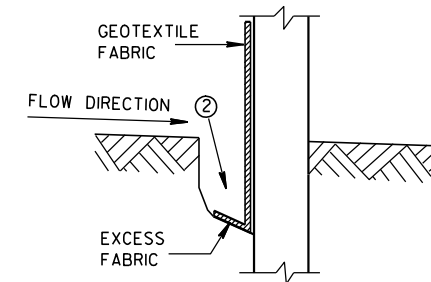


TRENCH DETAIL

NOTE: ADDITIONAL POST DEPTH OR TIE BACKS MAY BE REQUIRED IN UNSTABLE SOILS

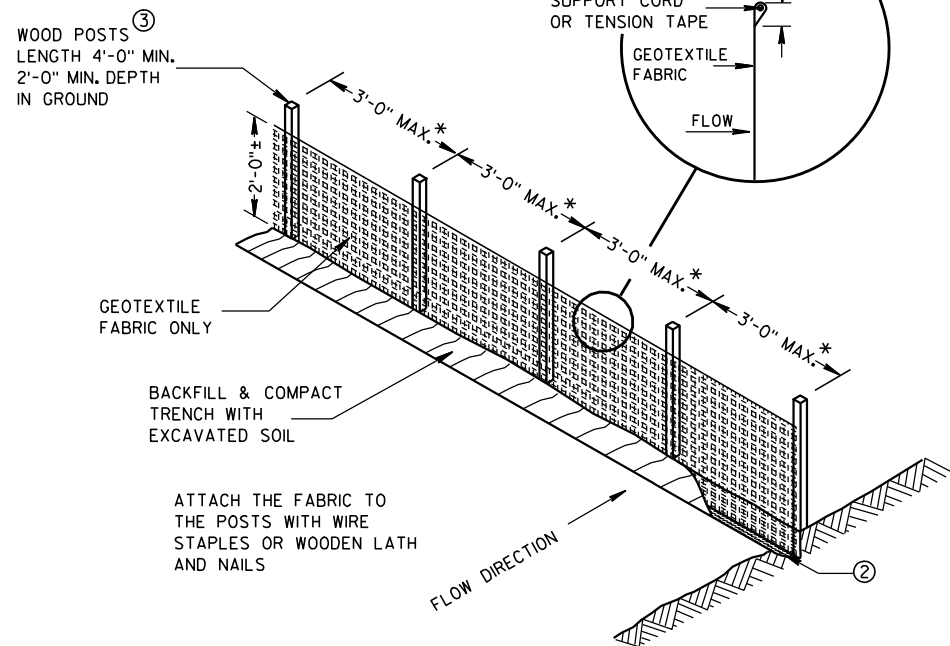


SILT FENCE

* NOTE: 8'-0" POST SPACING ALLOWED IF A WOVEN GEOTEXTILE FABRIC IS USED.

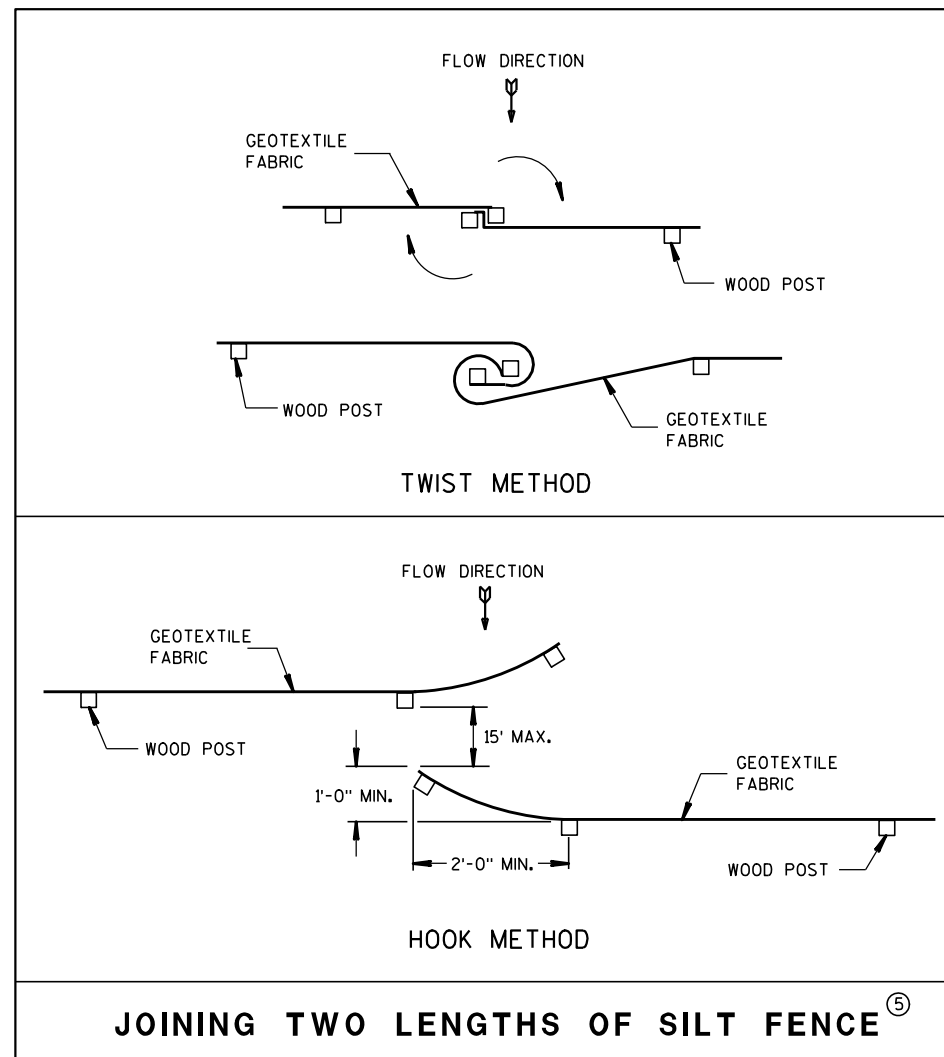

JOINING TWO LENGTHS OF SILT FENCE ⑤

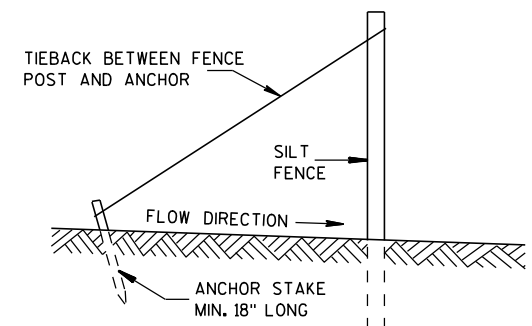

SILT FENCE TIE BACK
(WHEN REQUIRED BY THE ENGINEER)

SILT FENCE



STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED

4-29-05
DATE

FHWA

/S/ Beth Canestra
CHIEF ROADWAY DEVELOPMENT ENGINEER

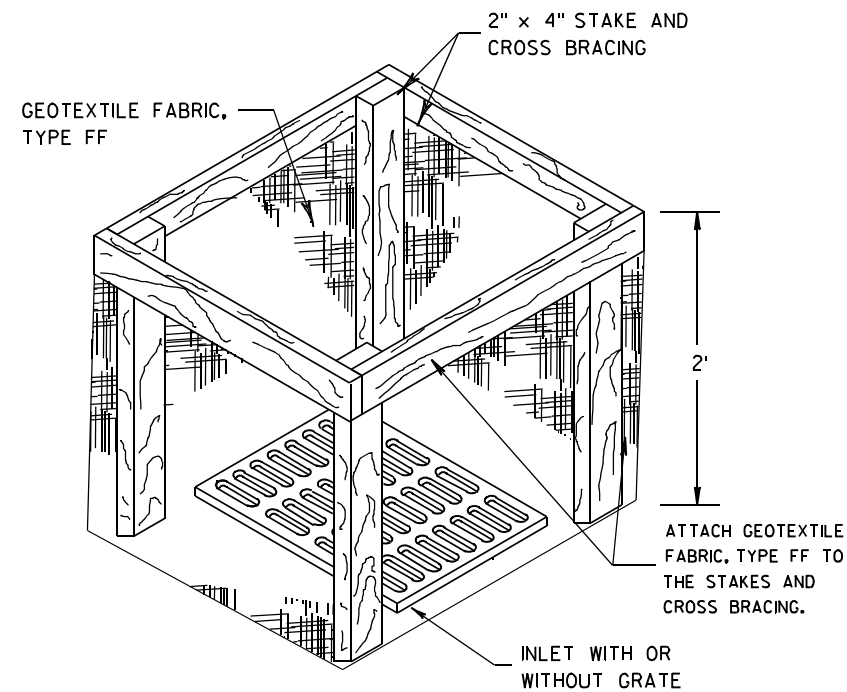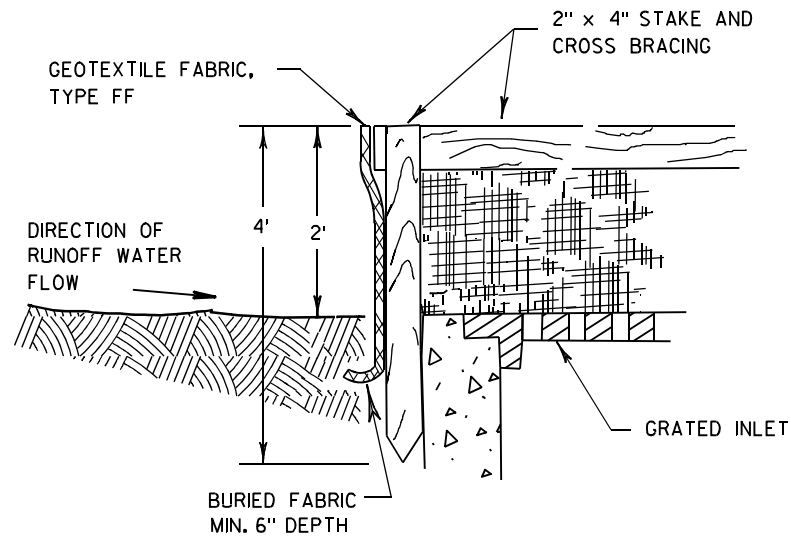

INLET PROTECTION, TYPE A


GENERAL NOTES

INLET PROTECTION DEVICES SHALL BE MAINTAINED OR REPLACED AT THE DIRECTION OF THE ENGINEER.

MANUFACTURED ALTERNATIVES APPROVED AND LISTED ON THE DEPARTMENT'S EROSION CONTROL PRODUCT ACCEPTABILITY LIST MAY BE SUBSTITUTED.


WHEN REMOVING OR MAINTAINING INLET PROTECTION, CARE SHALL BE TAKEN SO THAT THE SEDIMENT TRAPPED ON THE GEOTEXTILE FABRIC DOES NOT FALL INTO THE INLET. ANY MATERIAL FALLING INTO THE INLET SHALL BE REMOVED IMMEDIATELY.

- ① FINISHED SIZE, INCLUDING FLAP POCKETS WHERE REQUIRED, SHALL EXTEND A MINIMUM OF 10" AROUND THE PERIMETER TO FACILITATE MAINTENANCE OR REMOVAL.
- ② FOR INLET PROTECTION, TYPE C (WITH CURB BOX), AN ADDITIONAL 18" OF FABRIC IS WRAPPED AROUND THE WOOD AND SECURED WITH STAPLES. THE WOOD SHALL NOT BLOCK THE ENTIRE HEIGHT OF THE CURB BOX OPENING.
- ③ FLAP POCKETS SHALL BE LARGE ENOUGH TO ACCEPT WOOD 2X4.

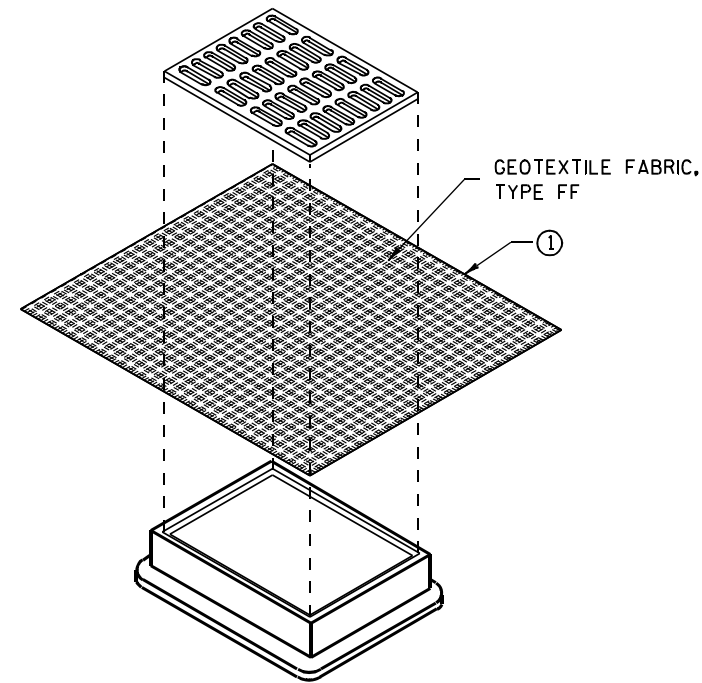

**INLET PROTECTION, TYPE B
(WITHOUT CURB BOX)**

(CAN BE INSTALLED IN ANY INLET WITHOUT A CURB BOX)

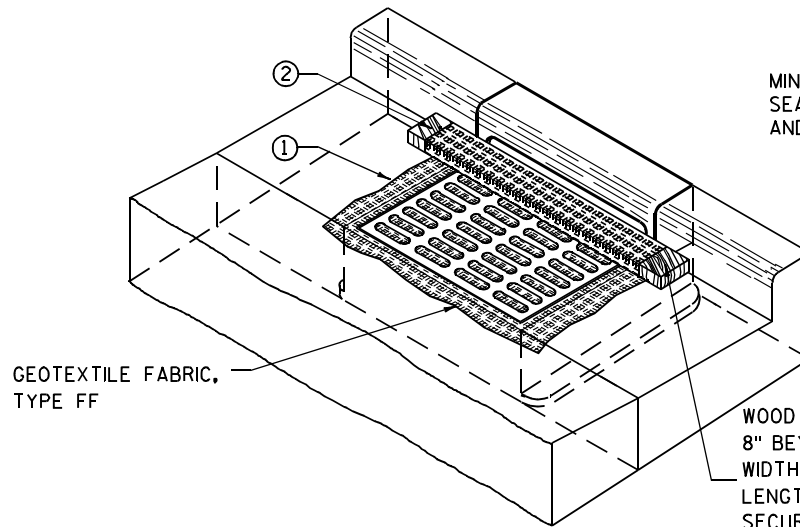

INLET PROTECTION, TYPE C (WITH CURB BOX)

INSTALLATION NOTES

TYPE B & C

TRIM EXCESS FABRIC IN THE FLOW LINE TO WITHIN 3" OF THE GRATE.


THE CONTRACTOR SHALL DEMONSTRATE A METHOD OF MAINTENANCE, USING A SEWN FLAP, HAND HOLDS OR OTHER METHOD TO PREVENT ACCUMULATED SEDIMENT FROM ENTERING THE INLET.

TYPE D

DO NOT INSTALL INLET PROTECTION TYPE D IN INLETS SHALLOWER THAN 30", MEASURED FROM THE BOTTOM OF THE INLET TO THE TOP OF THE GRATE.

TRIM EXCESS FABRIC IN THE FLOW LINE TO WITHIN 3" OF THE GRATE.


THE INSTALLED BAG SHALL HAVE A MINIMUM SIDE CLEARANCE, BETWEEN THE INLET WALLS AND THE BAG, MEASURED AT THE BOTTOM OF THE OVERFLOW HOLES, OF 3". WHERE NECESSARY THE CONTRACTOR SHALL CINCH THE BAG, USING PLASTIC ZIP TIES, TO ACHIEVE THE 3" CLEARANCE. THE TIES SHALL BE PLACED AT A MAXIMUM OF 4" FROM THE BOTTOM OF THE BAG.

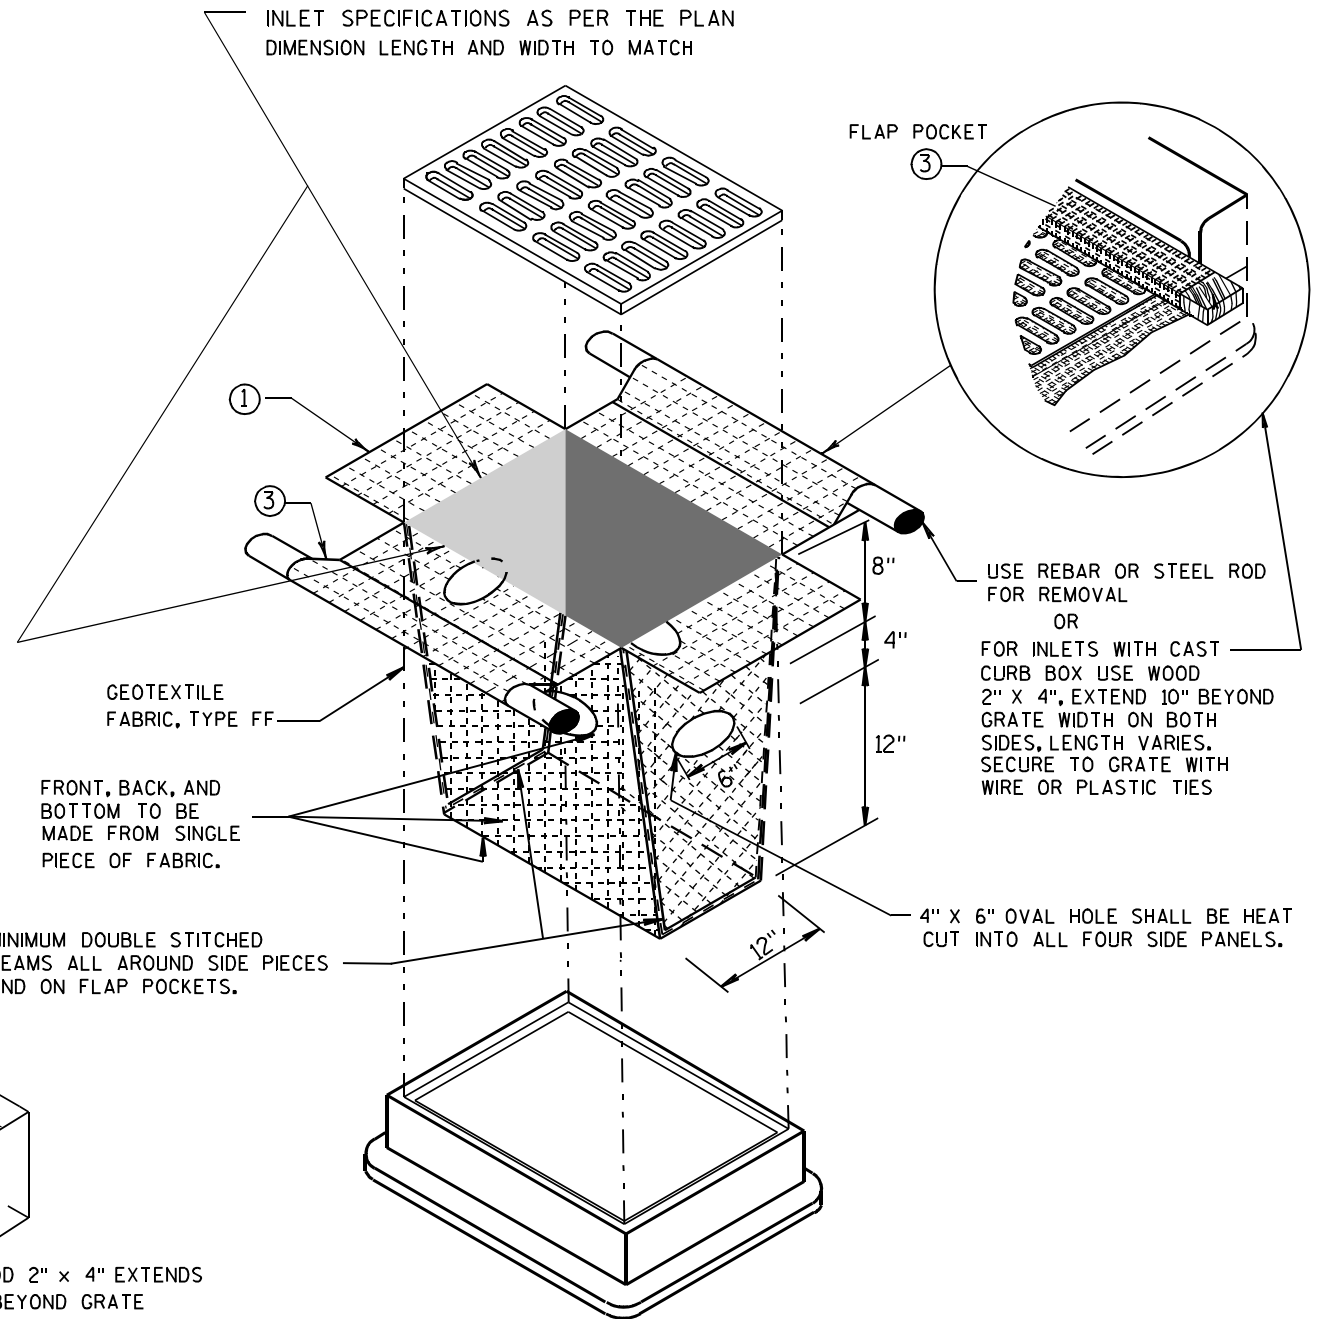


INLET PROTECTION, TYPE D

(CAN BE INSTALLED IN ANY INLET TYPE WITH OR WITHOUT A CURB BOX AS PER NOTE ②)

INLET PROTECTION TYPE A, B, C, AND D	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED 10/16/02 DATE	/S/ Beth Conestra CHIEF ROADWAY DEVELOPMENT ENGINEER
FHWA	

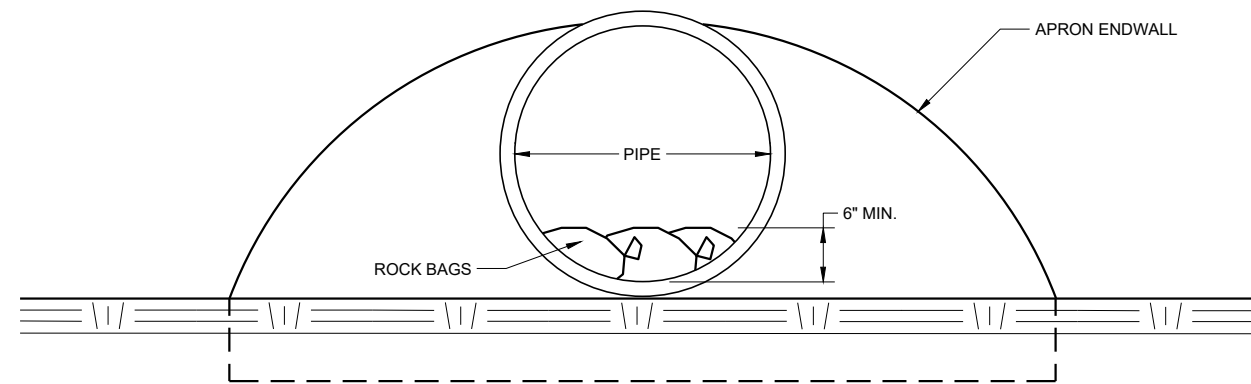

END VIEW

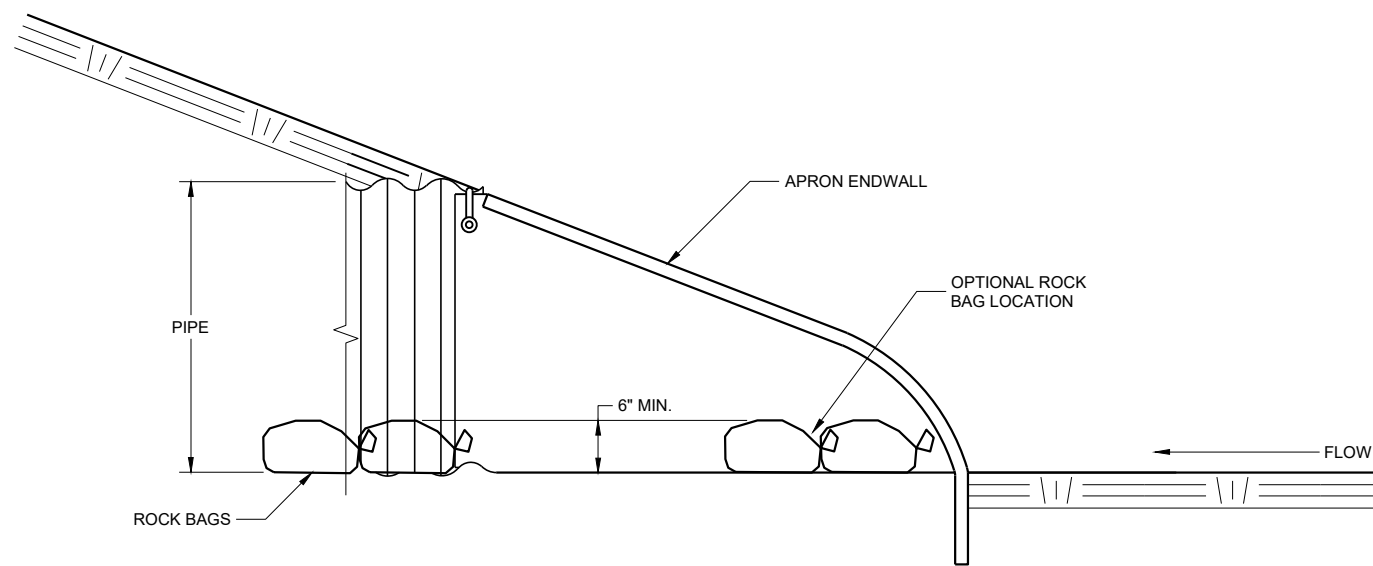

SIDE VIEW


CULVERT PIPE CHECK
 (INSTALL ON INLET END ONLY)

CULVERT PIPE CHECK


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
 May 2019 /S/ Daniel Schave
 DATE EROSION CONTROL ENGINEER

FHWA

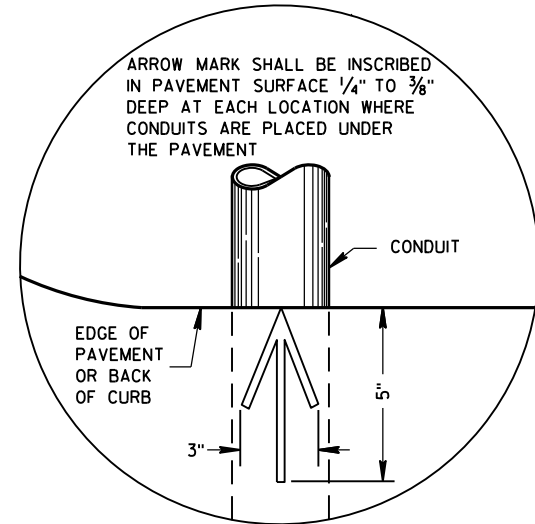

PLAN VIEW
ARROW MARK

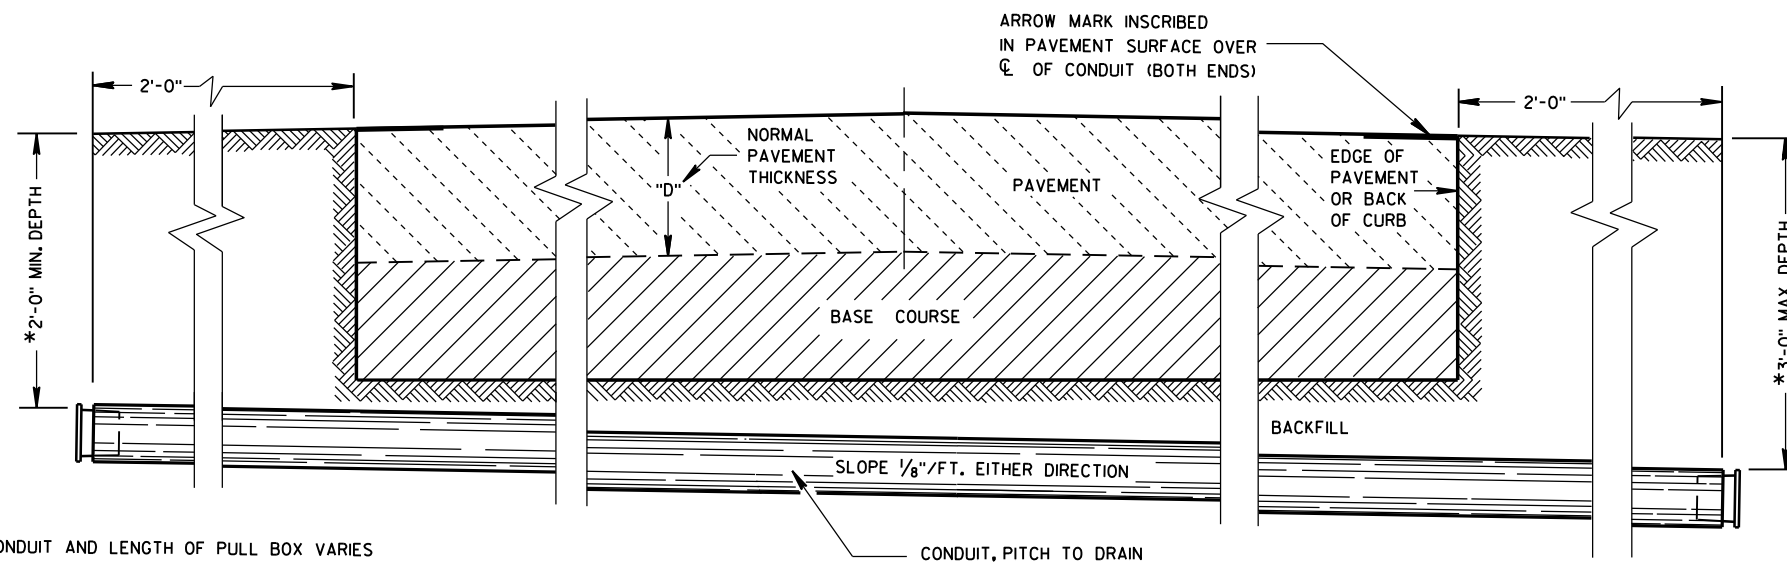

SIDE ELEVATION
DETAIL FOR CONDUIT UNDER PAVED HIGHWAYS

*DEPTH OF CONDUIT AND LENGTH OF PULL BOX VARIES WITH HEIGHT OF CURB USED. ALSO SEE PULL BOX S.D.D. 9B4

GENERAL NOTES

DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE CONTRACT.

METALLIC (STANDARD SPECIFICATION 652.2.2) OR NONMETALLIC (STANDARD SPECIFICATION 652.2.3) CONDUIT SHALL BE FURNISHED AND PLACED AS SHOWN.

DEPTH OF CONDUIT INSTALLED BELOW THE TRAVELED WAY SHALL BE 24 INCHES MINIMUM AND 36 INCHES MAXIMUM.

DEPTH OF CONDUIT INSTALLED THAT IS NOT BELOW THE TRAVELED WAY SHALL BE 18 INCHES MINIMUM AND 36 INCHES MAXIMUM.

ANY EXCEPTION TO THE MAXIMUM DEPTH SHALL BE ONLY WITH THE WRITTEN APPROVAL OF THE ENGINEER.

THE TRENCH SHALL NOT BE BACKFILLED PRIOR TO INSPECTION OF THE CONDUIT.

ALL METALLIC CONDUIT RACEWAY ENDS SHALL BE REAMED AND THREADED.

ALL METALLIC CONDUIT IN WHICH WIRE OR CABLE IS TO BE INSTALLED SHALL BE BUSHED WITH APPROVED THREADED BUSHINGS BEFORE INSTALLATION OF THE WIRE OR CABLE.

ALL METALLIC CONDUITS IN WHICH WIRE OR CABLE IS NOT TO BE INSTALLED SHALL BE CAPPED WITH THREADED PROTECTIVE CAPS, AS APPROVED BY THE ENGINEER.

ALL NONMETALLIC CONDUIT SHALL BE CAPPED OR PLUGGED IMMEDIATELY AFTER INSTALLATION AND SHALL REMAIN CAPPED OR PLUGGED UNTIL WIRE/CABLES ARE INSTALLED.

NONMETALLIC CONDUITS IN WHICH WIRE OR CABLE IS NOT BEING INSTALLED SHALL REMAIN CAPPED OR PLUGGED.

BENDING OF PVC ELECTRICAL CONDUIT SHALL BE ACCOMPLISHED BY USING A BLANKET OR EMERSON TYPE TANK DESIGNED FOR THE PURPOSE OF BENDING PVC ELECTRICAL CONDUIT.

ALL CUT ENDS SHALL BE TRIMMED INSIDE AND OUTSIDE TO REMOVE ALL ROUGH EDGES ON NONMETALLIC CONDUIT. (SEE NEC 347.5)

WHEN REQUIRED TO CONNECT NONMETALLIC CONDUIT TO METALLIC CONDUIT, ONLY U.L. LISTED ADAPTER FITTINGS SHALL BE USED.

PRIOR TO CONDUIT ACCEPTANCE, CONDUIT CAPS OR PLUGS SHALL BE REMOVED, AND THE CAPS, PLUGS AND CONDUIT ENDS SHALL BE THOROUGHLY CLEANED AND THEN THE CAPS OR PLUGS REINSTALLED TO ENSURE THAT THE CAPS OR PLUGS CAN BE EASILY REMOVED IN THE FUTURE.

ALL CONDUIT BEING FURNISHED AND INSTALLED SHALL HAVE THE U.L. LABEL FIRMLY ATTACHED.

CONDUIT RUNS SHALL BE THE SAME SIZE OF CONDUIT FROM ONE END TO THE OTHER (FROM PULL BOX TO PULL BOX-OR-JUNCTION BOX TO JUNCTION BOX-OR-BASE TO BASE, ETC.).

TRACER WIRE SHALL BE INSTALLED AS STATED IN THE STANDARD SPECIFICATION, ITEM 652.3.1.1.

ALL CONDUIT RUNS SHALL BE STRAIGHT (WITHOUT BENDS) FROM PULL BOX TO PULL BOX, PULL BOX TO BASE AND BASE TO BASE AS SHOWN ON THE PLANS.


6

6


S.D.D. 9 B 2-10

S.D.D. 9 B 2-10


CONDUIT	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED March, 2017 DATE	/S/ Ahmet Demirbilek STATE ELECTRICAL ENGINEER
FHWA	

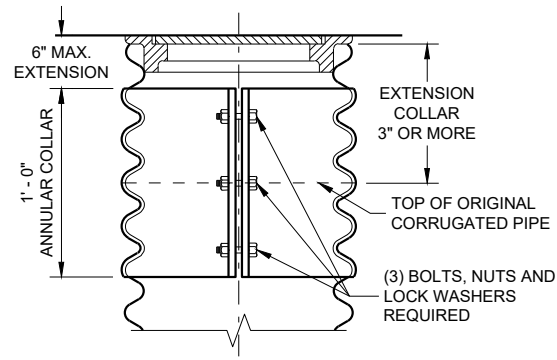


CORRUGATED PIPE EXTENDER

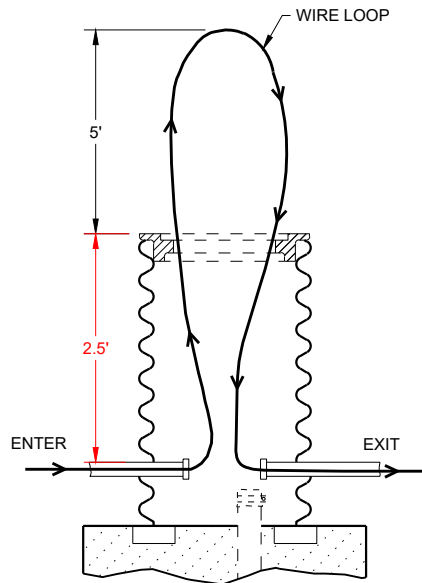

MEASUREMENT DETAIL FOR WIRE/CABLE IN THE PULL BOX

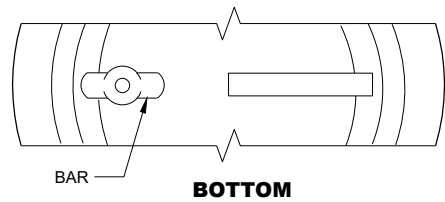

BOTTOM



SECTION

**ALTERNATE COVER (LOCKING)
TIGHTENING BAR TYPE**

GENERAL NOTES

DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE CONTRACT.

ALL FRAMES AND COVERS SHALL BE HEAVY DUTY TYPE, SUITABLE FOR VEHICULAR TRAFFIC LOADS.

PULL BOXES LOCATED IN THE ROADWAYS SHALL HAVE LOCKING COVERS.

ENTRANCE HOLES INTO PULL BOXES SHALL BE CUT WITH A CIRCULAR HOLE SAW OR HYDRAULIC CONDUIT PUNCH. HOLE SIZE SHALL BE THE OUTSIDE DIAMETER OF THE CONDUIT THAT IS TO FIT IN THE OPENING PLUS NO MORE THAN 1/4".

THE CONTRACTOR SHALL NOT INSTALL WIRE IN ANY PULL BOX UNTIL ITS INSTALLATION HAS BEEN INSPECTED AND ACCEPTED BY THE ENGINEER.

GROUNDING LUGS (MECHANICAL CONNECTORS) SHALL BE U.L. LISTED AND APPROVED FOR USE WITH COPPER WIRE.

ALL METALLIC CONDUIT IN WHICH WIRE AND/OR CABLE IS TO BE INSTALLED, SHALL BE BUSHED BEFORE INSTALLATION OF THE WIRE AND/OR CABLE.


WHEN PULL BOXES ARE INSTALLED FOR FUTURE USE, DO NOT INSTALL THE EQUIPMENT GROUNDING LUG. THE EQUIPMENT GROUNDING LUG, THE EQUIPMENT GROUNDING ELECTRODE AND THE EQUIPMENT GROUNDING CONDUCTOR SHALL BE REQUIRED AND INSTALLED UNDER A FUTURE WIRING CONTRACT.

TABLE OF NOMINAL DIMENSIONS AND WEIGHTS


DIMENSION IN INCHES	CORRUGATED STEEL PIPE									
	PIPE DIAMETER (INSIDE)	12	12	12	18	18	18	24	24	24
PIPE DIAMETER (INSIDE)	A	12	12	12	18	18	18	24	24	24
PIPE LENGTH**	B	24	30	36	24	30	36	36	42	48
WALL THICKNESS	C	0.064	0.064	0.064	0.064	0.064	0.064	0.064	0.064	0.064
COVER	D	10 1/4	10 1/4	10 1/4	16 1/4	16 1/4	16 1/4	22 1/4	22 1/4	22 1/4
FRAME	E	14 1/2	14 1/2	14 1/2	20 1/2	20 1/2	20 1/2	26 1/2	26 1/2	26 1/2
FRAME	F	8 1/2	8 1/2	8 1/2	14 1/2	14 1/2	14 1/2	20 1/2	20 1/2	20 1/2
FRAME	G	11 1/2	11 1/2	11 1/2	17 1/2	17 1/2	17 1/2	23 1/2	23 1/2	23 1/2
WEIGHT IN POUNDS*										
FRAME AND COVER		60	60	60	110	110	110	155	155	155

* THE ACTUAL WEIGHT OF THE MANHOLE FRAME AND COVER MAY VARY WITHIN 5 PERCENT PLUS OR MINUS OF THE WEIGHTS SHOWN.



** NORMALLY USED LENGTHS. THE PROJECT ENGINEER SHALL DETERMINE IF PIPE LENGTHS, OTHER THAN THOSE SPECIFIED, SHALL BE USED, TO A MAXIMUM OF 48" (CONTINUOUS LENGTH, NON-SPLICED). THE ADDITIONAL LENGTH SHALL BE INCIDENTAL TO THE PULL BOX BID PRICE.

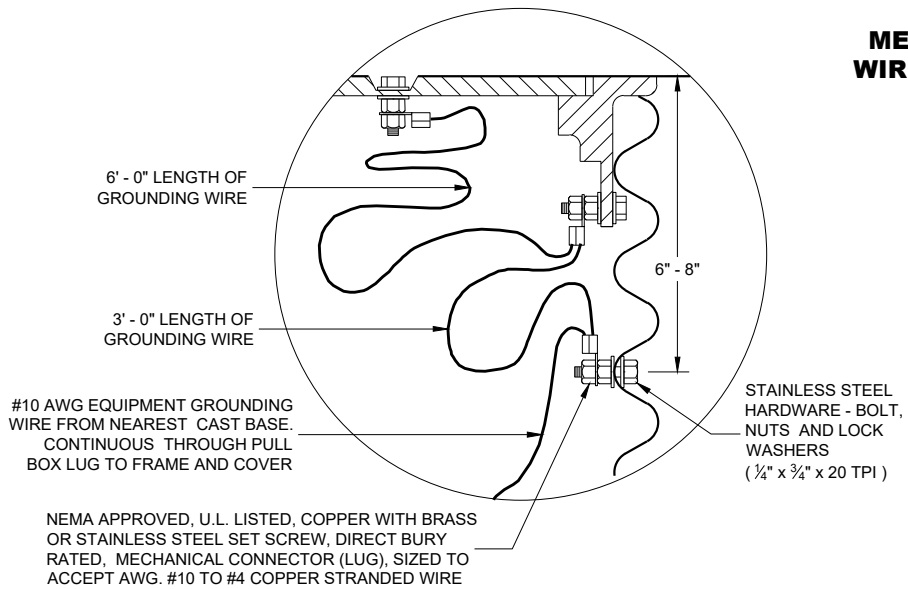

EQUIPMENT GROUNDING LUG AND LOCATION IN STEEL PULL BOXES

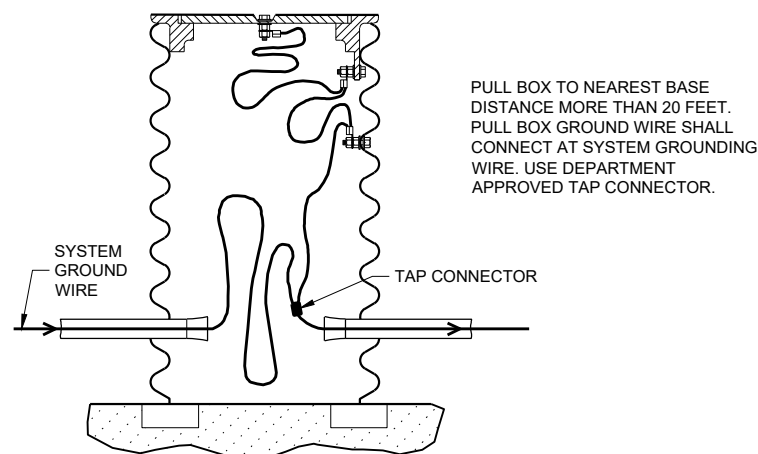

EQUIPMENT GROUNDING LUG AND LOCATION IN STEEL PULL BOXES

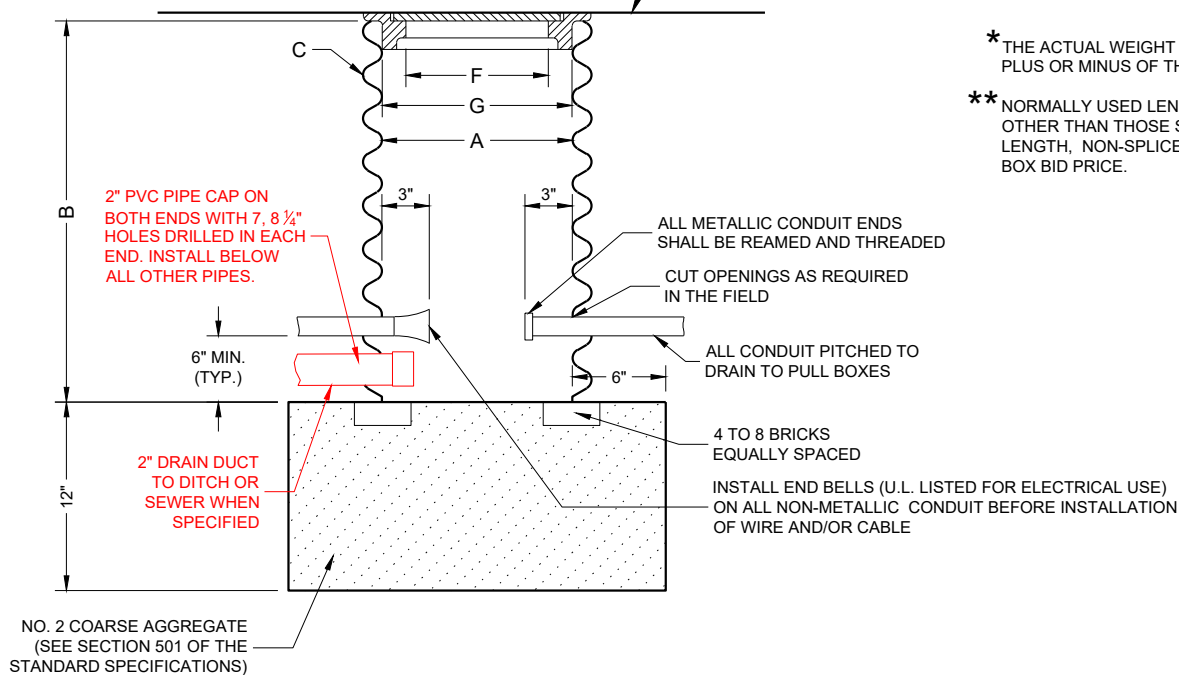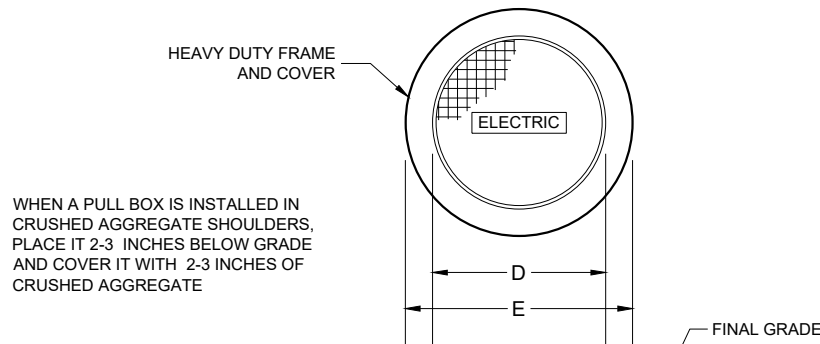

PULL BOX

PULL BOX

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
DATE: May 2022 /S/ Ahmet Demirbilek
STATE ELECTRICAL ENGINEER

FHWA

GENERAL NOTES

DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE CONTRACT.

FOUR (4) BOLTS SHALL BE FURNISHED WITH EACH TRANSFORMER BASE. BOLTS SHALL BE 1" DIAMETER, 4" IN LENGTH, WITH WASHERS, LOCK WASHERS AND NUTS. BOLTS, NUTS AND WASHERS SHALL BE MANUFACTURED IN ACCORDANCE WITH SECTION 531.2.2 OF THE STANDARD SPECIFICATIONS.

LEVELING SHIMS, IF NEEDED, SHALL BE DESIGNED FOR THE PURPOSE AND USED UNDER CAST BASES WHEN PLUMBING POLES OR STANDARDS DURING INSTALLATION. THE USE OF WASHERS IN LIEU OF PROPER LEVELING SHIMS IS NOT ACCEPTABLE.

SHIM LENGTH SHALL BE LONG ENOUGH TO COMPLETELY COVER THE AREA UNDER THE LENGTH AND WIDTH OF THE BASE MOUNTING FLANGE.

DOUBLE NUTTING IS NOT ACCEPTABLE FOR LEVELING OR MOUNTING PURPOSES.

A NEMA APPROVED, U.L. LISTED, COPPER WITH BRASS OR STAINLESS STEEL SET SCREW, DIRECT BURY RATED, MECHANICAL CONNECTOR (LUG), SIZED TO ACCEPT AWG. #10 TO #4 COPPER STRANDED WIRE SHALL BE FURNISHED AND INSTALLED IN THE PEDESTAL AND TRANSFORMER BASES.





THE MECHANICAL CONNECTOR SHALL BE INSTALLED USING A 1/4" - 20 (TPI) STAINLESS STEEL HEX HEAD BOLT OF SUFFICIENT LENGTH TO FIRMLY ATTACH THE LUG TO THE BASE.

SHOULD THE MANNER OF ATTACHMENT OF THE LUG REQUIRE WASHERS, HEX NUTS, LOCK WASHER - THEY SHALL BE STAINLESS STEEL AS IS THE BOLT. THE MANNER OF ATTACHMENT SHALL NOT BLOCK ACCESSIBILITY TO WIRE PLACEMENT IN THE CONNECTOR.



PEDESTAL BASE COLLAR THREADING SHALL BE TAPERED AND IN ACCORDANCE WITH NATIONAL PIPE THREADING DIMENSIONS.

BASE COLLAR THREADING SHALL EXTEND INTO THE BASE COLLAR WITH SUFFICIENT DEPTH TO ACCEPT THE INSTALLATION OF TRAFFIC SIGNAL STANDARDS TO A DEPTH OF 1/2", THEN TIGHTENING TO A POINT OF BEING IMMOVABLE.



THE ACCESS DOOR SHALL BE OF THE SAME MATERIAL AS THE BASE.

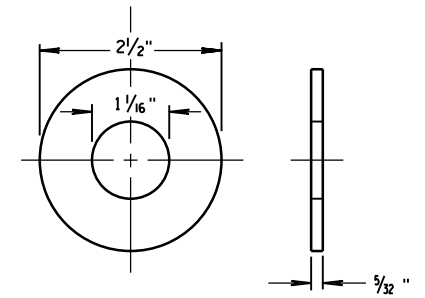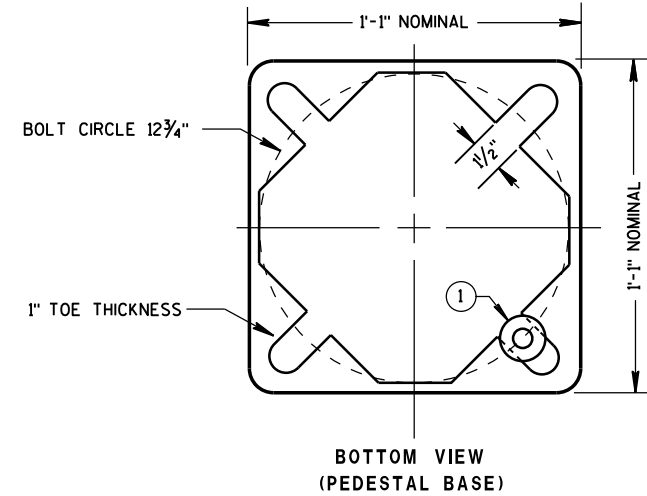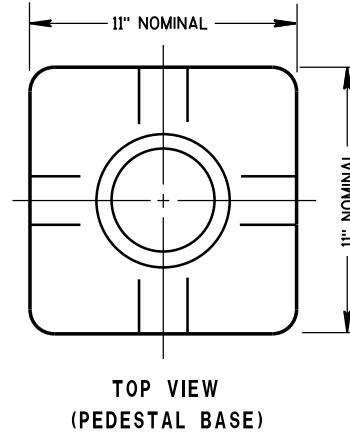


ZINC COATED STEEL WASHER TO BE PROVIDED BY THE CONTRACTOR
PEDESTAL BASE WASHER ①

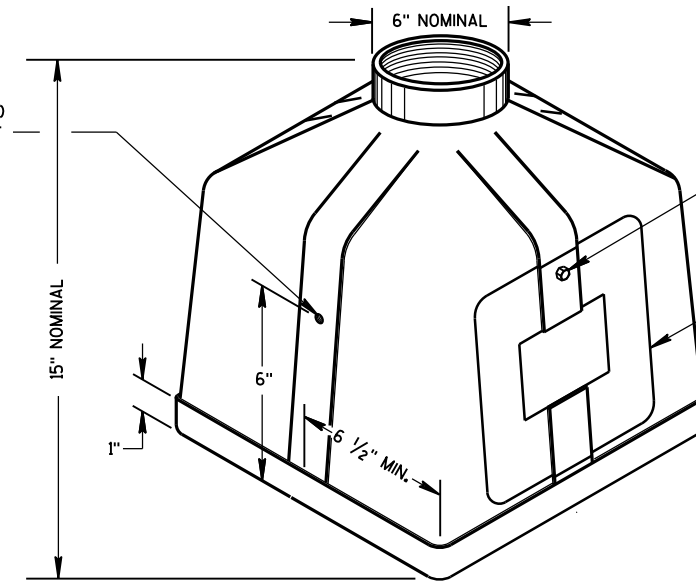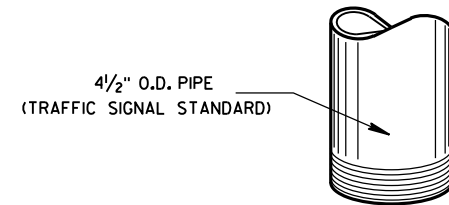

ISOMETRIC VIEW PEDESTAL BASE

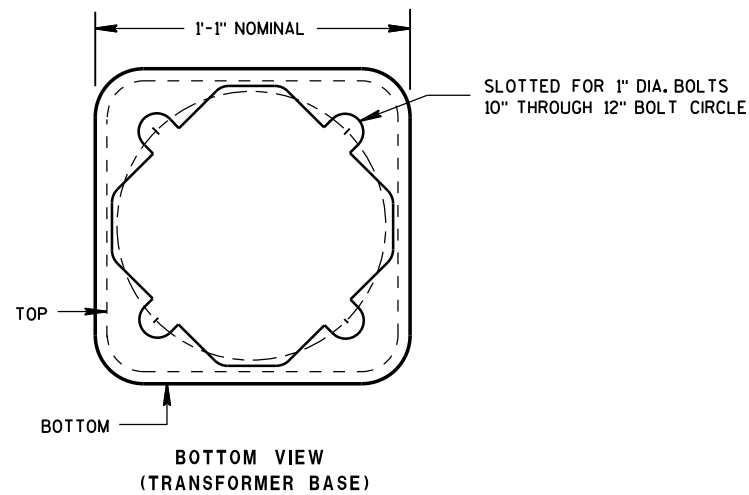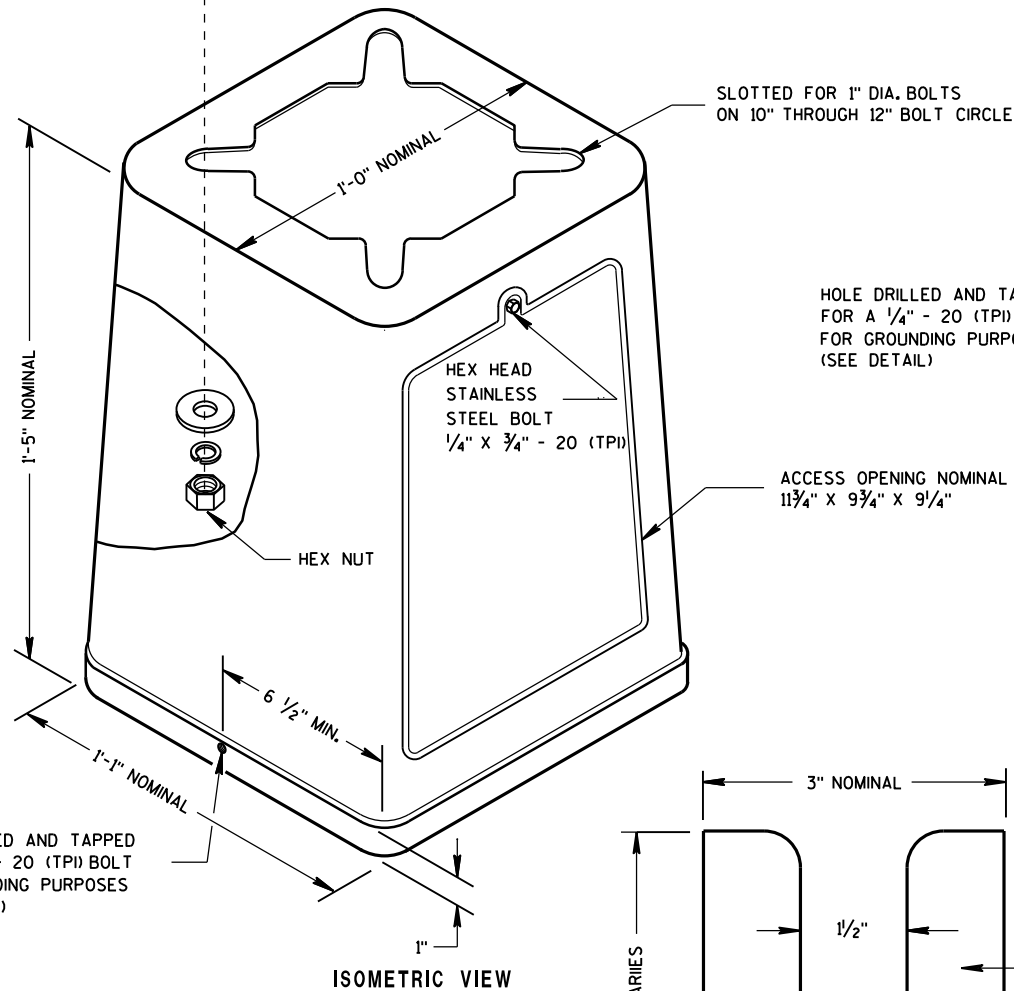


BOTTOM VIEW (TRANSFORMER BASE)



TYPICAL MECHANICAL CONNECTOR LUG
TO BE FURNISHED WITH EACH BASE

TRANSFORMER BASE
INTENDED FOR USE WITH TYPE 2, 3, 4, 5 & 6 POLES

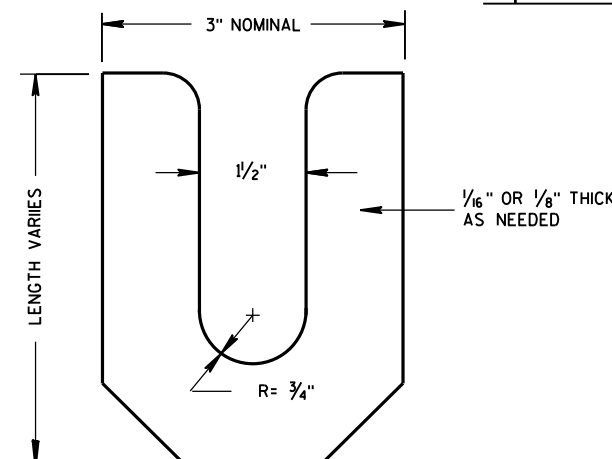

LEVELING SHIM

TRANSFORMER/PEDESTAL BASES	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED Sept. 2014 DATE	/S/ Ahmet Demirbilek STATE ELECTRICAL ENGINEER
FHWA	

6


6

S.D.D. 9 C 3-4

S.D.D. 9 C 3-4




SDD 09C06 Concrete Control Cabinet Base, Type 9, Special

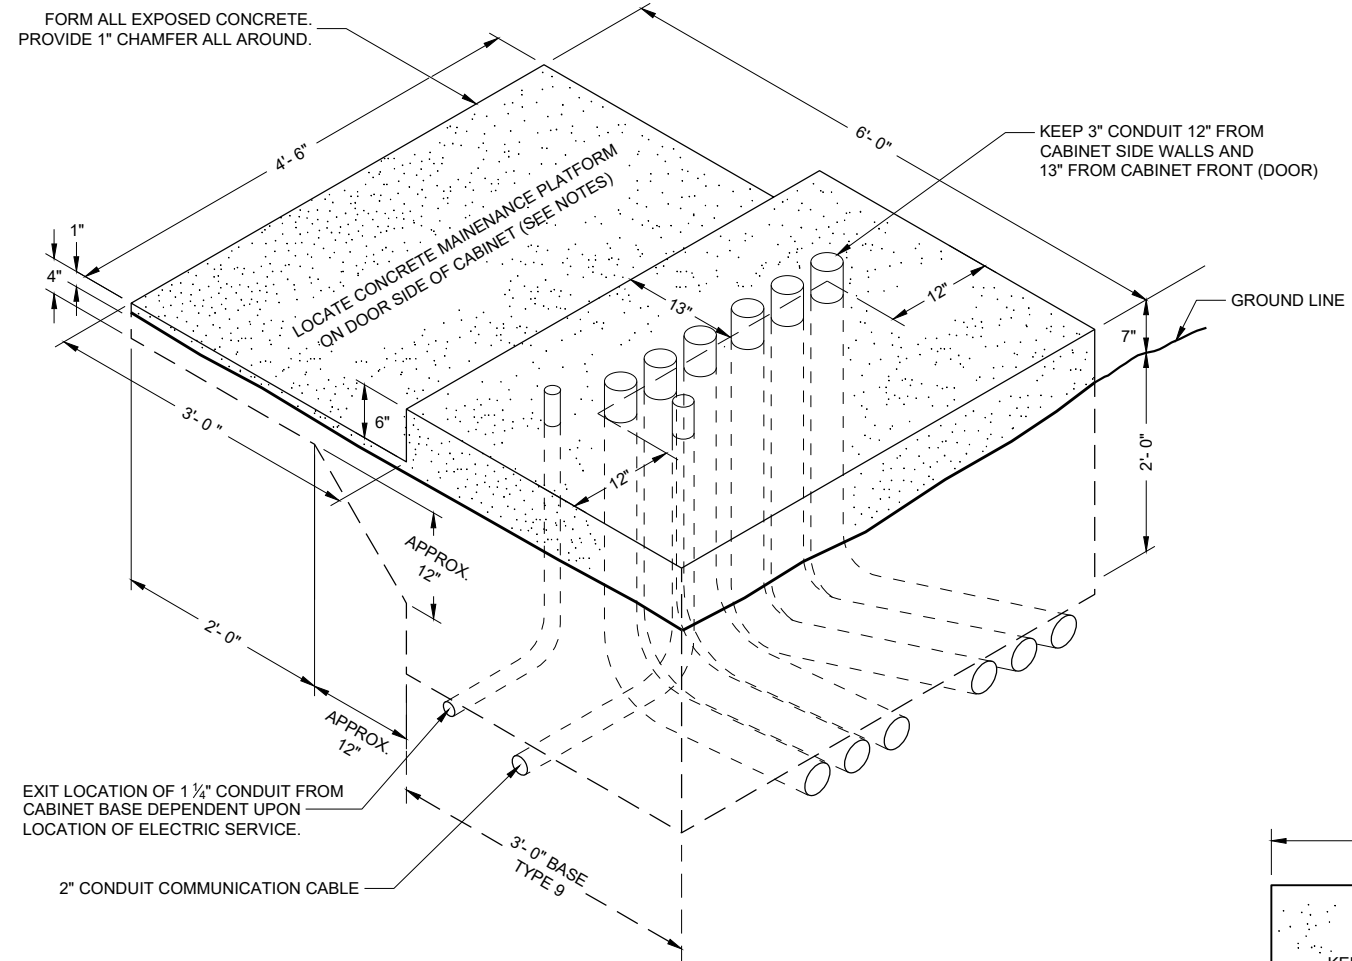

ISOMETRIC VIEW TYPE 9 SPECIAL

(C.Y. CONCRETE = APPROX. 1.56)

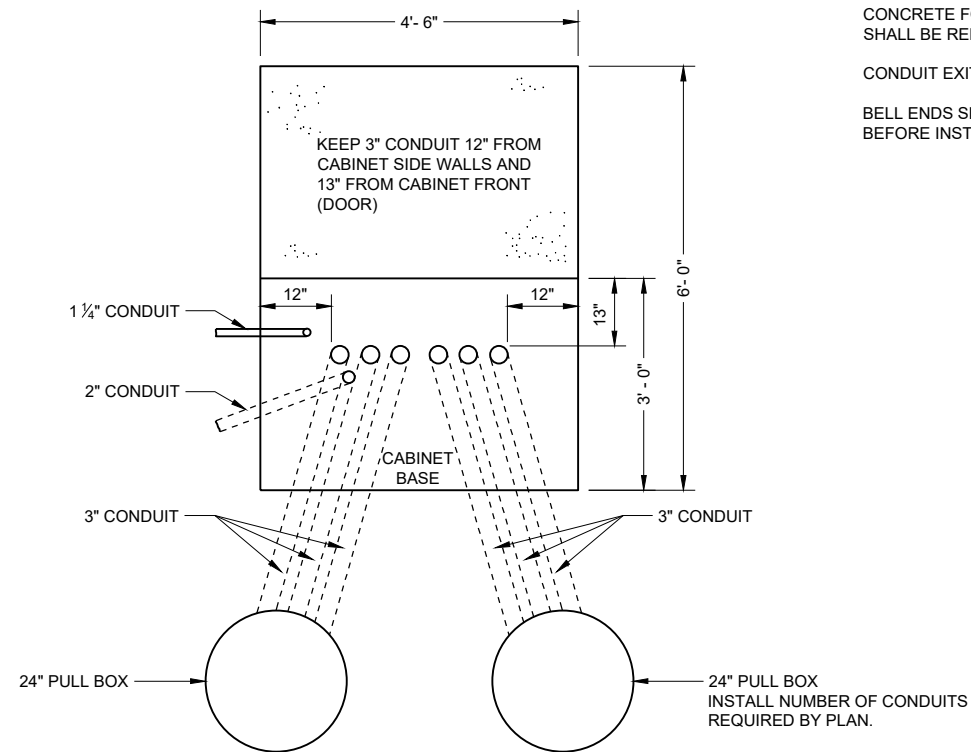

PLAN VIEW CONCRETE CONTROL CABINET BASE, TYPE 9 SPECIAL

GENERAL NOTES

DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE CONTRACT.

INSTALL FOUR INCH MINIMUM DIAMETER X 4 INCH MINIMUM LENGTH STAINLESS STEEL APPROVED CONCRETE MASONRY ANCHORS WITH A PULLOUT STRENGTH OF 9,000 LBS. TO ANCHOR THE CABINET TO TYPE 6, 7, 8, AND 9 BASES. THE ANCHOR STUDS SHALL BE LOCATED AS DIRECTED BY THE ENGINEER TO PROPERLY ANCHOR THE CONTROL CABINET TO THE BASE.

WHEN REQUIRED TO CONNECT NON - METALLIC CONDUIT TO METALLIC CONDUIT, ONLY ADAPTER FITTINGS, U. L. LISTED FOR ELECTRICAL USE, SHALL BE USED.

CONDUIT HEIGHT ABOVE THE CONCRETE BASE SHALL BE 1 INCH.

DEPTH OF CONDUIT INSTALLED BELOW THE TRAVELED WAY SHALL BE 24 INCHES MINIMUM AND 36 INCHES MAXIMUM.

DEPTH OF CONDUIT INSTALLED THAT IS NOT BELOW THE TRAVELED WAY SHALL BE 18 INCHES MINIMUM AND 36 INCHES MAXIMUM.

ANY EXCEPTION TO THE MAXIMUM DEPTH SHALL BE ONLY WITH THE WRITTEN APPROVAL OF THE ENGINEER.

CONTROL CABINET BASE TOP SURFACE SHALL BE TROWEL FINISHED SMOOTH AND LEVEL.

MAINTENANCE PLATFORM SHALL BE FLOAT OR BROOM FINISHED AND LEVEL.

MAINTENANCE PLATFORMS ARE NOT REQUIRED WHEN THE SURROUNDING AREA IS PAVED.

MINIMUM BENDING RADIUS OF CONDUIT EQUALS 6 TIMES THE DIAMETER.

ALL METALLIC CONDUIT ENDS SHALL BE REAMED AND THREADED.

CAP ALL BELOW GRADE METALLIC CONDUIT ENDS IN WHICH WIRE OR CABLE IS NOT BEING INSTALLED.

PLUG ALL BELOW GRADE NON - METALLIC CONDUIT ENDS IN WHICH WIRE OR CABLE IS NOT BEING INSTALLED.

ALL CONDUIT ENDS AT THE TOP OF CONCRETE BASES SHALL BE CAPPED IF METALLIC OR PLUGGED IF NON - METALLIC IMMEDIATELY AFTER PLACEMENT AND BEFORE CONCRETE IS POURED. CONDUITS IN WHICH WIRE OR CABLE IS NOT BEING INSTALLED SHALL REMAIN CAPPED OR PLUGGED.

CONCRETE FORM DEPTH BELOW FINISHED GRADE SHALL BE 6 INCHES MAXIMUM. CONCRETE FORMS SHALL BE REMOVED AFTER CONCRETE HAS SET.

CONDUIT EXITING THE CONCRETE BASE (SIX 3") SHALL TERMINATE IN PULL BOXES AS SHOWN ON THE PLANS.

BELL ENDS SHALL BE INSTALLED ON ALL PVC CONDUIT EXPOSED AT THE TOP OF THE CONCRETE BASE BEFORE INSTALLATION OF CABLE OR WIRE.

6

6

SDD 09C06 - 07

SDD 09C06 - 07

CONCRETE CONTROL CABINET BASE TYPE 9, SPECIAL

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
September 2014 /S/ Ahmet Demerbilek
DATE STATE ELECTRICAL ENGINEER

FHWA

GENERAL NOTES

DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE CONTRACT.

BASES (SHAFT), BELOW THE WING, SHALL BE EXCAVATED BY THE USE OF A CIRCULAR AUGER. IF A BASE REQUIRES A DEEP FORM BECAUSE OF LOOSE SOIL, THE FORM SHALL BE REMOVED BEFORE BACKFILLING AROUND THE BASE. BACKFILL SHALL BE TAMPED TIGHT AGAINST THE BARE CONCRETE BASE IN LAYERS OF 1 FOOT OR LESS.

TOP SURFACE OF THE CONCRETE BASE SHALL BE TROWEL FINISHED AND LEVEL.

USE 3" CLEAR FOR ALL REINFORCEMENT UNLESS NOTED OTHERWISE.

BENDING DIMENSIONS FOR REINFORCING BARS ARE OUT TO OUT.

BAR STEEL REINFORCEMENT SHALL BE COATED WITH POWDERED EPOXY RESIN IN ACCORDANCE WITH SECTION 505 OF THE STANDARD SPECIFICATIONS.

ANCHOR RODS SHALL BE INSTALLED WITH MISALIGNMENTS OF LESS THAN 1:40 FROM VERTICAL.

WELDING OF ANCHOR RODS TO THE CAGE IS UNACCEPTABLE. TEMPLATES SHALL BE USED.

ORIENT ANCHOR RODS IN FOOTING AND PROVIDE ANCHOR ROD PROJECTION ABOVE TOP OF CONCRETE FOOTING BASE PER THIS SHEET.

CONDUIT SIZE AND LOCATIONS SHALL BE AS SHOWN ON THE PLANS.

MINIMUM BENDING RADIUS OF CONDUIT IS EQUAL TO 6 X THE DIAMETER.

CONDUIT HEIGHT ABOVE CONCRETE BASE SHALL BE 4 1/2 INCHES. ALL METALLIC CONDUIT ENDS SHALL BE REAMED AND THREADED. NONMETALLIC CONDUIT SHALL HAVE BELL ENDS INSTALLED. ALL CONDUIT SHALL SLOPE TO PULL BOX.

ALL CONDUIT ENDS AT THE TOP OF CONCRETE BASES SHALL BE CAPPED IF METALLIC OR PLUGGED IF NONMETALLIC IMMEDIATELY AFTER PLACEMENT AND BEFORE CONCRETE IS POURED. CONDUITS IN WHICH WIRE OR CABLE IS NOT INSTALLED SHALL REMAIN CAPPED OR PLUGGED.

BELL ENDS SHALL BE INSTALLED ON ALL PVC CONDUIT EXPOSED AT THE TOP OF CONCRETE BASES BEFORE INSTALLATION OF CABLE OR WIRE.

WHEN REQUIRED TO CONNECT NONMETALLIC CONDUIT TO METALLIC CONDUIT, ONLY ADAPTOR FITTINGS, U.L. LISTED FOR ELECTRICAL USE, SHALL BE USED.

A NO. 4 AWG, STRANDED COPPER EQUIPMENT GROUNDING CONDUCTOR SHALL BE EXOTHERMICALLY WELDED TO THE EQUIPMENT GROUNDING ELECTRODE (GROUND ROD).

THE EQUIPMENT GROUNDING CONDUCTOR SHALL BE FURNISHED AND INSTALLED TO ENTER THE BASE THROUGH A 1-INCH CONDUIT INSTALLED FOR GROUNDING PURPOSES, LEAVING A 4-FOOT COIL OF WIRE ABOVE THE CONCRETE BASE, THE EQUIPMENT GROUNDING CONDUCTOR SHALL BE NEATLY COILED AND THE COILS TIED TOGETHER.

THE CONTRACTOR IS RESPONSIBLE FOR MAKING HIS OWN DETERMINATION AS TO THE TYPE AND LOCATION OF THE UNDERGROUND UTILITIES AS MAY BE NECESSARY TO AVOID DAMAGE THERETO.

① THE MINIMUM DEPTH OF CONDUIT EXITING THE CONCRETE BASE AND INSTALLED BELOW THE TRAVEL WAY SHALL BE 24-INCHES. THE MINIMUM DEPTH OF CONDUIT EXITING THE CONCRETE BASE THAT IS NOT INSTALLED BELOW THE TRAVELED WAY SHALL BE 18-INCHES. THE MAXIMUM DEPTH OF ALL CONDUIT SHALL BE 36-INCHES, (GREATER THAN 36-INCHES IF INSTALLED IN BREAKER-RUN), EXCEPT WITH THE WRITTEN APPROVAL OF THE ENGINEER.


② (6) 1 3/4" DIA. X 7' - 2" ANCHOR RODS

③ (10) NO. 6 X 14' - 1" BAR STEEL VERTICAL REINFORCEMENT.


④ (22) NO. 5 X 11' - 0" BAR STEEL REINFORCEMENT @ 8" MAX. C-C.

⑤ (10) NO. 5 X 11' - 0" BAR STEEL HORIZONTAL REINFORCEMENT

CONCRETE MASONRY.....fc = 3,500 p.s.i.
 HIGH STRENGTH BAR STEEL REINFORCEMENT, GRADE 60.....fy = 60,000 p.s.i.
 ANCHOR RODS, ASTM F1554 GRADE 55 (IN ACCORDANCE WITH SECTION 531.2.2 OF THE STANDARD SPECIFICATION).....fy = 55,000 p.s.i.
 TEMPLATES, ASTM A709, GRADE 36.....fy = 36,000 p.s.i.

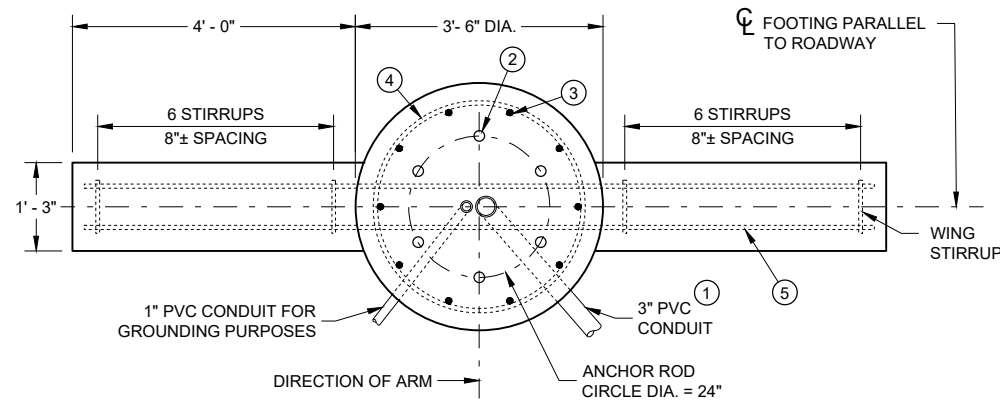


PLAN VIEW

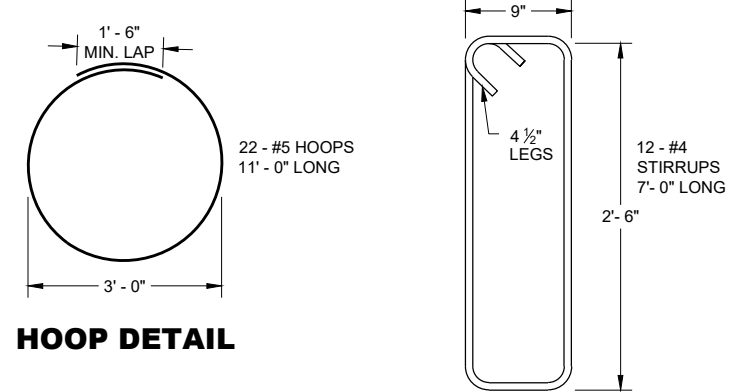


HOOP DETAIL

WING STIRRUP DETAIL

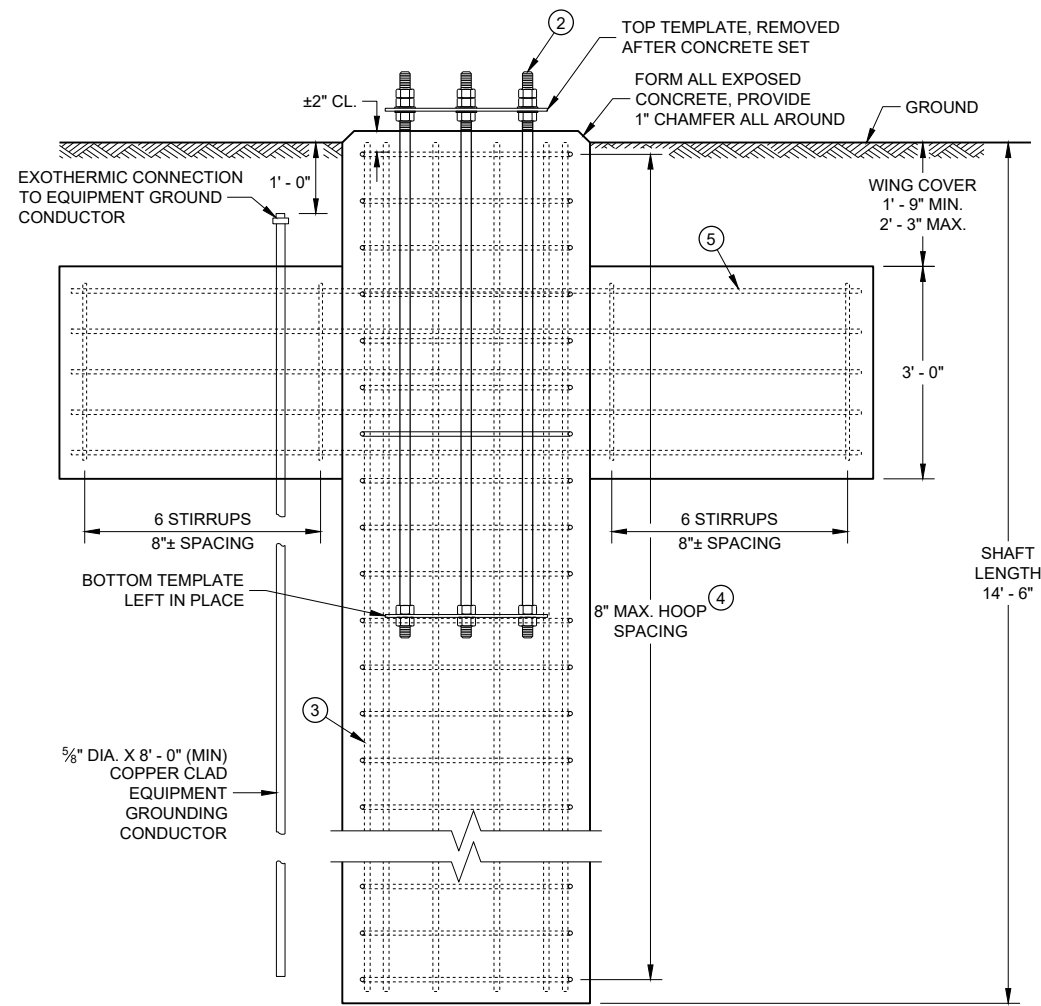

ELEVATION VIEW
(CONDUITS NOT SHOWN ON THIS VIEW FOR CLARITY)

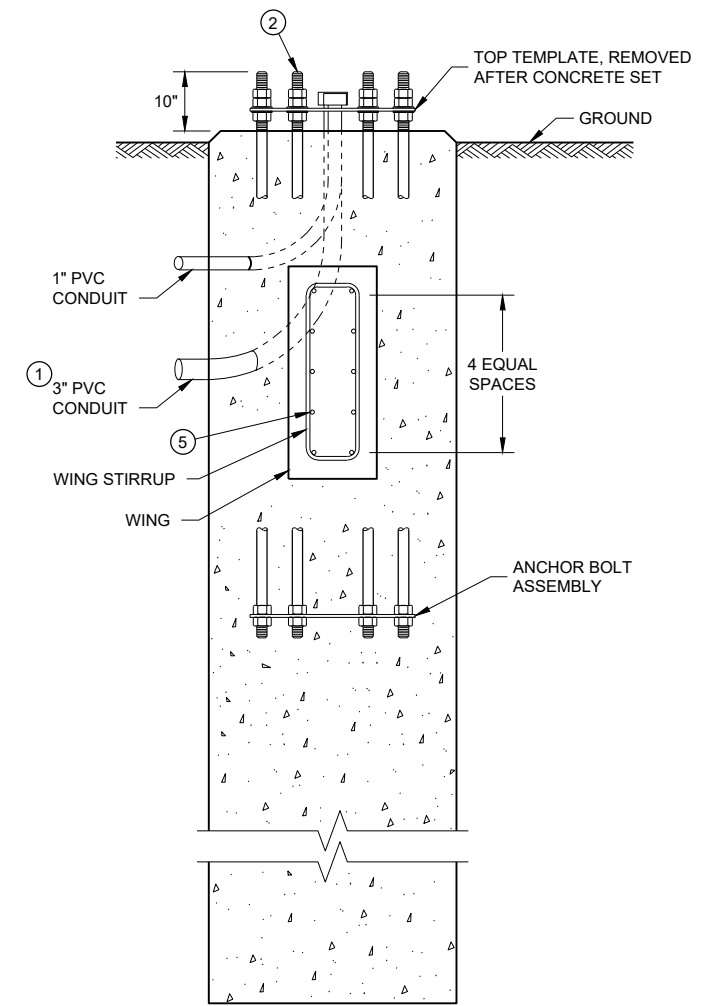

(HOOPS AND VERTICAL SHAFT REINFORCEMENT NOT SHOWN ON THIS VIEW FOR CLARITY)

CONCRETE BASE, TYPE 13
(FOR TYPE 12, TYPE 13 AND OVER HEIGHT (OH) POLES)

CONCRETE = 6.3 CUBIC YARD
 H.S. REINFORCEMENT = 635 LBS.

TO BE USED WHEN GROUND ELEVATION AT BASE EQUALS OR IS GREATER THAN HIGH POINT OF ROADWAY ELEVATION. SEE 9C13 WHEN GROUND ELEVATION AT BASE IS LOWER THAN HIGH POINT OF ROADWAY ELEVATION

CONCRETE BASE TYPE 13


STATE OF WISCONSIN
 DEPARTMENT OF TRANSPORTATION

6


6

SDD 09C12 - 09a


SDD 09C12 - 09a

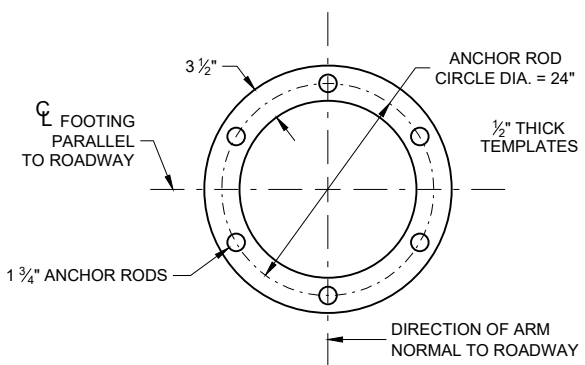

TOP AND BOTTOM TEMPLATE

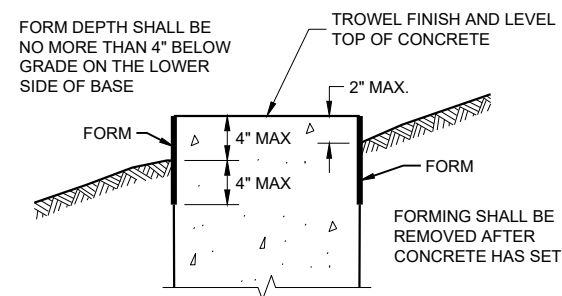

FORMING DETAIL

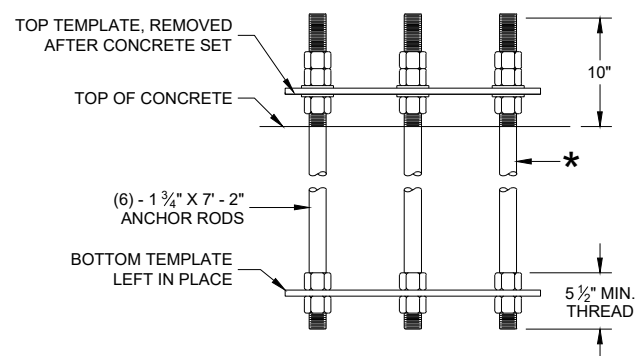

ANCHOR ROD ASSEMBLY DETAILS

* THREAD TOP 11" OF ANCHOR ROD FOR 3 NUTS AND 2 WASHERS AND BOTTOM 5 1/2" FOR 2 NUTS PER ANCHOR ROD. HOT DIP GALVANIZE THE ENTIRE LENGTH OF THE ANCHOR ROD (ASTM A123) AND HOT DIP NUTS AND WASHERS (ASTM A153. USE ZINC COATED NUTS MANUFACTURED WITH SUFFICIENT ALLOWANCE TO ALLOW NUTS TO RUN FREELY ON THE THREADS.

CONCRETE BASE TYPE 13

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
May 2017 DATE /S/ Ahmet Demirelek
WIND LOADED STRUCTURES PROGRAM LEADER

GENERAL NOTES

DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE CONTRACT.

THE CONTRACTOR IS RESPONSIBLE FOR MAKING THEIR OWN DETERMINATION AS TO THE TYPE AND LOCATION OF UNDERGROUND UTILITIES AS MAY BE NECESSARY TO AVOID DAMAGE THERETO.

BASES (SHAFT) SHALL BE EXCAVATED BY THE USE OF A CIRCULAR AUGER. IF BASE REQUIRES A DEEP FORM BECAUSE OF LOOSE SOIL, THE FORM SHALL BE REMOVED BEFORE BACKFILLING. A STEEL CASING OR CORRUGATED METAL PIPE IS ALLOWED TO REMAIN. BACKFILL SHALL BE TAMPED TIGHT AGAINST THE BASE IN LAYERS OF ONE FOOT OR LESS.

TOP SURFACE OF THE CONCRETE BASE SHALL BE TROWEL FINISHED AND LEVEL.

ANY DAMAGE TO THE CONCRETE BASE AND ANCHOR RODS DURING CONSTRUCTION OPERATIONS SHALL BE REPAIRED AT THE ENGINEER'S DIRECTION, AT THE EXPENSE OF THE CONTRACTOR.

THE REINFORCEMENT AND ANCHOR RODS SHALL BE ADEQUATELY SUPPORTED IN THE PROPER POSITIONS SO NO MOVEMENT OCCURS DURING CONCRETE PLACEMENT.

ORIENT ANCHOR RODS IN FOOTING AND PROVIDE ANCHOR RODS STICK OUT ABOVE TOP OF CONCRETE FOOTING BASE PER THIS SHEET.

ANCHOR RODS SHALL BE INSTALLED WITH MISALIGNMENTS OF LESS THAN 1:40 FROM VERTICAL.

BAR STEEL REINFORCEMENT SHALL BE COATED WITH POWDERED EPOXY RESIN IN ACCORDANCE WITH SECTION 505 OF THE STANDARD SPECIFICATIONS (LATEST EDITION).

BENDING DIMENSIONS FOR REINFORCING BARS ARE OUT TO OUT.

WELDING OF ANCHOR RODS TO THE CAGE IS UNACCEPTABLE. TEMPLATES SHALL BE USED.

USE 3" CLEAR FOR ALL REINFORCEMENT UNLESS NOTED OTHERWISE.

FORM ALL EXPOSED CONCRETE CORNERS WITH 1" CHAMFER ALL AROUND. TOP OF THE CONCRETE BASE SHALL BE TROWEL FINISHED AND LEVEL.

CONDUIT SIZES AND LOCATIONS SHALL BE SHOWN ON THE PLANS.

MINIMUM BENDING RADIUS OF CONDUIT IS EQUAL TO 6 TIMES THE DIAMETER.

CONDUIT HEIGHT ABOVE CONCRETE BASES SHALL BE 4 1/2" INCHES. ALL METALLIC CONDUIT ENDS SHALL BE REAMED AND THREADED. NON-METALLIC CONDUIT SHALL HAVE BELL ENDS INSTALLED. ALL CONDUIT SHALL SLOPE TO PULL BOX.

ALL CONDUIT ENDS AT THE TOP OF CONCRETE BASES SHALL BE CAPPED IF METALLIC OR PLUGGED IF NON-METALLIC IMMEDIATELY AFTER PLACEMENT AND BEFORE CONCRETE IS POURED. CONDUITS IN WHICH WIRE OR CABLE IS NOT INSTALLED SHALL REMAIN CAPPED OR PLUGGED.

BELL ENDS SHALL BE INSTALLED ON ALL PVC CONDUIT EXPOSED AT THE TOP OF CONCRETE BASES BEFORE INSTALLATION OF CABLE OR WIRE.

WHEN REQUIRED TO CONNECT NON-METALLIC CONDUIT TO METALLIC CONDUIT, ONLY ADAPTER FITTINGS, U.L. LISTED FOR ELECTRICAL USE, SHALL BE USED.


A NO. 4 AWG STRANDED COPPER EQUIPMENT GROUNDING CONDUCTOR SHALL BE EXOTHERMICALLY WELDED TO THE EQUIPMENT GROUNDING ELECTRODE (GROUND ROD).

THE EQUIPMENT GROUNDING CONDUCTOR SHALL BE FURNISHED AND INSTALLED TO ENTER THE BASE THROUGH A 1 INCH CONDUIT INSTALLED FOR GROUNDING PURPOSES, LEAVING A 4 FOOT COIL OF WIRE ABOVE THE CONCRETE BASE. THE EQUIPMENT GROUNDING CONDUCTOR SHALL BE NEATLY COILED AND THE COILS TIED TOGETHER.


THE FINAL OR TERMINATING CONCRETE BASE IN A CONDUIT RUN SHALL HAVE A 6" EXIT STUB INSTALLED FOR FUTURE CABLING USE. THE EXIT STUB SHALL BE SIZED AS USED THROUGHOUT THE CONDUIT RUN AS SHOWN AT THE ENTRANCE OF THE BASE.

① THE MINIMUM DEPTH OF CONDUIT EXITING THE CONCRETE BASE AND INSTALLED BELOW THE TRAVELED WAY SHALL BE 24 INCHES. THE MINIMUM DEPTH OF CONDUIT EXITING THE CONCRETE BASE THAT IS NOT INSTALLED BELOW THE TRAVELED WAY SHALL BE 18 INCHES. THE MAXIMUM DEPTH OF ALL CONDUIT SHALL BE 36 INCHES (GREATER THAN 36 INCHES IF INSTALLED IN BREAKER RUN) EXCEPT WITH WRITTEN APPROVAL OF THE ENGINEER.


CONCRETE MASONRY.....fc = 3,500 p.s.i.
 HIGH STRENGTH BAR STEEL REINFORCEMENT, GRADE 60.....fy = 60,000 p.s.i.
 ANCHOR RODS, ASTM F1554 GRADE 55 (IN ACCORDANCE WITH SECTION 531.2.2 OF THE STANDARD SPECIFICATION).....fy = 55,000 p.s.i.
 TEMPLATES, ASTM A709, GRADE 36.....fy = 36,000 p.s.i.

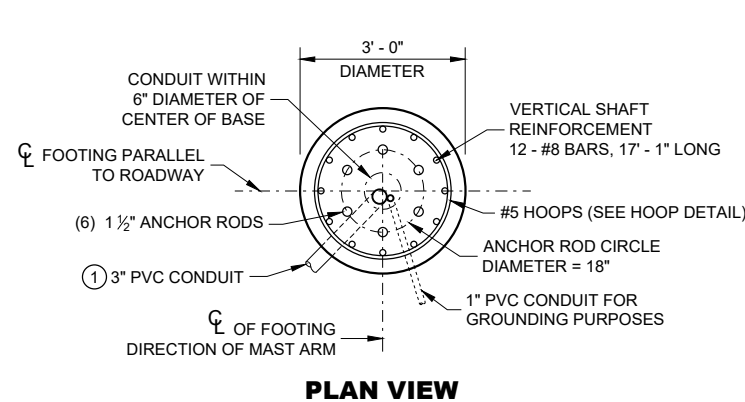


PLAN VIEW

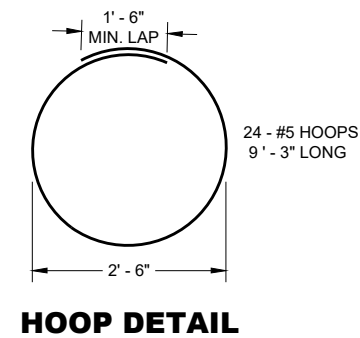


HOOP DETAIL

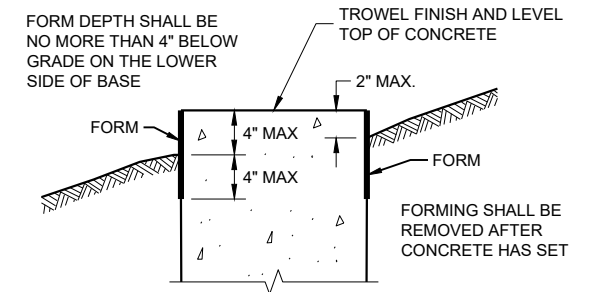


FORMING DETAIL

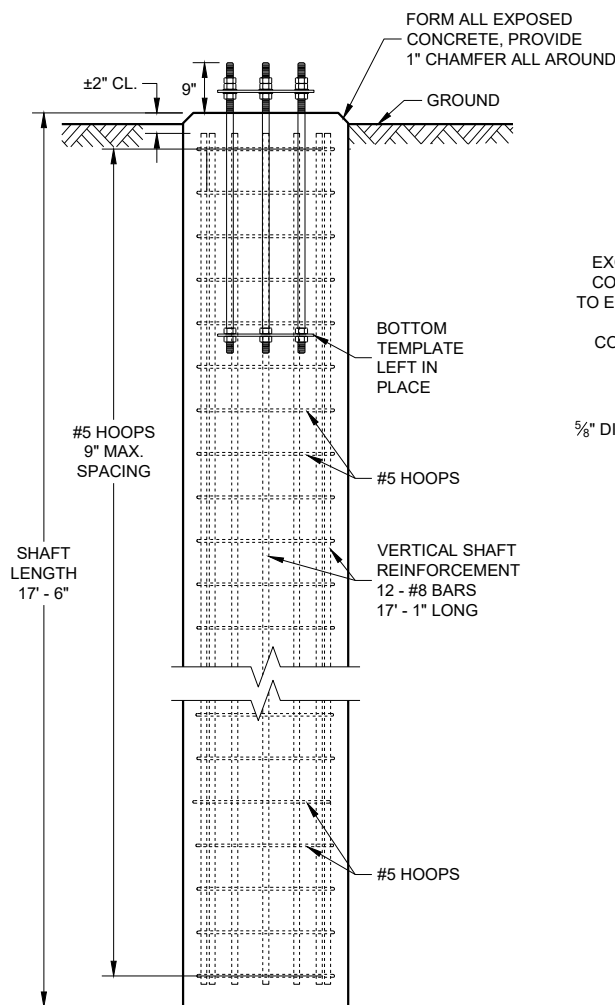


ELEVATION VIEW
(CONDUITS NOT SHOWN ON THIS VIEW FOR CLARITY)

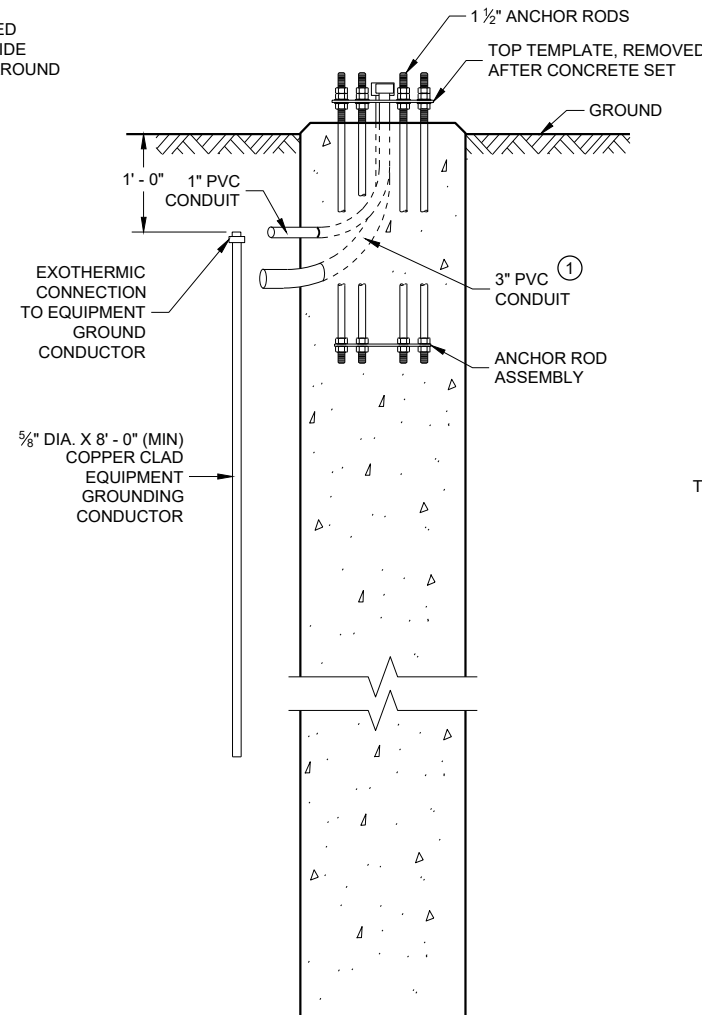

SIDE VIEW
(HOOPS AND VERTICAL SHAFT REINFORCEMENT NOT SHOWN ON THIS VIEW FOR CLARITY)

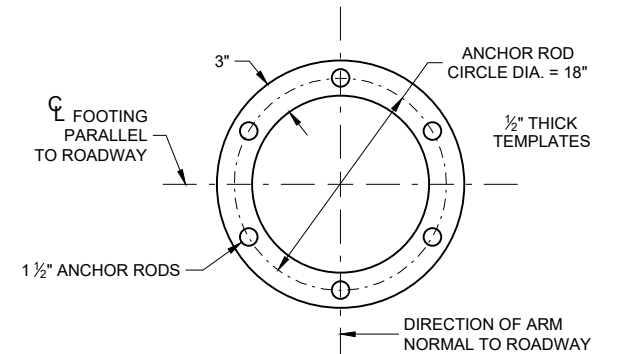

TOP AND BOTTOM TEMPLATE

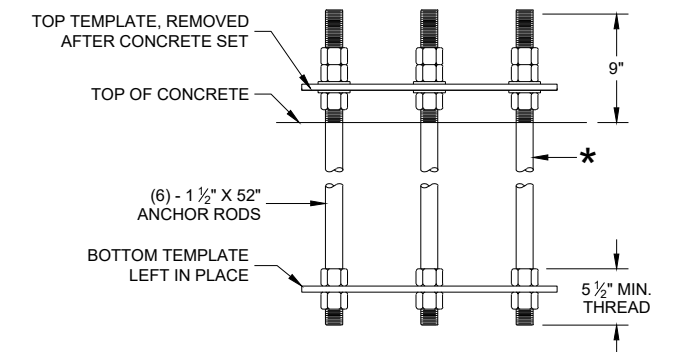

ANCHOR ROD ASSEMBLY DETAILS

* THREAD TOP 10" OF ANCHOR ROD FOR 3 NUTS AND 2 WASHERS AND BOTTOM 5 1/2" FOR 2 NUTS PER ANCHOR ROD. HOT DIP GALVANIZE THE ENTIRE LENGTH OF THE ANCHOR ROD (ASTM A123) AND HOT DIP NUTS AND WASHERS (ASTM A153. USE ZINC COATED NUTS MANUFACTURED WITH SUFFICIENT ALLOWANCE TO ALLOW NUTS TO RUN FREELY ON THE THREADS.

**CONCRETE BASE, TYPE 10 SPECIAL
(FOR TYPE 9 SPECIAL AND TYPE 10 SPECIAL POLES)**


CONCRETE = 4.6 CUBIC YARD
 H.S. REINFORCEMENT = 779 LBS.

FOR USE WHEN GROUND ELEVATION AT BASE EQUALS OR IS GREATER THAN HIGH POINT OF ROADWAY ELEVATION.

**CONCRETE BASE
TYPE 10 SPECIAL**

STATE OF WISCONSIN
 DEPARTMENT OF TRANSPORTATION

APPROVED
 August 2020 /S/ Alex Crabtree
 DATE WIND LOADED STRUCTURES PROGRAM LEADER
 FHWA

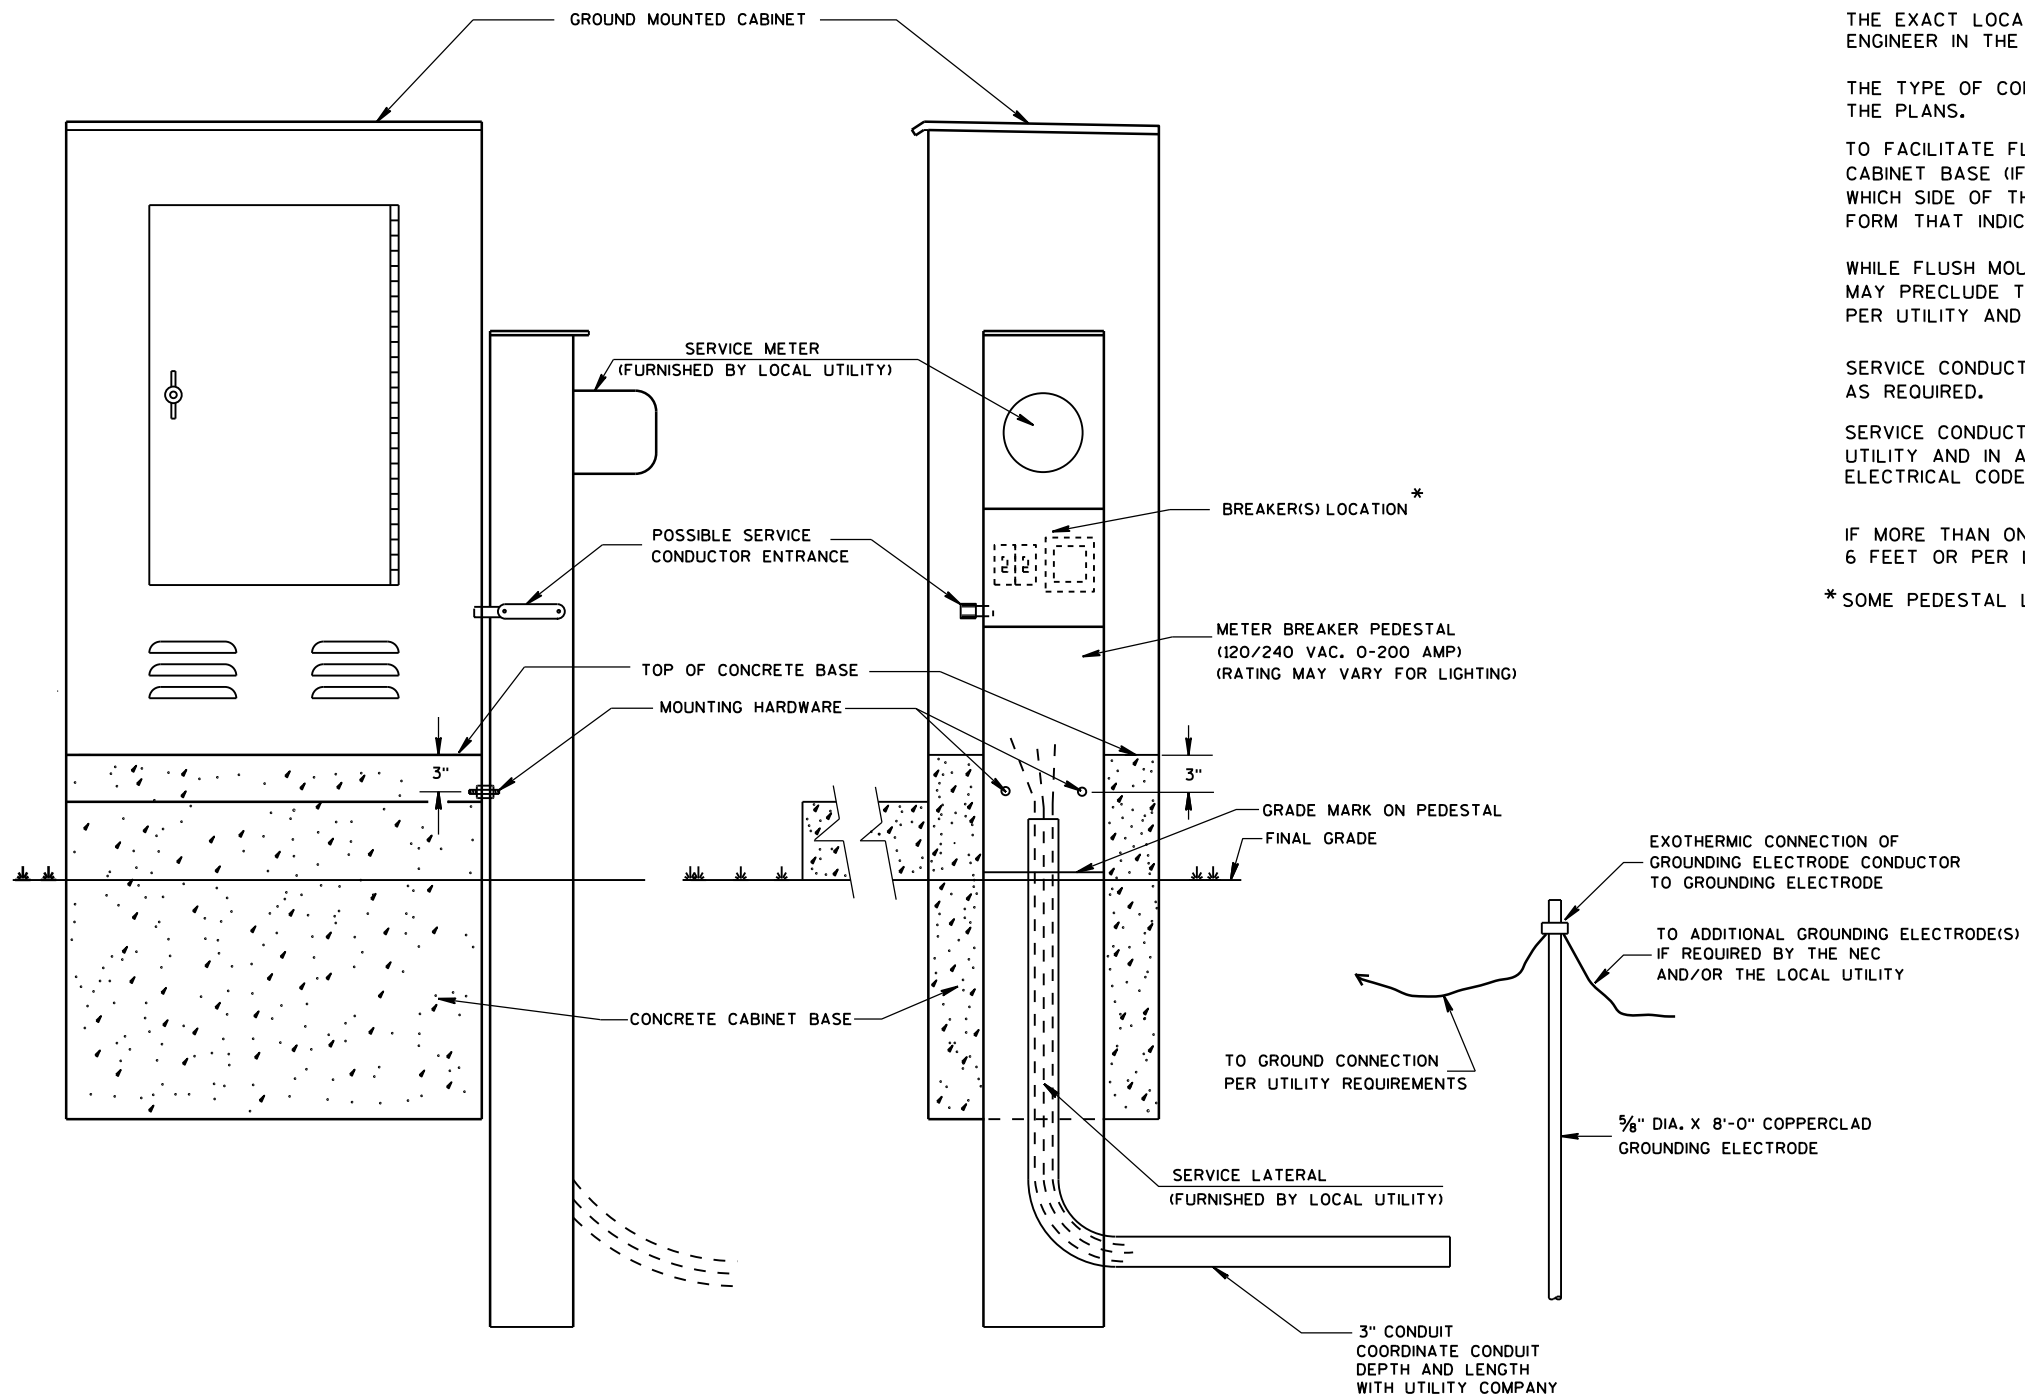

TYPICAL CABINET SERVICE INSTALLATION

GENERAL NOTES

DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE CONTRACT.

THE EXACT LOCATION OF THE METER BREAKER PEDESTAL SHALL BE DETERMINED BY THE ENGINEER IN THE FIELD.

THE TYPE OF CONCRETE CABINET BASE TO BE INSTALLED SHALL BE AS CALLED FOR IN THE PLANS.

TO FACILITATE FLUSH MOUNTING OF THE METER BREAKER PEDESTAL AGAINST THE SIDE OF THE CABINET BASE (IF FLUSH MOUNTING POSSIBLE, CONFER WITH THE LOCAL UTILITY TO DETERMINE WHICH SIDE OF THE CONCRETE BASE THE ELECTRICAL SERVICE LATERAL WILL APPROACH, THEN FORM THAT INDICATED SIDE FOR FULL SIDE DEPTH.

WHILE FLUSH MOUNTING IS THE MOST DESIRABLE MOUNTING CONFIGURATION UTILITY REQUIREMENTS MAY PRECLUDE THIS OPTION. CONTRACTOR MUST PROVIDE UTILITY APPROVED PEDESTAL AND INSTALL PER UTILITY AND MANUFACTURERS REQUIREMENTS.



SERVICE CONDUCTOR ENTRANCES SHALL BE RIGID METALLIC CONDUIT, NIPPLES AND/OR CONDULETS AS REQUIRED.

SERVICE CONDUCTOR ENTRANCES SHALL BE SIZED AND LOCATED AS REQUIRED BY THE LOCAL UTILITY AND IN ACCORDANCE WITH APPROPRIATE ARTICLES OF THE LATEST ACCEPTED NATIONAL ELECTRICAL CODE.


IF MORE THAN ONE GROUNDING ELECTRODE IS REQUIRED, THE DISTANCE APART SHALL BE 6 FEET OR PER LOCAL UTILITY REGULATIONS.

* SOME PEDESTAL LIGHTING PLANS SHOW MAIN LUGS ONLY.


CABINET SERVICE INSTALLATION (METER BREAKER PEDESTAL)	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED DATE	/S/ Ahmet Demirbilek STATE ELECTRICAL ENGINEER
FHWA	

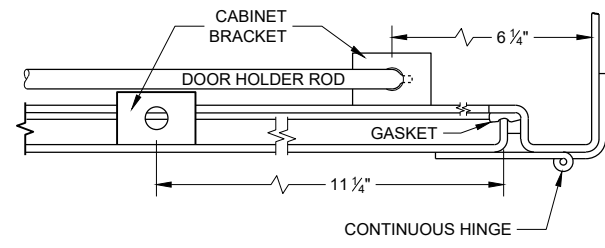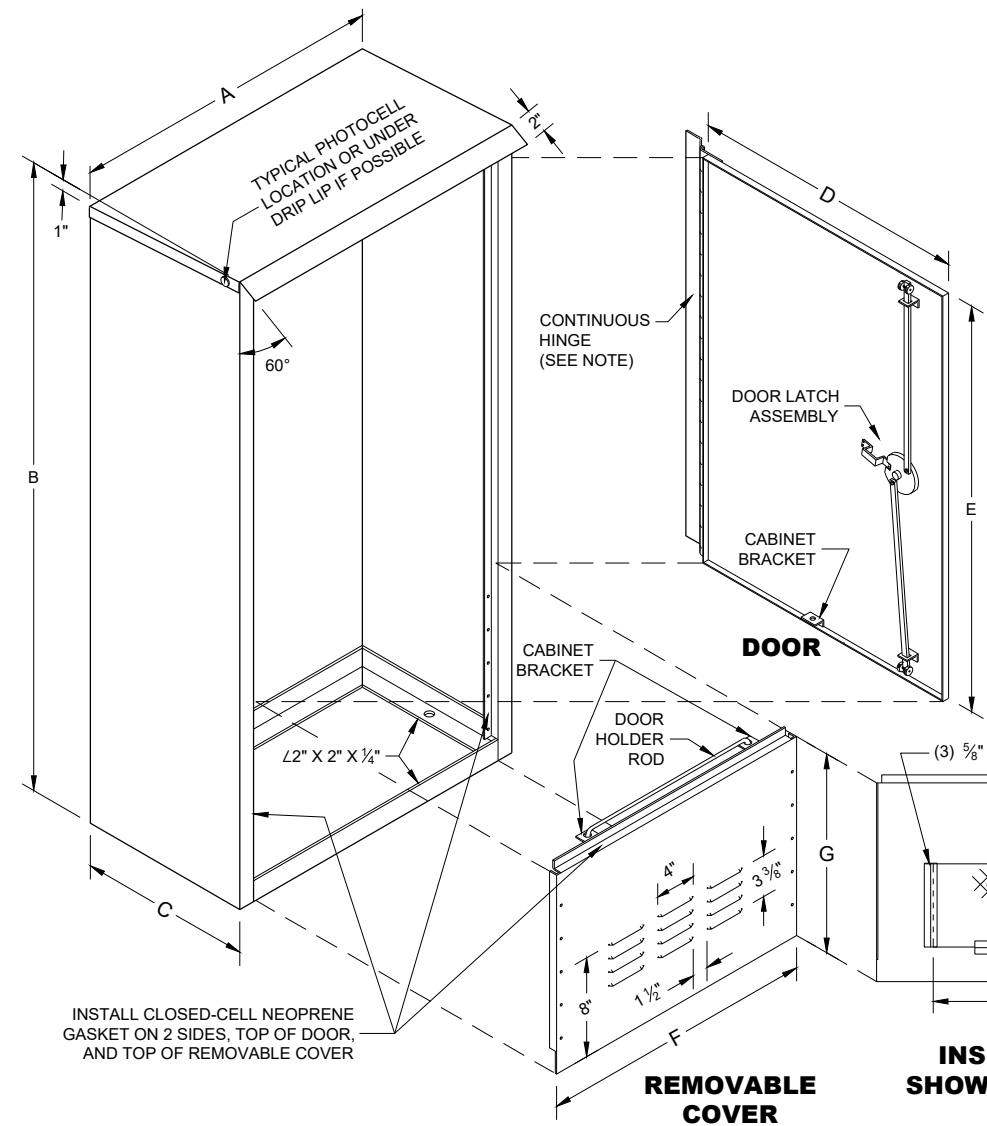


HINGE AND DOOR HOLDER

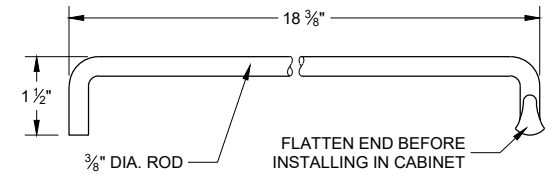


HOLDER ROD

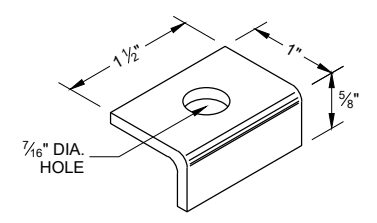


CABINET BRACKET



INSIDE VIEW SHOWING FILTER

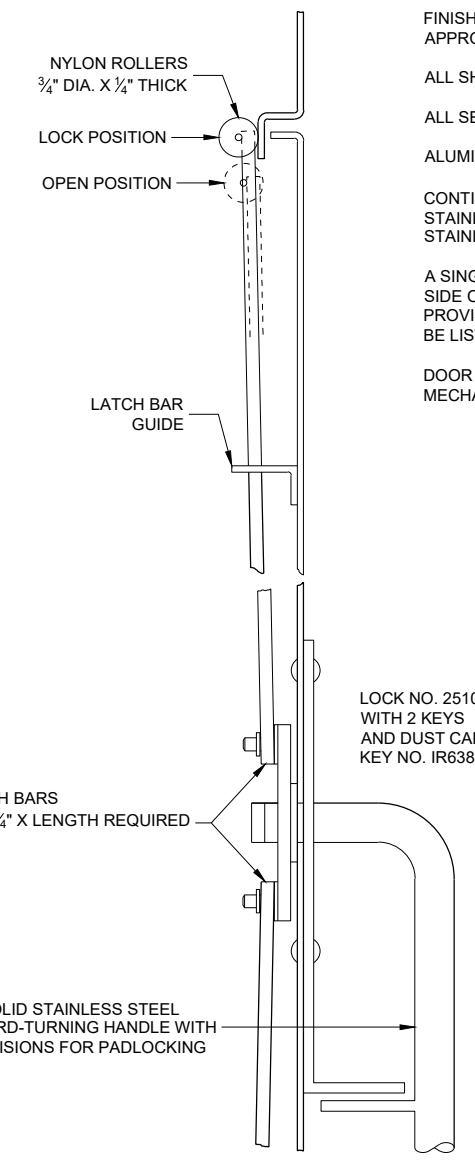


SIDE VIEW

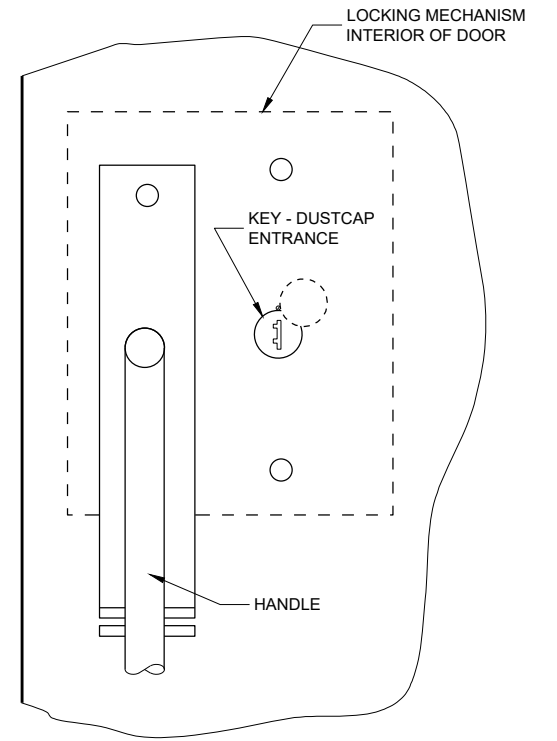

FRONT VIEW


LATCH ASSEMBLY

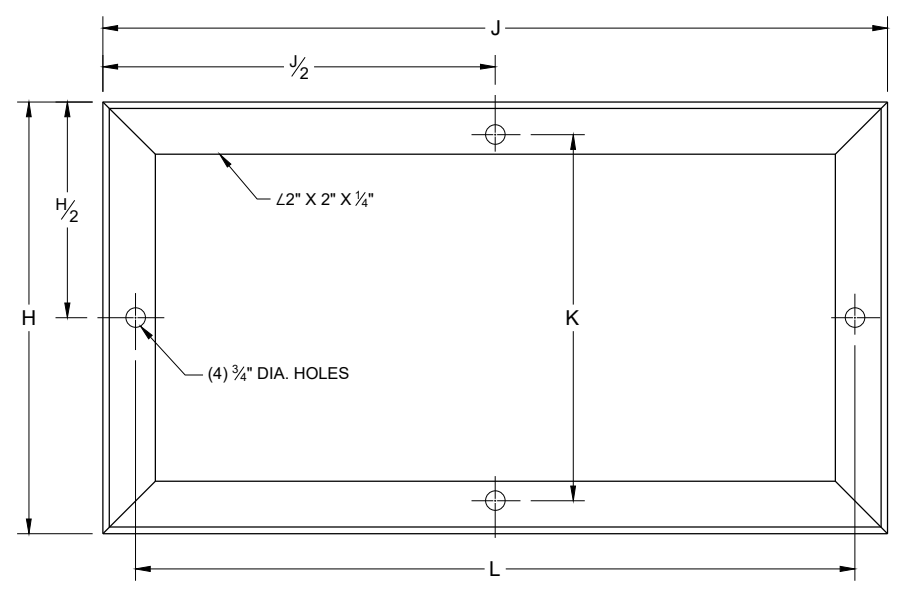

MOUNTING BASE

TABLE OF DIMENSIONS (INCHES)

MARK	CABINET TYPE		
	3060	3860	3866
A	30	38	38
B	60	60	66
C	16 1/2	16 1/2	24
D	26 1/2	34 3/4	33 3/4
E	38 3/4	38 3/4	38 3/4
F	26 1/2	34 3/4	33 3/4
G	19	19	25
H	16 1/2	16 1/2	24
H/2	8 3/4	8 3/4	12
J	30	38	38
J/2	15	19	19
K	13 3/4	13 3/4	21 1/4
L	27 1/2	35 1/2	35 1/2



LATCH BAR GUIDE

GENERAL NOTES

DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND APPLICABLE SPECIAL PROVISIONS.

PRIME WITH PHOSPHATE TREATMENT AND PRIMER.

FINISH EXTERIOR SURFACES WITH RUSTOLEUM #906 SILVER GRAY OR APPROVED EQUAL.

FINISH INTERIOR WITH RUSTOLEUM #2766 HIGH GLOSS WHITE ENAMEL OR APPROVED EQUAL.

ALL SHEET METAL PARTS SHALL BE .125 INCH THICK ALUMINUM.

ALL SEAMS SHALL BE CONTINUOUSLY WELDED.

ALUMINUM SHALL BE TYPE 5052-H32.

CONTINUOUS HINGE SHALL BE HEAVY GAUGE ALUMINUM WITH 1/2" DIAMETER STAINLESS STEEL HINGE PIN. HINGE IS SECURED WITH 1/2" X 20 TPI STAINLESS STEEL CARRIAGE BOLTS AND STAINLESS STEEL NYLOCK NUTS.

A SINGLE PHOTOCCELL SHALL BE LOCATED ON THE NORTH - NORTHEAST SIDE OF THE CABINET UNLESS OTHERWISE CALLED FOR IN THE SPECIAL PROVISIONS. THE PHOTOCCELL SHALL BE PLACED AS SHOWN AND SHALL BE LISTED ON THE DEPARTMENTS APPROVED PRODUCTS LIST.

DOOR LATCH ASSEMBLY TO BE PROVIDED WITH THREE-POINT LOCKING MECHANISM.

6

6


SDD 09D02 - 03

SDD 09D02 - 03



SIGNAL CONTROL CABINET

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION



APPROVED
September 2014 /S/ Ahmet Demerbilek
DATE STATE ELECTRICAL ENGINEER
FHWA




SECTION A-A

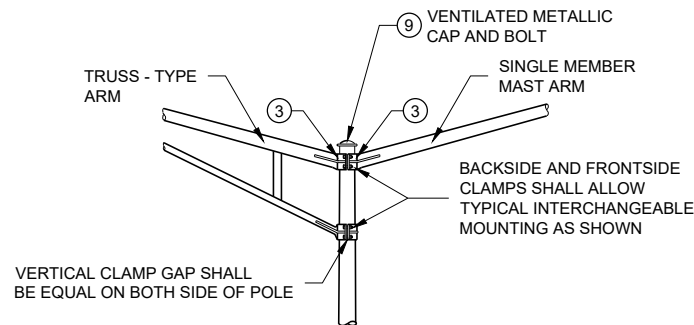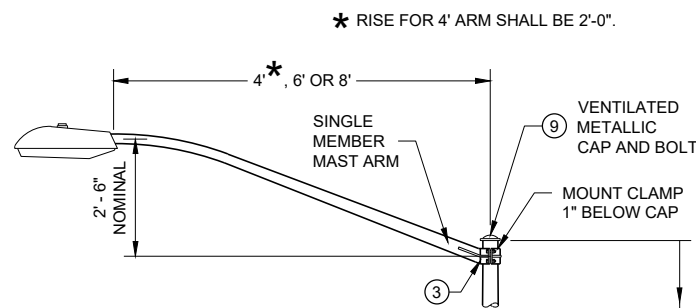

INTERCHANGEABLE MOUNTING DETAIL

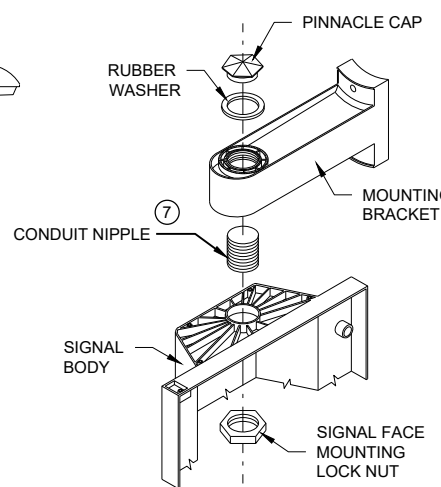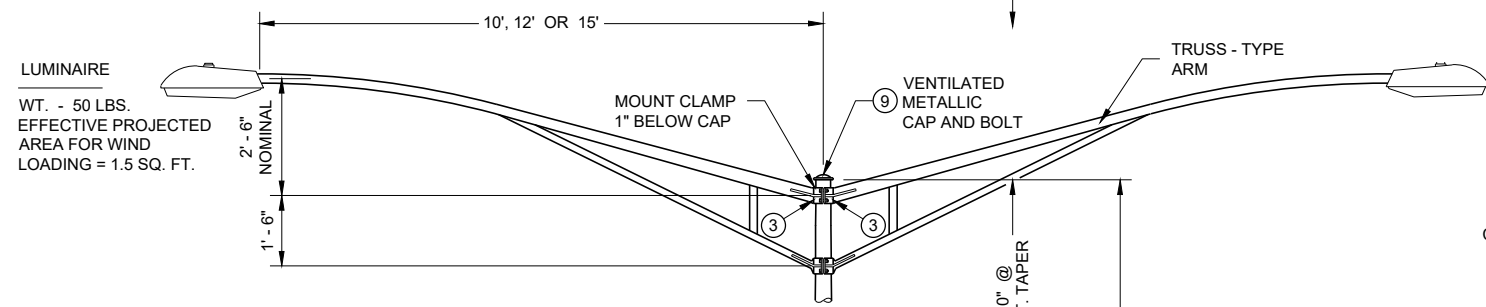

SIGNAL FACE MOUNTING DETAIL (BANDED)

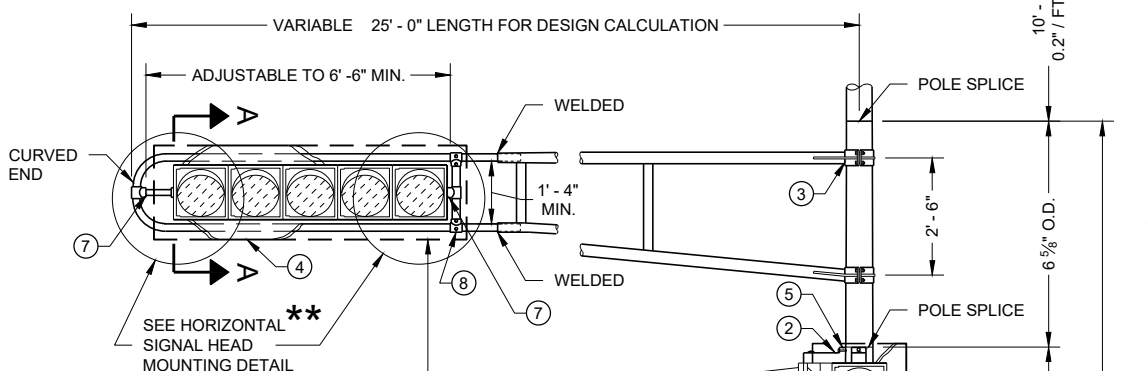


POLE SPLICE DETAIL

FOR MANUFACTURERS USE ONLY


WELD TO BE 100% R.T. OR U.T. TESTED AS PER THE REQUIREMENTS OF AWS D 1.5-88. RECORDS OF COMPLIANCE OF SUCH TESTING SHALL BE FURNISHED TO THE OFFICE OF DESIGN / BRIDGE FOR VERIFICATION AND APPROVAL.




BACK - UP BAR

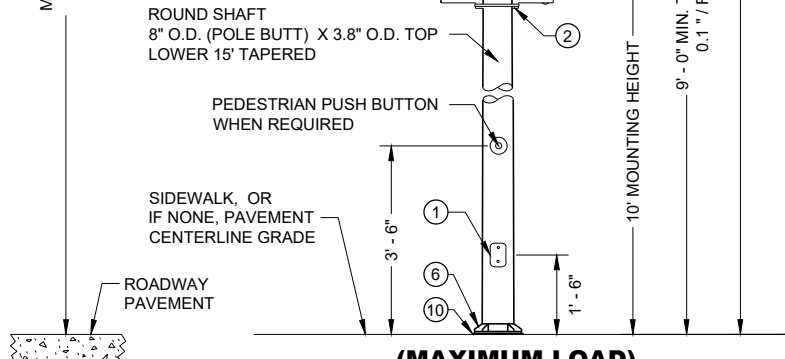


(MAXIMUM LOAD)

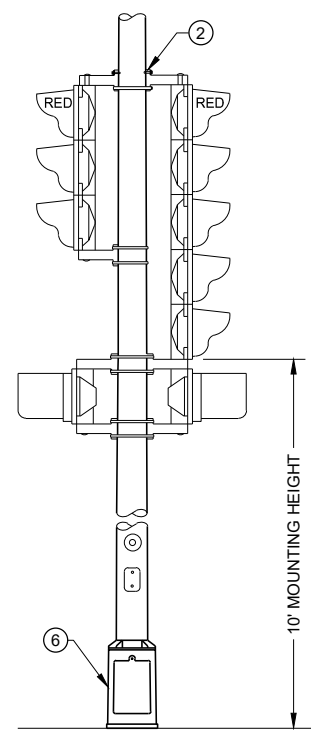

TYPICAL MOUNTING OF BACK TO BACK 3 AND 5 SECTION SIGNAL FACES

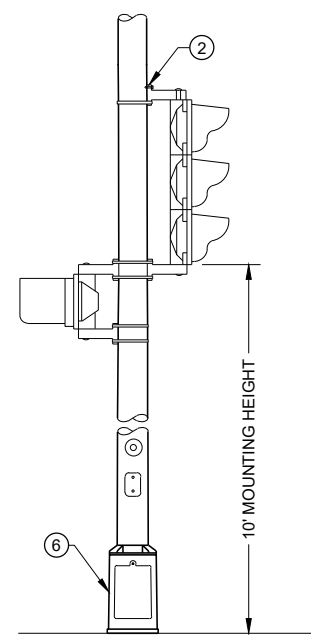

TYPICAL MOUNTING OF 3 SECTION SIGNAL FACE

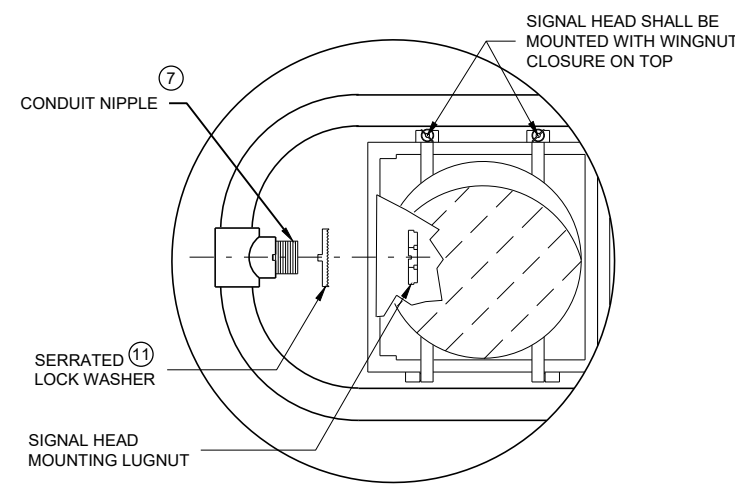

HORIZONTAL SIGNAL HEAD MOUNTING DETAIL

** SIGNAL HEAD ATTACHMENT ALSO APPLIES TO MOUNTING AT CROSS BAR

GENERAL NOTES

DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE CONTRACT.

ALL TYPE 3 POLE MOUNTINGS SHALL BE DESIGNED TO INCLUDE TWIN 15' ARMS WITH LUMINAIRES.

POLES SHALL BE GALVANIZED STEEL.

SECTION 657, POLES, OF THE STANDARD SPECIFICATIONS SHALL APPLY TO THIS DRAWING.

A PULL WIRE / ROPE SHALL BE INSTALLED IN EACH TROMBONE ARM RACEWAY DURING THE MANUFACTURING PROCESS.


THE SLIPFITTER END OF THE LUMINAIRE MAST ARM SHALL BE A NOMINAL 2 3/8 INCHES IN OUTSIDE DIAMETER. THE STRAIGHT PORTION OF THE SLIPFITTER END OF THE LUMINAIRE MAST ARM SHALL BE A NOMINAL 12 INCHES IN LENGTH.

WHEN TRANSFORMER BASES ARE USED, WIRE CONNECTIONS SHALL BE MADE IN THE TRANSFORMER BASE.


- ① 4" X 6" REINFORCED HANDHOLE AND COVER ASSEMBLY WITH TWO (2) 1/2" X 3/4" - 20 TPI, STAINLESS STEEL, HEX HEAD BOLTS.
- ② SIGNAL FACE MOUNTING BRACKETS. MOUNT WITH CAP SCREWS AND BANDING.
- ③ GROMMETS. 1" CHASE NIPPLES OR 1" CLOSE CONDUIT NIPPLES WITH BUSHINGS SHALL BE PROVIDED FOR 1 1/2" HOLE IN POLE SHAFT FOR WIRING.
- ④ SECURELY MOUNT DULL BLACK POLYCARBONATE BACKPLATES, PROJECTING 5" BEYOND ALL SIDES OF THE SIGNAL FACE HOUSING, PER MANUFACTURER'S RECOMMENDATIONS.
- ⑤ POLE MOUNTED SIGNAL FACES SHALL REQUIRE ONE OR MORE MOUNTING SPACERS UNDER THE TOP MOUNTING BRACKET(S) AS REQUIRED, TO PLUMB THE SIGNAL FACE.
- ⑥ CAST ALUMINUM TRANSFORMER BASE, WHEN REQUIRED. UNDER MAX LOADING, TYPE 3 POLE SHALL BE MOUNTED DIRECTLY TO ITS CONCRETE BASE.
- ⑦ USE 1 1/2" ID NIPPLES ZINC-COATED RIGID METAL CONDUIT, LONG ENOUGH TO ACCOMMODATE FULL DEPTH THREADING INTO THE HEAD MOUNTING LOCK NUT IN ORDER TO TIGHTEN THE FACE, BUT THAT DO NOT INTERFERE WITH REFLECTOR CLOSURE. THREAD THE NIPPLE INTO THE MOUNTING BRACKET/ELBOW UNTIL TIGHT. USE APPROVED PINNACLE TYPE HARDWARE FROM A DEPARTMENT APPROVED MANUFACTURER TO CLOSE THE UNUSED 1 1/2" OPENING IN SIGNAL FACES AND BRACKET ENDS.
- ⑧ VERTICAL STRUT (ADJUSTABLE), ONE (1) SET SCREW (1/2" X 3/4" - 20 TPI STAINLESS STEEL, HEX HEAD) INTO EACH ARM MEMBER IF STRUT IS THE SLIDING TYPE.
- ⑨ FURNISH AND INSTALL VENTILATED, CAST METALLIC (ALUMINUM ALLOY) CAPS. FASTEN CAPS WITH ONE (1) 1/2" X 3/4" - 20 TPI STAINLESS STEEL, HEX HEAD BOLT.
- ⑩ SHIMMING, IF NEEDED, SHALL BE LOCATED BETWEEN THE CONCRETE FOUNDATION AND POLE.
- ⑪ USE SERRATED LOCK WASHERS WITH NOTCHES BETWEEN END TEE AND SIGNAL HEAD.

POLE MOUNTINGS FOR TRAFFIC SIGNALS AND LIGHTING UNITS TYPE 3 (HEAVY DUTY)


STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION

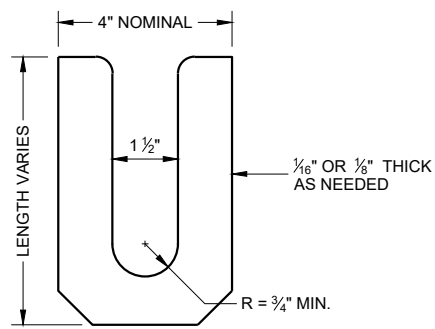

LEVELING SHIM
SHALL BE ALUMINUM

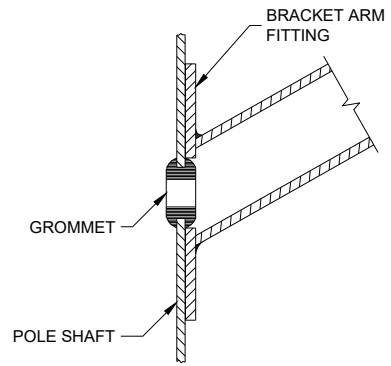

TYPICAL APPLICATION OF GROMMET IN POLE SHAFT

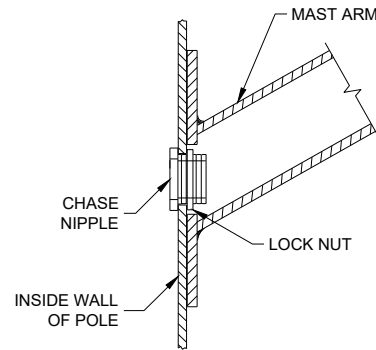


TYPICAL APPLICATION OF CHASE NIPPLE IN POLE SHAFT

GENERAL NOTES


CLAMP BOLT-NUT TIGHTENING TORQUE SHALL BE INDICATED BY INDENT STAMPING (1/2 INCH NUMERALS AND LETTERS) OR WEATHERPROOF PRINTING ON THE INSIDE OF THE CLAMP THAT IS WELDED TO THE ARM MEMBER.

- ① 4.5" I.D. FOR LUMINAIRE MAST ARM CLAMP. 6.625" I.D. FOR TROMBONE MAST ARM CLAMP.
- ② INDIVIDUAL BASE PLATE ANCHOR ROD COVERS. (4 REQUIRED)
- ③ BASE PLATE SLOTTED TO ACCEPT 11" THROUGH 12" BOLT CIRCLE USING 1" DIAMETER ANCHOR RODS.
- ④ LEVELING SHIMS, DESIGNED FOR THE PURPOSE, SHALL BE USED WHEN PLUMBING POLES. THE USE OF WASHERS IN LIEU OF PROPER LEVELING SHIMS IS NOT ACCEPTABLE. LEVELING SHIMS SHALL BE USED ONLY BETWEEN THE TOP OF THE CONCRETE BASE AND A METALLIC BASE PLATE.


SHIMS SHALL BE LONG ENOUGH AND WIDE ENOUGH TO COMPLETELY COVER THE AREA UNDER THE LENGTH AND WIDTH OF THE BASE MOUNTING FLANGE.

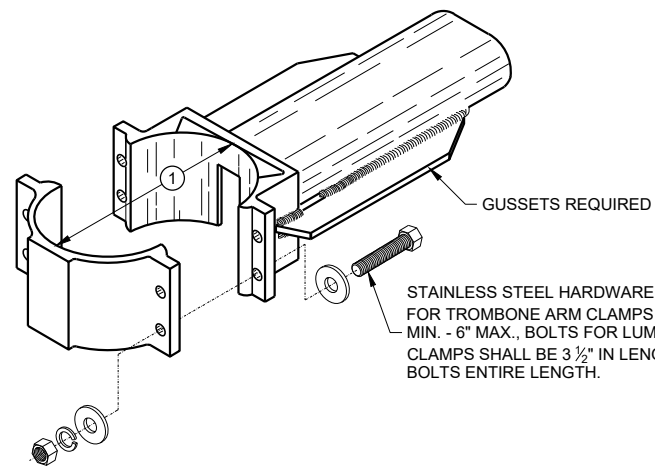


TYPICAL TROMBONE MAST ARM AND SINGLE LUMINAIRE MAST ARM MOUNTING CLAMP

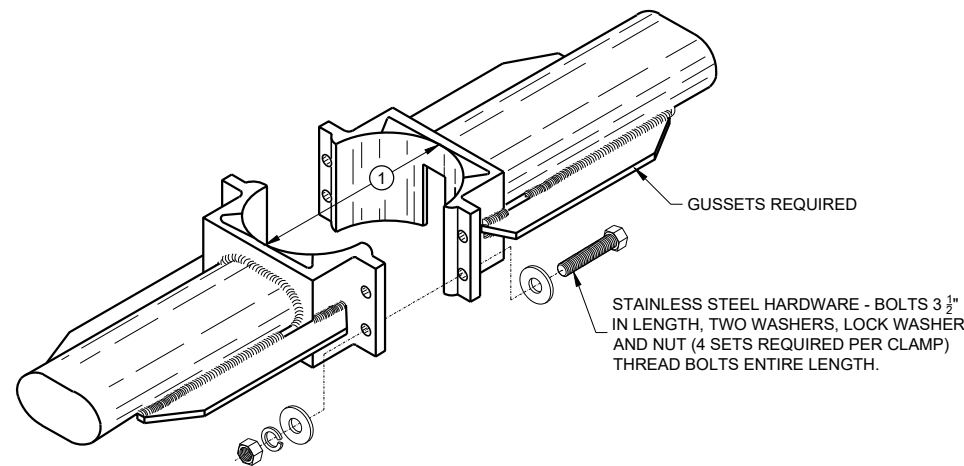



TYPICAL LUMINAIRE MAST ARM (DOUBLE) MOUNTING BRACKETS

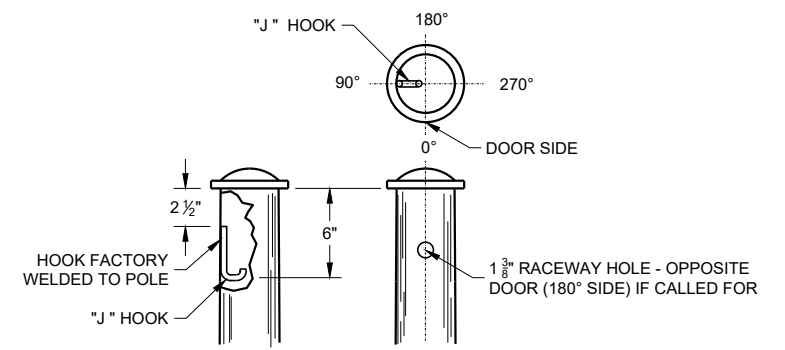


TYPICAL "J" HOOK LOCATION

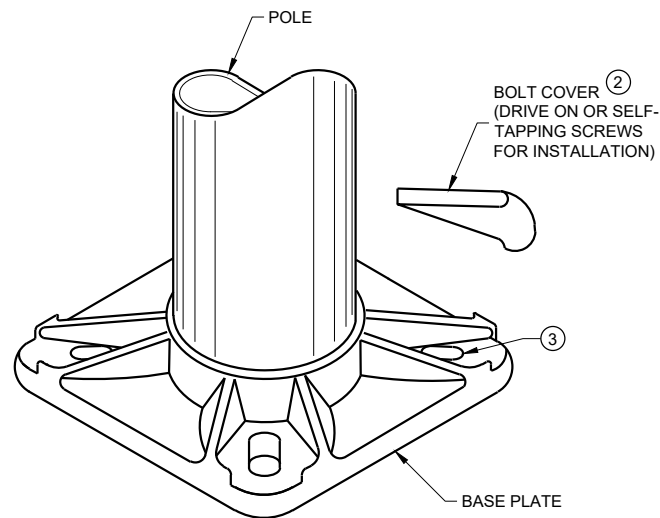

BASE PLATE

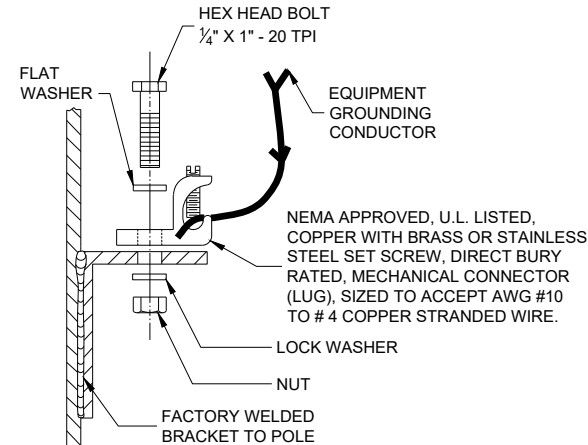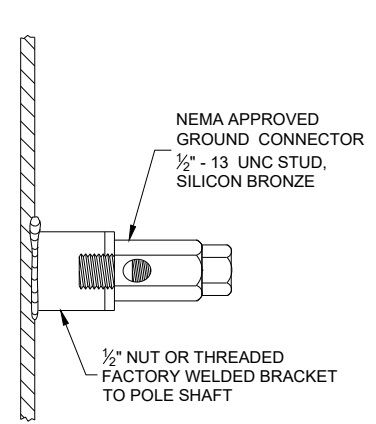

TYPICAL GROUNDING CONNECTIONS
NUT, BOLT AND WASHERS SHALL BE STAINLESS STEEL

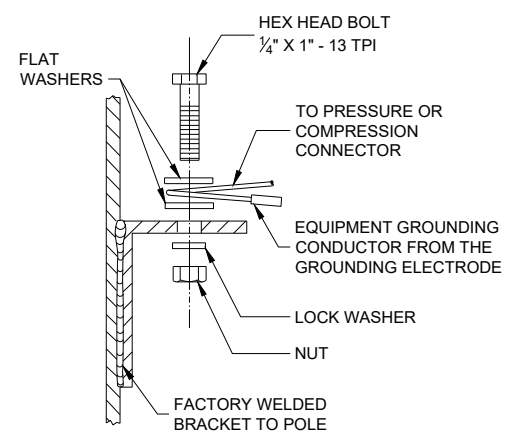

HARDWARE DETAILS FOR POLE MOUNTING

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION


APPROVED
November 2018 /S/ Ahmet Demirbilek
DATE STATE ELECTRICAL ENGINEER
FHWA

GENERAL NOTES



DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE CONTRACT.

THE EQUIPMENT GROUND CONNECTOR SHALL BE TAPED WITH 3 WRAPS (MINIMUM) OF APPROVED RUBBER TAPE AND 3 WRAPS (MINIMUM) OF APPROVED VINYL TAPE TO COVER SHARP WIRE ENDS AFTER THE CONNECTION IS COMPLETED.


WHEN TRANSFORMER BASES ARE USED, ALL WIRING CONNECTIONS SHALL OCCUR WITHIN THE TRANSFORMER BASES.

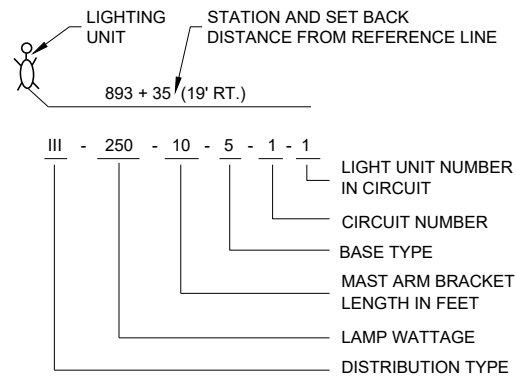


LIGHTING UNIT CODE (TYPICAL)

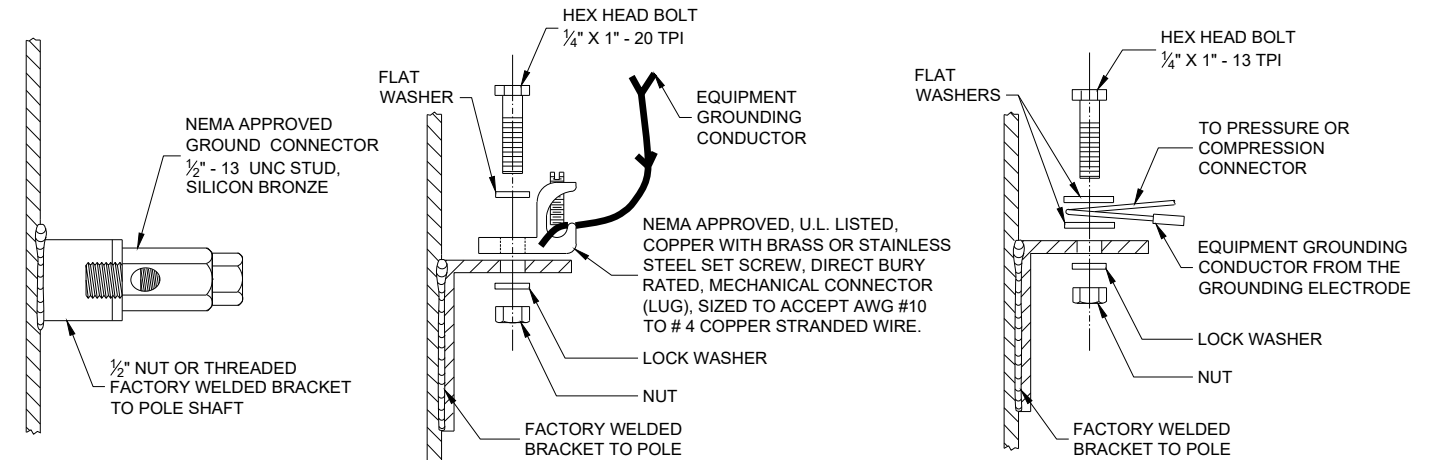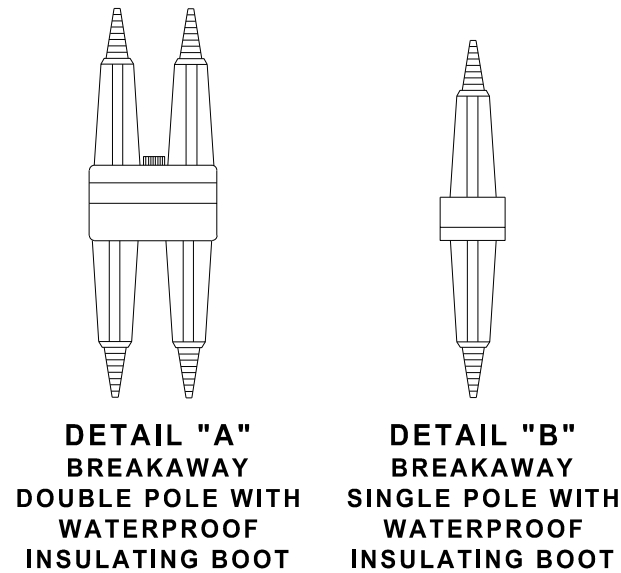

TYPICAL GROUNDING CONNECTIONS
NUT, BOLT AND WASHERS SHALL BE STAINLESS STEEL

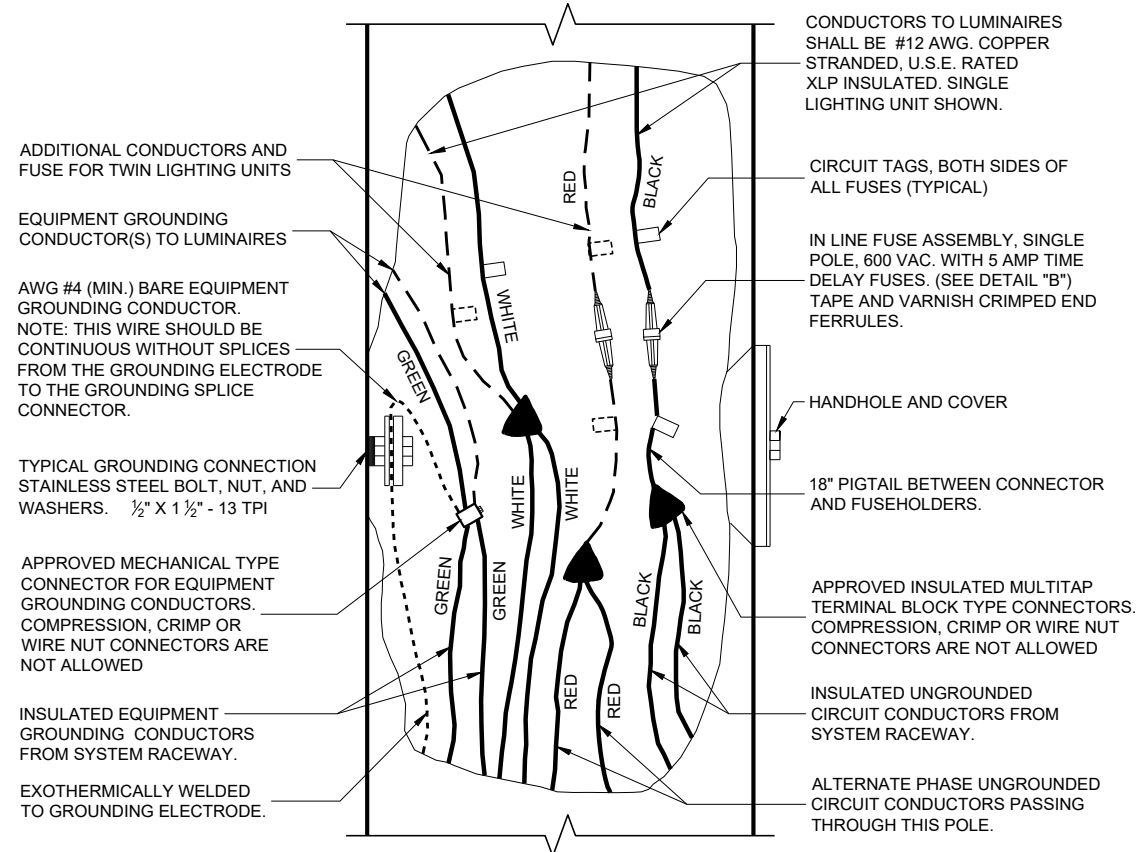

3 WIRE - 120, 240 OR 480 VAC (UNGROUNDING CONDUCTORS) WITH GROUNDING CONDUCTOR AND EQUIPMENT GROUNDING CONDUCTOR

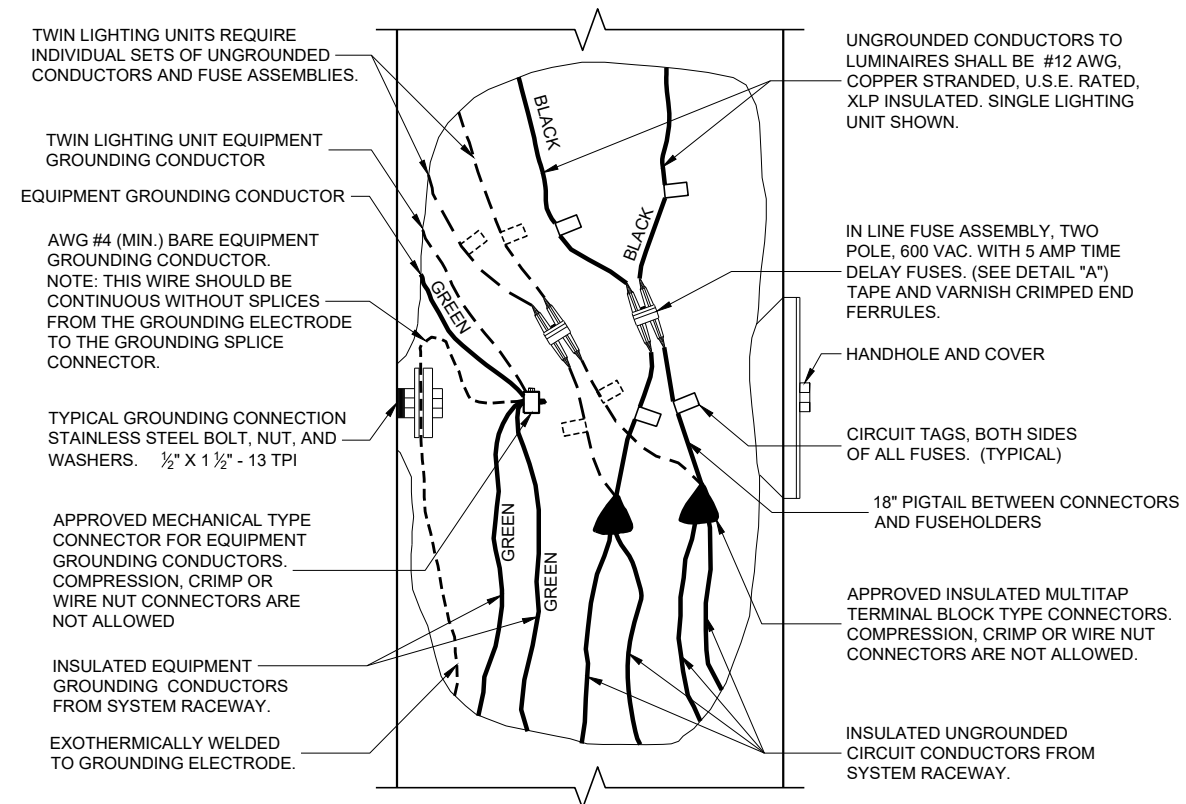



2 WIRE - 240 OR 480 VAC (UNGROUNDING CONDUCTORS) WITH EQUIPMENT GROUNDING CONDUCTOR

NON - FREEWAY LIGHTING UNIT POLE WIRING

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION







APPROVED
November 2018 /S/ Ahmet Demirelek
DATE STATE ELECTRICAL ENGINEER

FHWA

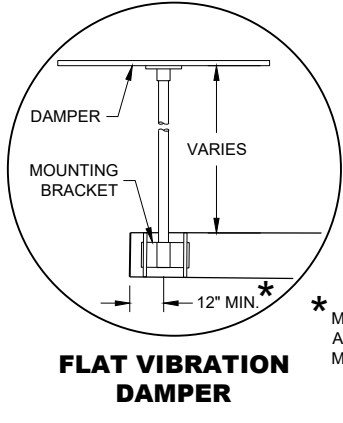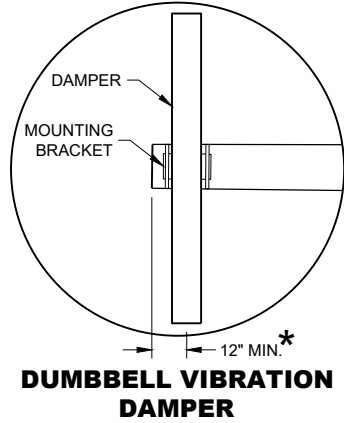

* MOUNT AS CLOSE TO END OF MAST ARM FOR MAXIMUM DAMPING PER MANUFACTURER'S RECOMMENDATIONS.

LUMINAIRE, WT. - 50 LBS.
EPA FOR WIND LOADING 1.5 SQ. FT.

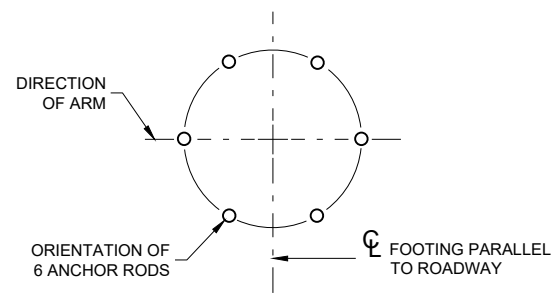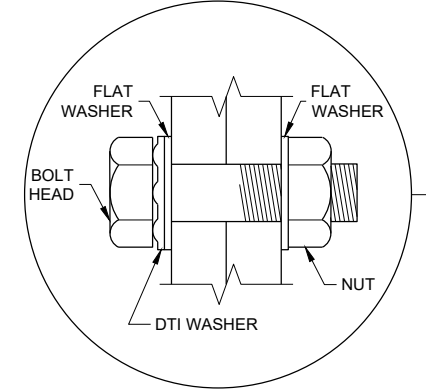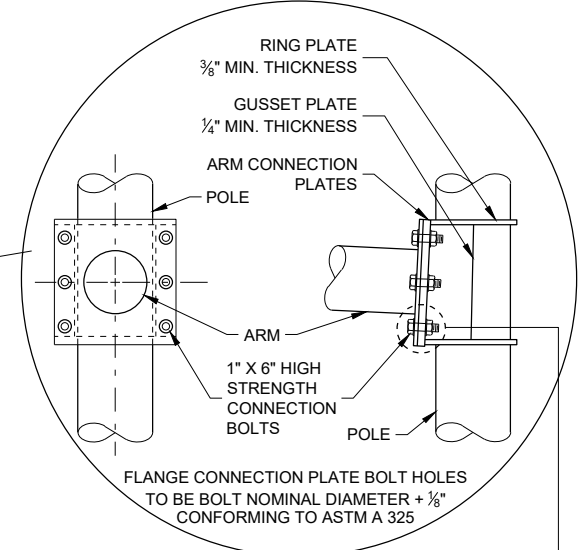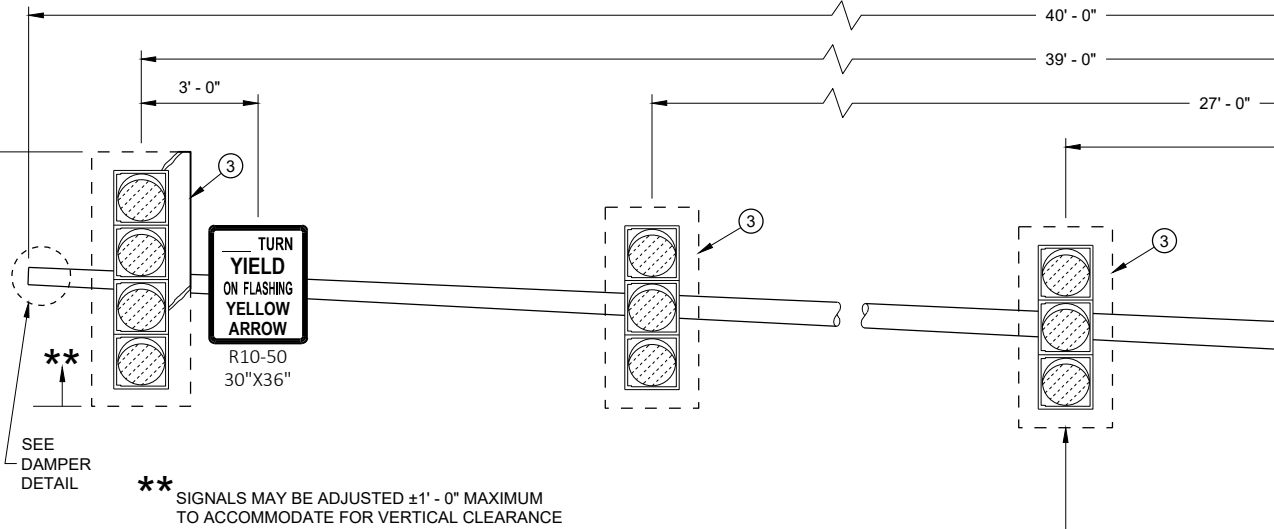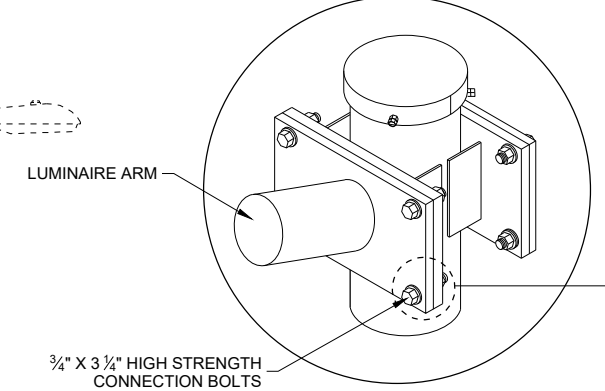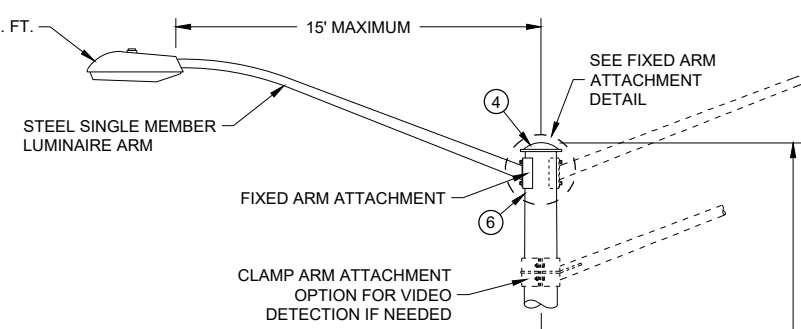


POLE: (0.14"/FT. TAPER), 1 PIECE (NO WELDED POLE SECTIONS) POLE BUTT DIA. = 13"

TYPICAL PEDESTRIAN SIGN
PEDESTRIAN PUSH BUTTON WHEN REQUIRED

ANCHOR RODS
FY = 55 KSI
ASTM F1554 GR 55
ROD CIRCLE = 18"
ANCHOR ROD DIA. 1 1/2" GALVANIZED.
(MIN. 6 ANCHOR RODS)

MAXIMUM BASE PLATE THICKNESS = 2 1/2"



25.6' MAXIMUM MOUNTING HEIGHT

17' - 6" MINIMUM MOUNTING HEIGHT

30' - 0" NOMINAL

19' - 0"

10' - 0"

3' - 6"

TYPE 10 SPECIAL POLE 40' MONOTUBE ARM (MAXIMUM LOAD)

TYPE 10 SPECIAL POLE 40' MONOTUBE ARM



STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
August 2020 DATE /S/ Ahmet Demirelek
STATE ELECTRICAL ENGINEER


SDD 09E08 - 09g

SDD 09E08 - 09g


LUMINAIRE, WT. - 50 LBS.
EPA FOR WIND LOADING 1.5 SQ. FT.

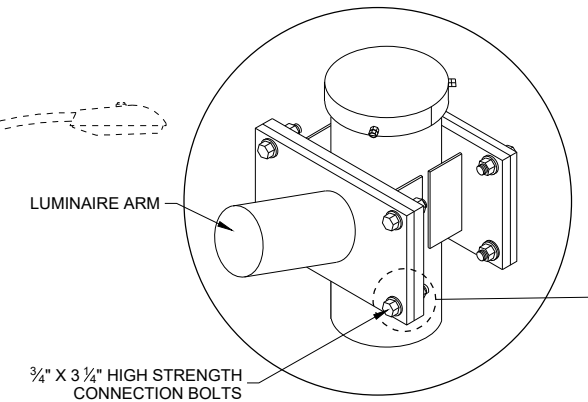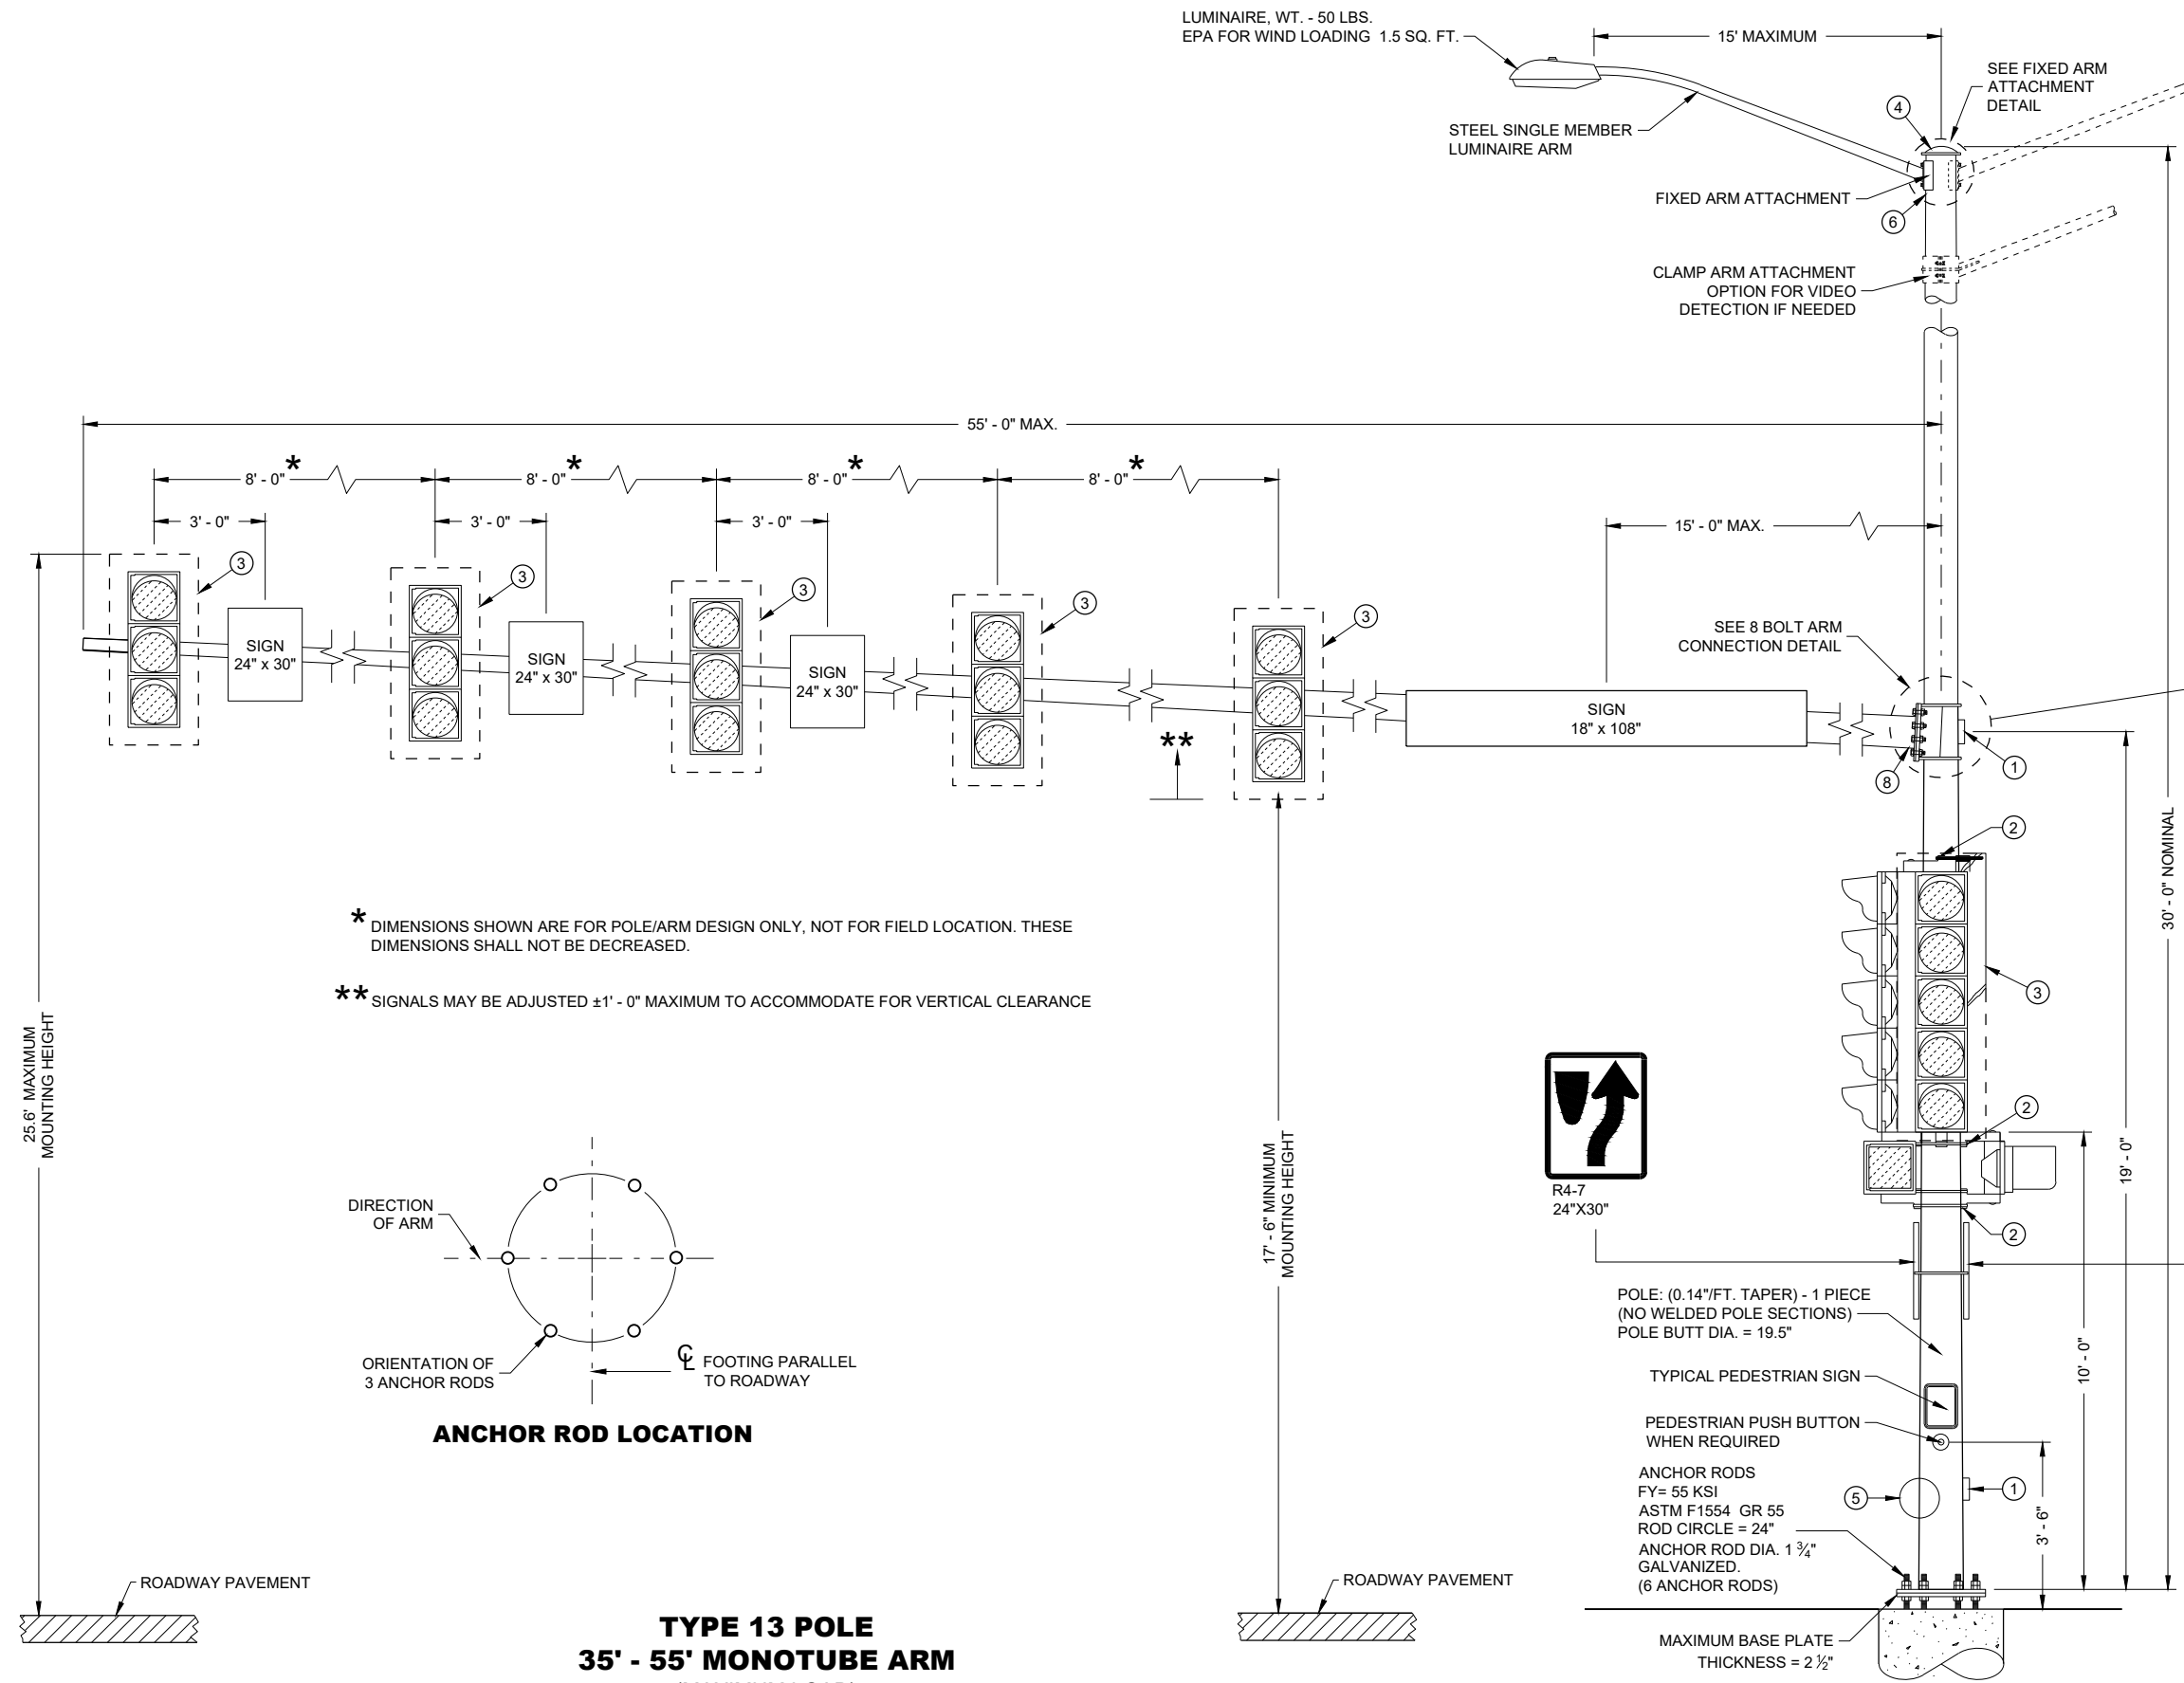

FIXED ARM ATTACHMENT DETAIL

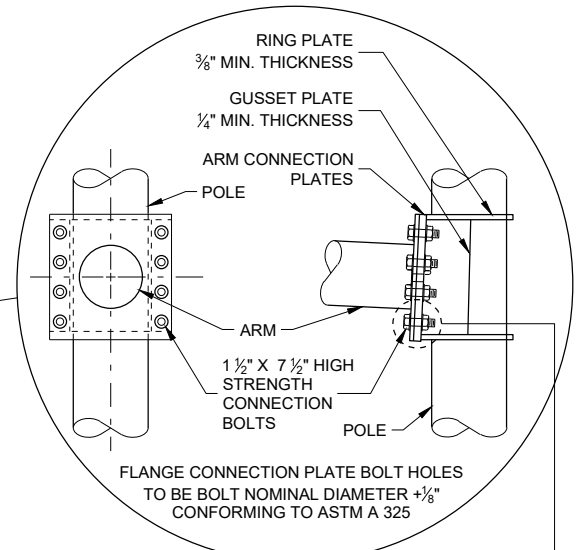


8 BOLT ARM CONNECTION DETAIL

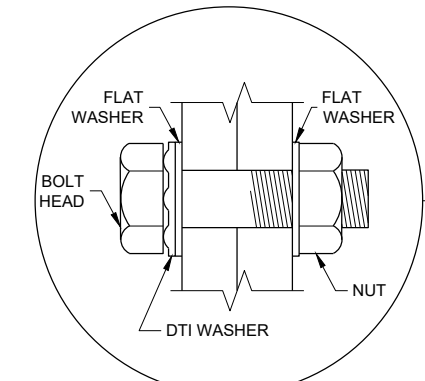

RECOMMENDED BOLT ASSEMBLY DETAIL

* DIMENSIONS SHOWN ARE FOR POLE/ARM DESIGN ONLY, NOT FOR FIELD LOCATION. THESE DIMENSIONS SHALL NOT BE DECREASED.

** SIGNALS MAY BE ADJUSTED ±1' - 0" MAXIMUM TO ACCOMMODATE FOR VERTICAL CLEARANCE

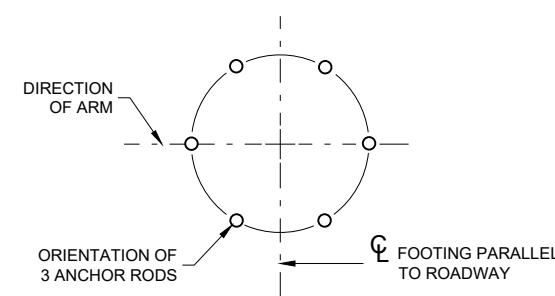

ANCHOR ROD LOCATION

**TYPE 13 POLE
35' - 55' MONOTUBE ARM
(MAXIMUM LOAD)**




POLE: (0.14"/FT. TAPER) - 1 PIECE
(NO WELDED POLE SECTIONS)
POLE BUTT DIA. = 19.5"

TYPICAL PEDESTRIAN SIGN

PEDESTRIAN PUSH BUTTON
WHEN REQUIRED

ANCHOR RODS
FY= 55 KSI
ASTM F1554 GR 55
ROD CIRCLE = 24"
ANCHOR ROD DIA. 1 3/4"
GALVANIZED.
(6 ANCHOR RODS)

MAXIMUM BASE PLATE
THICKNESS = 2 1/2"



TYPE 13 POLE 35' - 55' MONOTUBE ARM	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED August 2020 DATE	/S/ Ahmet Demirelek STATE ELECTRICAL ENGINEER
FHWA	

GENERAL NOTES

DETAILS OF CONSTRUCTION NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE CONTRACT.

POLE TYPES 9 AND 10 ARE FOR ARM LENGTHS 15 FOOT TO 30 FOOT.

POLE TYPES 9 SPECIAL AND 10 SPECIAL ARE FOR ARM LENGTHS 35 FOOT, 40 FOOT, AND 45 FOOT.

POLE TYPES 12 AND 13 ARE FOR ARM LENGTHS 35 FOOT TO 55 FOOT.

MONOTUBE POLES AND ARMS SHALL BE GALVANIZED STEEL.

RING STIFFENED BUILT UP BOX TYPE OF ATTACHMENT FOR TRAFFIC SIGNAL ARM.

ONE PIECE POLE CONSTRUCTION (NO WELDED POLE SECTIONS).

STANDARD STRAIGHT ARM DESIGN (3% ± RISE).

SECTION 657, POLES OF THE STANDARD SPECIFICATION SHALL APPLY TO THIS DRAWING.

PROVIDE WIREWAY THRU POLE WALL AND ARM CONNECTION PLATES. PROVIDE ROUND, SMOOTH INSIDE SURFACE.

MANUFACTURER'S SUBMITTED POLE DESIGNS AND DRAWINGS SHALL BE SIGNED AND STAMPED BY A REGISTERED PROFESSIONAL ENGINEER AND CERTIFIED AS BEING IN COMPLIANCE WITH THE AASHTO "LRFD SPECIFICATIONS FOR STRUCTURAL SUPPORTS FOR HIGHWAY SIGNS, LUMINAIRES AND TRAFFIC SIGNAL 2015 1ST EDITION (INCLUDING INTERIM REVISIONS)" AND ALL PERTINENT WISDOT SPECIFICATIONS AND DRAWINGS FOR THE LIGHTING STRUCTURES AS FOLLOWS:

CATEGORY III FATIGUE LOADS OF GALLOPING, TRUCK GUSTS (AT 45 MPH VEHICLE VELOCITY) AND NATURAL WIND GUSTS FOR DESIGN OF TYPE 9 AND TYPE 10 STRUCTURES.

CATEGORY II FATIGUE LOADS OF TRUCK GUSTS (AT 45 MPH VEHICLE VELOCITY) AND NATURAL WIND GUSTS FOR DESIGN OF TYPE 9 SPECIAL AND TYPE 10 SPECIAL STRUCTURES. IN LIEU OF DESIGNING FOR GALLOPING, A VIBRATION DAMPER MITIGATION DEVICE IS REQUIRED TO BE SUPPLIED AND INSTALLED AT THE END OF THE MAST ARM.

CATEGORY II FATIGUE LOADS OF GALLOPING, TRUCK GUSTS (AT 45 MPH VEHICLE VELOCITY) AND NATURAL WIND GUSTS FOR DESIGN OF TYPE 12 AND TYPE 13 STRUCTURES.

115 MPH (700 YEAR MRI BASIC WIND SPEED).

SECURE THE OPENING BELOW THE BASE PLATE WITH STAINLESS STEEL OR GALVANIZED STEEL MESH AND SECURE THE MESH WITH 3/4" STAINLESS STEEL BANDING AROUND THE LEVELING NUTS.

INDENT PRINT (NOMINAL 1/2" HIGH) THE POLE LENGTH AND FIRST TWO LETTERS OF THE MANUFACTURERS NAME ON TWO SIDES OF THE BASE PLATE 180 DEGREES APART, BEFORE GALVANIZING. THE ARM SHALL BE IDENTIFIED WITH THE SAME INFORMATION BY INDENT PRINT.

SIGNAL FACE SHALL BE MOUNTED 6 INCHES (NOMINAL) FROM THE END OF THE MONOTUBE ARM OR AS SHOWN ON THE PLAN CONSTRUCTION DETAIL OR AS DIRECTED BY THE PROJECT ENGINEER/ELECTRICAL OPERATIONS PERSONNEL. MOUNT ALL LIKE HEAD AT SAME ELEVATION.


SIGN MOUNTING BRACKETS SHALL BE FURNISHED IN ACCORDANCE WITH SECTION 637 OF THE STANDARD SPECIFICATIONS FOR HIGHWAY AND STRUCTURE CONSTRUCTION.

- ① DESIGN FOR MAXIMUM ALLOWABLE HAND HOLE WITH COVER ASSEMBLY WITH TWO 1/4" X 3/4" - 20 TPI STAINLESS STEEL HEX HEAD BOLTS.
- ② SIGNAL MOUNTING BRACKETS FOR POLE MOUNTING, MOUNT WITH CAP SCREW AND BANDING (SEE SPECIFICATION SECTION 658).
- ③ SECURELY MOUNT BACK PLATES, PROJECTING 5" BEYOND ALL SIDES OF THE SIGNAL FACE HOUSING, PER MANUFACTURERS RECOMMENDATIONS.
- ④ THE TOP OF THE POLE SHAFT AND THE MONOTUBE ARM SHALL BE EQUIPPED WITH A REMOVABLE, VENTILATED CAP HELD SECURELY IN PLACE WITH SET SCREWS.
- ⑤ FACTORY WELDED BRACKET FOR GROUNDING LUG, OPPOSITE HAND HOLD, (LUG AND HARDWARE PAID UNDER SEPARATE ITEM). PROVIDE HOLE IN BRACKET FOR 1/4" X 3/4" - 20 TPI STAINLESS STEEL HEX HEAD BOLT.
- ⑥ FACTORY WELDED "J" HOOK FOR STRAIN RELIEF FOR POLE LUMINAIRE WIRE.
- ⑦ INSTALL STRUCTURAL IDENTIFICATION PLAQUES.


STRUCTURAL IDENTIFICATION PLAQUES SHALL BE PLACED ON THE POLES IN THE SAME DIRECTION AS THE ARM.

MOUNTING HEIGHT SHALL BE 6' - 0" ABOVE THE CURB OR SHOULDER. ADJUST IF IT IS KNOWN THAT REQUIRED TRAFFIC SIGNS WILL BE OBSTRUCTED.

- ⑧ FACTORY DRILLED 1/2" DRAIN HOLE 2" FROM FLANGE CONNECTION PLATE.

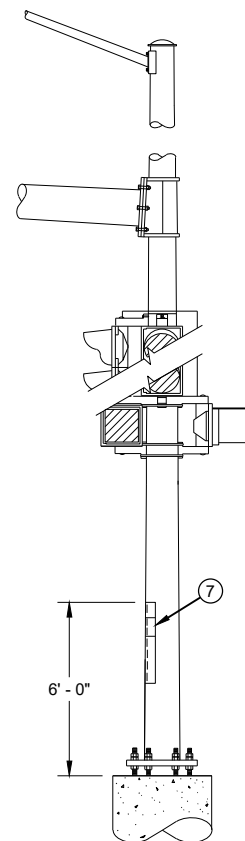


**STRUCTURAL IDENTIFICATION
PLAQUE PLACEMENT**

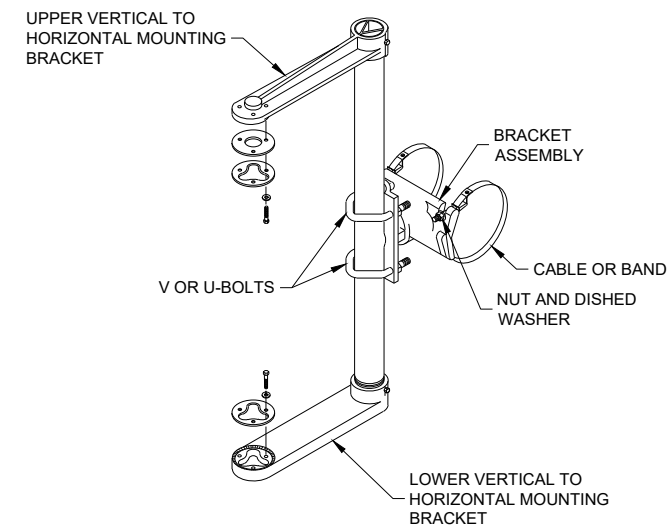


**SIGNAL FACE MOUNTING BRACKET
DETAIL FOR MONOTUBE ARM**

(MOUNT PER MANUFACTURER'S RECOMMENDATION)

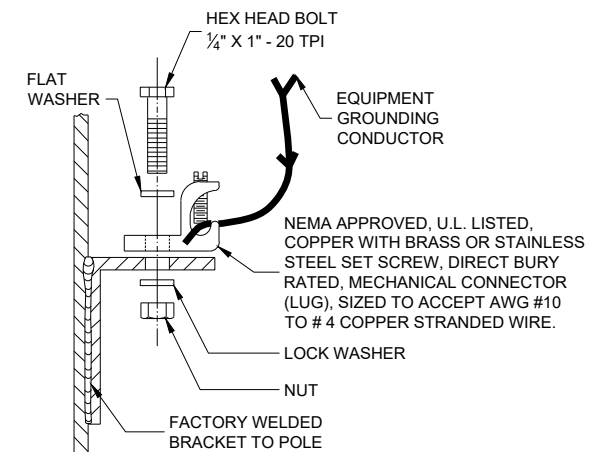


**TYPICAL GROUNDING
CONNECTIONS**

NUT, BOLT AND WASHERS SHALL BE STAINLESS STEEL

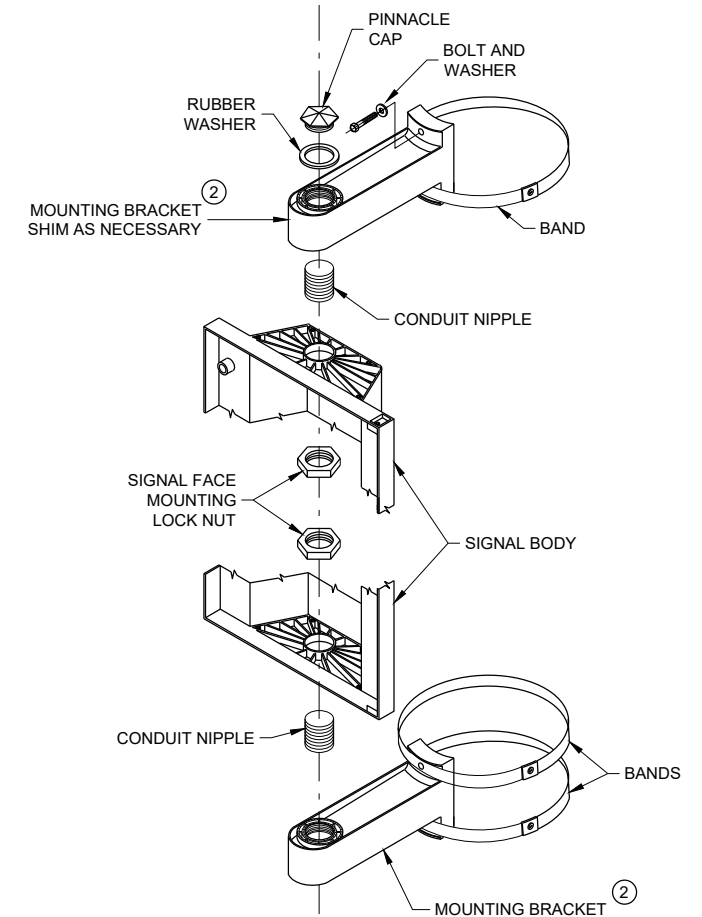

**SIGNAL FACE VERTICAL
MOUNTING DETAIL**

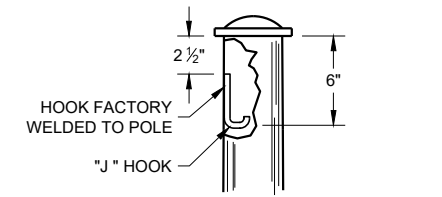

**TYPICAL "J" HOOK
WIRE SUPPORT**


**GENERAL NOTES AND
HARDWARE FOR TYPES 9,10,
9/10 SPECIAL, 12 AND 13
POLES WITH MONOTUBE ARMS**

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
August 2020 /S/ Ahmet Demirbilek
DATE STATE ELECTRICAL
ENGINEER

FHWA

MINIMUM POLE LENGTHS	POLE BURIAL DEPTHS
25'	5'
30'	6'
35'	7'
40'	8'
45'	9'

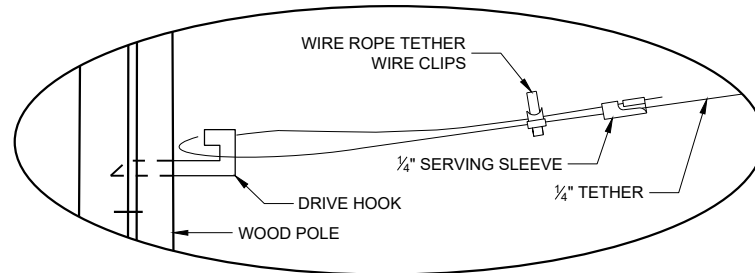


DETAIL "A"

GENERAL NOTES

DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE CONTRACT.

1. WOOD POLES SHALL BE CLASS 4. LENGTH DETERMINED BY SIGNAL PLAN.
2. SIGNAL FACES:
 - A. ALL SECTIONS SHALL BE 12" AND POLYCARBONATE.
 - B. EACH SHALL CONTAIN A 5" WIDE DULL BLACK POLYCARBONATE BACKPLATE.
 - C. EACH SHALL BE WIRED FROM THE TOP SIGNAL MOUNTING BRACKET.
 - D. NEAR RIGHT SIGNAL FACE SUSPENDED ON THE TETHER (NO BACKPLATE) SHALL NOT BE OVER THE TRAVELED WAY. IF THE POLE IS WITHIN 5 FEET OF THE TRAVELED WAY MOUNT THE SIGNAL FACE ON THE WOOD POLE WITH BACKPLATE.
3. SPAN WIRE:
 - A. EACH SPAN WIRE SHALL BE INDIVIDUALLY DOWN GUYED
 - B. SIGNAL AND LIGHTING CABLES SHALL ONLY BE ATTACHED TO THE UPPER SPAN WIRE.
 - C. THE SIGNAL ASSEMBLY SHALL HAVE A 17' MIN. HEIGHT ABOVE THE ROADWAY. THIS SHALL BE MEASURED AFTER THE SPAN WIRE INSTALLATION IS COMPLETED WITH ALL CABLES AND SIGNAL FACES IN PLACE. MAINTAIN MINIMUM AND MAXIMUM HEIGHTS AS ROADWAY WORK PROGRESSES.

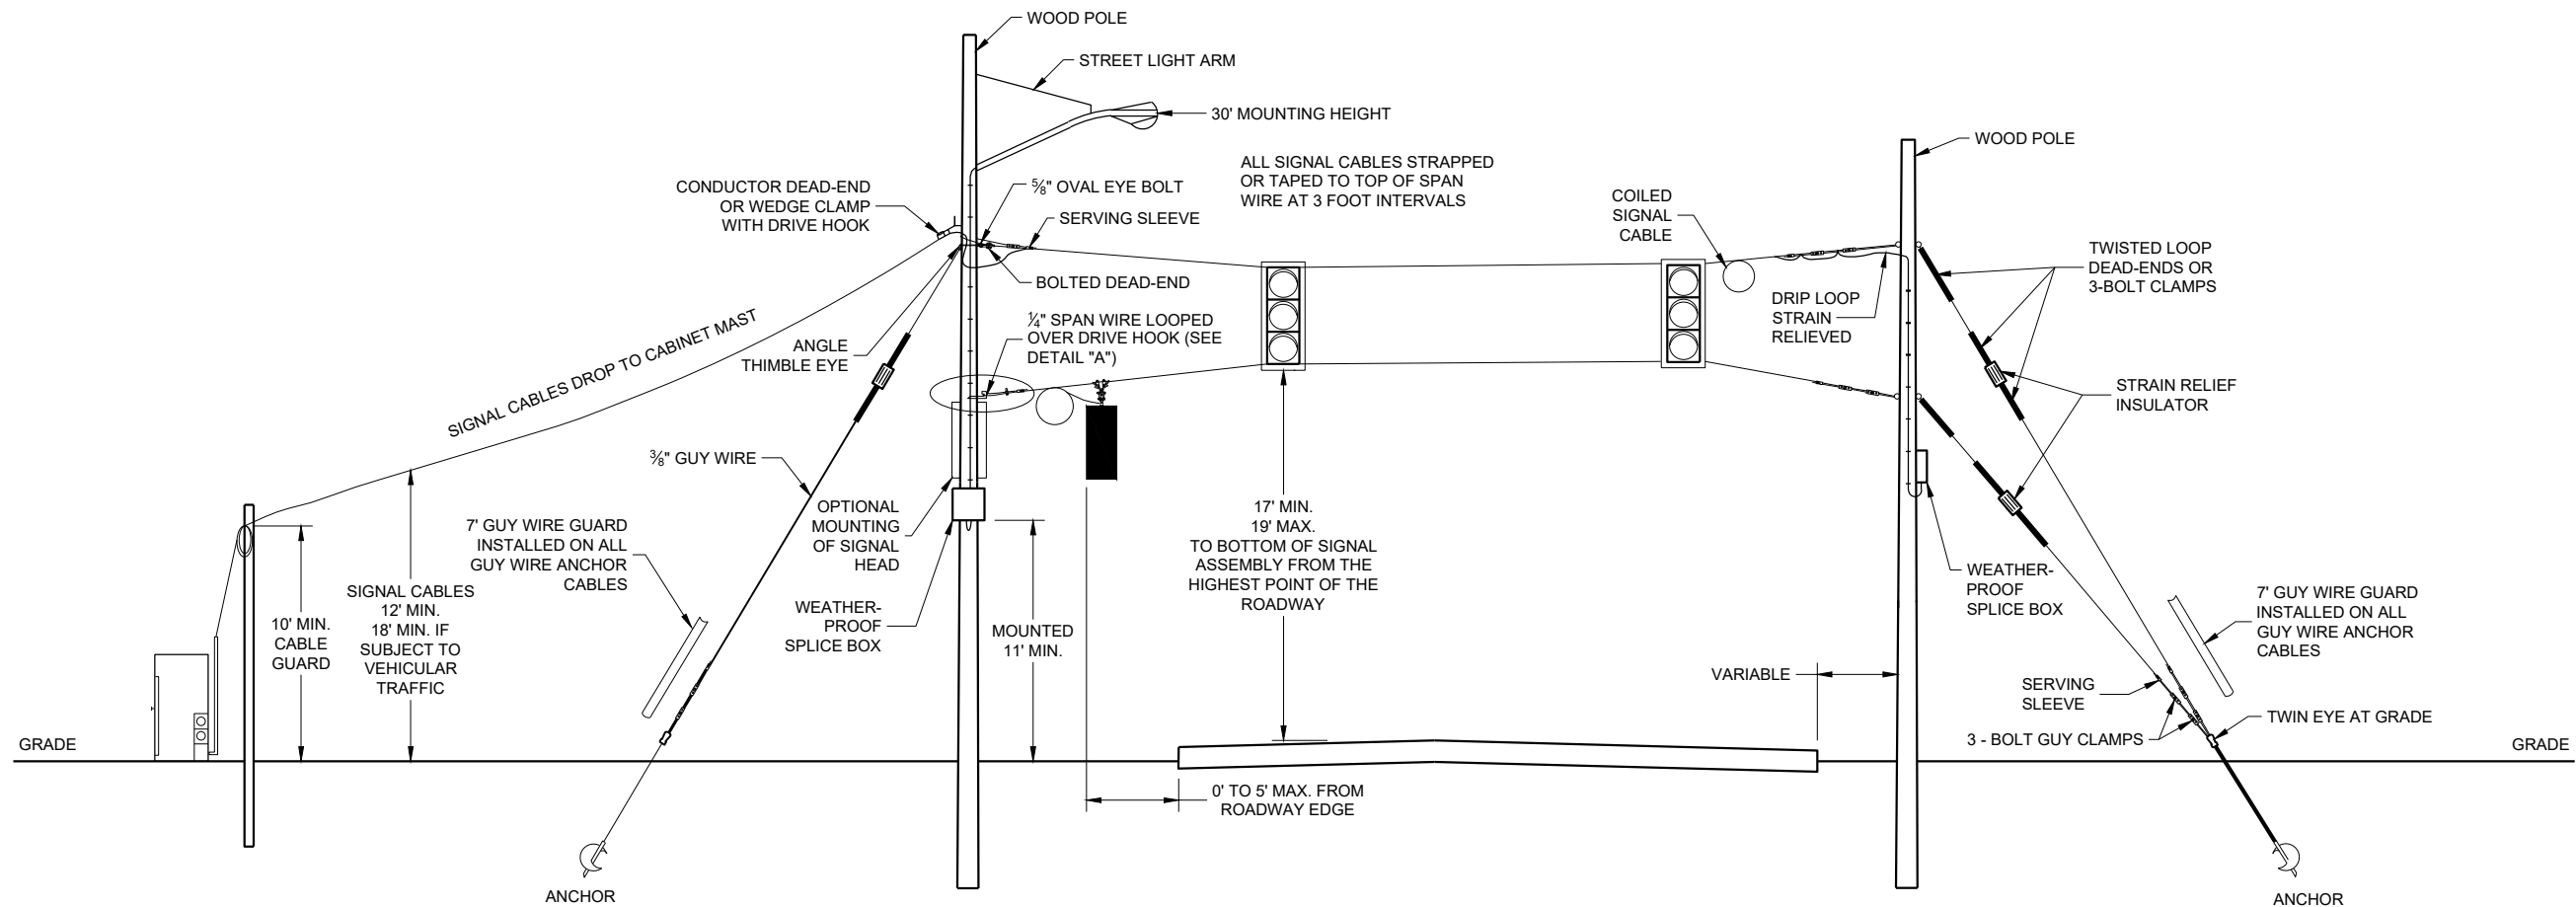

SPAN WIRE TEMPORARY SIGNALS


SPAN WIRE TEMPORARY TRAFFIC SIGNAL

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
June 2015 /S/ Ahmet Demerbilek
DATE STATE ELECTRICAL ENGINEER

FHWA

MINIMUM POLE LENGTHS	CLASS	POLE BURIAL DEPTHS
25'	V	5'
30'	V	6'
35'	IV	7'
40'	IV	8'
45'	IV	9'

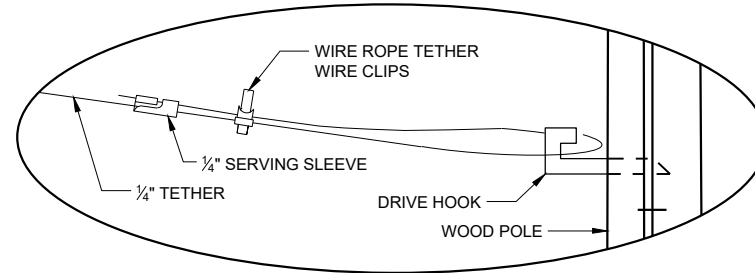


DETAIL "A"

GENERAL NOTES

DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE CONTRACT.

1. WOOD POLES SHALL BE CLASS 4. LENGTH DETERMINED BY SIGNAL PLAN.
2. SIGNAL FACES:
 - A. ALL SECTIONS SHALL BE 12" AND POLYCARBONATE.
 - B. EACH SHALL CONTAIN A 5" WIDE DULL BLACK POLYCARBONATE BACKPLATE.
 - C. EACH SHALL BE WIRED FROM THE TOP SIGNAL MOUNTING BRACKET.
 - D. NEAR RIGHT SIGNAL FACE SUSPENDED ON THE TETHER (NO BACKPLATE) SHALL NOT BE OVER THE TRAVELED WAY. IF THE POLE IS WITHIN 5 FEET OF THE TRAVELED WAY MOUNT THE SIGNAL FACE ON THE WOOD POLE WITH BACKPLATE.
 - E. FAR INDICATION SHALL BE MAINTAINED OVER CENTER OF TRAFFIC LANE.
3. SPAN WIRE:
 - A. EACH SPAN WIRE SHALL BE INDIVIDUALLY DOWN GUYED
 - B. SIGNAL AND LIGHTING CABLES SHALL ONLY BE ATTACHED TO THE UPPER SPAN WIRE.
 - C. THE SIGNAL ASSEMBLY SHALL HAVE A 17' MIN. HEIGHT ABOVE THE ROADWAY. THIS SHALL BE MEASURED AFTER THE SPAN WIRE INSTALLATION IS COMPLETED WITH ALL CABLES AND SIGNAL FACES IN PLACE. MAINTAIN MINIMUM AND MAXIMUM HEIGHTS AS ROADWAY WORK PROGRESSES.

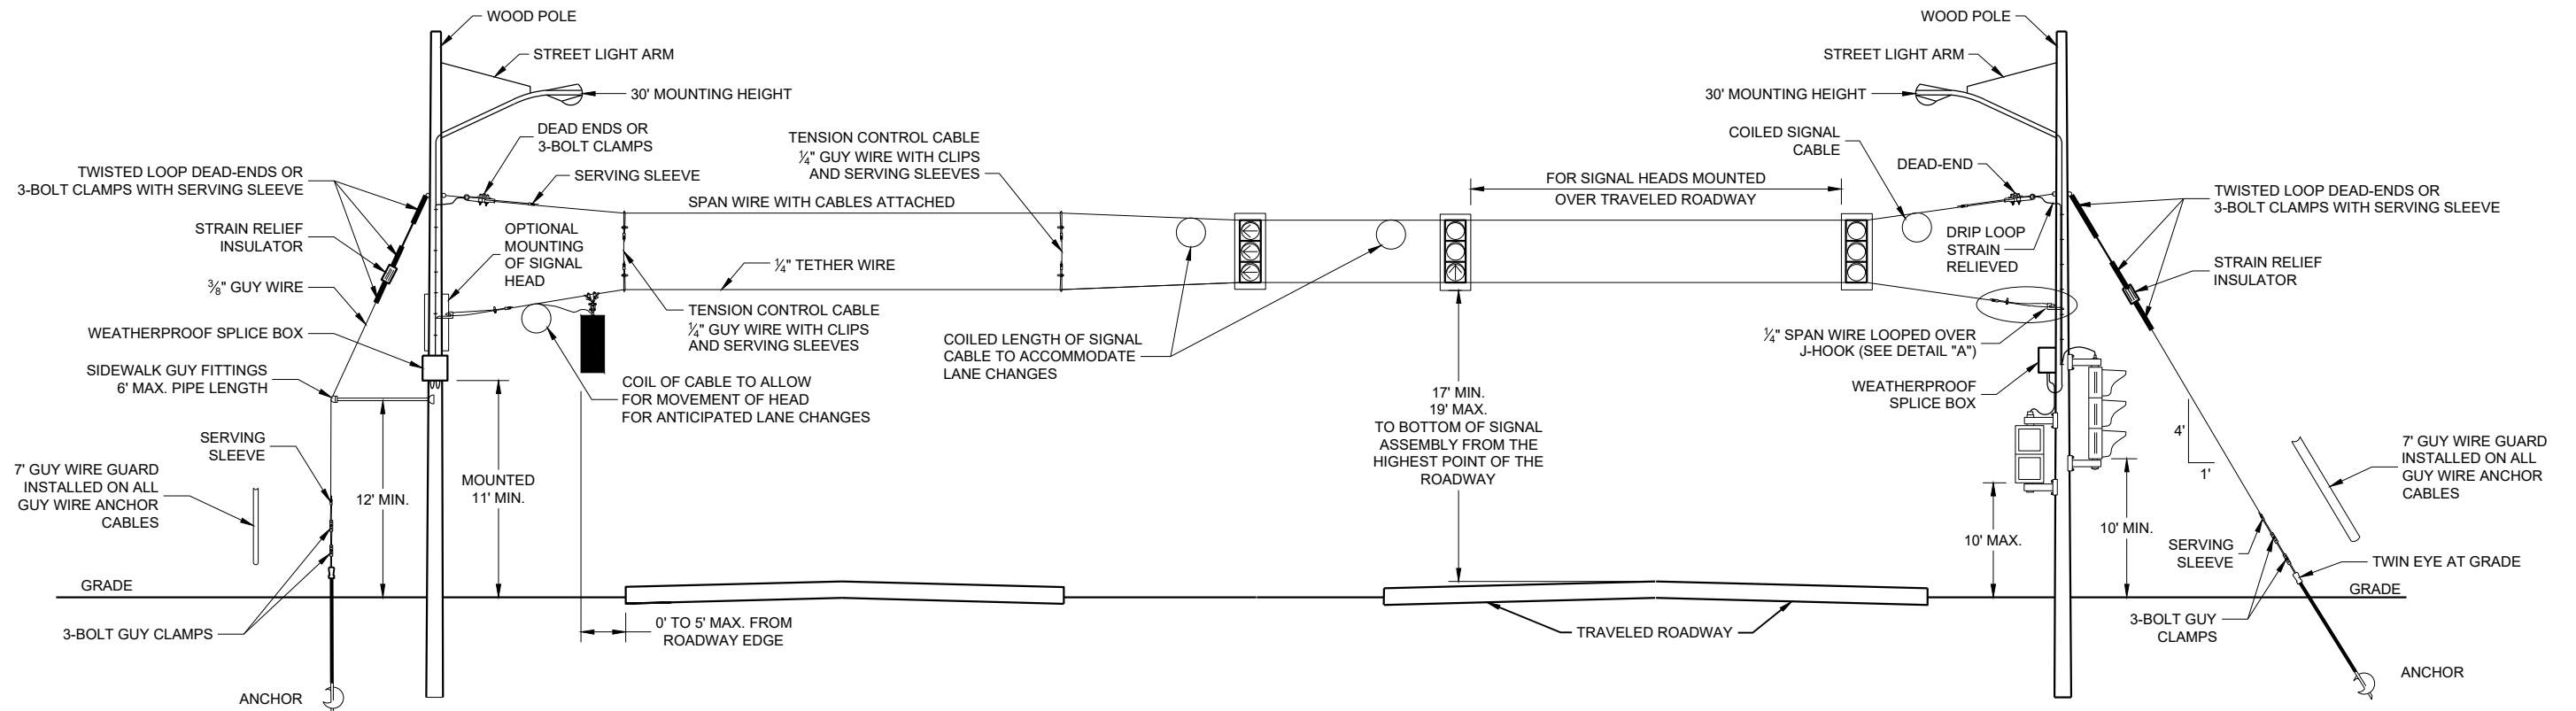

**SPAN WIRE
TEMPORARY SIGNALS
4 LANE ROADWAYS**

**SPAN WIRE TEMPORARY
TRAFFIC SIGNAL**

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION


APPROVED
June 2015 /S/ Ahmet Demerbilek
DATE STATE ELECTRICAL ENGINEER

FHWA

SDD09G01 - 04b

SDD09G01 - 04b

MINIMUM POLE LENGTHS	CLASS	POLE BURIAL DEPTHS
25'	V	5'
30'	V	6'
35'	IV	7'
40'	IV	8'
45'	IV	9'

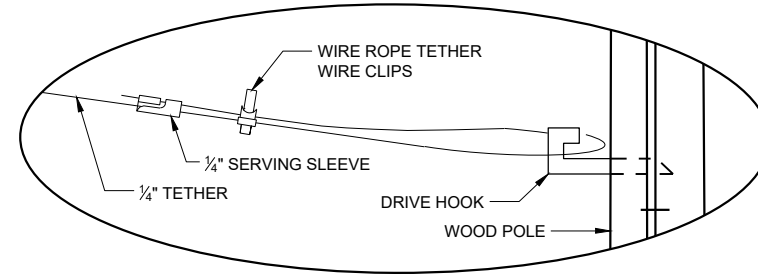


DETAIL "A"

GENERAL NOTES

DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE CONTRACT.

- WOOD POLES SHALL BE CLASS 4. LENGTH DETERMINED BY SIGNAL PLAN.
- SIGNAL FACES:
 - ALL SECTIONS SHALL BE 12" AND POLYCARBONATE.
 - EACH SHALL CONTAIN A 5" WIDE DULL BLACK POLYCARBONATE BACKPLATE.
 - EACH SHALL BE WIRED FROM THE TOP SIGNAL MOUNTING BRACKET.
 - NEAR RIGHT SIGNAL FACE SUSPENDED ON THE TETHER (NO BACKPLATE) SHALL NOT BE OVER THE TRAVELED WAY. IF THE POLE IS WITHIN 5 FEET OF THE TRAVELED WAY MOUNT THE SIGNAL FACE ON THE WOOD POLE WITH BACKPLATE.
 - FAR INDICATION SHALL BE MAINTAINED OVER CENTER OF TRAFFIC LANE.
- SPAN WIRE:
 - EACH SPAN WIRE SHALL BE INDIVIDUALLY DOWN GUYED
 - SIGNAL AND LIGHTING CABLES SHALL ONLY BE ATTACHED TO THE UPPER SPAN WIRE.
 - THE SIGNAL ASSEMBLY SHALL HAVE A 17' MIN. HEIGHT ABOVE THE ROADWAY. THIS SHALL BE MEASURED AFTER THE SPAN WIRE INSTALLATION IS COMPLETED WITH ALL CABLES AND SIGNAL FACES IN PLACE. MAINTAIN MINIMUM AND MAXIMUM HEIGHTS AS ROADWAY WORK PROGRESSES.

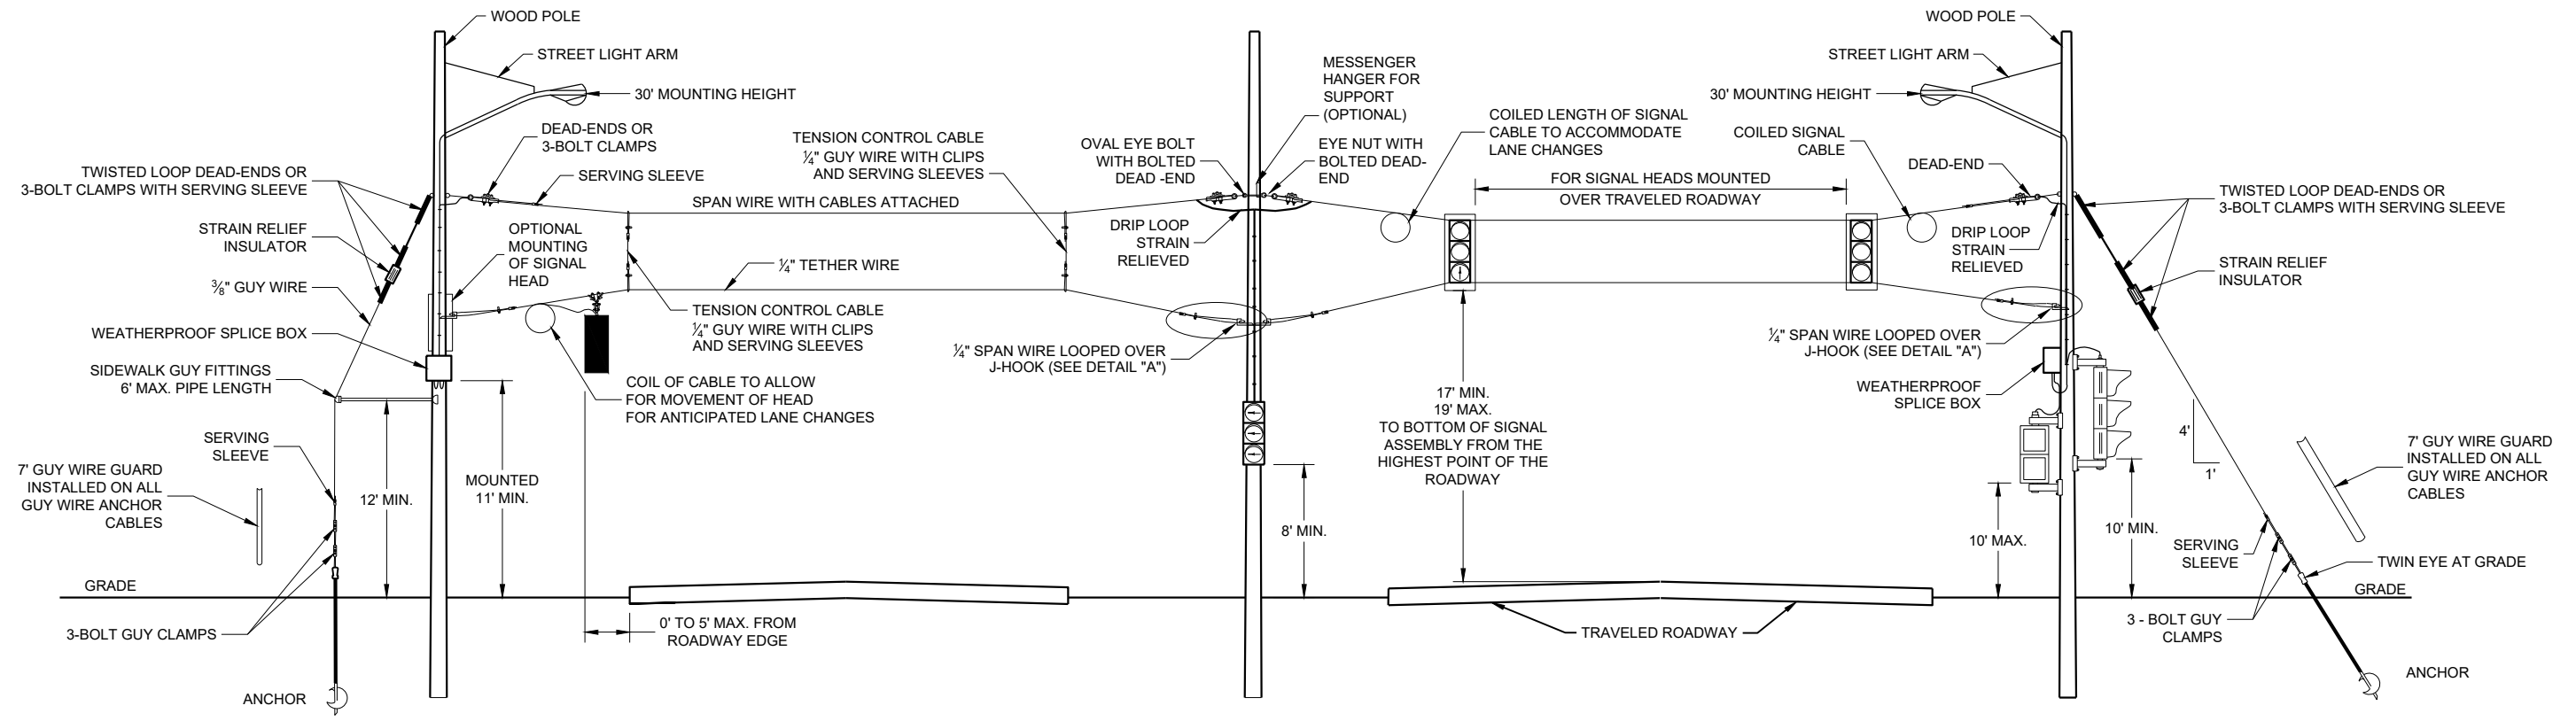

**SPAN WIRE TEMPORARY SIGNALS
4 LANE ROADWAYS**

SPAN WIRE TEMPORARY TRAFFIC SIGNAL



STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
June 2015 /S/ Ahmet Demerbilek
DATE STATE ELECTRICAL ENGINEER

FHWA

SDD09G01 - 04c


SDD09G01 - 04c

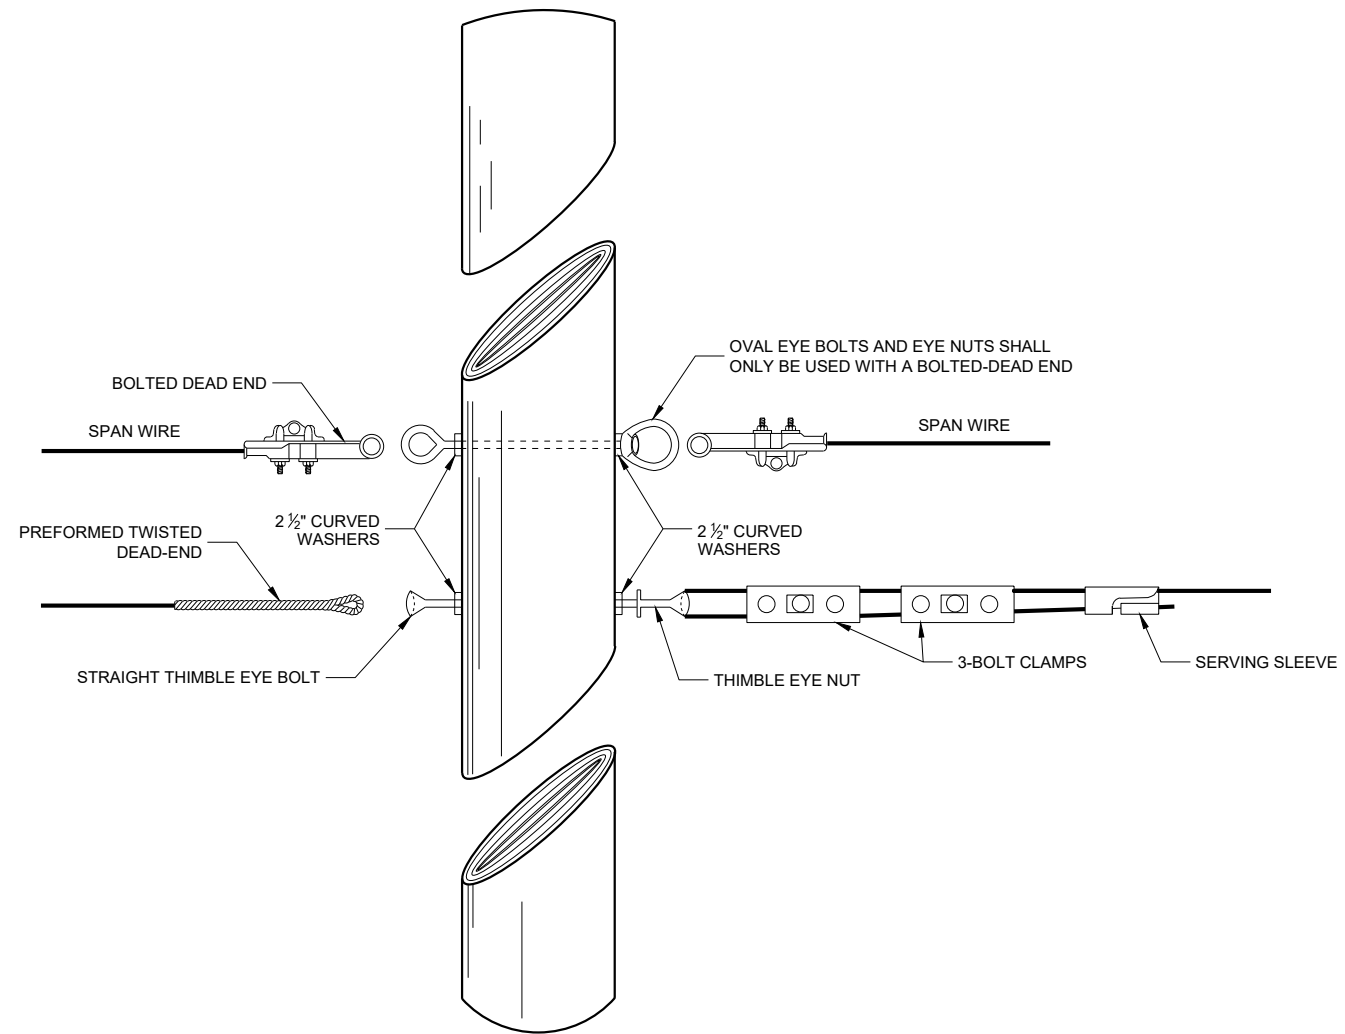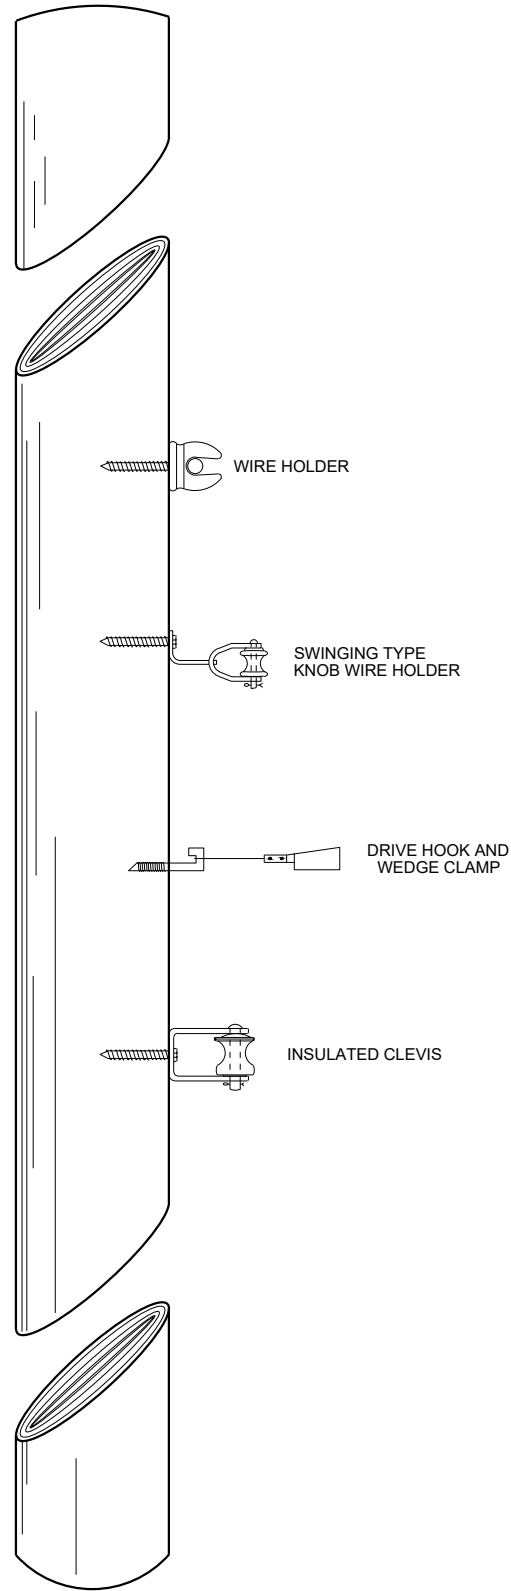

SPAN WIRE TEMPORARY TRAFFIC SIGNAL

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
June 2015 /S/ Ahmet Demerbilek
DATE ROADWAY STANDARDS DEVELOPMENT
ENGINEER

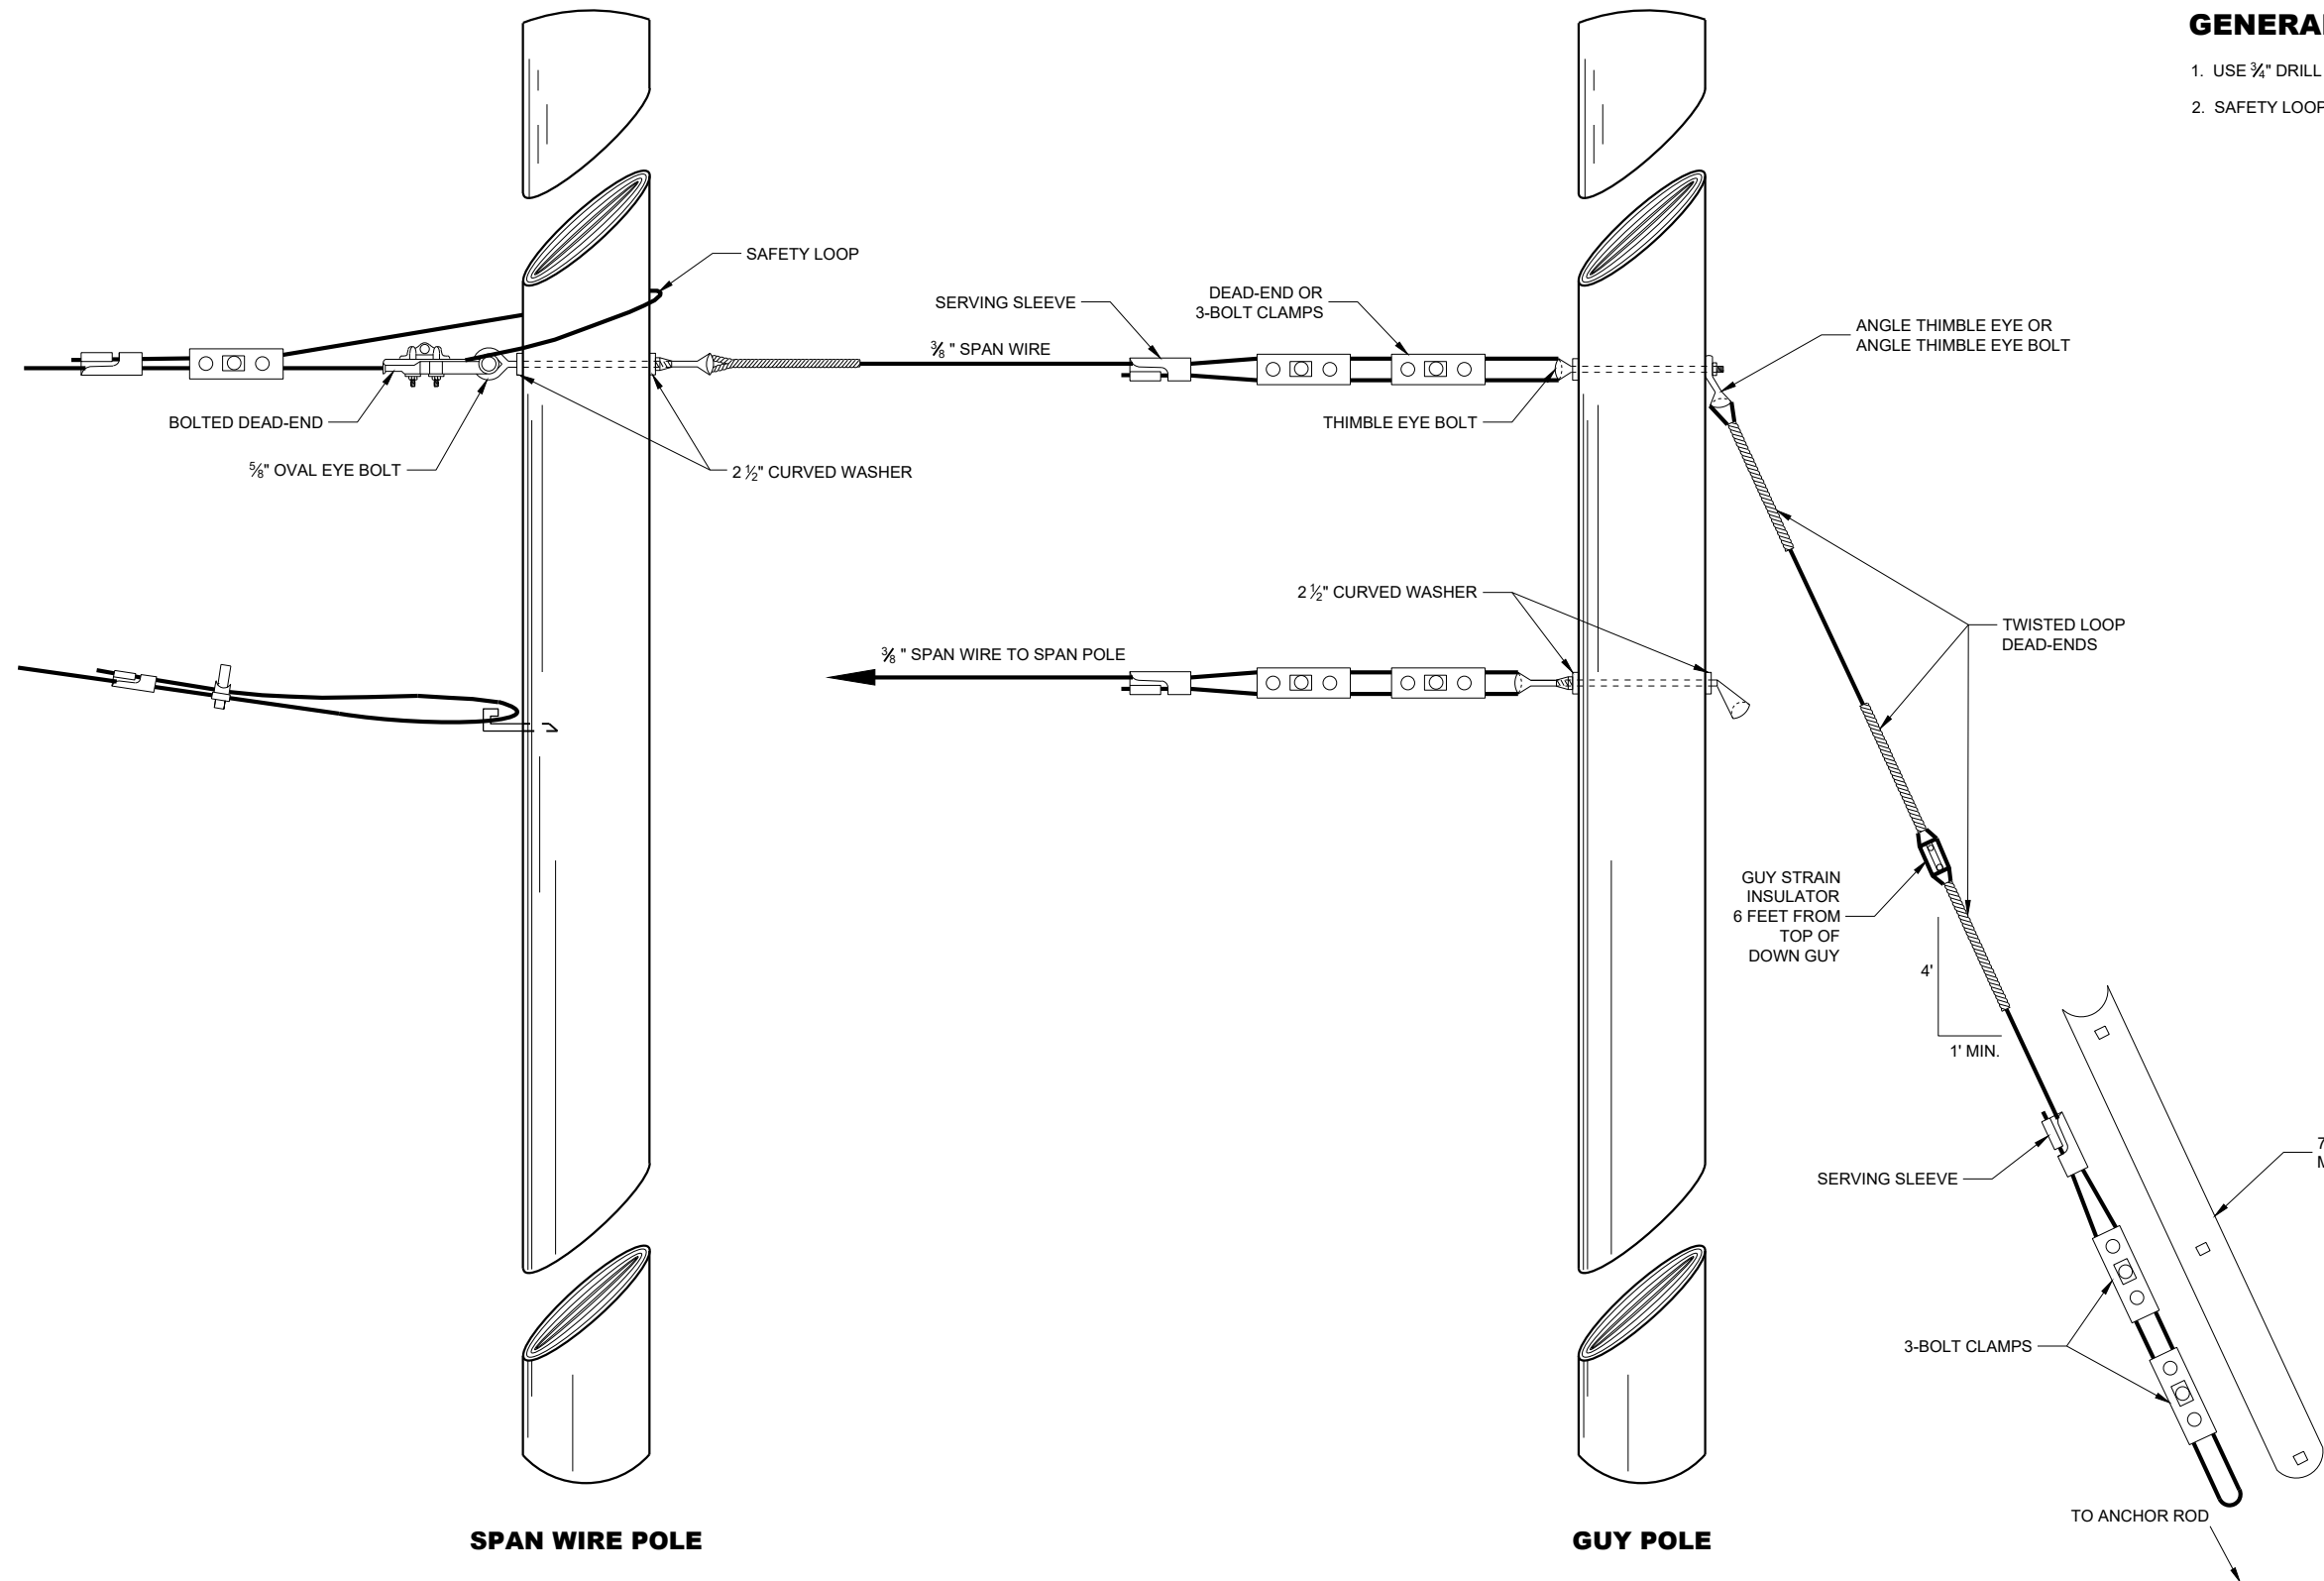

GENERAL NOTES

1. USE 3/4" DRILL IN WOOD POLE TO PROVIDE FOR 5/8" BOLTS.
2. SAFETY LOOP REQUIRED ON EACH END OF ALL SPAN WIRES.

SPAN WIRE POLE

GUY POLE

TYPICAL DEAD-ENDINGS OR GUYING

SPAN WIRE TEMPORARY TRAFFIC SIGNAL

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
June 2015 /S/ Ahmet Demerbilek
DATE ROADWAY STANDARDS DEVELOPMENT ENGINEER


FHWA

6


6

SDD 09G01 - 4e


SDD 09G01 - 4e

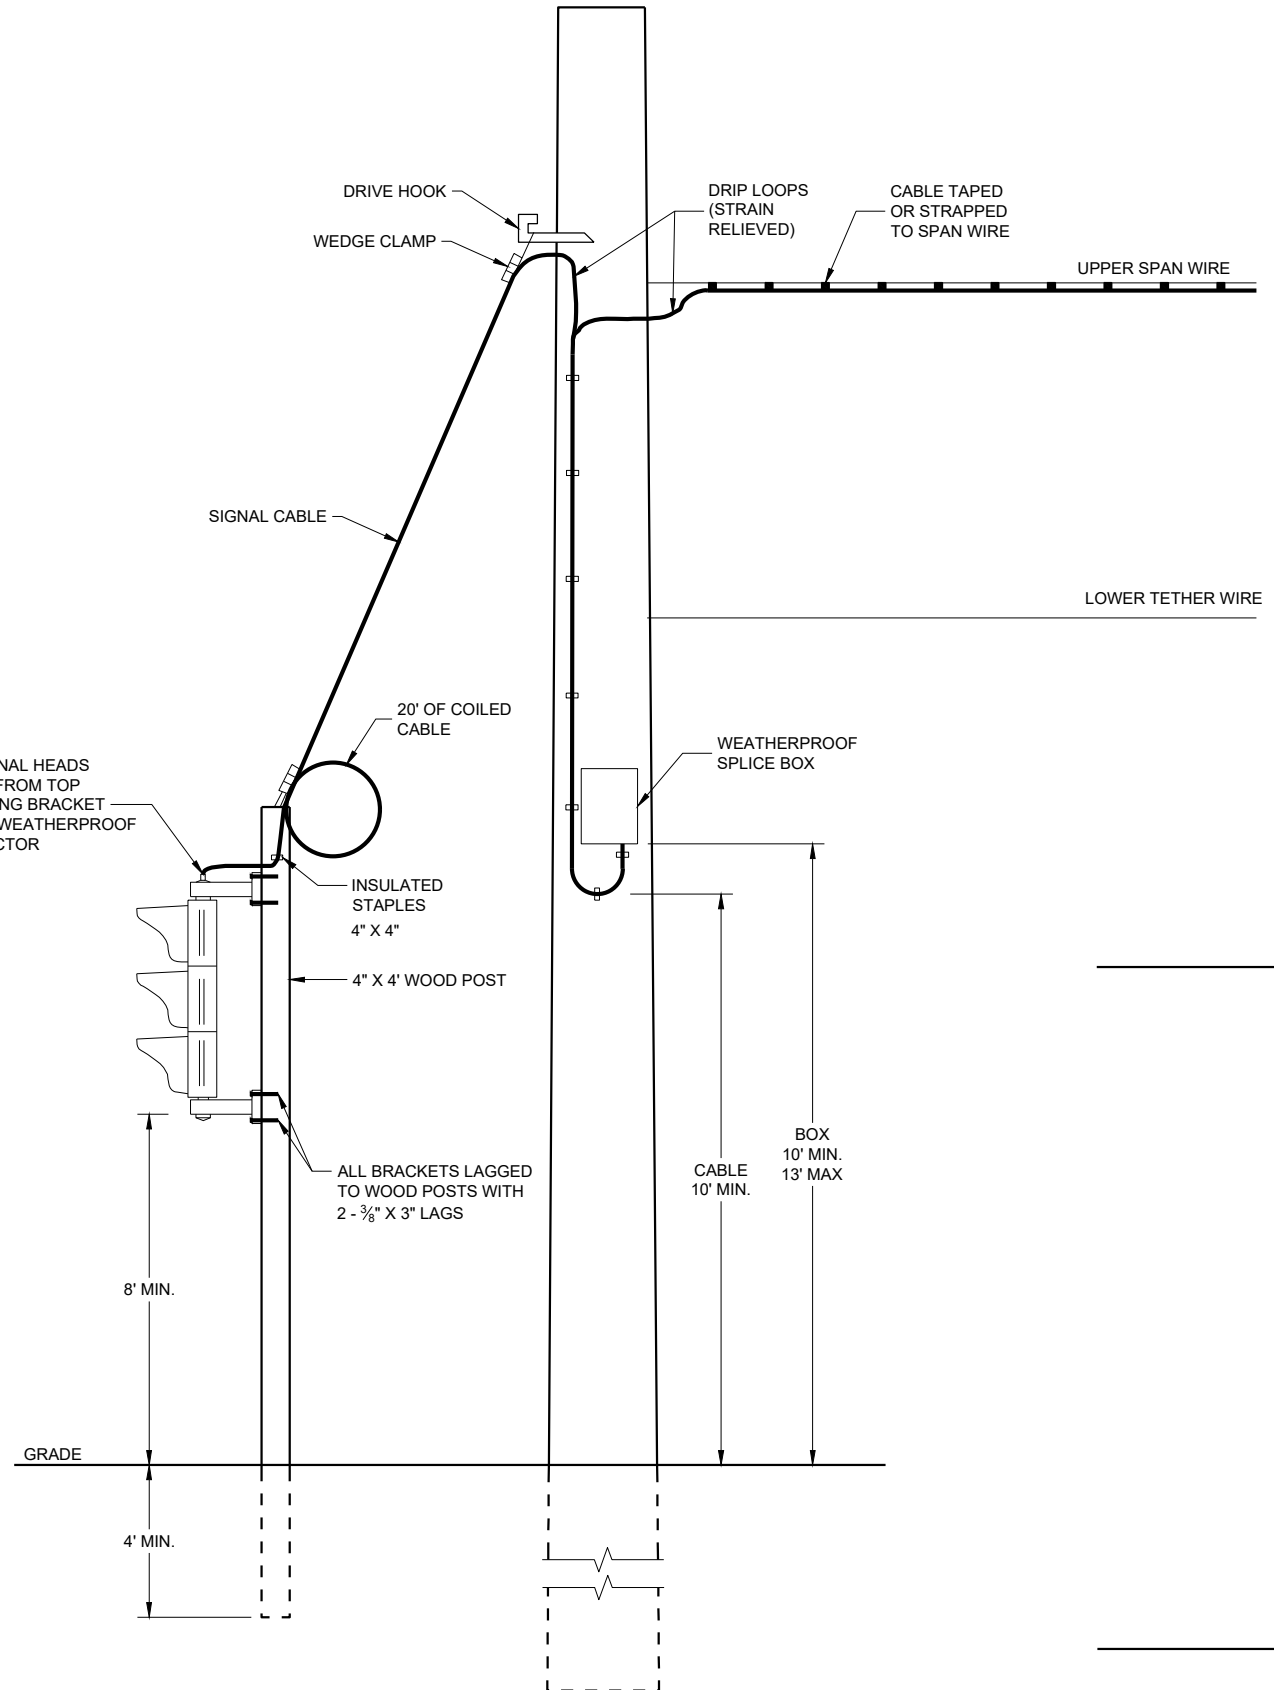


TYPICAL DROP TO TEMPORARY MOVEABLE SIGNAL

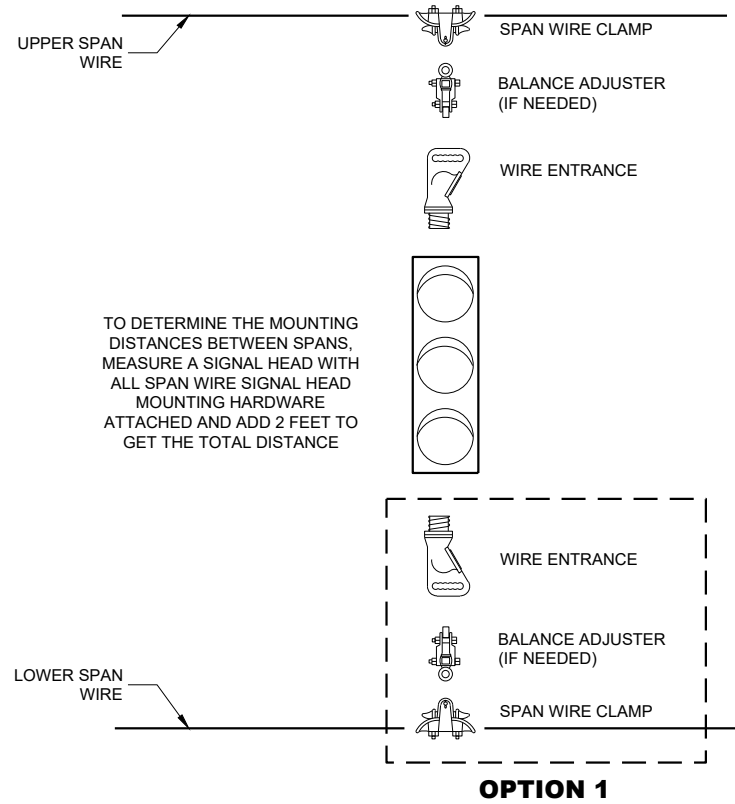

TYPICAL SPAN WIRE MOUNTING HARDWARE


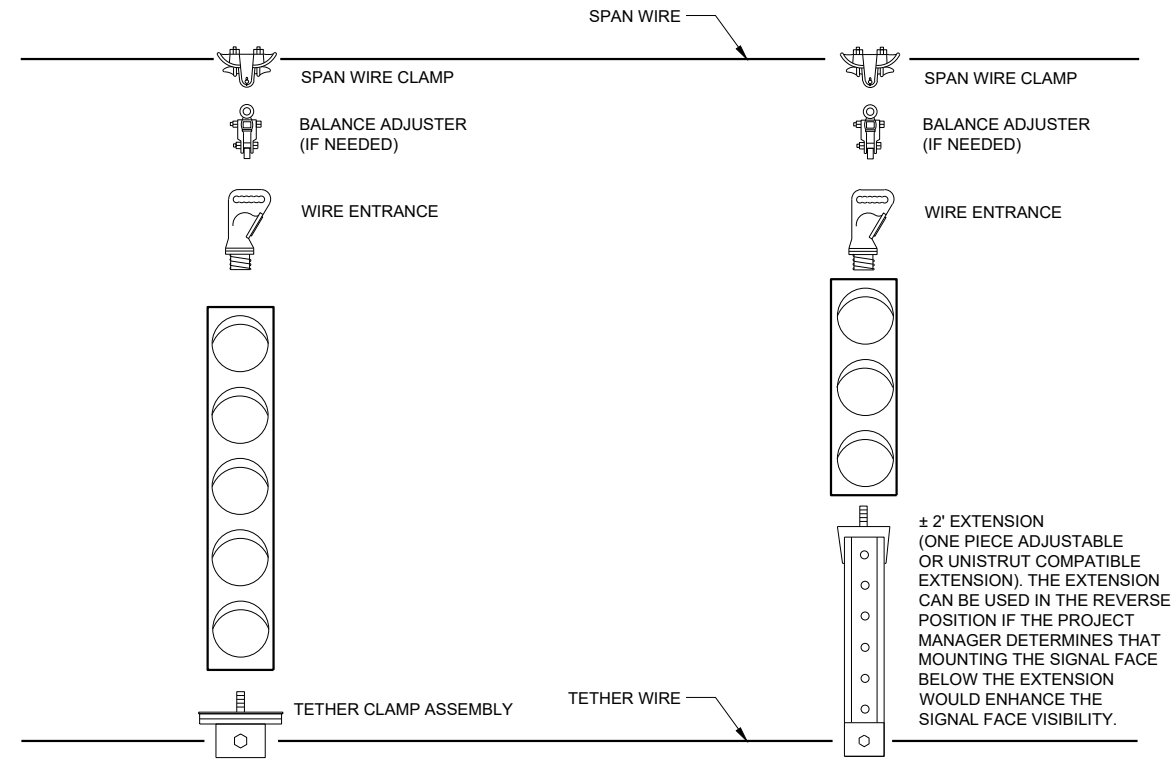


5 SECTION VERTICAL WITH 3 SECTION VERTICAL ON ONE SPAN WIRE




TETHER CLAMP ASSEMBLY OPTION


SPAN WIRE TEMPORARY TRAFFIC SIGNAL	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED June 2015 DATE	/S/ Ahmet Demerbilek ROADWAY STANDARDS DEVELOPMENT ENGINEER
FHWA	

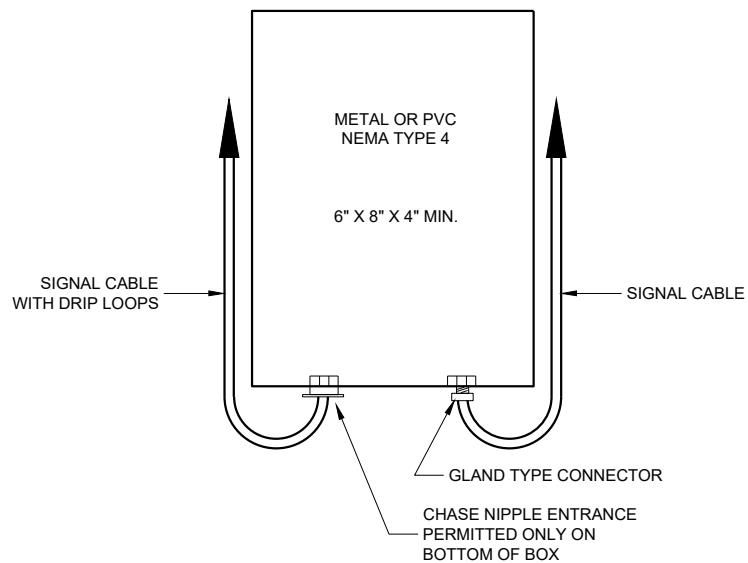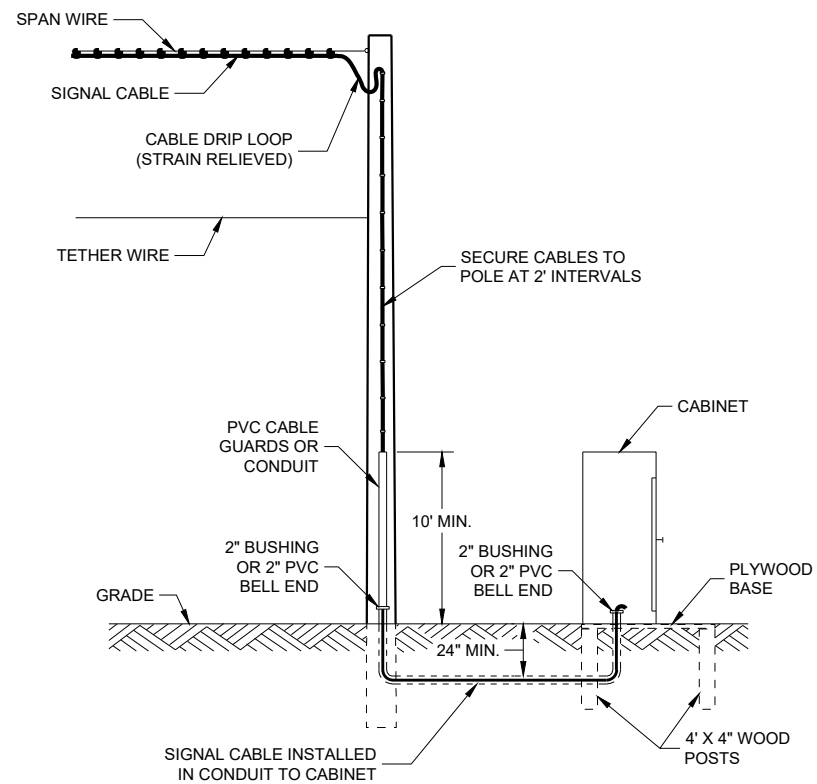

SPLICE BOX

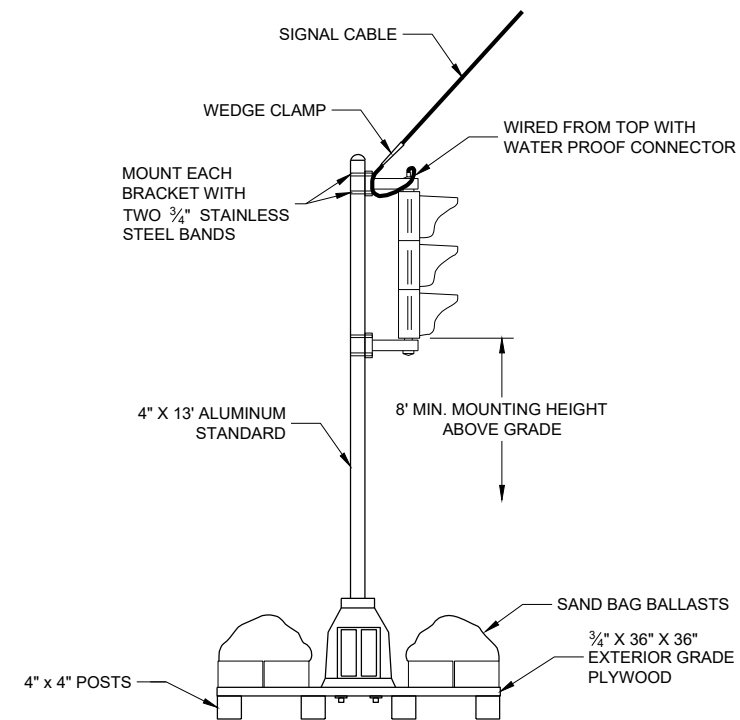


TYPICAL SKID TYPE TEMPORARY

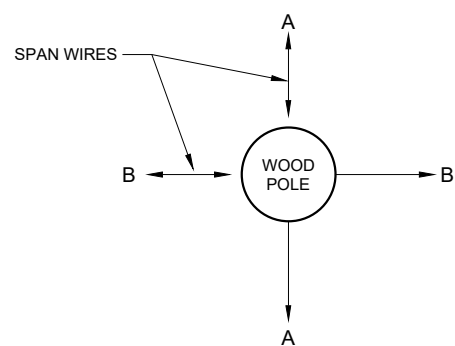


CORNER POLES

ALL DOWN OR SIDEWALK GUYS SHALL BE INSTALLED IN THE OPPOSITE DIRECTION OF THE STRAIN OF THE SPAN WIRE

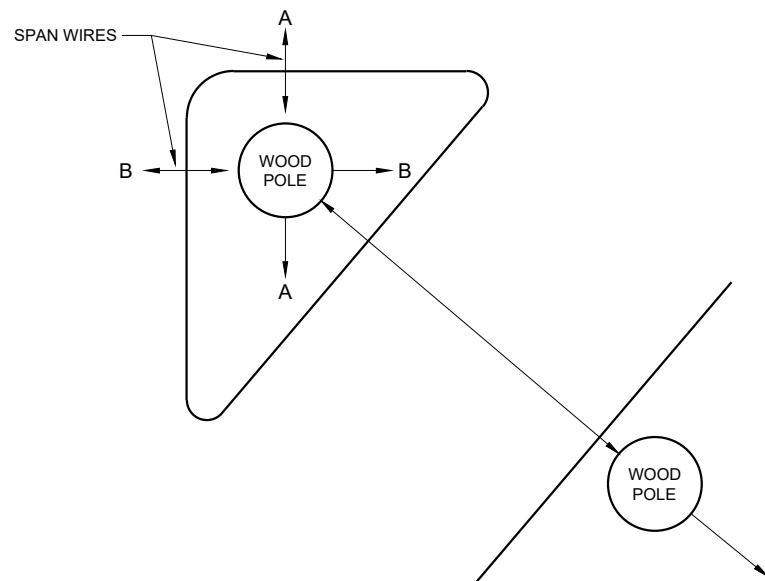

ISLAND POLES



MEDIAN POLES


GUY AWAY FROM INTERSECTION OR IN OPPOSITE DIRECTION OF THE SPAN LOADING

SPAN WIRE TEMPORARY TRAFFIC SIGNAL


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
June 2015 DATE /S/ Ahmet Demerbilek
ROADWAY STANDARDS DEVELOPMENT ENGINEER

FHWA

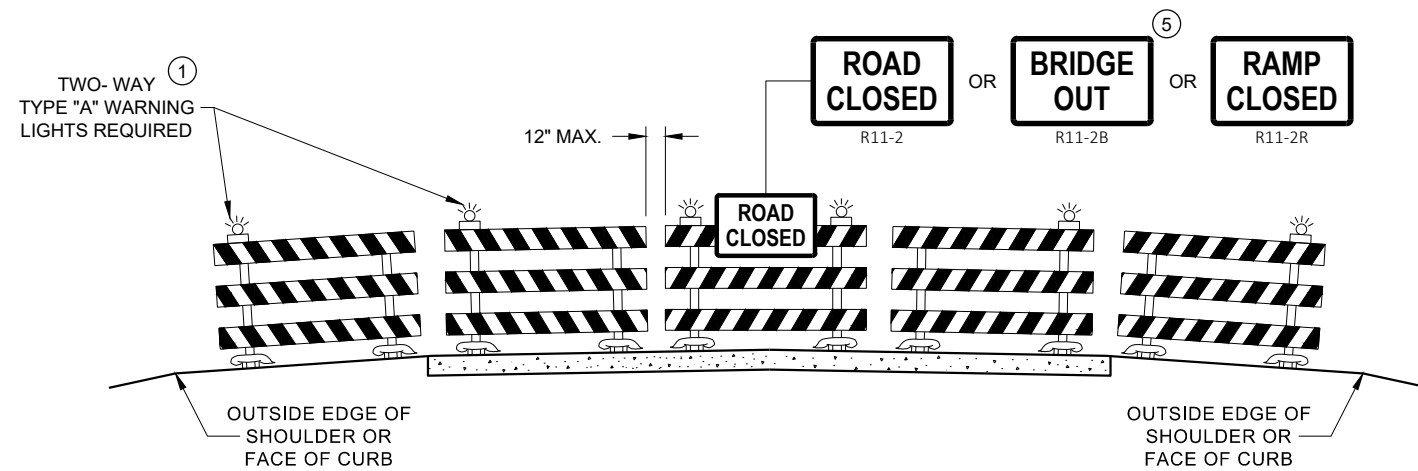

**DETAIL D
ROAD CLOSURE BARRICADE DETAIL
APPROACH VIEW**

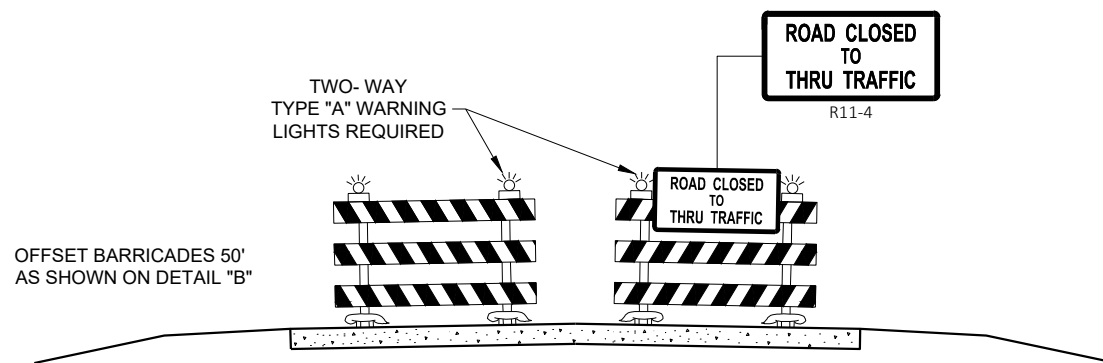

**DETAIL E
LANE CLOSURE BARRICADE DETAIL
APPROACH VIEW**

SEE SDD 15C2 - SHEET "a" FOR LEGEND

GENERAL NOTES

THE EXACT NUMBER, LOCATION, AND SPACING OF ALL SIGNS AND BARRICADES SHALL BE ADJUSTED TO FIT FIELD CONDITIONS AS APPROVED BY THE ENGINEER.

ANY SIGNS TEMPORARY OR EXISTING, WHICH CONFLICT WITH TRAFFIC CONTROL "IN USE", SHALL BE REMOVED OR COVERED AS NEEDED AND AS APPROVED BY THE ENGINEER.

THE SPACING BETWEEN TRAFFIC CONTROL SIGNS SHOULD BE ADJUSTED TO NOT CONFLICT WITH AND SHOULD PROVIDE A DESIRABLE MINIMUM OF 200 FEET CLEARANCE TO EXISTING SIGNS THAT WILL REMAIN IN PLACE.

BARRICADES THAT MUST BE MOVED FOR A WORK OPERATION SHALL BE IMMEDIATELY RE-ESTABLISHED UPON COMPLETION OF THE OPERATION, OR FOR CONTINUING OPERATIONS, AT THE END OF EACH WORKING DAY.

SIGNS THAT WILL BE IN PLACE LESS THAN 7 CONTINUOUS DAYS AND NIGHTS MAY BE MOUNTED ON PORTABLE SUPPORTS.

ALL TYPE III BARRICADES SHALL HAVE RAILS REFLECTORIZED ON BOTH FACES. STRIPES SHALL BE PROPERLY SLOPED DOWN TOWARD THE TRAFFIC SIDE OR AS SHOWN IN THE ROAD CLOSURE BARRICADE DETAIL "D" FOR FULL ROAD CLOSURES.

TYPE "A" LOW - INTENSITY FLASHING WARNING LIGHTS SHALL BE VISIBLE ON BOTH SIDES OF THE BARRICADE.

THE R11 - 2, R11 - 3, M4 - 9, R11 - 4, AND R10 - 61 SIGNS PLACED ON THE BARRICADES SHALL COVER NO MORE THAN THE TOP RAIL. THE SIGNS SHALL NOT COVER ANY PORTION OF THE MIDDLE RAIL OR BOTTOM RAILS.

"WO" AND "MO" SIGNS ARE THE SAME AS "W" AND "M" SIGNS EXCEPT THE BACKGROUND IS ORANGE.

ALL SIGNS SHALL BE 48" X 48" UNLESS OTHERWISE NOTED BELOW:


- R11 - 2 SHALL BE 48" X 30"
- R11 - 3 SHALL, R11 - 4 AND R10 - 61 SHALL BE 60" X 30"
- M4 - 9 SHALL BE 30" X 24"
- M3 - X SHALL BE 24" X 12" (36" X 18" IF NEEDED TO MATCH EXISTING SIGNS)
- M4 - 8 SHALL BE 24" X 12" (36" X 18" IF NEEDED TO MATCH EXISTING SIGNS)
- M1 - 4, M1 - 5A AND M1 - 6 SHALL BE 24" X 24" (36" X 36" IF NEEDED TO MATCH EXISTING SIGNS)
- MO5 - 1 AND MO6 - 1 SHALL BE 21" X 21" (30" X 30" IF NEEDED TO MATCH EXISTING SIGNS)
- D1 - X SHALL BE AS SHOWN ON SPECIFIC PROJECT SIGNING DETAIL SHEETS.
- R1 - 1 SHALL BE 36" X 36"

- ① TWO WARNING LIGHTS SHALL BE PROVIDED ON THE CENTER BARRICADE AND A MINIMUM OF ONE WARNING LIGHT SHALL BE PROVIDED ON EACH OF THE OTHER BARRICADES WITHIN THE ROADWAY LIMITS. SPACING OF THE WARNING LIGHTS SHALL BE UNIFORM TO THE EDGE OF ROADWAY AS SHOWN (APPROX. 8 FOOT LIGHT SPACING).
- ② THESE SIGNS AND BARRICADES ARE NOT REQUIRED IF ROAD CLOSURE BEGINS AT AN INTERSECTION.
- ③ FOR ROAD CLOSURE WITHOUT LOCAL ACCESS TO PROJECT, SEE ROAD CLOSURE BARRICADE DETAIL "D".
- ④ FOR ROAD CLOSURE WITH LOCAL ACCESS TO PROJECT, SEE ROAD CLOSURE BARRICADE DETAIL "E".
- ⑤ FOR BRIDGE OR CULVERT REPLACEMENTS, SUBSTITUTE "BRIDGE OUT" INSTEAD OF "ROAD CLOSED" ON R11 - 2 AND R11 - 3 SIGNS.
- ⑥ INSTALL DETOUR AND COMMUNITY GUIDE SIGNS AND ARROWS ONLY IF SPECIFIED IN THE CONTRACT. IF THERE ARE EXISTING ROUTE MARKER ASSEMBLIES THAT WILL REMAIN IN PLACE, ADJUST THE LOCATION OF THE DETOUR ROUTE SIGNS TO CORRESPOND WITH THE EXISTING ASSEMBLIES. MODIFY EXISTING SIGNS WHERE POSSIBLE. SEE SPECIFIC PROJECT DETOUR SIGNING DETAIL SHEETS. IF DETOUR SIGNS ARE BEING INSTALLED BY OTHERS, PLACE THE CONTRACTED TRAFFIC CONTROL SIGNS TO ALLOW FOR PLACEMENT OF ALL WARNING, DETOUR AND GUIDE SIGNS AS SHOWN.
- ⑦ "EAST" CARDINAL DIRECTION MARKERS AND RIGHT TURN ARROWS ARE SHOWN. USE OTHER CARDINAL DIRECTIONS AND ARROWS AS APPROPRIATE.

**BARRICADES AND SIGNS
FOR
VARIOUS CLOSURES**

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
February 2020 /S/ Andrew Heidtke
DATE WORK ZONE ENGINEER
FHWA

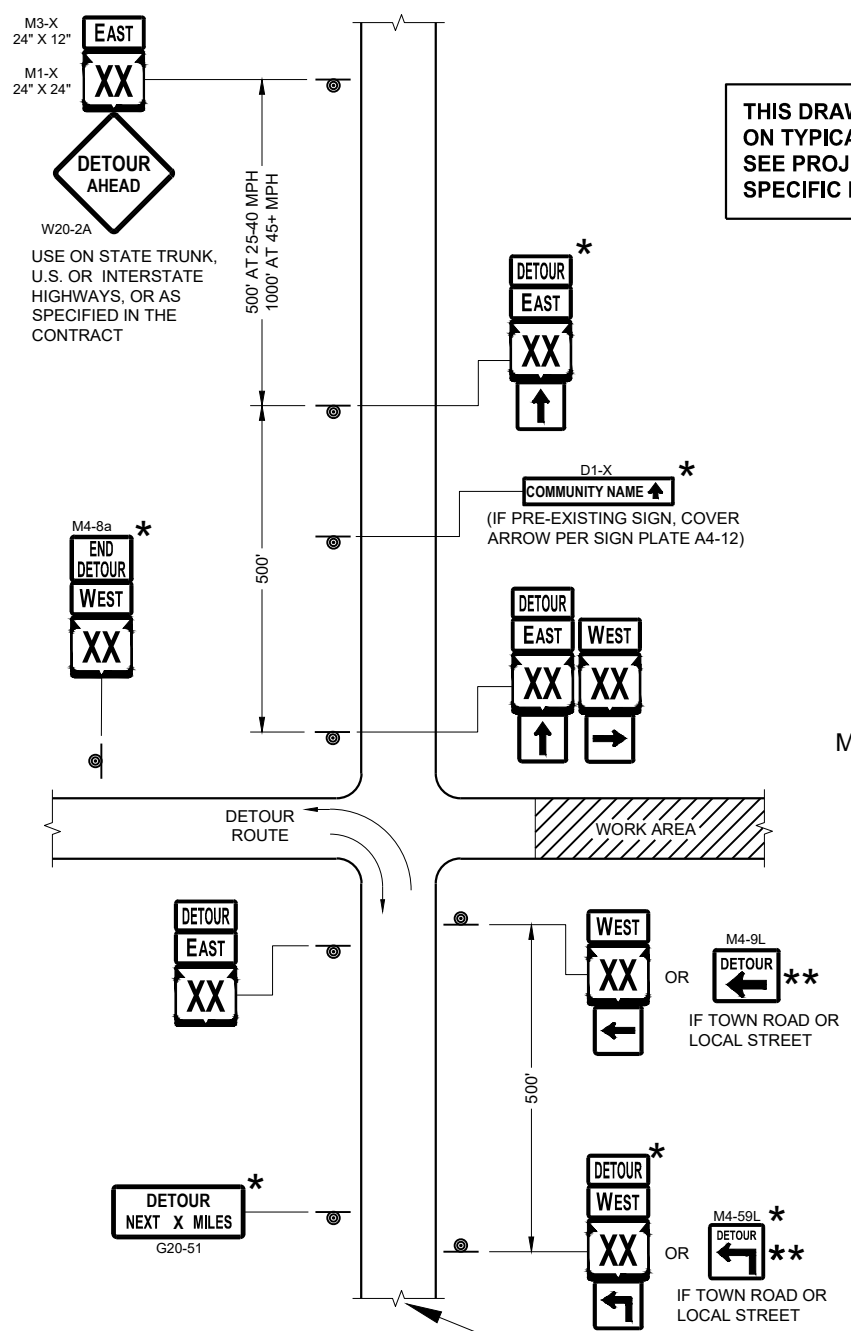

THIS DRAWING PROVIDES GENERAL GUIDANCE ON TYPICAL DETOUR SIGN LAYOUT AND SPACING. SEE PROJECT DETOUR SIGNING SHEETS FOR SPECIFIC DETAILS FOR EACH PROJECT.

LEGEND

- SIGN ON PERMANENT SUPPORT
- WORK AREA
- M4 - 8
- M3 - X
- M1 - 4
- M1 - 6
- M1 - 5A
- M05 - 1
- M06 - 1
- M06 - 1

GENERAL NOTES

THE EXACT NUMBER, LOCATION AND SPACING OF ALL SIGNS SHALL BE ADJUSTED TO FIT FIELD CONDITIONS AS APPROVED BY THE ENGINEER.

IF THERE ARE EXISTING ROUTE MARKER ASSEMBLIES THAT WILL REMAIN IN PLACE, ADJUST THE LOCATION OF THE DETOUR ROUTE SIGNS TO CORRESPOND WITH THE EXISTING ASSEMBLIES. SEE SPECIFIC PROJECT DETOUR SIGNING DETAIL SHEETS. MODIFY EXISTING SIGNS WHERE POSSIBLE.

THE SPACING BETWEEN TRAFFIC CONTROL AND DETOUR SIGNS SHOULD BE ADJUSTED TO NOT CONFLICT WITH AND TO PROVIDE A DESIRABLE MINIMUM OF 200 FEET CLEARANCE TO EXISTING SIGNS THAT WILL REMAIN IN PLACE.

ANY SIGNS TEMPORARY OR EXISTING, WHICH CONFLICT WITH TRAFFIC CONTROL "IN USE" SHALL BE REMOVED OR COVERED AS NEEDED AND AS APPROVED BY THE ENGINEER.

SIGNS THAT WILL BE IN PLACE LESS THAN 7 CONTINUOUS DAYS AND NIGHTS MAY BE MOUNTED ON PORTABLE SUPPORTS.


"MO" SIGNS ARE THE SAME AS "M" SIGNS EXCEPT THE BACKGROUND IS ORANGE.

SIGN SIZES SHALL BE AS FOLLOWS:


- M3-X SHALL BE 24" X 12" (36" X 18" IF NEEDED TO MATCH EXISTING SIGNS)
- M4-8 SHALL BE 24" X 12" (36" X 18" IF NEEDED TO MATCH EXISTING SIGNS)
- M1-4, M1-5A AND M1-6 SHALL BE 24" X 24" (36" X 36" IF NEEDED TO MATCH EXISTING SIGNS)
- M05-1 AND M06-1 SHALL BE 21" X 21" (30" X 30" IF NEEDED TO MATCH EXISTING SIGNS)
- M4-9 AND M4-59 SHALL BE 30" X 24"
- M4-8a SHALL BE 24" X 18"
- G20-51 SHALL BE 60" X 24"
- W20-2A SHALL BE 48" X 48"
- D1-X SHALL BE AS SHOWN ON SPECIFIC PROJECT SIGNING DETAIL SHEETS.

- * OPTIONAL SIGNS. SEE SPECIFIC PROJECT DETOUR SIGNING DETAIL SHEETS.
- ** FOR A TOWN ROAD OR LOCAL STREET DETOURED ONTO A STATE TRUNK HIGHWAY, PLACE A ROAD NAME PLAQUE ABOVE THE M4-9 SIGN AS SPECIFIED IN THE CONTRACT.









MATCH POINT

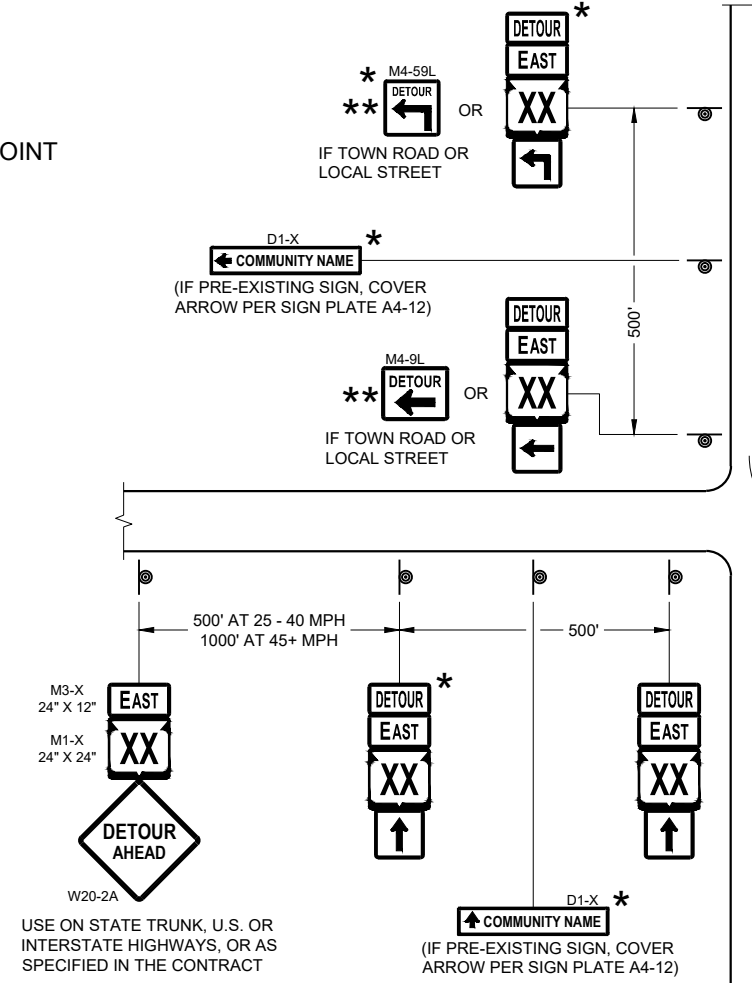

**DETAIL F
DETOUR SIGNING**

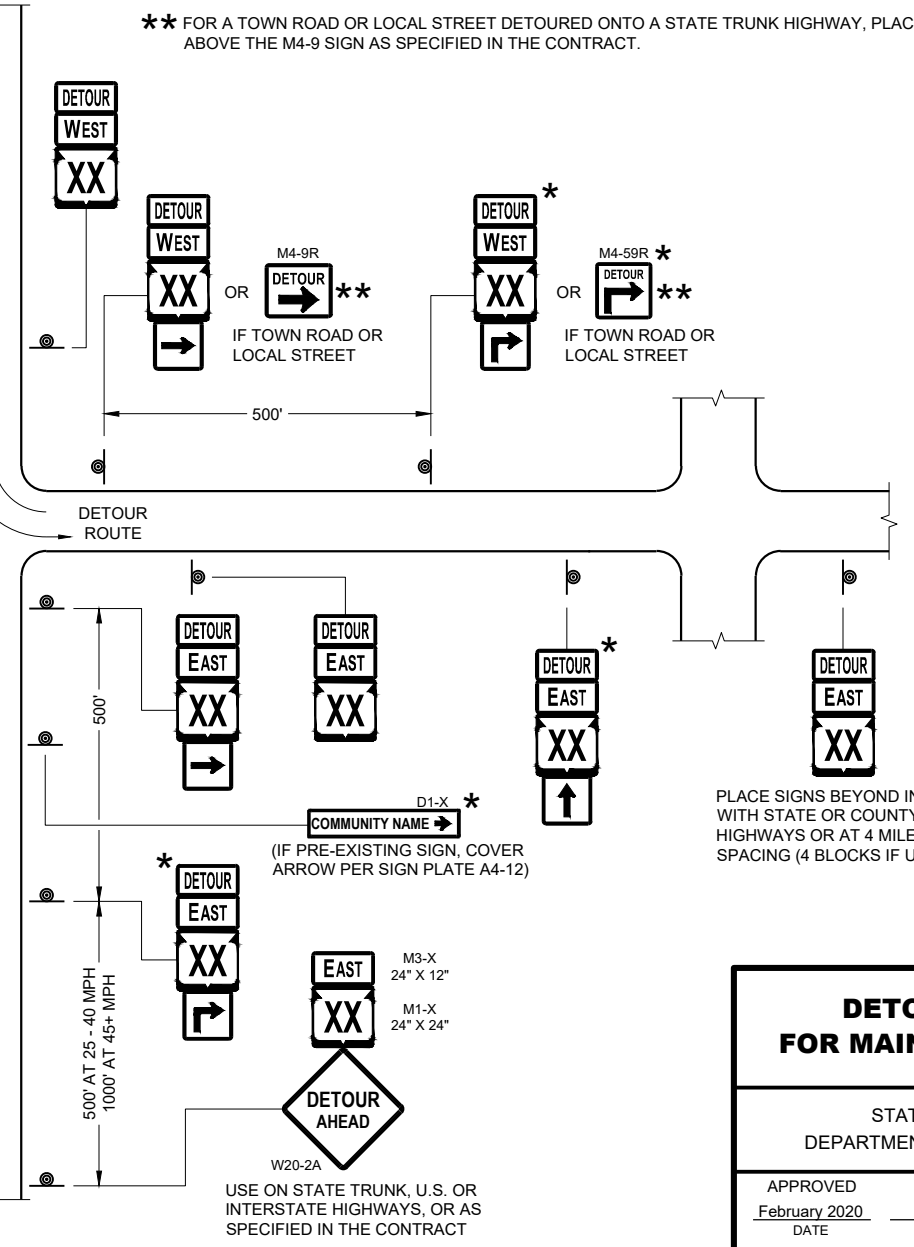

DETOUR SIGNING FOR MAINLINE CLOSURES	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED February 2020 DATE	/s/ Andrew Heidtke WORK ZONE ENGINEER
FHWA	

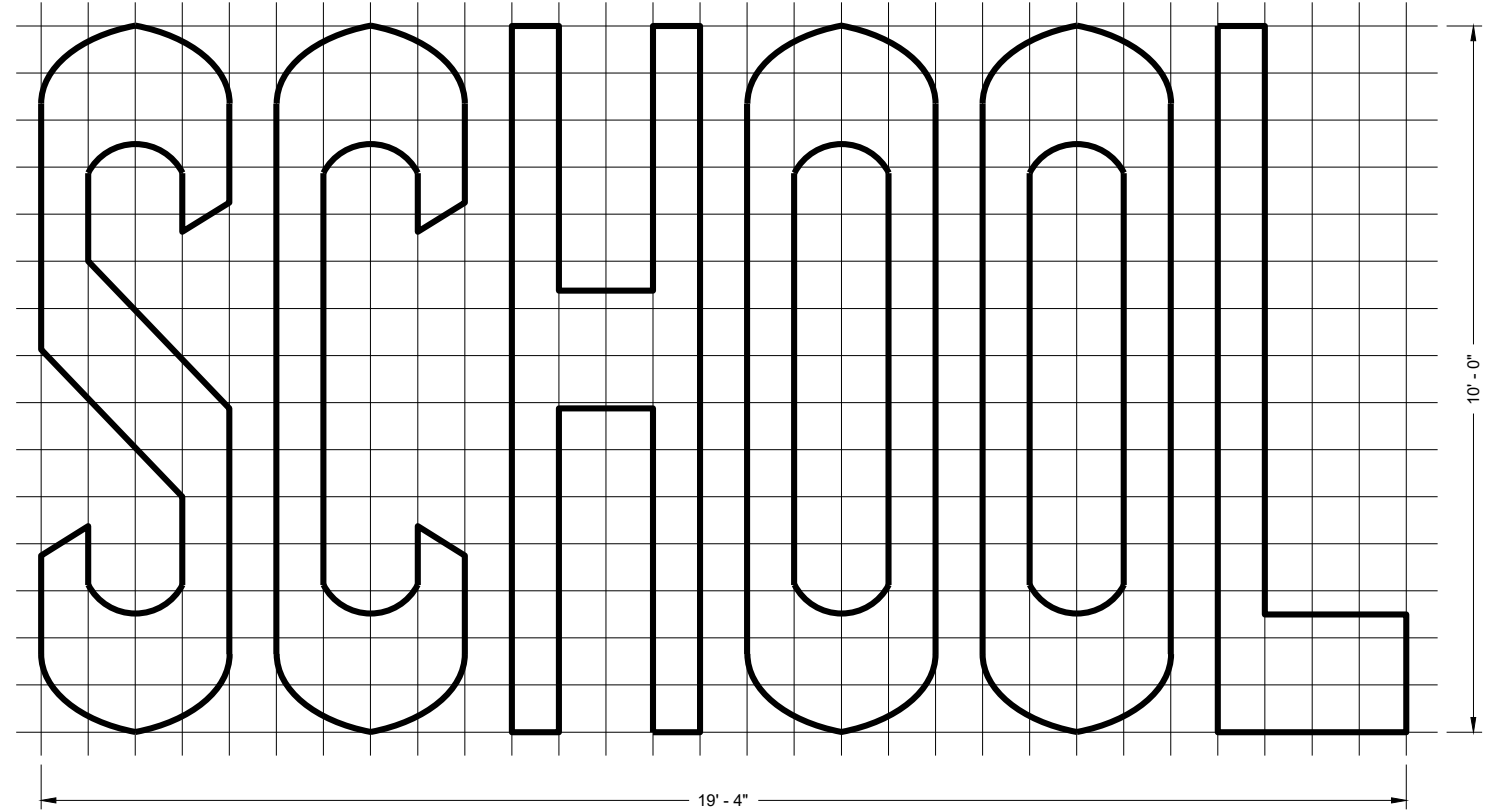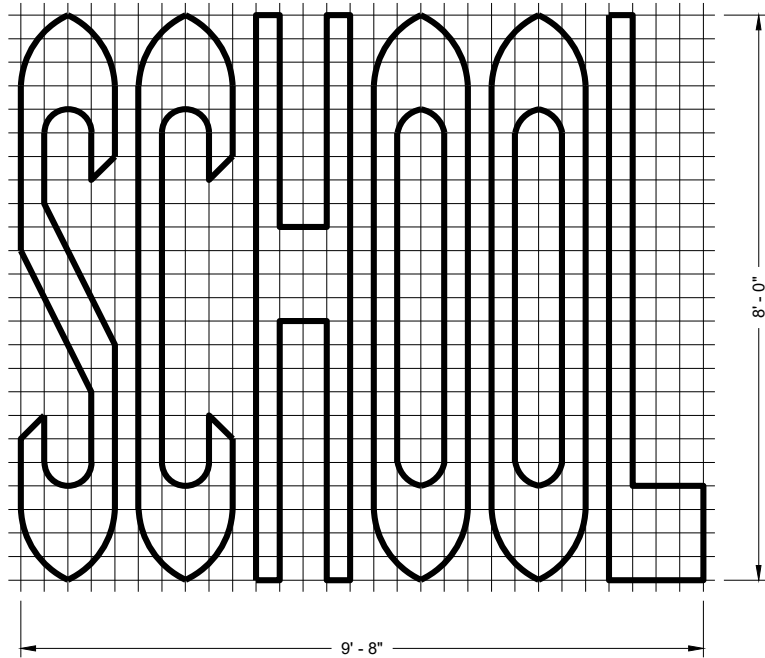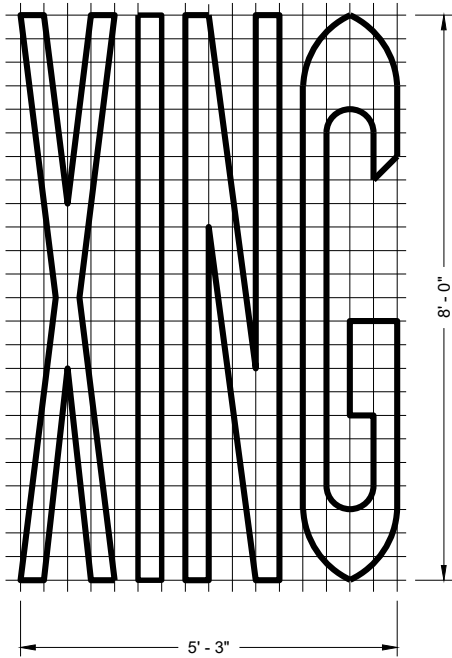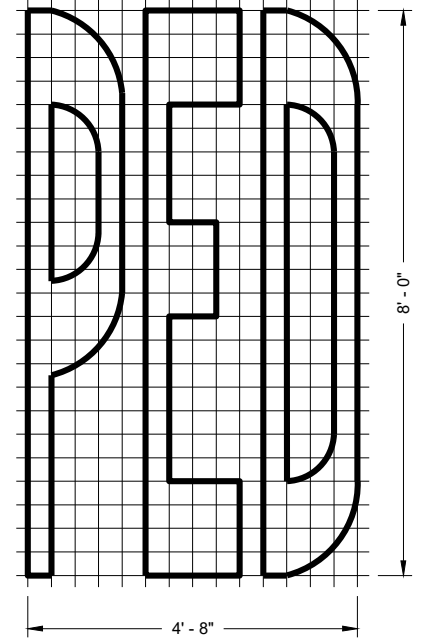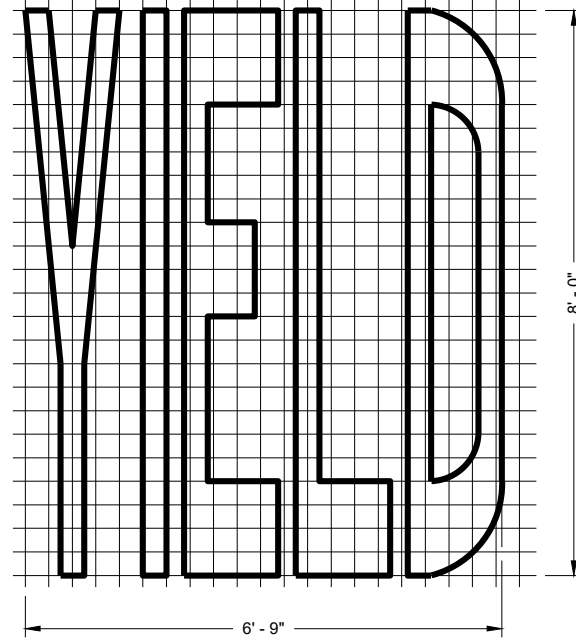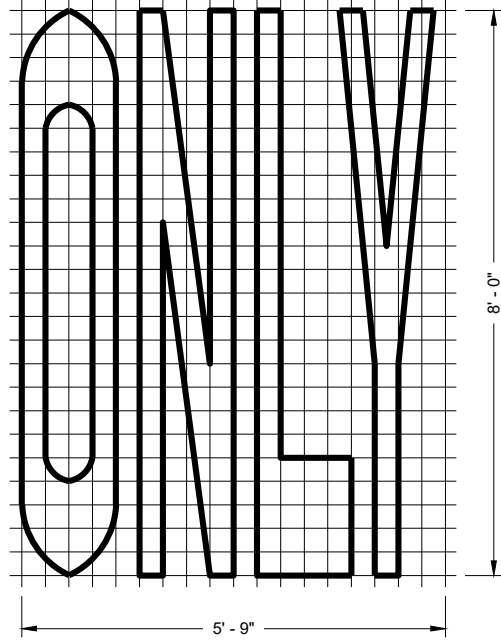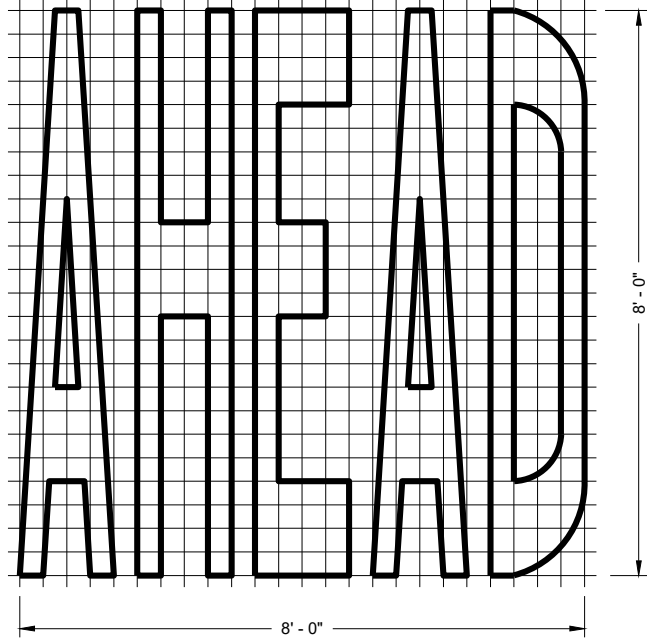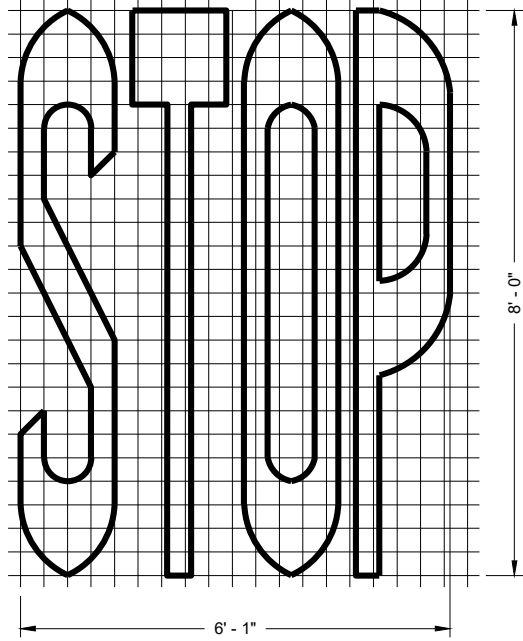

SINGLE LANE

TWO - LANE

GENERAL NOTES


DETAILS OF INSTALLATION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND APPLICABLE SPECIAL PROVISIONS.

PAVEMENT MARKING WORDS


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
November 2019 /S/ Matthew Rauch
DATE STATE SIGNING AND MARKING
ENGINEER


FHWA

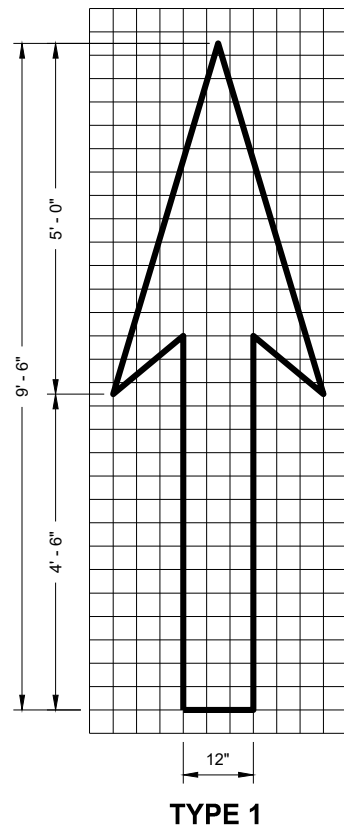


TYPE 1

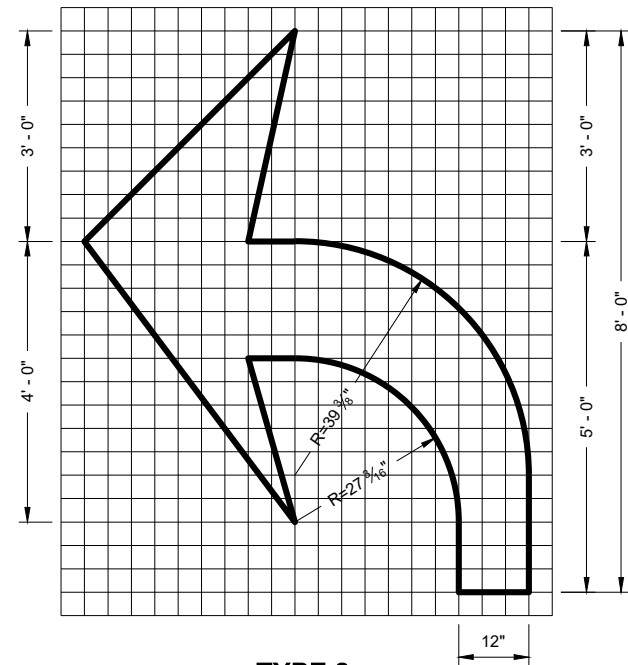


TYPE 2

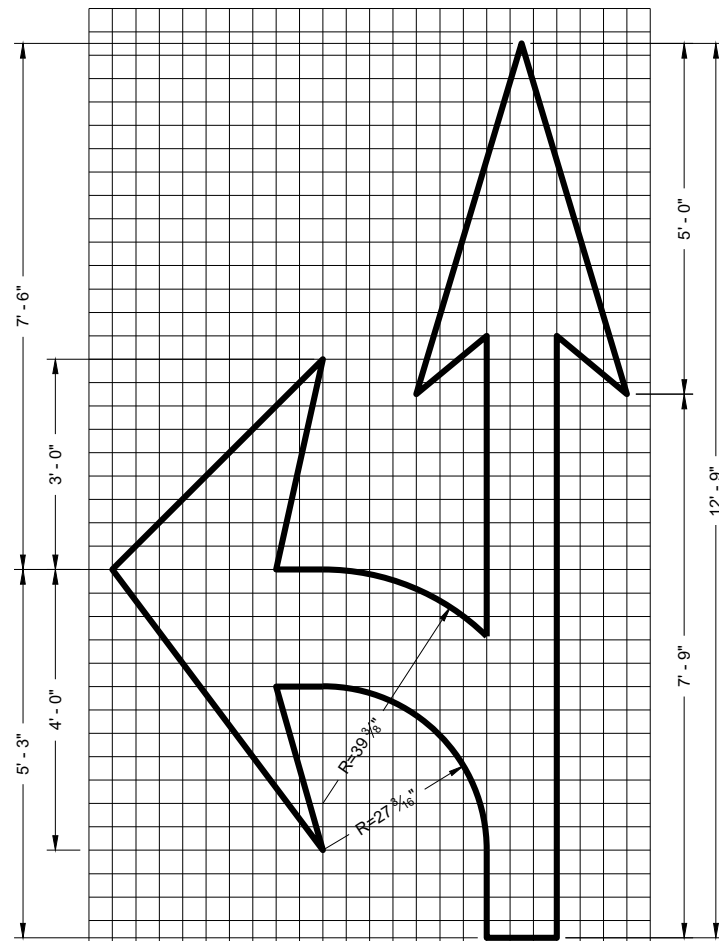


TYPE 3

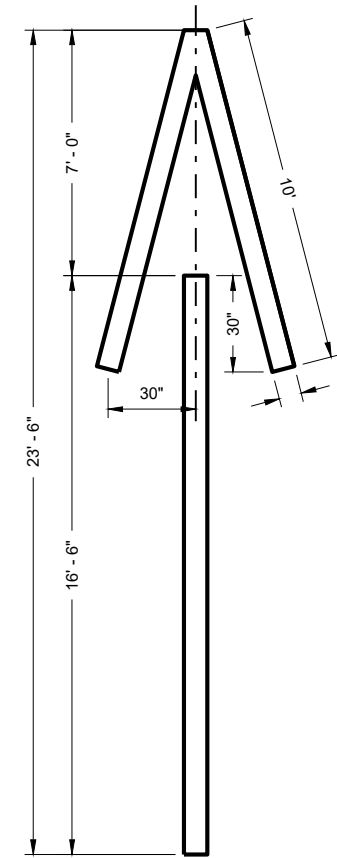


TYPE 4

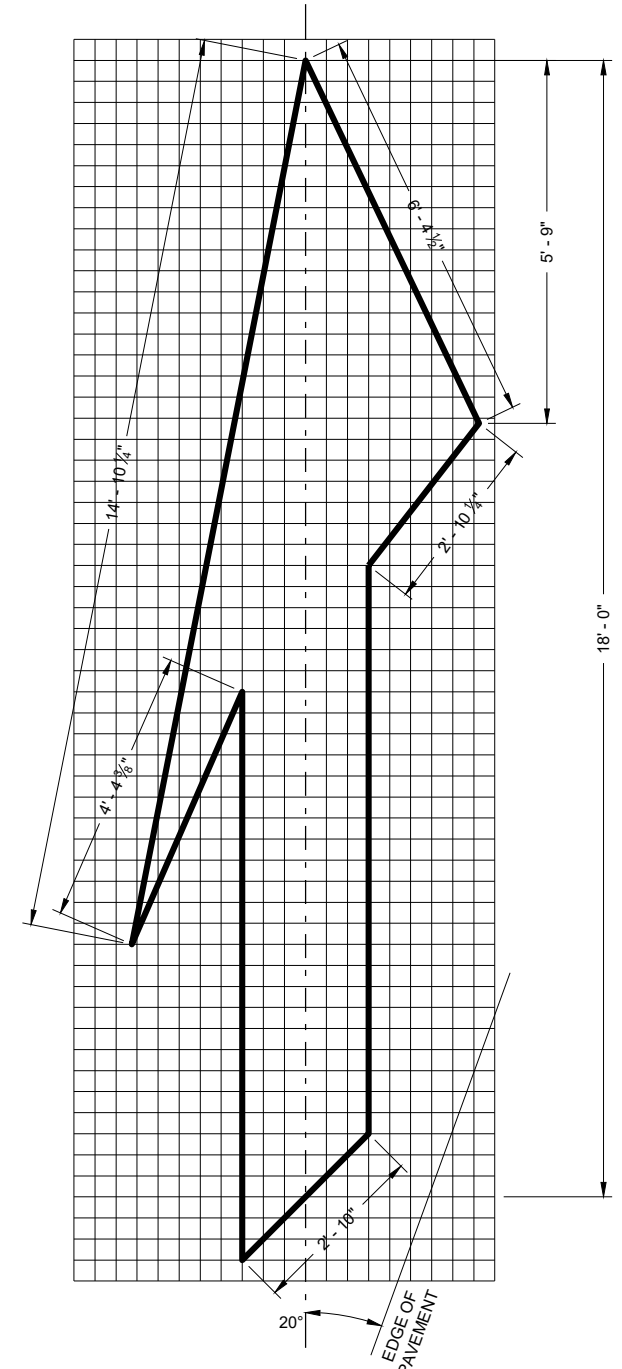

TYPE 5 LANE DROP ARROW

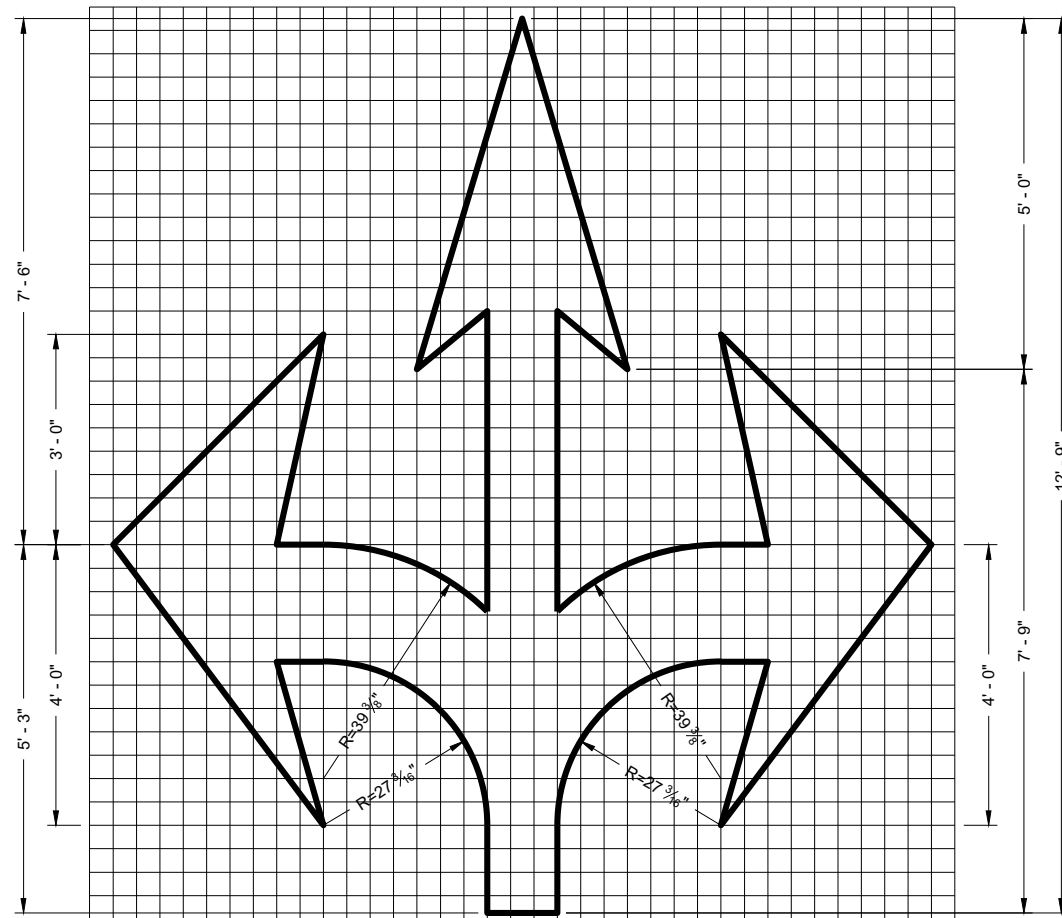

TYPE 6

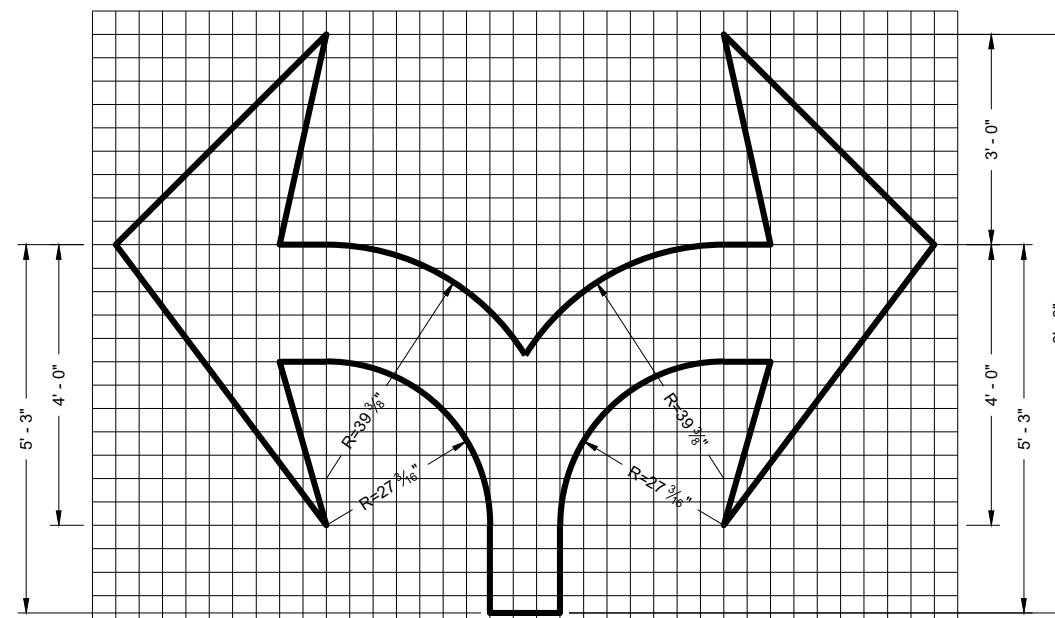

TYPE 7

GENERAL NOTES

DETAILS OF INSTALLATION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND APPLICABLE SPECIAL PROVISIONS.

PAVEMENT MARKING ARROWS

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION




APPROVED
November 2019
DATE /S/ Matthew Rauch
STATE SIGNING AND MARKING
ENGINEER
FHWA


GENERAL NOTES

DETAILS OF CONSTRUCTION NOT SHOWN ON THIS DRAWING SHALL CONFORM TO STANDARD SPECIFICATIONS AND SPECIAL PROVISIONS.


- ① LOCATE THE NO PASSING ZONE W14-3 SIGN WITHIN 50 FEET OF THE "T" MARKING
- ② MEASURE FROM EDGE OF MARKING TO JOINT LINE. THIS DOES NOT INCLUDE SPACE NEEDED FOR GROOVING OPERATIONS.

LEGEND

-  "T" MARKING
-  SIGN ON PERMANENT SUPPORT
-  DIRECTION OF TRAFFIC

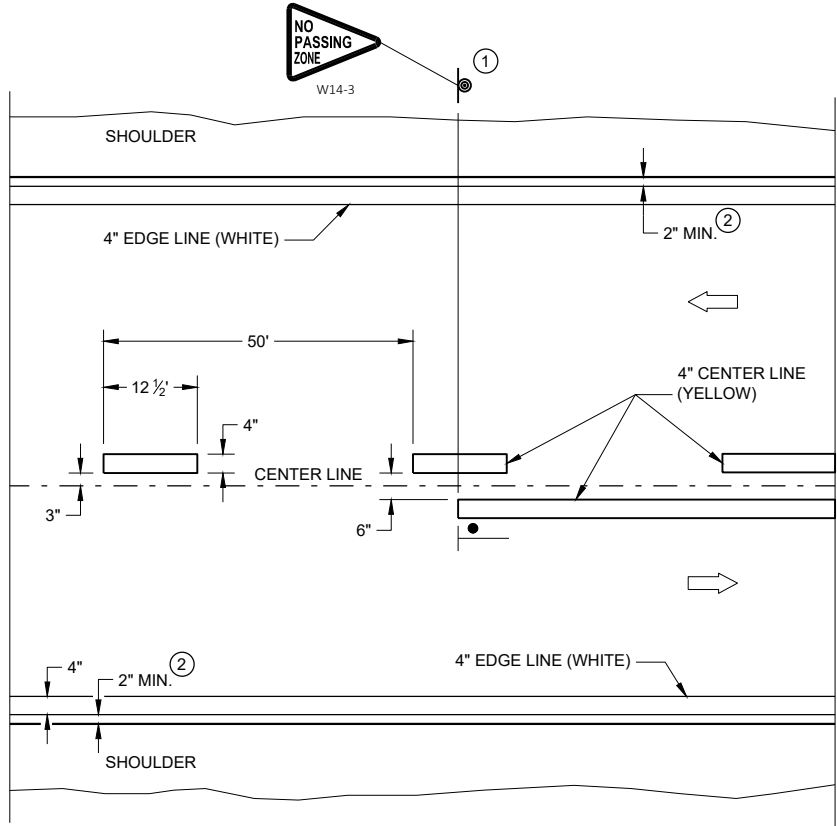


TWO WAY TRAFFIC

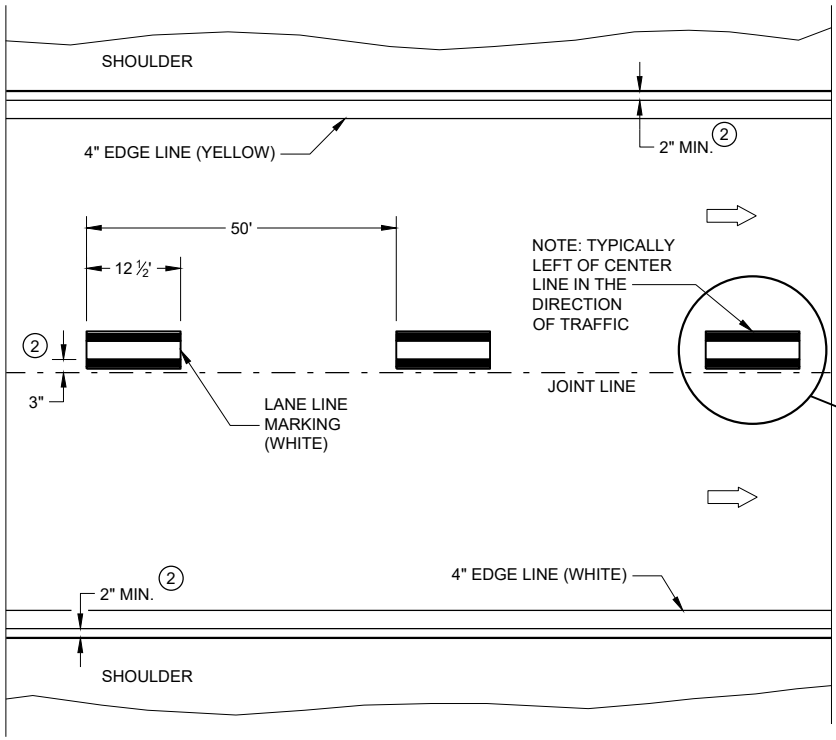

ONE WAY TRAFFIC

PERMANENT PAVEMENT MARKING

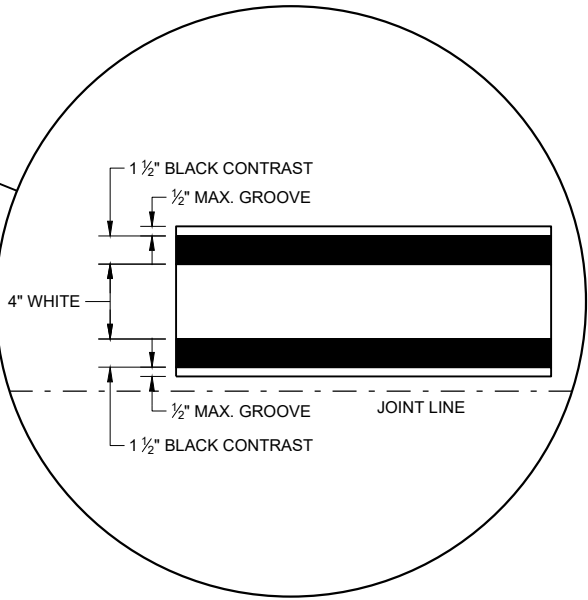

6

6

SDD 15C08 - 22a

SDD 15C08 - 22a

PERMANENT LONGITUDINAL PAVEMENT MARKINGS

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION


APPROVED
DATE: May 2022 /S/ Jeannie Silver
STATEWIDE SIGNING AND MARKING ENGINEER

FHWA

GENERAL NOTES

- ① A SET OF ARROWS IS REQUIRED EVERY 400 FEET OR NEAR INTERSECTIONS OR DRIVEWAYS WITH TURNING TRAFFIC.
- ② 8" WHITE
- ③ TURN BAY LENGTH OF LESS THAN 48' DOES NOT REQUIRE PAVEMENT ARROWS OR TEXT.

➡ DIRECTION OF TRAFFIC

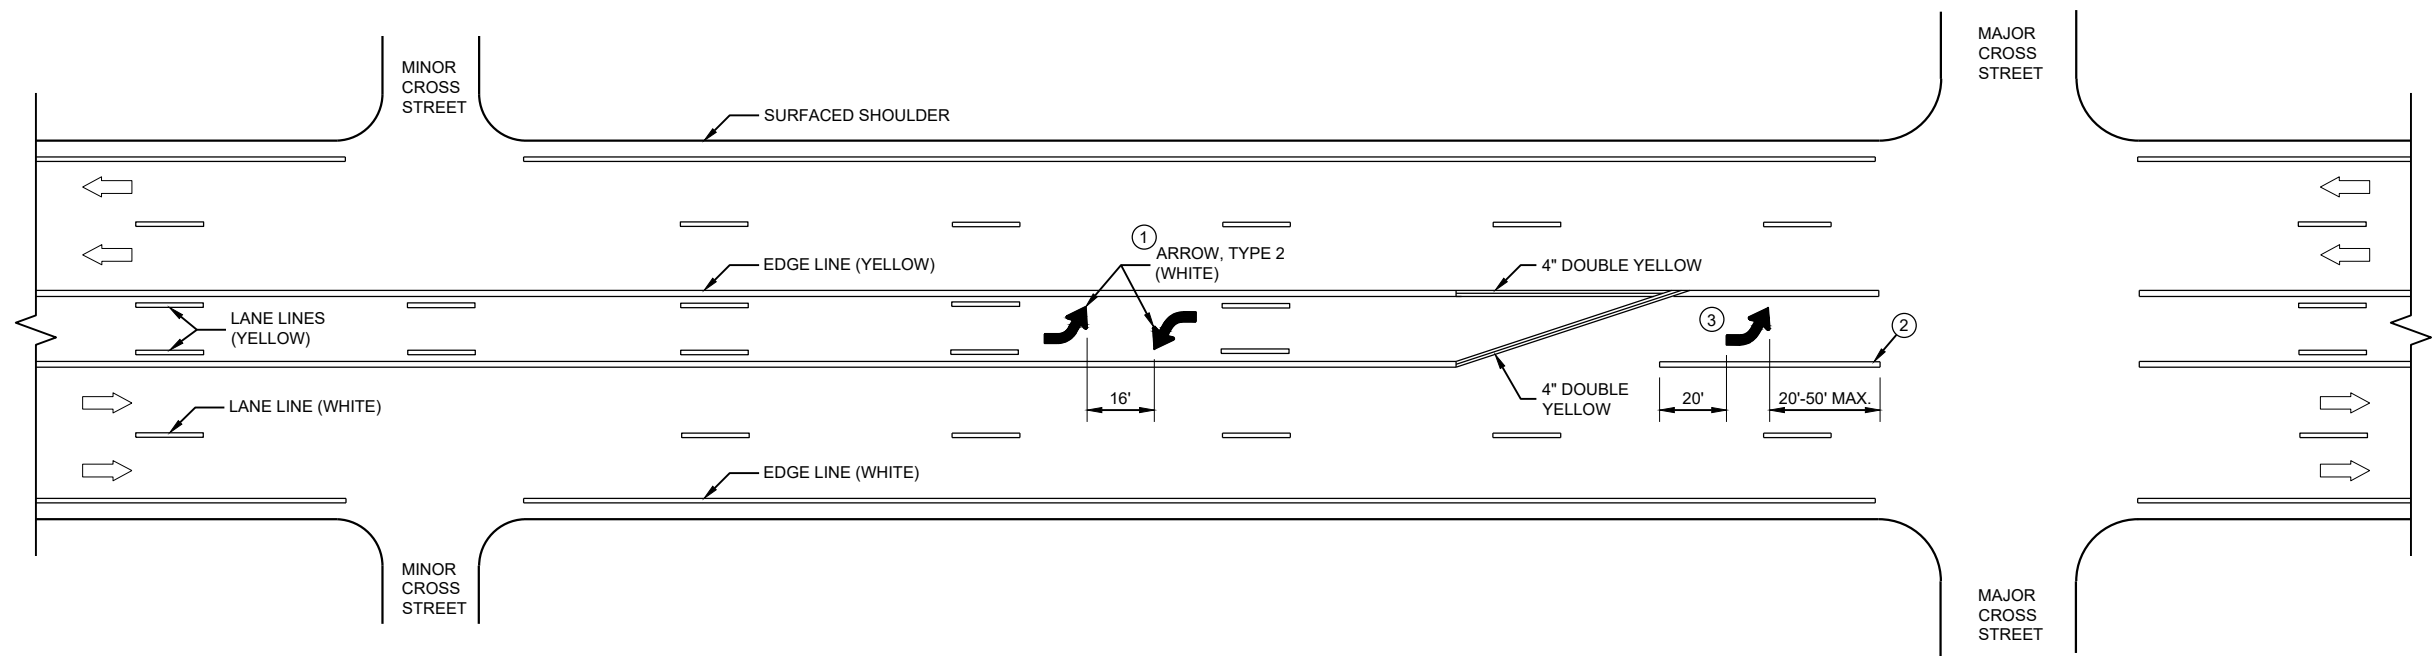

TWO WAY LEFT TURN LANE


6

6

SDD 15C08 - 22c




SDD 15C08 - 22c

<p>PAVEMENT MARKING (TURN LANES)</p>
<p>STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION</p>

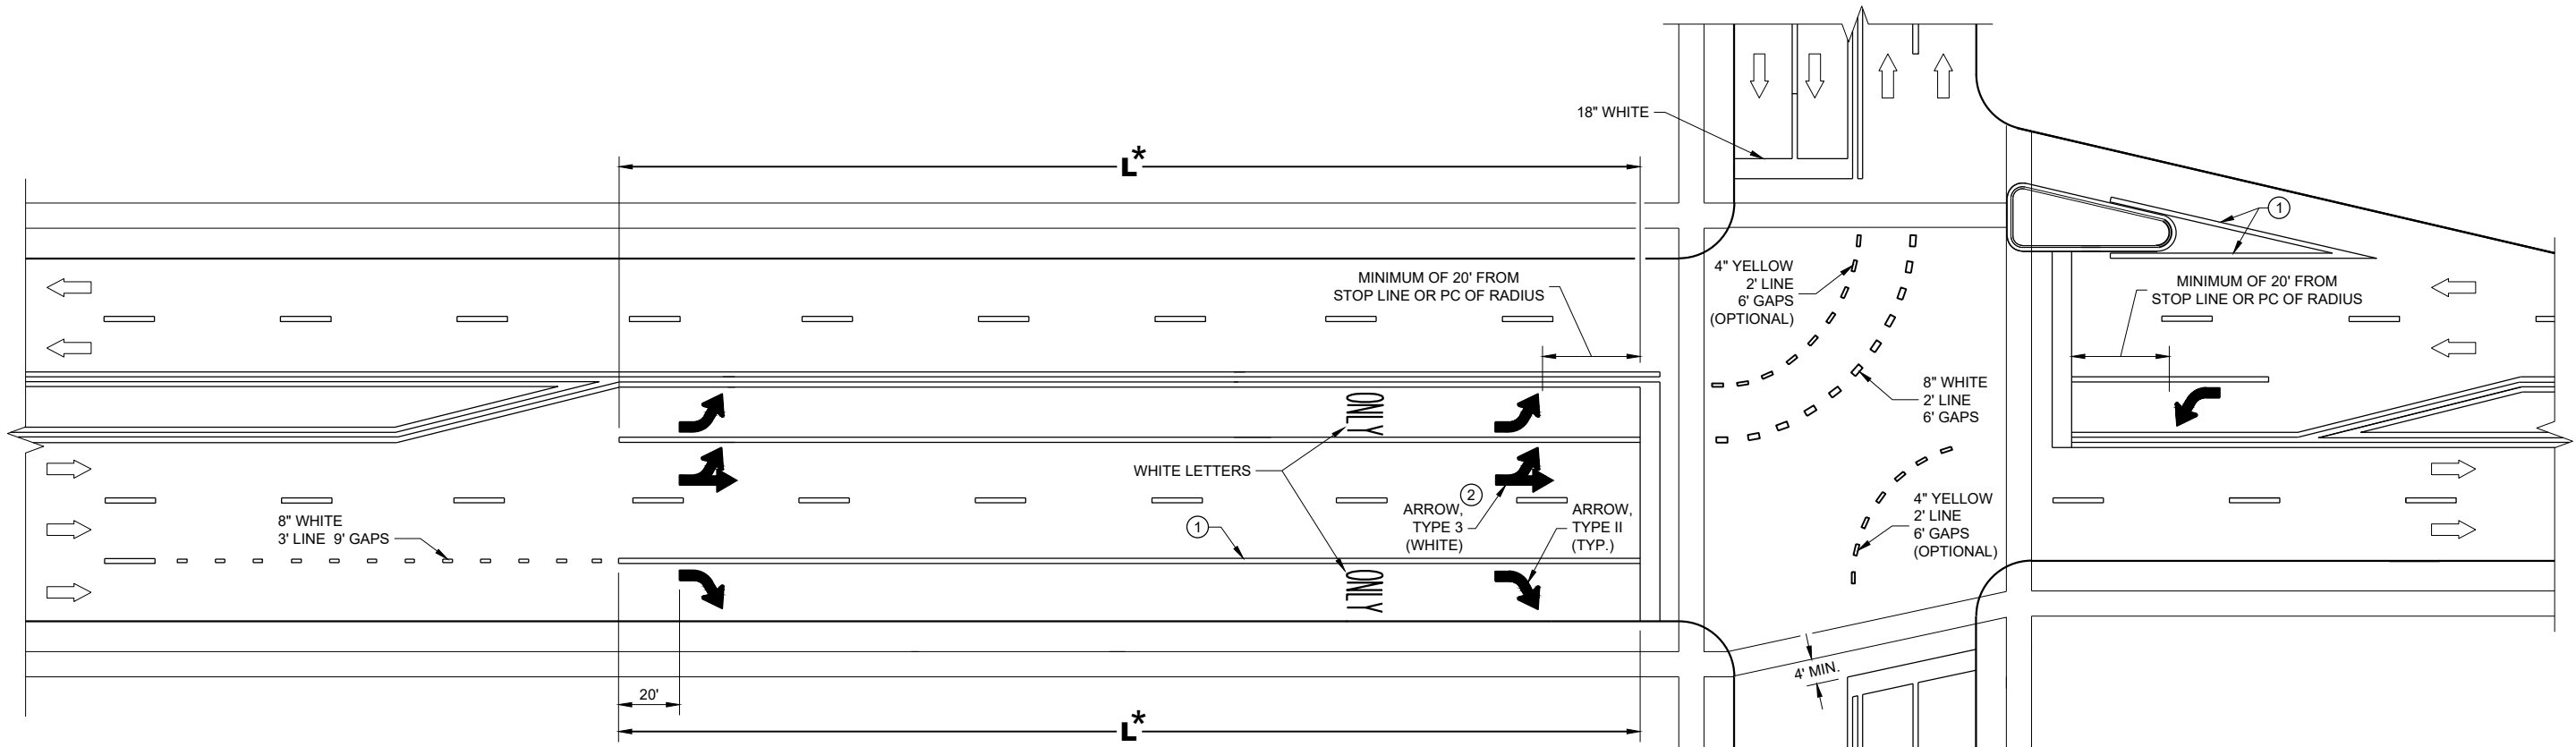

TURN LANE OPTIONS

LENGTH OF TURN BAY (L) OF 0 - 47' DOES NOT REQUIRE PAVEMENT MARKING ARROWS OR WORDS

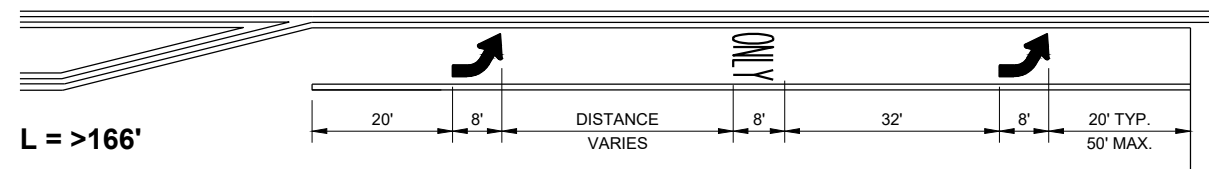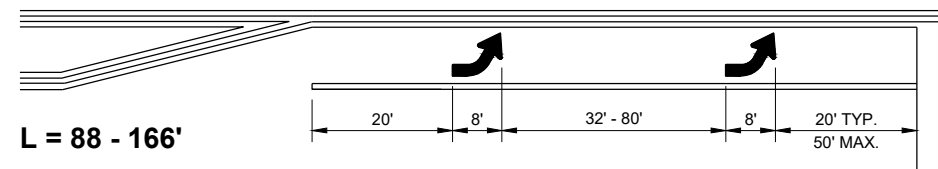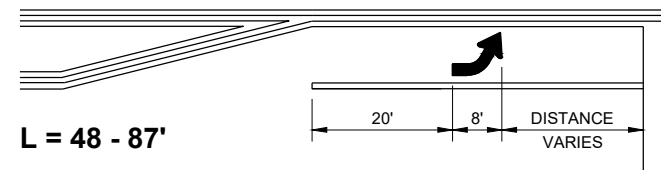

*(SEE TURN LANE OPTIONS FOR PLACEMENT OF PAVEMENT MARKING ARROWS AND WORDS)

GENERAL NOTES


- ① 8" WHITE
- ② QUANTITY AND LOCATION OF TYPE 3 ARROWS ARE THE SAME AS THE TYPE II ARROWS IN THE ADJACENT TURN LANE. FOR TURN LANES WITH A PHYSICAL SEPARATION IN THE SAME DIRECTION OF TRAVEL, THE ARROWS AND "ONLY" MARKING MAY BE ELIMINATED.

➡ DIRECTION OF TRAFFIC


L = LENGTH OF TURN BAY

PAVEMENT MARKING (TURN LANES)

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

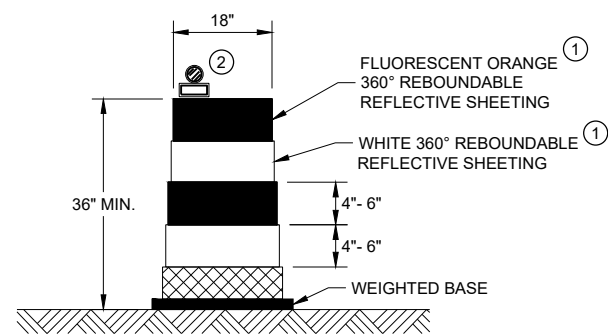


DRUM

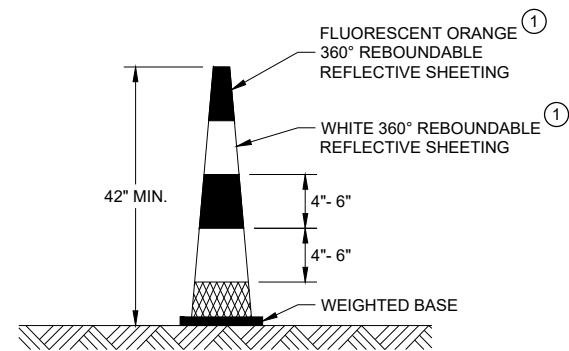

42" CONE

DO NOT USE IN TAPERS
 1/2 SPACING OF DRUMS

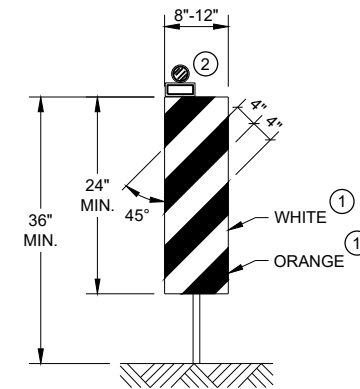


VERTICAL PANEL

THE STRIPES SHALL SLOPE DOWNWARD TO THE TRAFFIC SIDE FOR CHANNELIZATION.


GENERAL NOTES

- ① REFLECTIVE SHEETING SHALL FOLLOW THE REQUIREMENTS IN THE APPROVED PRODUCTS LISTING FOR SIGN SHEETING.
- ② LOCATION OF WARNING LIGHTS WHEN SHOWN ON THE PLAN.

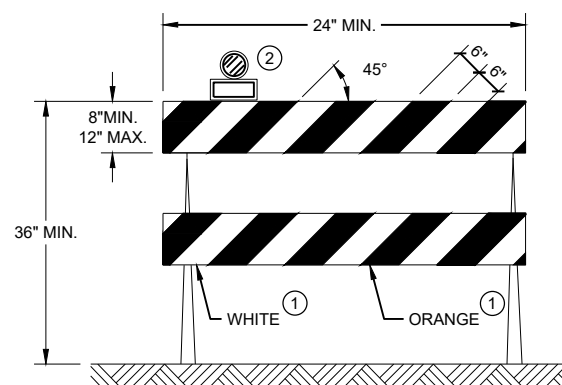

TYPE II BARRICADE

FOR RAILS LESS THAN 36" LONG, 4" WIDE STRIPES MAY BE USED. ALL STRIPES SHALL SLOPE DOWNWARD TO THE TRAFFIC SIDE FOR CHANNELIZATION.

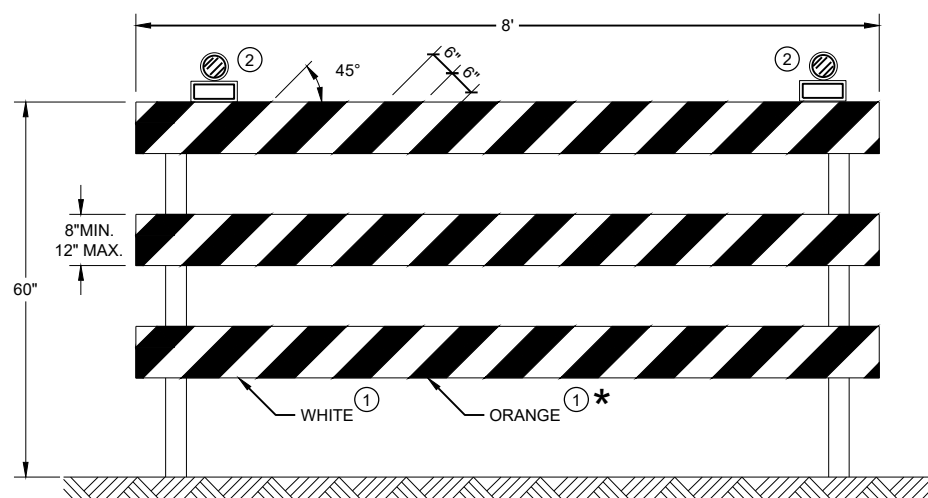

TYPE III BARRICADE

IF SIGN MOUNTED, DO NOT COVER MORE THAN 50% OF THE TOP TWO RAILS OR 33% OF THE TOTAL AREA OF THE THREE RAILS.

* IF USED FOR A PERMANENT APPLICATION USE RED SHEETING.


CHANNELIZING DEVICES DRUMS, CONES, BARRICADES AND VERTICAL PANELS	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED May 2021 DATE	/S/ Andrew Heidtke WORK ZONE ENGINEER
FHWA	

GENERAL NOTES


- ① DIAGONALS ARE OPTIONAL WHEN PAINTED ISLAND IS LESS THAN 6 FEET AT THE WIDEST POINT. OMIT DIAGONALS IF WIDTH IS LESS THAN 4 FEET.

➡ DIRECTION OF TRAVEL


* WHEN THE PAINTED MEDIAN LENGTH IS LESS THAN 50 FEET THE SPACING IS 10'.

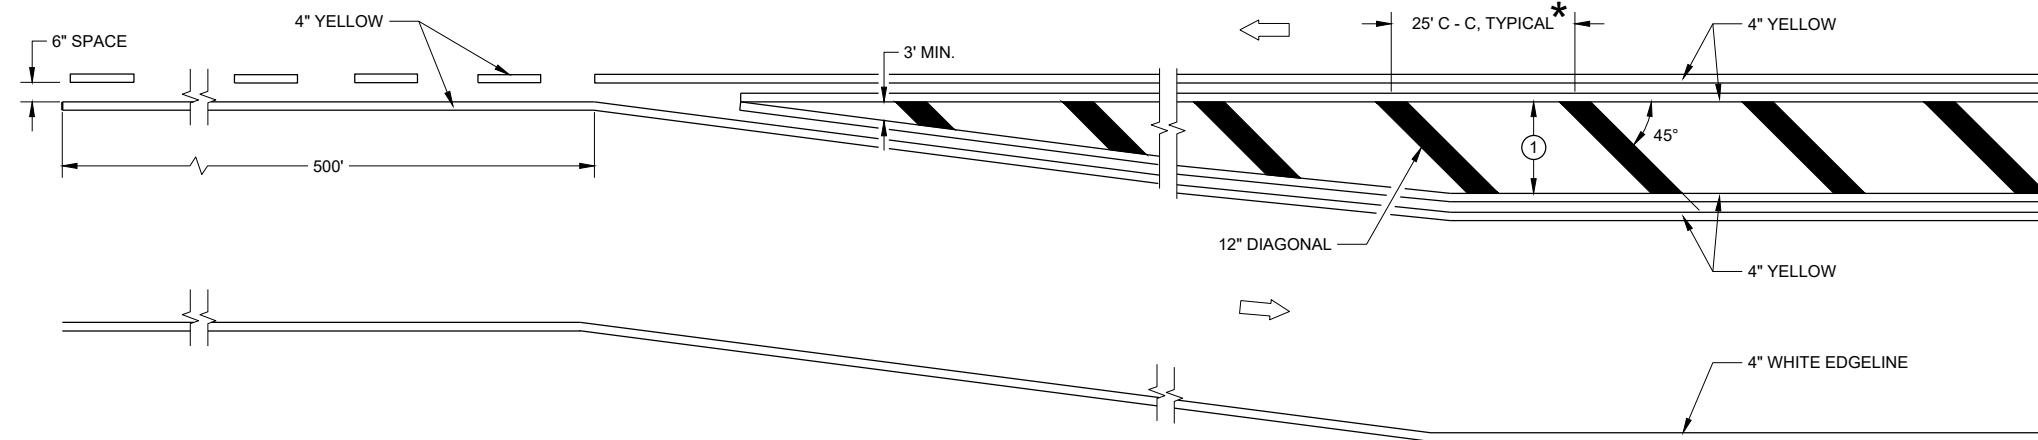

MEDIAN ISLAND DETAIL

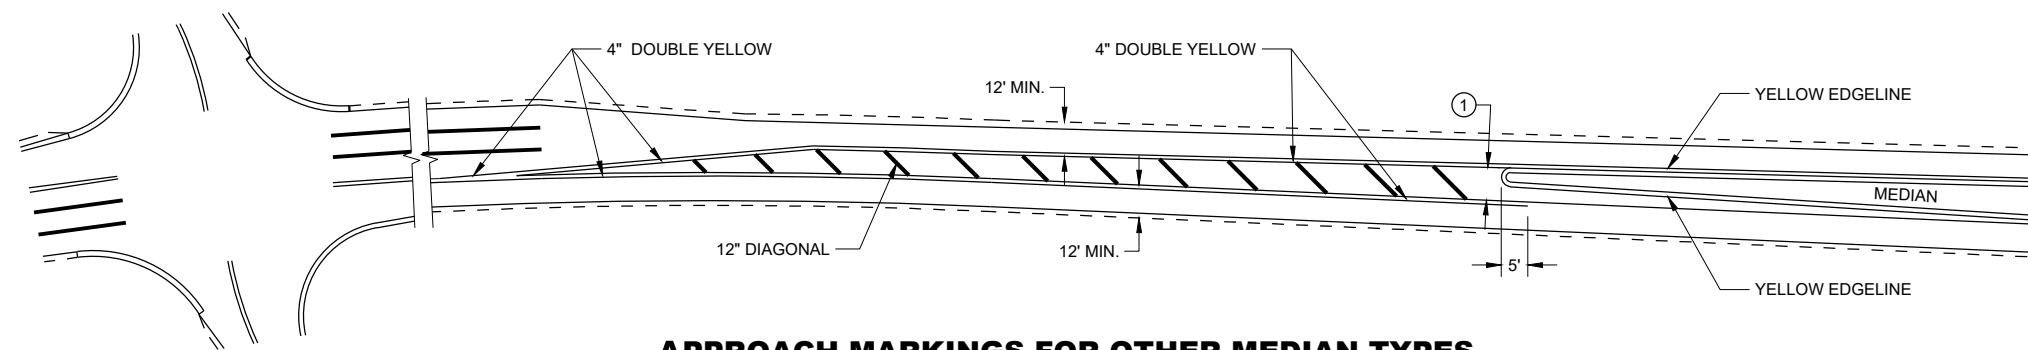

APPROACH MARKINGS FOR OTHER MEDIAN TYPES

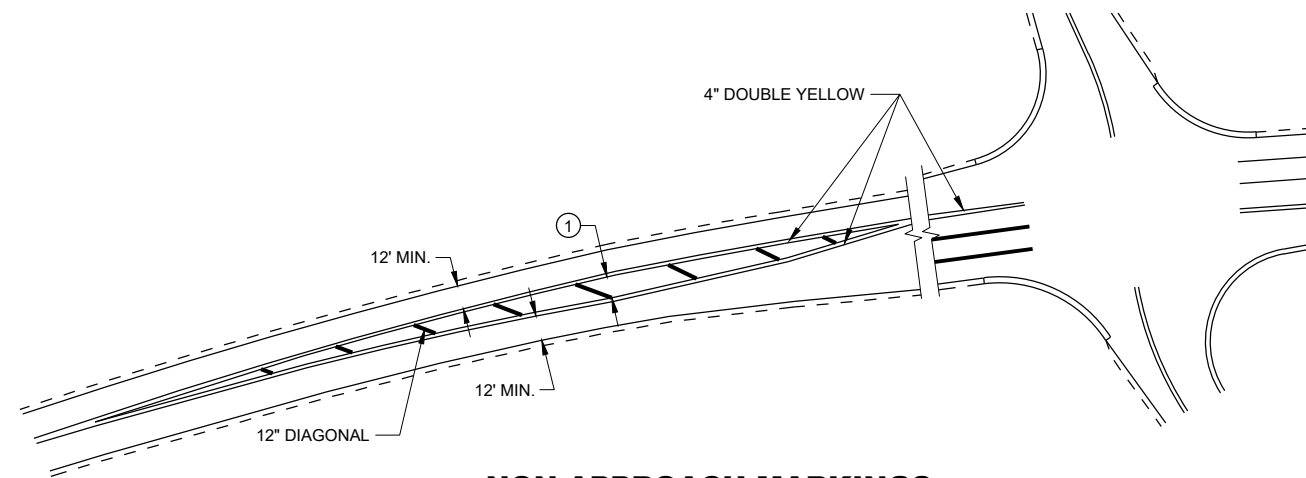

NON-APPROACH MARKINGS

6

6

SDD 15C18 - 06a


SDD 15C18 - 06a

**MEDIAN ISLAND
PAVEMENT MARKINGS**


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
May 2022 DATE /S/ Jeannie Silver
STATE SIGNING AND MARKING
ENGINEER


FHWA

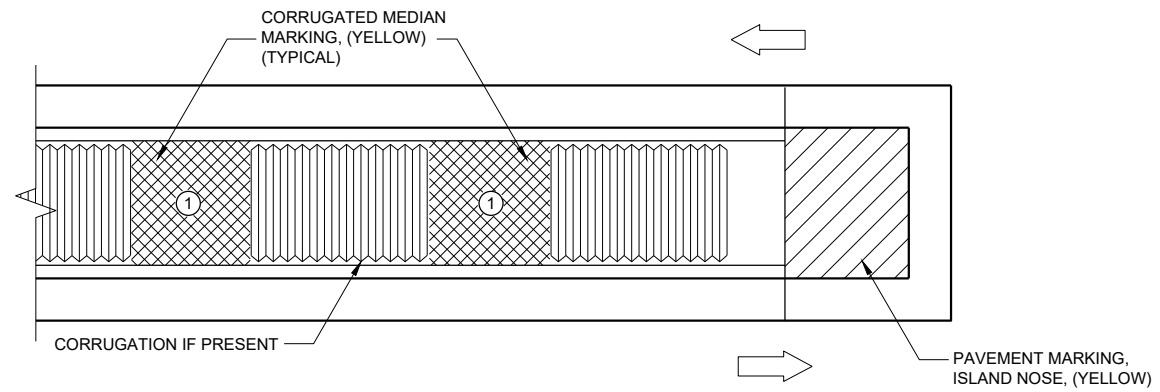

MEDIAN ISLAND WITH SQUARE BLUNT NOSE

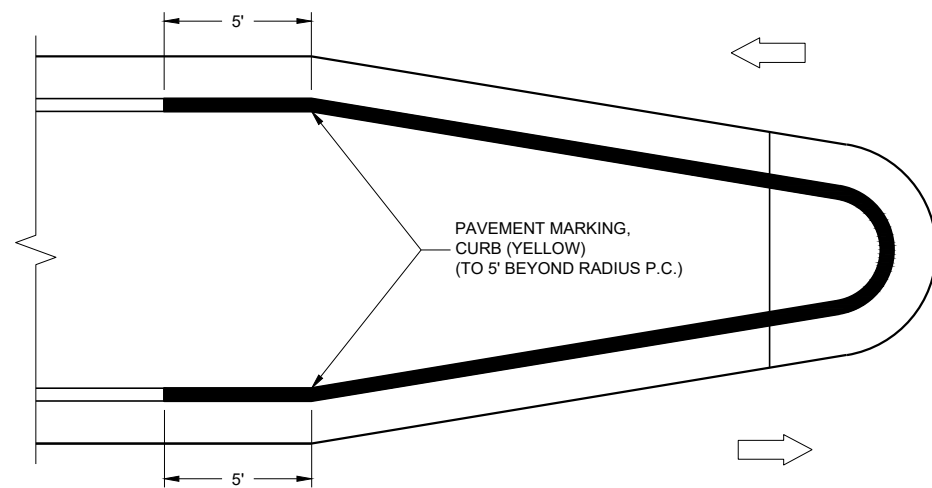

MEDIAN ISLAND WITH ROUND BLUNT NOSE

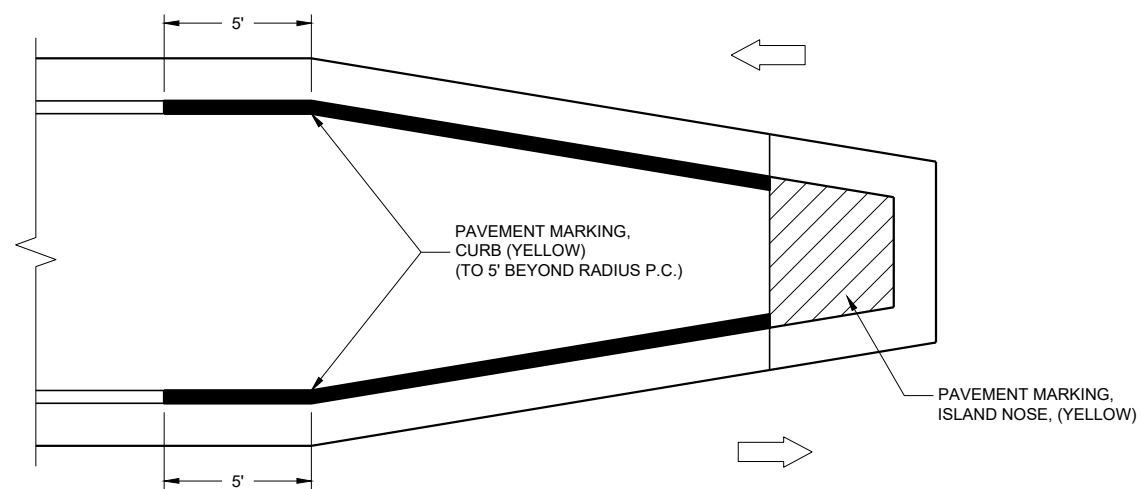





MEDIAN ISLAND WITH SLOPED NOSE

TYPICAL PLACEMENT OF PAVEMENT MARKING ON MEDIAN ISLANDS

GENERAL NOTES

WHEN CONCRETE CORRUGATED MEDIAN IS CONSTRUCTED TO SEPARATE TRAFFIC OPERATING IN THE OPPOSING DIRECTION, YELLOW PAVEMENT MARKING SHALL BE APPLIED TO THE FLAT PORTION OF THE CONCRETE CORRUGATED MEDIAN. THE ITEM OF PAVEMENT MARKING, CONCRETE CORRUGATED MEDIAN, WILL BE MEASURED IN PLACE AND ACCEPTED IN ACCORDANCE WITH THE CONTRACT AND PAID FOR AT THE CONTRACT UNIT PRICE PER SQUARE FOOT.


- ① APPLY PAVEMENT MARKING TO THE FLAT PORTION OF CORRUGATED MEDIAN.

-  ISLAND NOSE MARKING
-  CURB MARKING
-  CORRUGATED MEDIAN MARKING
-  DIRECTION OF TRAVEL

**PAVEMENT MARKINGS,
MEDIAN ISLAND NOSE**

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
May 2022 /S/ Jeannie Silver
DATE STATE SIGNING AND MARKING
ENGINEER

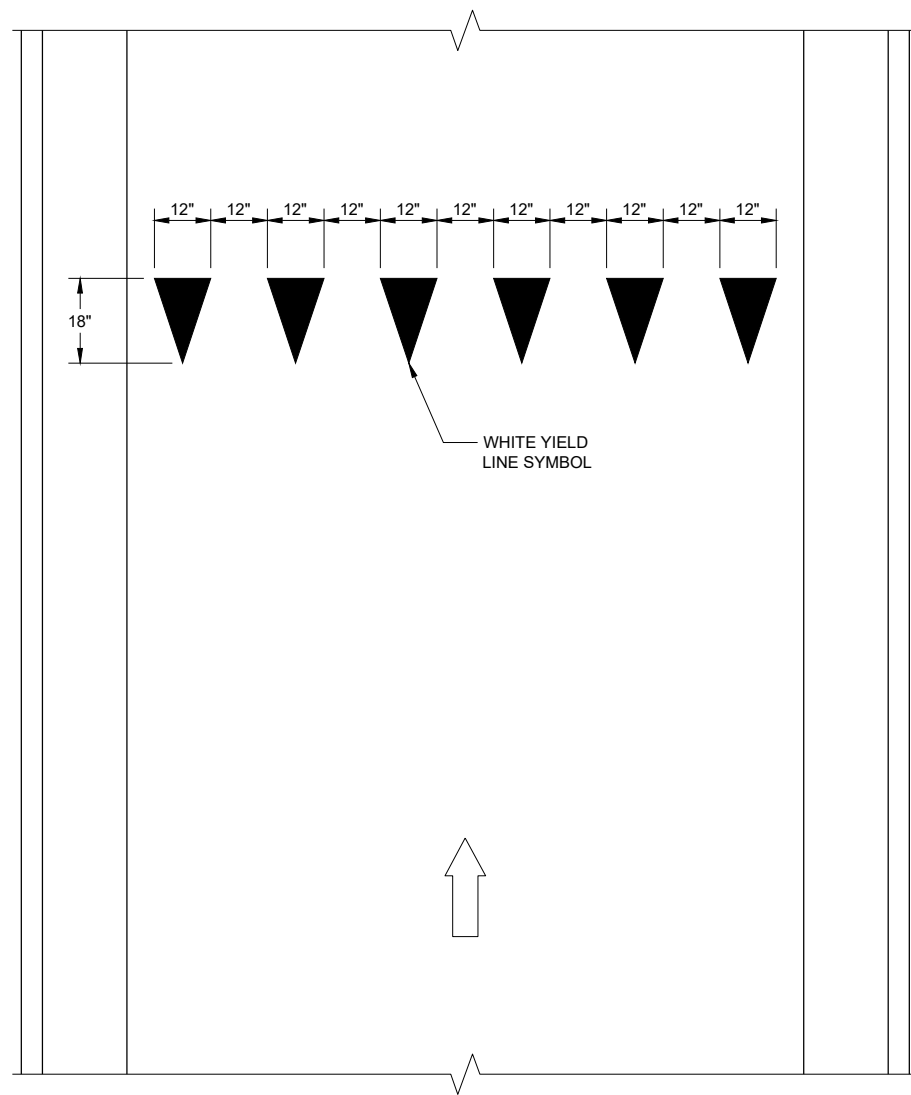

YIELD LINE

6

6

SDD 15C20 - 02


SDD 15C20 - 02

YIELD MARKINGS	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED 4-81-2016 DATE	/S/ Matthew R. Rauch STATE SIGNING AND MARKING ENGINEER
<small>FHWA</small>	


GENERAL NOTES

STOP SIGN SHALL BE PLACED A MINIMUM OF 6 FEET TO A MAXIMUM OF 50 FEET FROM THE EDGELINE LOCATION.


- ① 18-INCH STOP LINES MAY BE DELETED OR ADDED BY THE REGION MARKING ENGINEER BASED ON VISIBILITY AND SIGHT LINES.
- ② NO STOP LINE IS REQUIRED IF STOP SIGN IS LESS THAN OR EQUAL TO 40 FEET FROM THE EDGELINE.
- ③ NO STOP LINE IS REQUIRED IF STOP SIGN IS LESS THAN OR EQUAL TO 30 FEET FROM THE FLANGELINE EXTENSION.
- ④ MOVE CLOSER TO THE EDGE OF TRAVEL LINE AS NEEDED FOR VISIBILITY AND SIGHT LINES (NO CLOSER THAN 4 FEET).
- ⑤ LADDER BAR CROSSWALKS SHOULD ONLY BE USED FOR MID BLOCK CROSSINGS. USE 2 - 6" TRANSVERSE LINES INSTEAD.

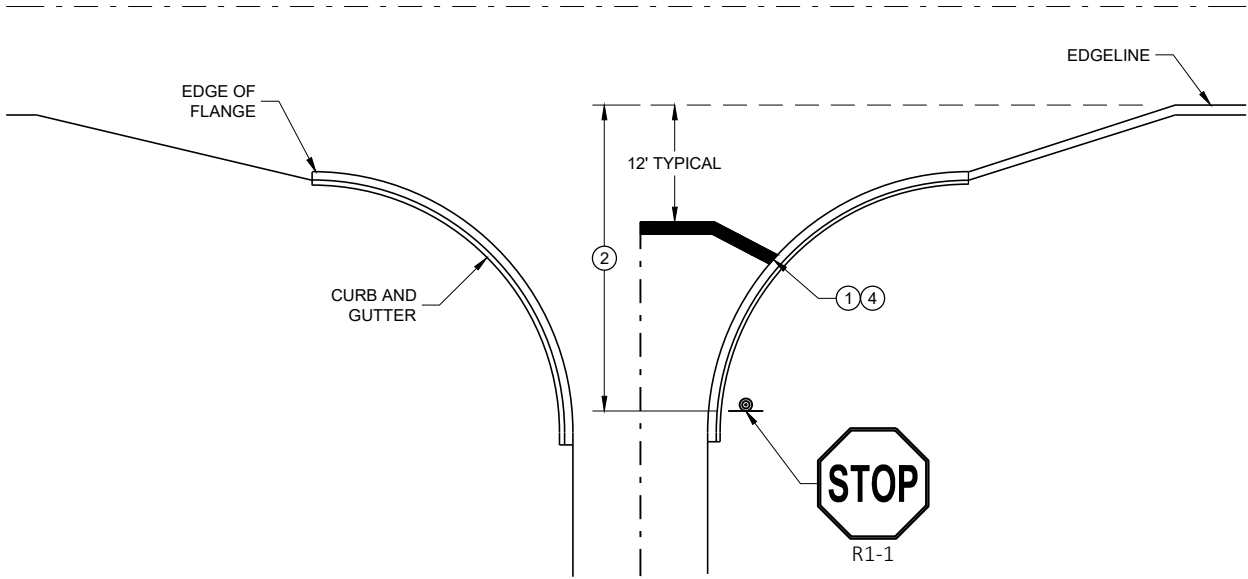


TYPICAL STOP LINE PAVEMENT MARKING WITH CURB AND GUTTER

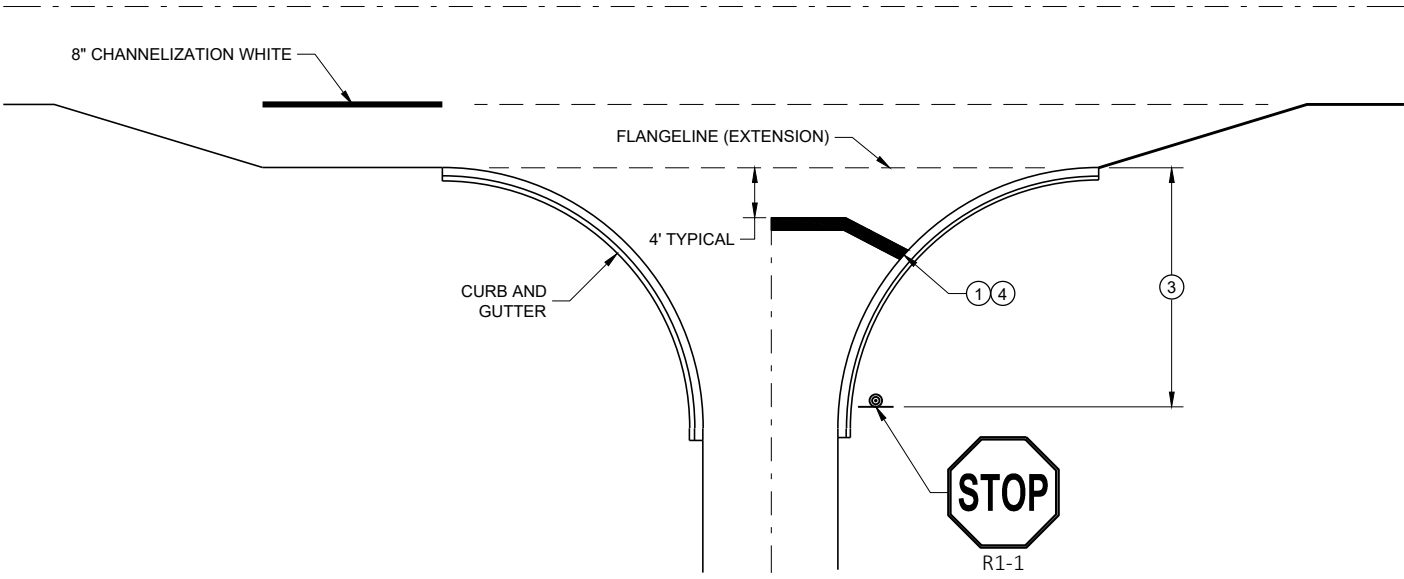

TYPICAL STOP LINE PAVEMENT MARKING FOR SIDEROADS WITH RIGHT TURN LANE

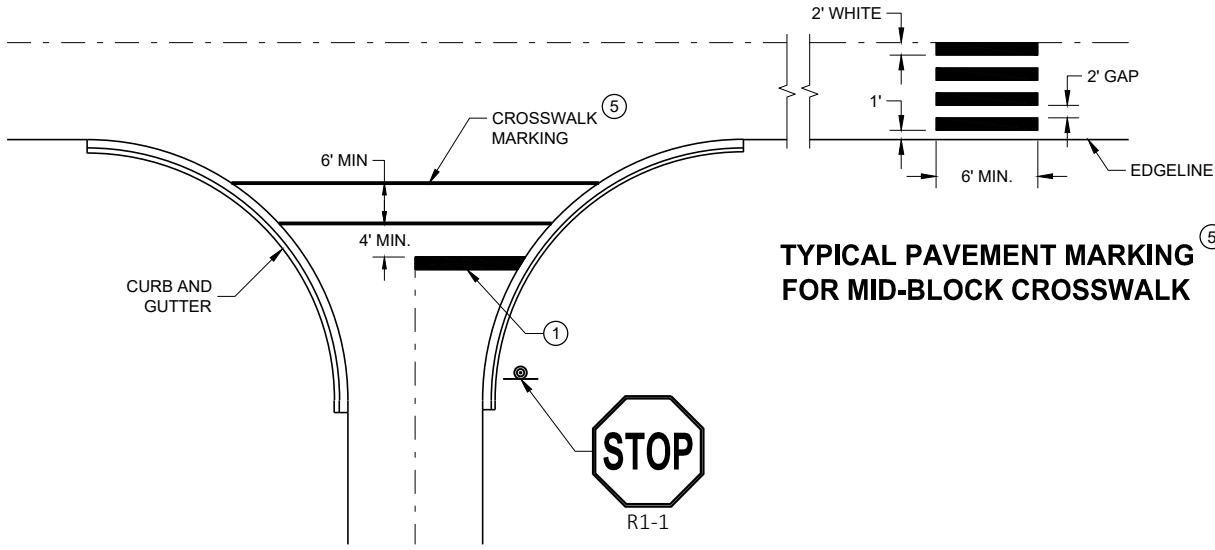

TYPICAL STOP LINE PAVEMENT MARKING FOR SIDEROADS WITH CROSSWALK MARKING

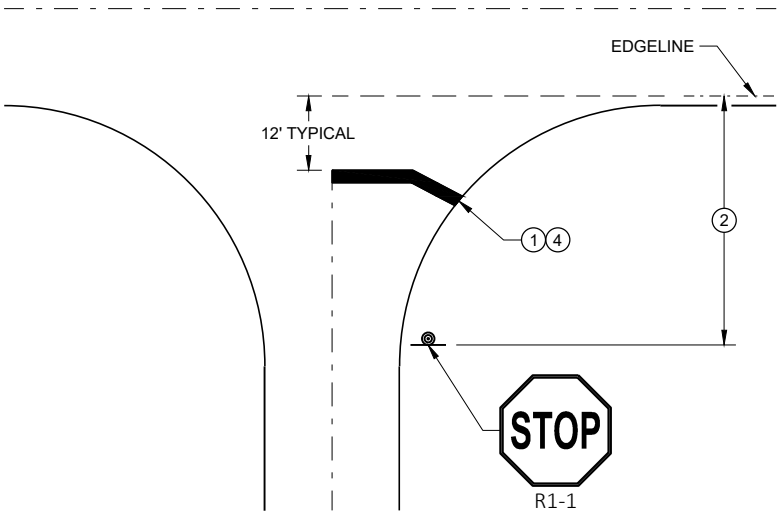

TYPICAL STOP LINE PAVEMENT MARKING WITHOUT CURB AND GUTTER

TYPICAL PAVEMENT MARKING FOR MID-BLOCK CROSSWALK

STOP LINE AND CROSSWALK PAVEMENT MARKING

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
November 2019 /S/ Matthew Rauch
DATE STATE SIGNING AND MARKING ENGINEER

FHWA

GENERAL NOTES

THE EXACT NUMBER, LOCATION, AND SPACING OF ALL SIGNS AND DEVICES SHALL BE ADJUSTED TO FIT FIELD CONDITIONS AS APPROVED BY THE ENGINEER.

THE SPACING BETWEEN SIGNS SHOULD BE ADJUSTED TO NOT CONFLICT WITH AND TO PROVIDE A MINIMUM OF 200 FEET (500 FEET DESIRABLE) CLEARANCE TO EXISTING SIGNS.

THIS LANE CLOSURE IS TYPICAL FOR CLOSING RIGHT LANE - REVERSE FOR CLOSING LEFT LANE.

ALL SIGNS ARE 48" x 48" UNLESS OTHERWISE NOTED.

"WO" SIGNS ARE THE SAME AS "W" SIGNS EXCEPT THE BACKGROUND IS ORANGE.

ANY SIGNS TEMPORARY OR EXISTING, WHICH CONFLICT WITH TRAFFIC CONTROL "IN USE" SHALL BE REMOVED OR COVERED AS NEEDED OR AS APPROVED BY THE ENGINEER.

CONSIDER ROADWAY GEOMETRICS WHEN LOCATING SIGNS AND ARROW BOARD SO THE DRIVER HAS A CLEAR VIEW OF THE ARROW BOARD AND LANE CLOSURE DRUMS.

FOR A LANE CLOSURE THAT IS IN PLACE LESS THAN 7 CONTINUOUS DAYS AND NIGHTS, THE ADVANCED WARNING SIGNS MAY BE MOUNTED ON PORTABLE SUPPORTS.

REMOVE PAVEMENT MARKINGS AND PLACE TEMPORARY PAVEMENT MARKING LINE IF LANE CLOSURE IS TO BE IN PLACE 4 OR MORE CONTINUOUS DAYS AND NIGHTS.










WARNING LIGHTS ARE NOT REQUIRED IF THE LANE CLOSURE IS A DAYTIME ONLY OPERATION.

IF THE HORIZONTAL ALIGNMENT IS SUCH THAT A CURVE MAY REQUIRE ADDITIONAL DELINEATION, THE DEVICE SPACING MAY BE DECREASED TO 50 FEET.

ADJUSTMENTS IN BUFFER SPACE NEED TO BE INCORPORATED WHEN THE LANE CLOSURE OCCURS NEAR AN INTERCHANGE EXIT OR ENTRANCE RAMP OR INTERSECTION. THE LANE CLOSURE MUST TAKE PLACE FAR ENOUGH IN ADVANCE OF AN EXIT OR ENTRANCE RAMP TO STILL ALLOW FOR ADEQUATE BUFFER SPACE. THE MINIMUM LENGTH OF THE BUFFER SPACE BEFORE AN EXIT RAMP SHOULD BE ONE HALF THE LENGTH OF THE TRANSITION AREA. THE ENTRANCE RAMP SHOULD BE FOLLOWED BY THE ORIGINAL BUFFER SPACE LENGTH OF 800 FEET DESIRABLE PRIOR TO ANOTHER TRAFFIC CONTROL CHANGE SUCH AS A CROSSOVER MANEUVER.


① A SPEED LIMIT SIGN SHALL BE LOCATED 1500 FEET BEYOND THE END OF THE ACCELERATION LANE OF EACH ENTRANCE RAMP. PLACE A SPEED LIMIT SIGN A MINIMUM OF EVERY 3 MILES. INCLUDE A RESUME SPEED LIMIT SIGN 200 FEET MINIMUM (500 FEET DESIRABLE) BEYOND THE "END OF ROADWORK" SIGN.

LEGEND

-  SIGN ON PERMANENT SUPPORT
-  TRAFFIC CONTROL DRUM
-  TRAFFIC CONTROL DRUM WITH TYPE "C" STEADY BURN LIGHT
-  TYPE III BARRICADE WITH ATTACHED SIGN
-  TYPE "A" WARNING LIGHT (FLASHING)
-  REMOVING PAVEMENT MARKINGS
-  DIRECTION OF TRAFFIC
-  WORK AREA
-  FLASHING ARROW BOARD

6

SDD 15D12 - 10b

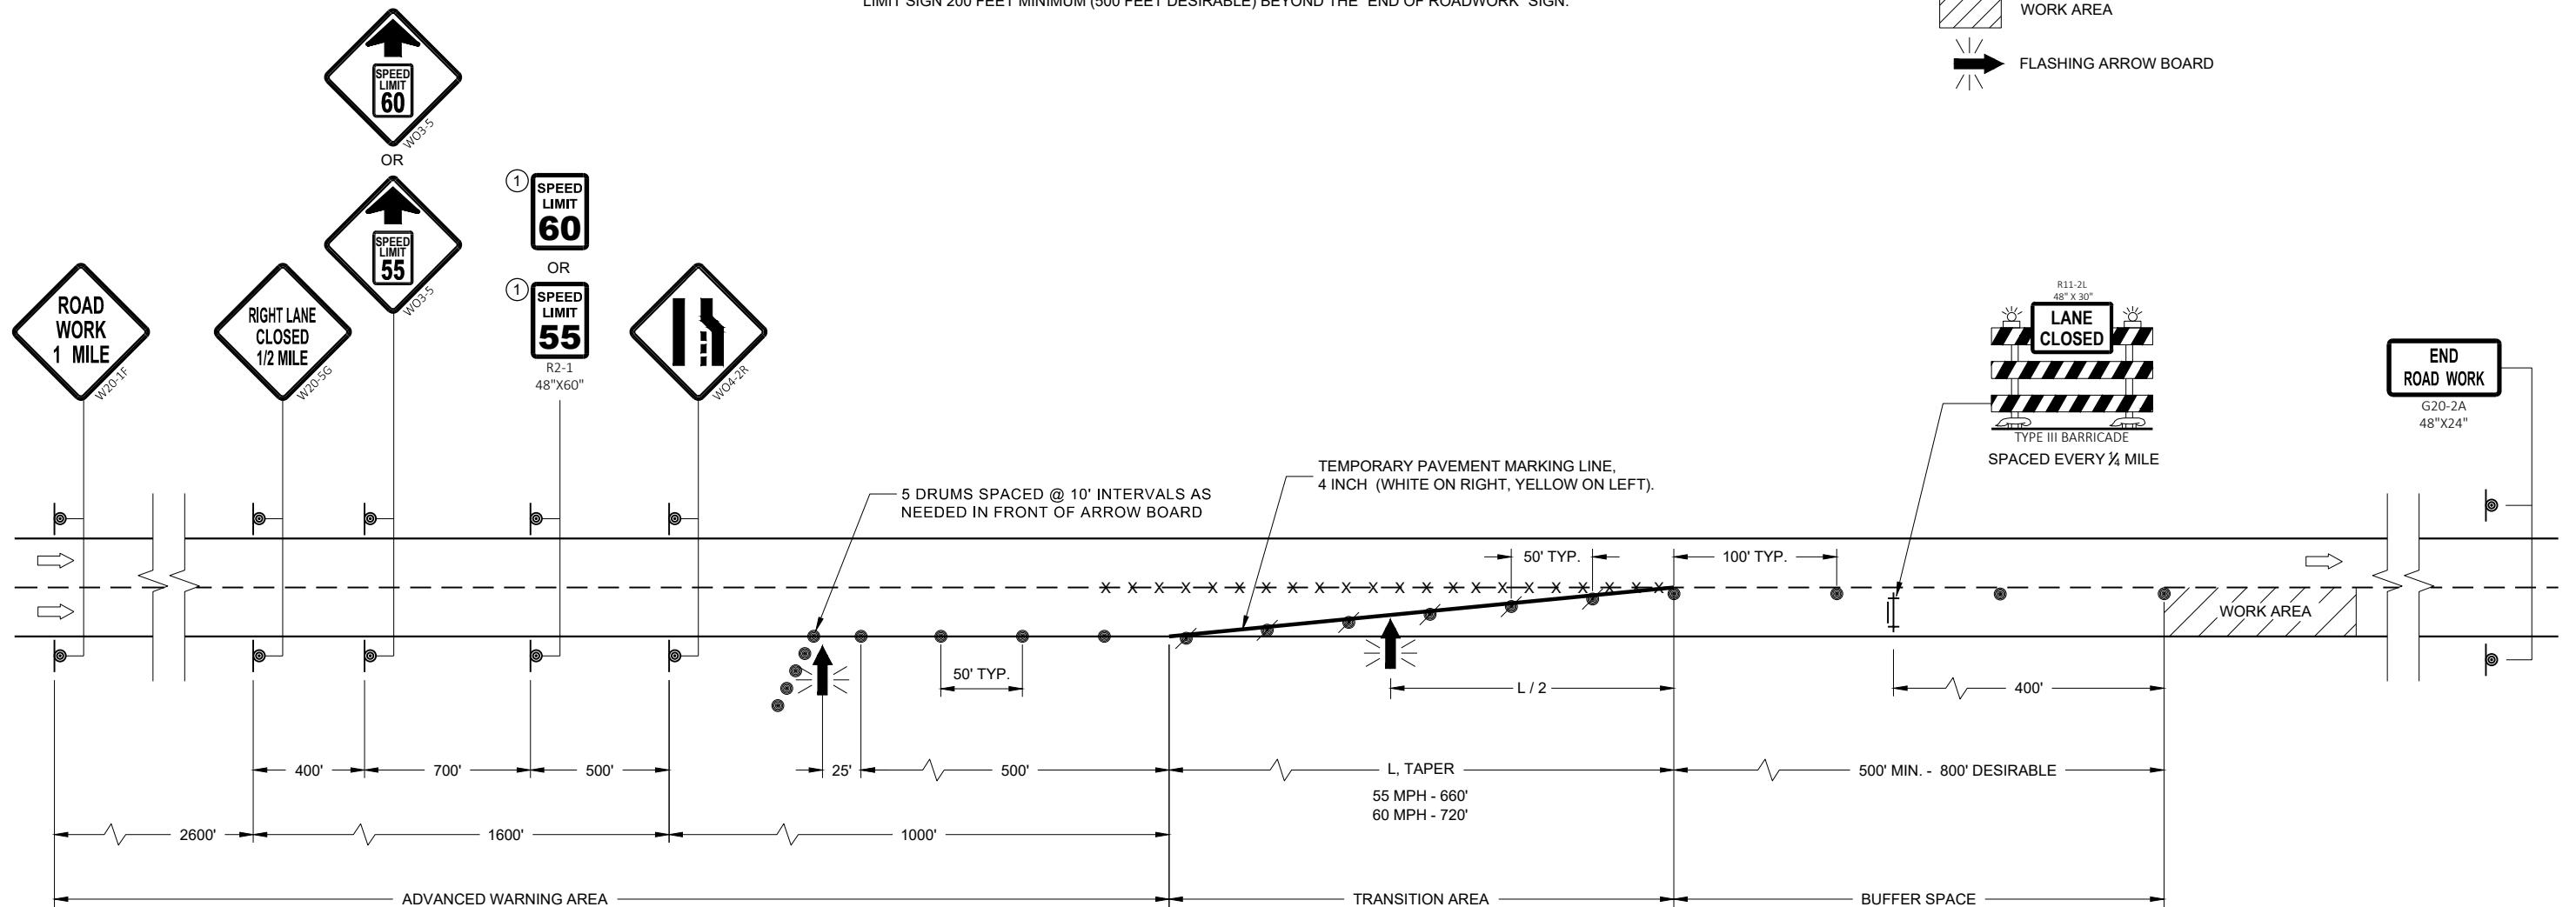

6

SDD 15D12 - 10b

TRAFFIC CONTROL, LANE CLOSURE, SPEED REDUCTION	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED February 2022 DATE	/S/ Andrew Heidtke WORK ZONE ENGINEER
FHWA	

GENERAL NOTES

DRAWING NOT TO SCALE. ALL SIGNS AND POSTS ON THIS SHEET SHALL BE PAID FOR WITH 'TRAFFIC CONTROL SIGNS' BID ITEM. ALL SIDE ROADS WHICH ARE UNDER CONSTRUCTION OF CURB AND GUTTER AND/OR GRADING SHALL BE ADEQUATELY SIGNED.

ALL SIGNS AND DEVICES SHALL BE IN CONFORMANCE WITH THE WISCONSIN MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES (WMUTCD). SIGN LAYOUTS SHALL BE IN ACCORDANCE WITH THE WISDOT STANDARD SIGN PLATES.

"WO" SIGNS ARE THE SAME AS "W" SIGNS EXCEPT THAT THE BACKGROUND IS ORANGE.

ALL SIGNS ARE 48" X 48" UNLESS OTHERWISE NOTED.



THE EXACT NUMBER, LOCATION AND SPACING OF ALL SIGNS AND DEVICES SHALL BE ADJUSTED TO FIT FIELD CONDITIONS AS DIRECTED BY THE ENGINEER.


ALL SIGNS INAPPROPRIATE TO THE STATUS OF THE CONTROL ZONE, INCLUDING PRE-EXISTING SIGNS IN THE VICINITY, SHALL BE COVERED OR REMOVED AS DIRECTED BY THE ENGINEER.

SEE 15C34 FOR ADDITIONAL TRAFFIC CONTROL SIGNING WHEN CENTERLINE PAVEMENT MAKINGS ARE MISSING. 'DO NOT PASS' SIGNS MUST BE INSTALLED ON THE SAME DAY AS MILLING OPERATIONS.


- ① PLACE SIGNS 350' IN ADVANCE OF MILLED SURFACES AND AT 1 MILE INTERVALS, OR AS DIRECTED BY THE ENGINEER.
- ② PLACE SIGN 200' MIN. FROM INTERSECTION AND 200' MIN. AFTER ADVANCE WARNING SIGN SHOWN IN SDD 15C04.

LEGEND

-  SIGN ON TEMPORARY SUPPORT
-  DIRECTION OF TRAFFIC

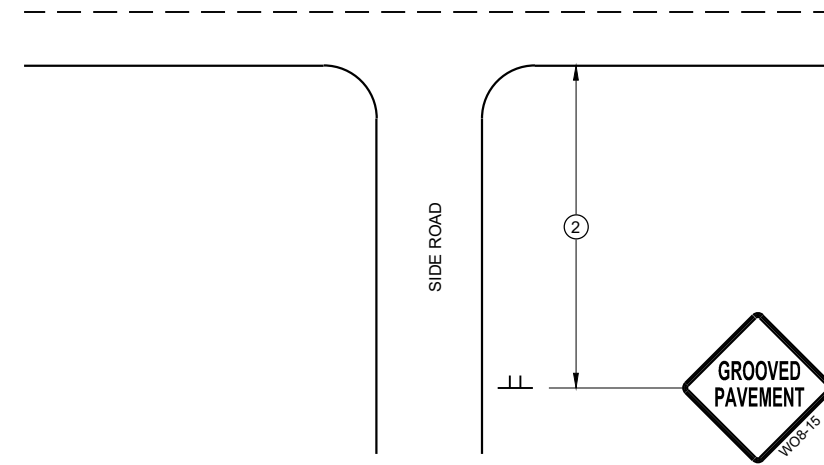


TYPICAL SIDE ROAD APPROACH SIGN DETAIL

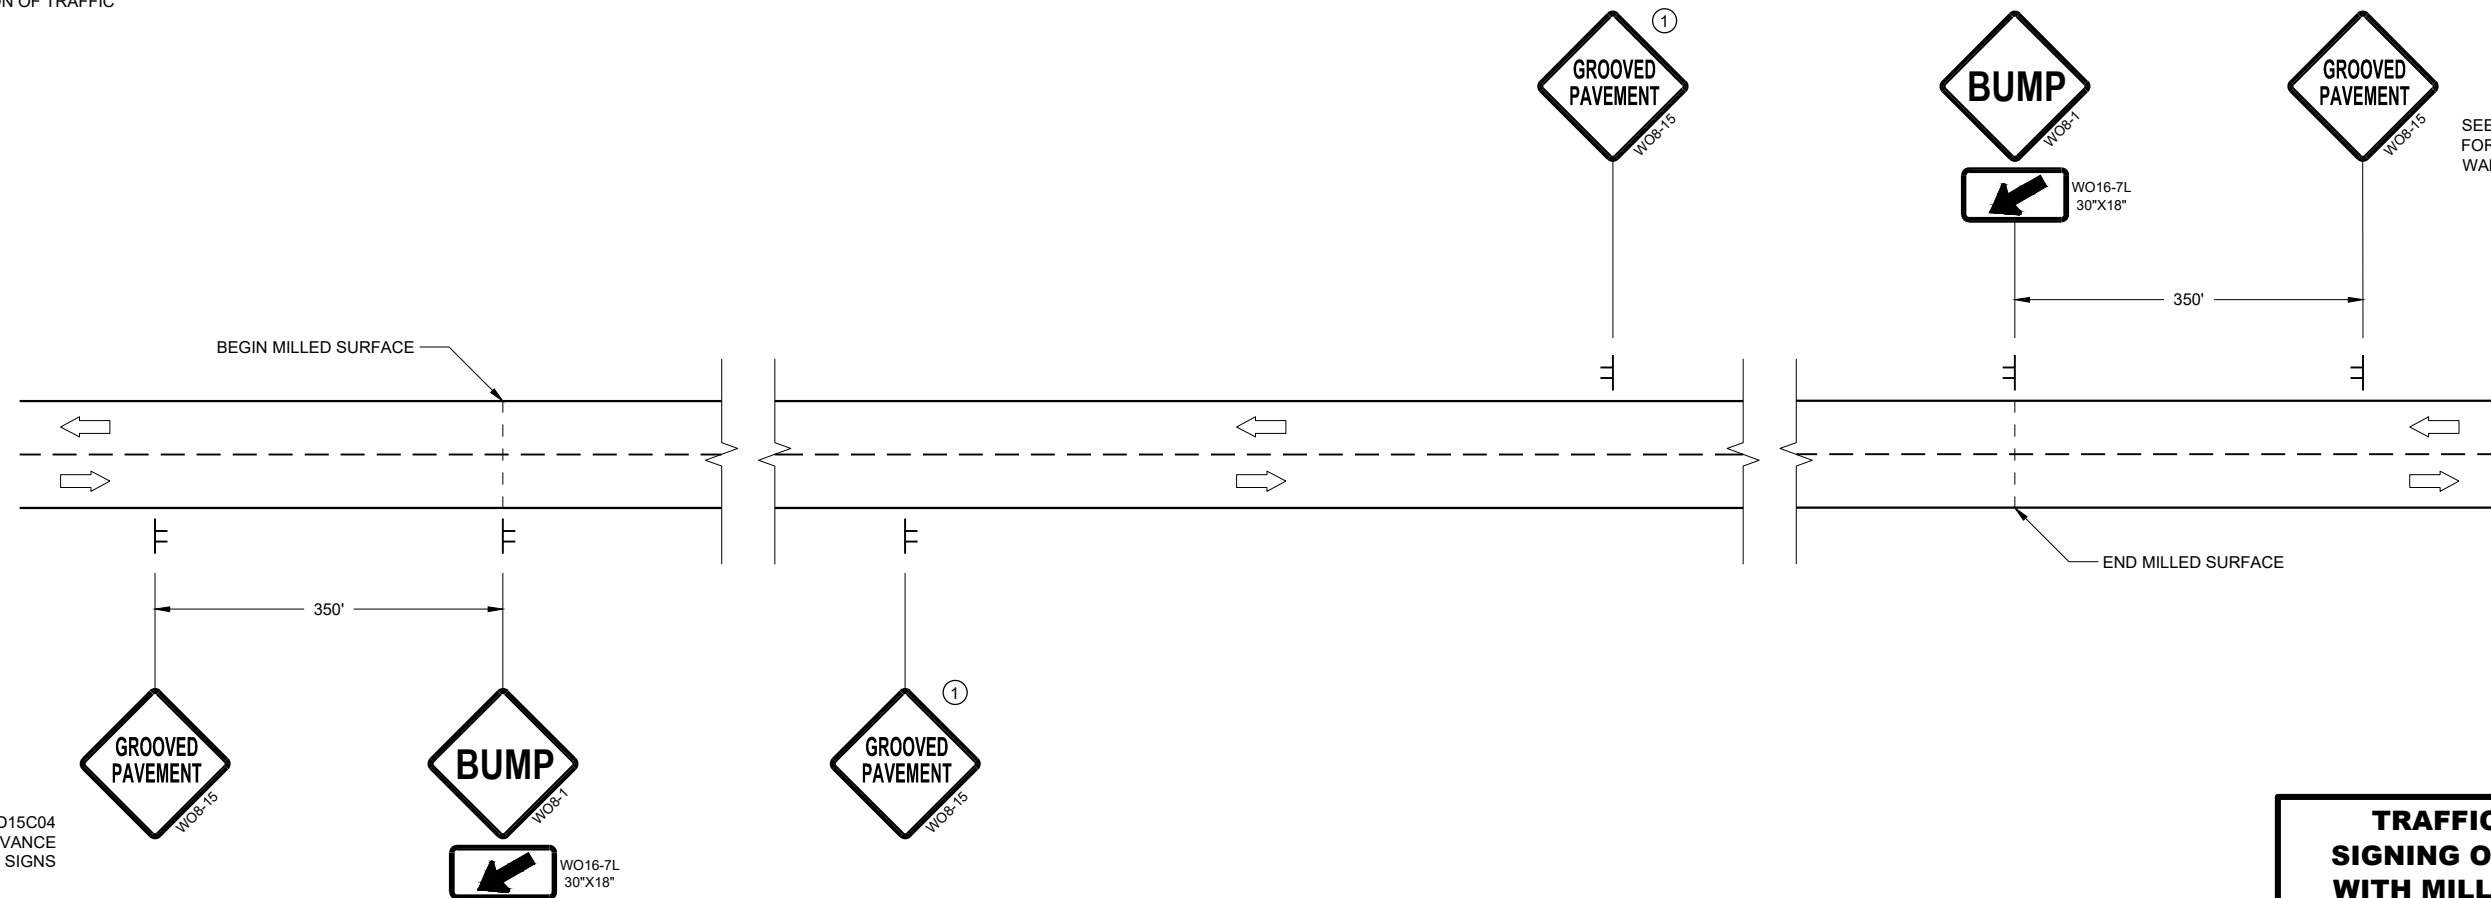


DETAIL FOR SIGNING ON MILLED SURFACES

TRAFFIC CONTROL, SIGNING ON ROADWAYS WITH MILLED SURFACES	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED February 2020 DATE	/S/ Andrew Heidtke WORK ZONE ENGINEER
FHWA	


TYPICAL ASSEMBLIES




J1-1




J1-2

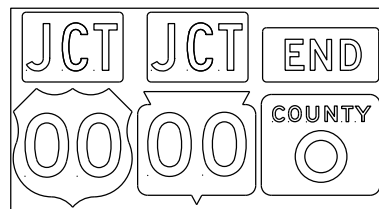


J1-3




JR1-1




J2-1




J2-2

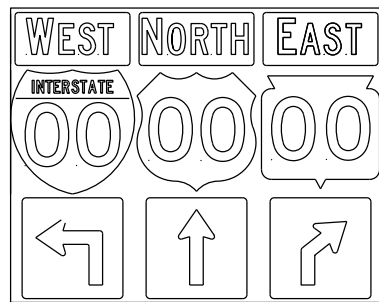


J2-3




J3-1




J3-2

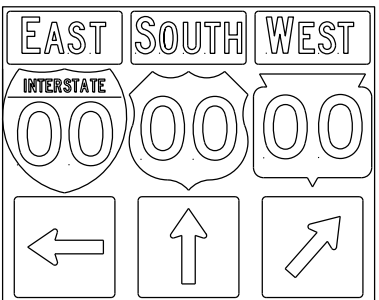


J3-3




J4-1




J4-2



J4-2




J12-1




J13-1




J32-1



J33-1



J22-1



J23-1



JR13-1



JR23-1




JR99-1



JV




(Typical Vertical J-Assembly See Note 10 and 11)



JH-1

Blue Background

blue background with interstate

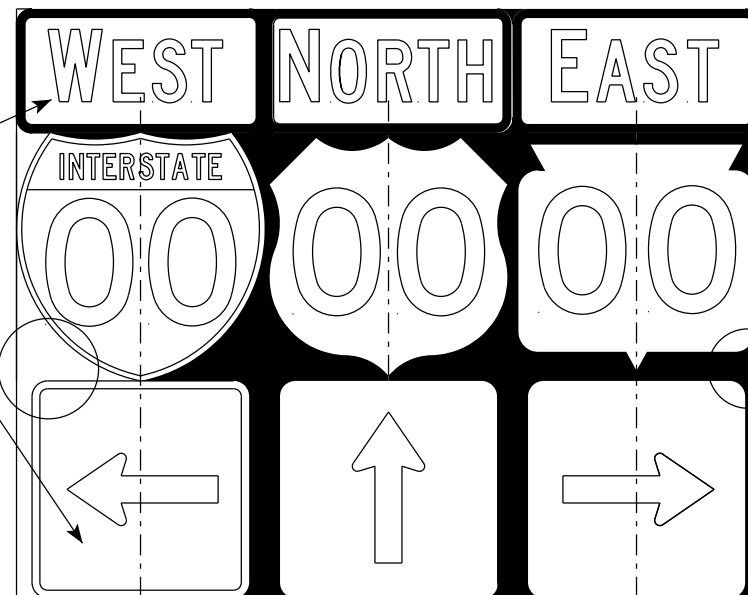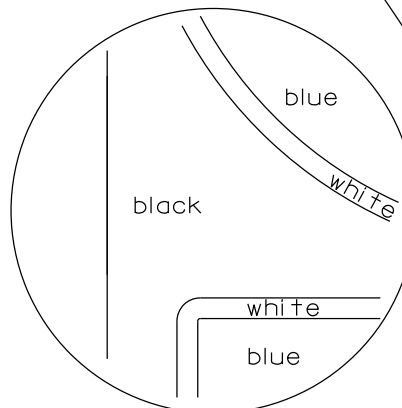

black background

- ### NOTES
- Signs are Type II - Type H Reflective
 - Color:
 - Background - Black Non-reflective
 - Message - see Note 5
 - Message Series - See Note 5
 - Corners shall be square or rounded if base material is plywood. If base material is metal the corners shall be rounded.
 - The colors and message spacing on each marker shall be according to the applicable route marker panel specifications.
 - Certain marker heads require the component pieces to be the same color. As an example, all the components used with an MI-1 Interstate marker shall be blue.
 - Single panel j-assemblies shall only be used with route marker shields that are same size. If the route marker shields are different size use multiple piece component.
 - Route assemblies that have 24 inch route shields and have dimensions greater than 48 inches (both vertical and horizontal) shall have one horizontal splice between the arrows and route shields. Vertical splices shall not be used on route assemblies with a horizontal dimension of 144 inches or less. The contractor shall not use more than one vertical joint per sign and the joint shall be between route shields.
 - Route assemblies that have 36 inch shields and have dimensions greater than 48 inches (both vertical and horizontal) shall have two horizontal splices. One horizontal splice shall be between the cardinal direction and route shields and the other horizontal splice shall be between the arrows and route shields. Vertical splices shall not be used on route assemblies with a horizontal dimension of 144 or less. The contractor shall not use more than one vertical joint per sign and the joint shall be between route shields.
 - All Vertical J Assemblies are given a Sign Code of JV
 - For JV Assemblies that have a mixture of Interstate and non Interstate shields, arrows and cardinals shall be white on blue.

ROUTE MARKERS & COMPONENTS IN TYPICAL ASSEMBLIES

WISCONSIN DEPT OF TRANSPORTATION

APPROVED

Matthew R. Rauch
for State Traffic Engineer

DATE 3/18/21



PLATE NO. A2-1S.9

PROJECT NO:



SHEET NO:

E

URBAN AREA

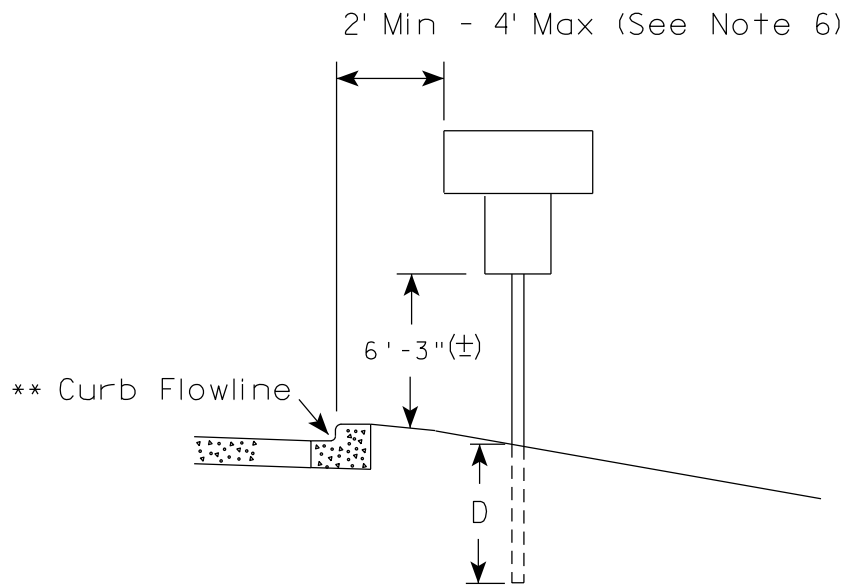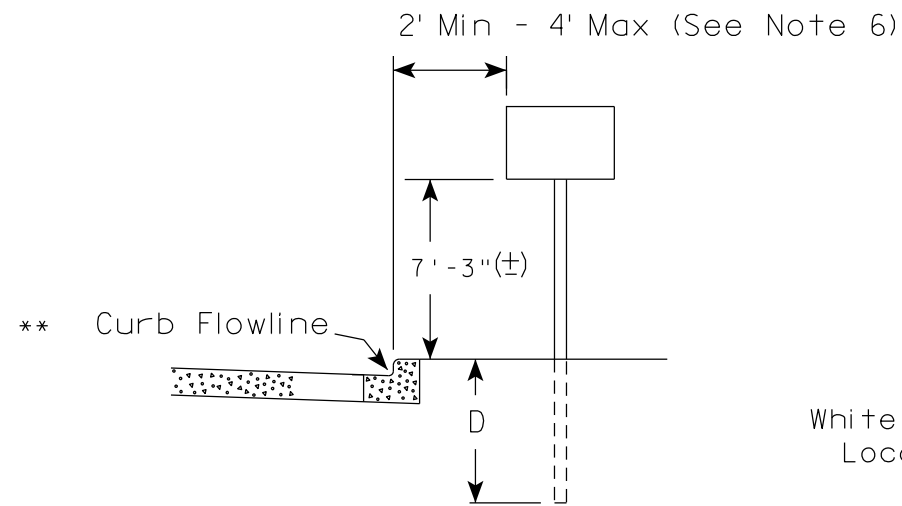

RURAL AREA (See Note 2)

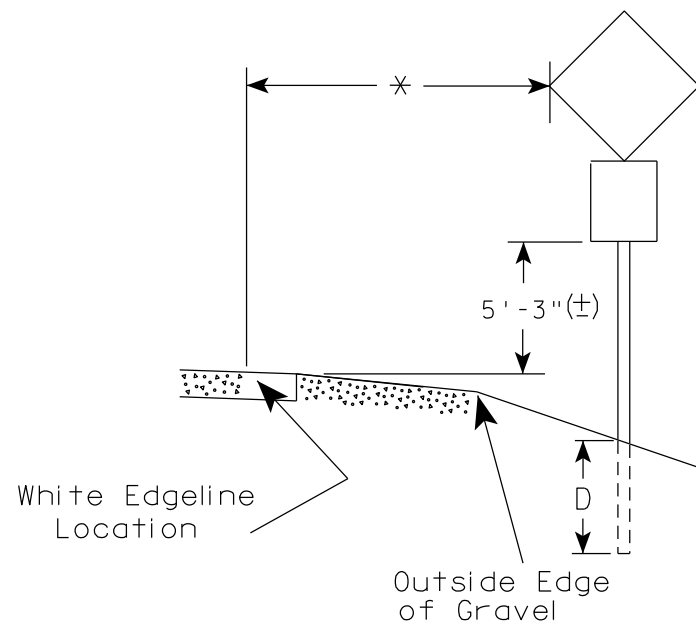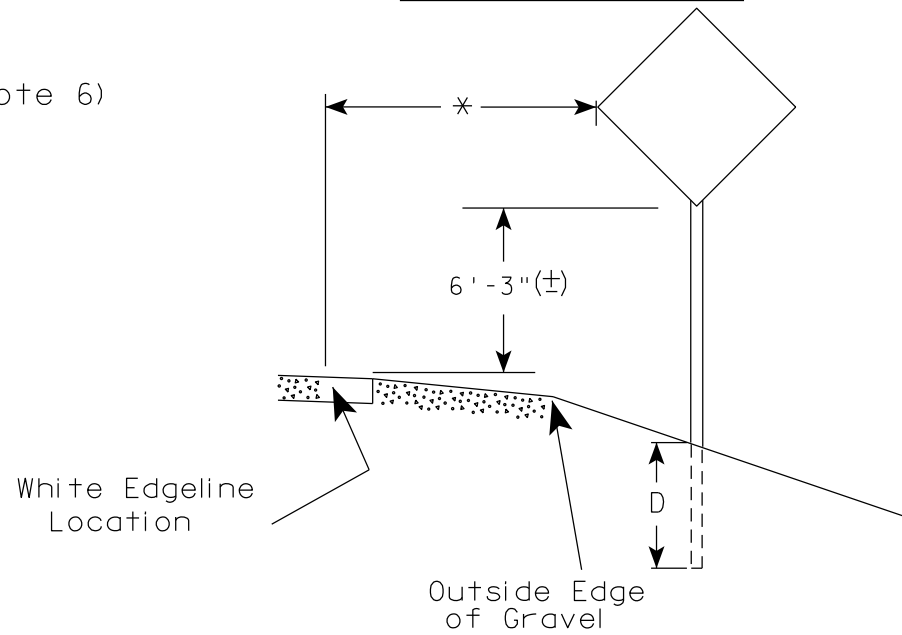

GENERAL NOTES

1. Signs wider than 4 feet or 20 sq.ft or larger, shall be mounted on multiple posts. Refer to plate A4-4.
2. If signs are mounted on or behind barrier wall, see A4-10 sign plate.
The Double Arrow sign (W12-1D) shall be mounted at a height of 2'-3" (±). The Chevron sign (W1-8), Roundabout Chevron panel (R6-4B), Enhanced Reference Markers, Clearance Markers (W5-52), Mile Markers (D10 series), In Road Object Markers (W5-54) & End of Road Markers (W5-56) shall be mounted at a height of 4'-3" (±).
3. For expressways and freeways, mounting height is 7'- 3" (±) or 6'-3" (±) depending upon existence of a sub-sign.
4. Minimum mounting height for signs mounted on traffic signal poles is 5'- 3" (±).
5. Offset distance shall be consistent with existing signs or consistent throughout length of project.
6. The (±) tolerance for mounting height is 3 inches.
7. Folding signs shall be mounted at a height of 5'-3" (±) or as directed by the Engineer.

POST EMBEDMENT DEPTH

Area of Sign Installation (Sq. Ft.)	D (Min)
20 or Less	4'
Greater than 20	5'

* * The existence of curb and gutter does not in itself mandate the vertical clearance illustrated. That height is typically measured where there is sidewalk adjacent to the roadway or parking is permitted. In the absence of sidewalk vertical clearance is measured from the top of the curb. Offset of signs is measured from the flow line.


* 6 feet from edge of a paved shoulder or 12 feet from the edge of pavement (edge line location) or 2 feet from outside edge of gravel, whichever is greater unless directed by project engineer.

TYPICAL INSTALLATION OF PERMANENT TYPE II SIGNS ON SINGLE POSTS

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer


DATE 5/13/2020 PLATE NO. A4-3.22

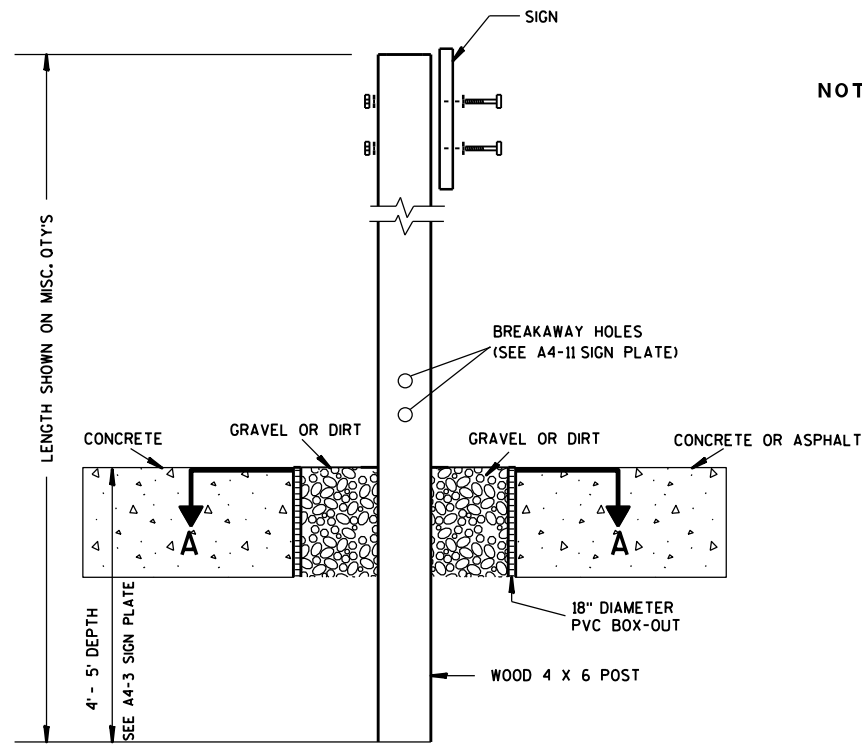

ELEVATION VIEW


DETAIL OF WOOD 4 X 6 SIGN POST IN BOX-OUT

- NOTES:**
1. ALL MATERIAL TO BE APPROVED BY ENGINEER PRIOR TO INSTALLATION
 2. SEE SIGN PLATE A4-8 FOR SIGN HARDWARE REQUIREMENTS
 3. 18 INCH X 18 INCH SQUARE BOX-OUTS MAY BE USED FOR INSTALLATIONS IN EXISTING CONCRETE OR ASPHALT LOCATIONS.

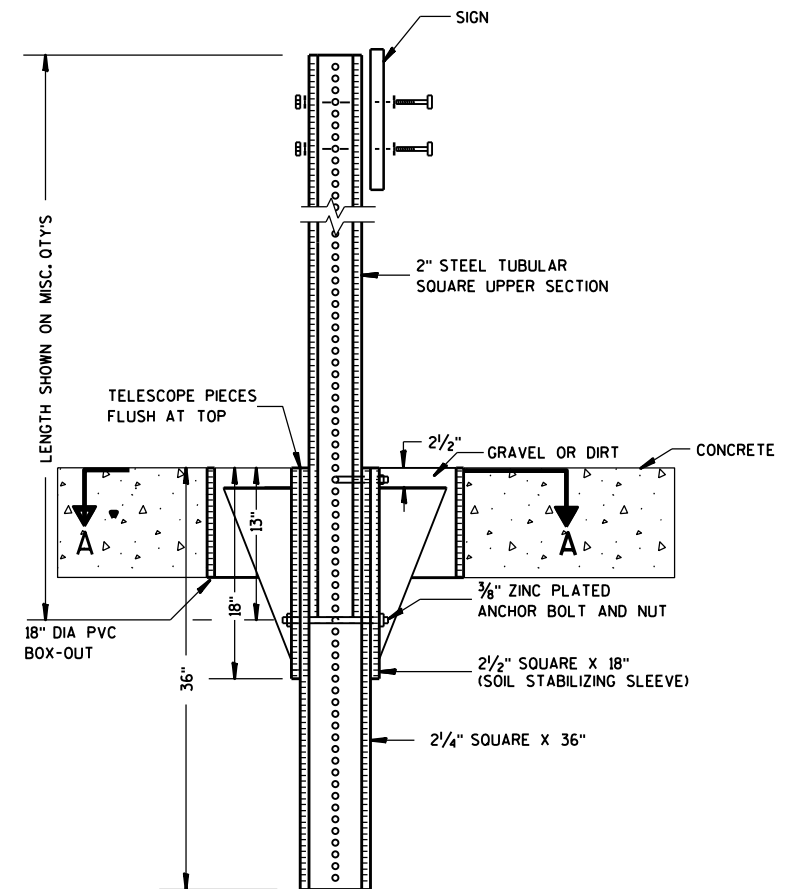

ELEVATION VIEW

DETAIL OF STEEL 2 X 2 SIGN POST IN BOX-OUT

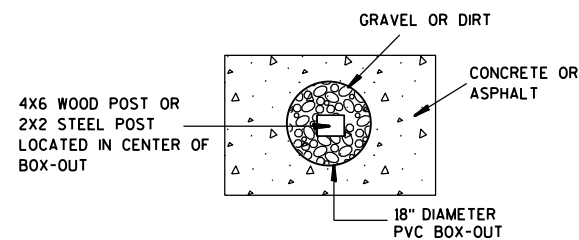

PLAN VIEW

FOR NEW CONCRETE/ ASPHALT INSTALLATIONS

**SIGN POST
BOX-OUTS
A4-3B**

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 1/27/14 PLATE NO. A4-3B.1


7

7



GENERAL NOTES

1. For 3 or 4 post installations, individual post spacing shall be greater than 3'-6".
2. See tables below for required number of posts.
3. For expressways and freeways, mounting height is 7'-3" (±) or 6'-3" (±) depending upon existence of sub-sign.
4. The (±) tolerance for mounting height is 3 inches.
5. J-Assemblies are considered to be one sign for mounting height.
6. Offset distance shall be consistent with existing signs or consistent throughout length of project.
7. Folding signs shall be mounted at a height of 5'-3" (±) or as directed by the engineer.
8. The Double Arrow sign (W12-1) shall be mounted at a height of 2'-3" (±). The Chevron sign (W1-8), Roundabout Chevron panel (R6-4B), Clearance Markers (W5-52), Mile Markers (D10 series), In Road Object Markers (W5-54) & End of Road Markers (W5-56) shall be mounted at a height of 4'-3" (±).


URBAN AREA

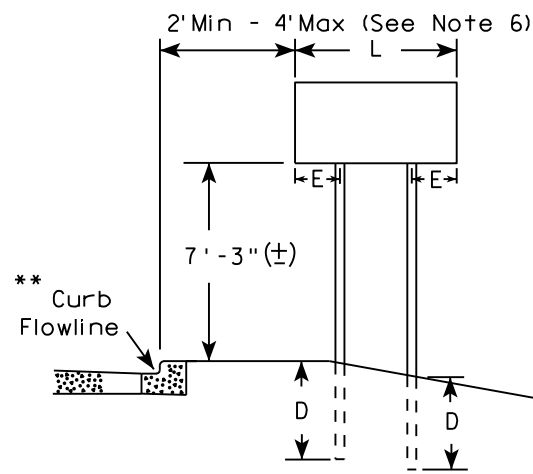


RURAL AREA (See Note 3)

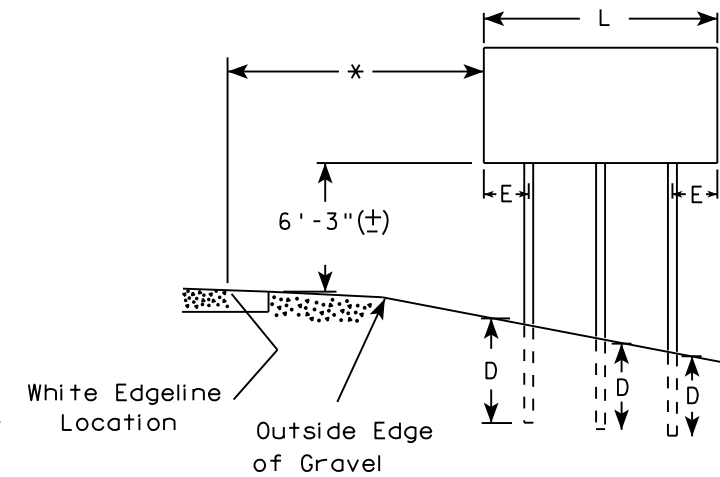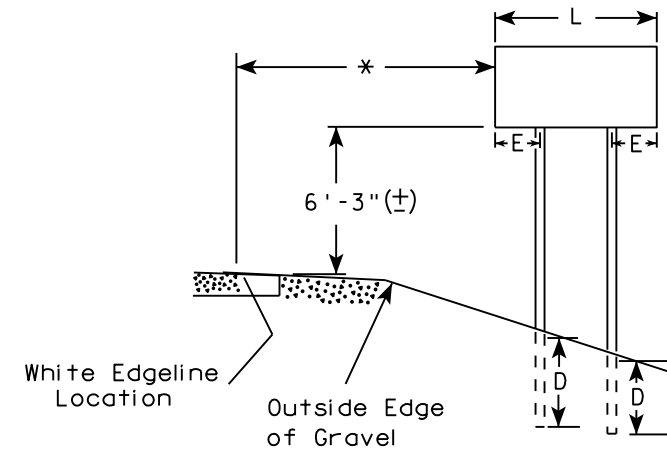

2' Min - 4' Max (See Note 6)

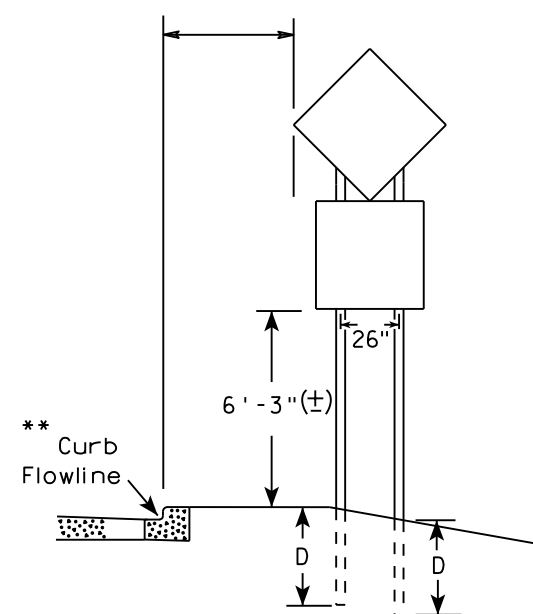

48" DIAMOND WARNING SIGN

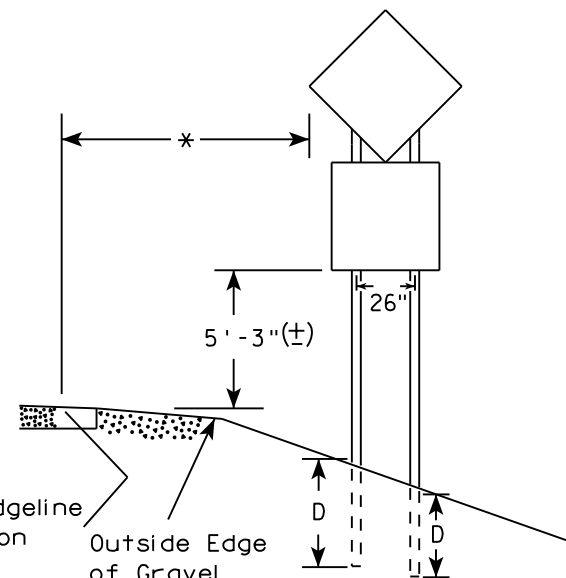

48" DIAMOND WARNING SIGN

* 6 feet from edge of a paved shoulder or 12 feet from the edge of pavement (edge line location) or 2 feet from outside edge of gravel, whichever is greater unless directed by project engineer.

** The existence of curb and gutter does not in itself mandate the vertical clearance illustrated. That height is typically measured where there is sidewalk adjacent to the roadway or parking is permitted. In the absence of sidewalk vertical clearance is measured from the top of the curb. Offset of signs is measured from the flow line.

*** See A4-3 sign plate for signs 4' or less in width and less than 20 S.F. in area.

SIGN SHAPE OTHER THAN DIAMOND (TWO POSTS REQUIRED)	
L	E
Greater than 48" Less than 60"	12"
60" to 108"	L/5


SIGN SHAPE OTHER THAN DIAMOND (THREE POSTS REQUIRED)	
L	E
Greater than 108" to 144"	12"

POST EMBEDMENT DEPTH

Area of Sign Installation (Sq. Ft.)	D (Min)
20 or Less	4'
Greater than 20	5'

TYPICAL INSTALLATION OF TYPE II SIGNS ON MULTIPLE POSTS

WISCONSIN DEPT OF TRANSPORTATION
 APPROVED *Matthew R. Rauch*
 For State Traffic Engineer
 DATE 8/21/17 PLATE NO. A4-4.15

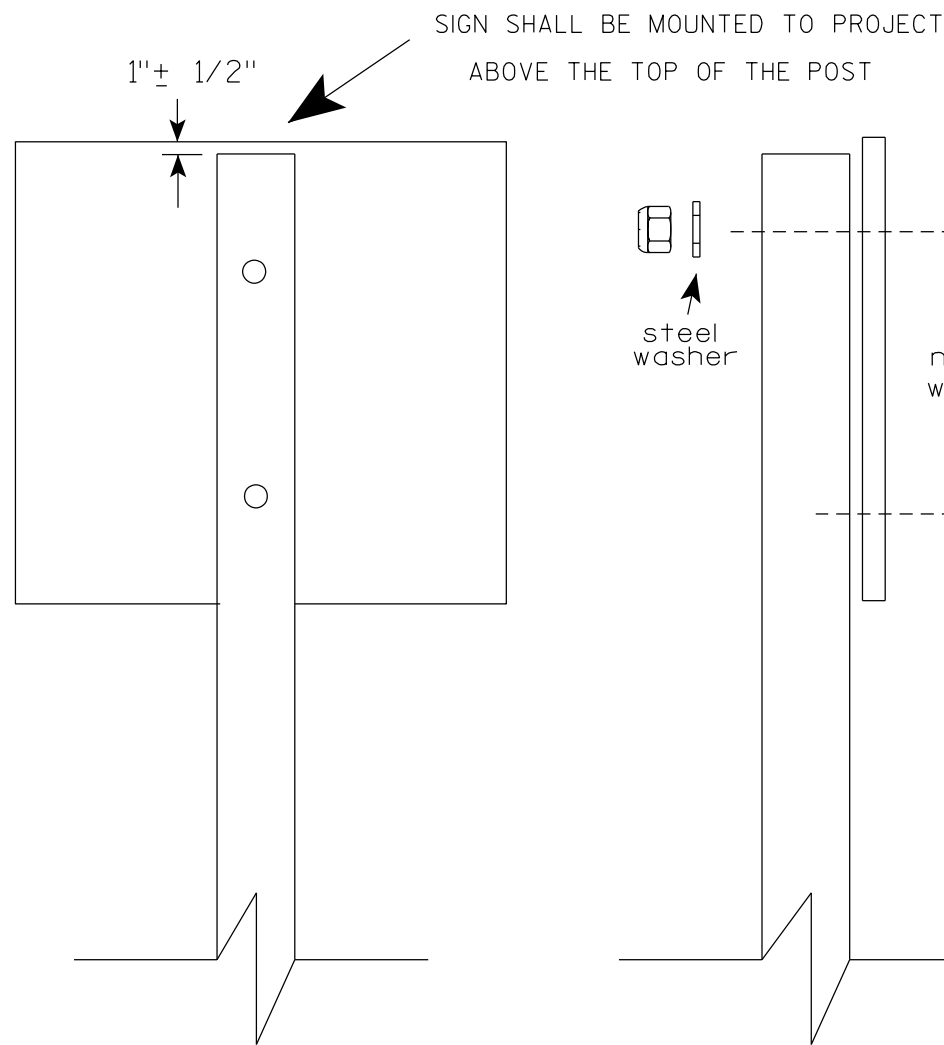

Nuts, bolts and lags used for mounting signs shall have hexagonal heads and shall be either :

- Hot dip galvanized in accordance with ASTM Designation: A 153, Class D, or SC 3
- Electro-galvanized in accordance with ASTM Designation : B 633, TYPE III, SC 3.

Threads on bolts and nuts shall be manufactured with sufficient allowance for the cadmium plate or galvanized coating to permit the nuts to run freely on the bolts.


- STRINGER BOLTING TO ALUMINUM SIGNS (SEE SIGN PLATE A4-18)
- MACHINE BOLTS - $\frac{5}{16}$ " X 1-3/4" Length w/ lock nuts
- WOOD POSTS (4" x 6")
- LAG SCREWS - $\frac{3}{8}$ " X 3" (NO STRINGERS ON BACK OF SIGN)
 - $\frac{3}{8}$ " X 4" (STRINGERS ON BACK OF SIGN)
- SQUARE STEEL POSTS (2" x 2")
- MACHINE BOLTS - $\frac{3}{8}$ " X 3-1/4" Length w/ nuts (NO STRINGER ON BACK OF SIGN)
 - $\frac{3}{8}$ " X 5" Length w/ nuts (STRINGERS ON BACK OF SIGN)
- RIVETS - $\frac{9}{32}$ " (6605-9-6) BULB-TITE, TRI-FOLD, ALUMINUM BODY/MANDREL
- O.D. FLANGE .720-.765 INCH, GRIP RANGE .042-.375 INCH
- WASHERS (ALL POSTS) -
- 1-1/4" O.D. X $\frac{3}{8}$ " I.D. X $\frac{1}{16}$ " STEEL
 - 1-1/4" O.D. X $\frac{3}{8}$ " I.D. X .080 NYLON

* Two different fastening systems are shown for illustration purposes. On any individual sign, either one or the other system shall be used. Actual number of fasteners per sign varies with the sign area, but normally there are two. For a single post installation, all signs greater than 9 sq. ft. require the use of 3 fasteners.


ATTACHMENT OF SIGNS TO POSTS	
WISCONSIN DEPT OF TRANSPORTATION	
APPROVED	<i>Matthew R Rauch</i> For State Traffic Engineer
DATE 4/1/2020	PLATE NO. A4-8.9

**TELESCOPIC TUBING ANCHORS
TWO PIECE SYSTEM**


2 1/4" SQUARE
12 GAUGE
PERFORATED
GALVANIZED FINISH

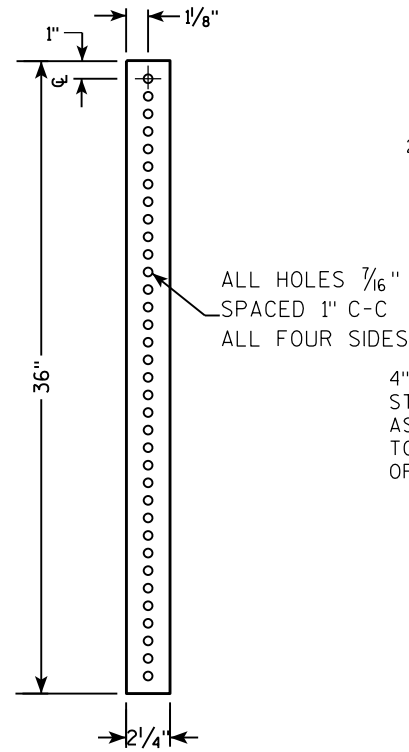



2 1/2" SQUARE
12 GAUGE
OMNI-DIRECTIONAL
PERFORATED
SOIL STABILIZING SLEEVE
GALVANIZED FINISH

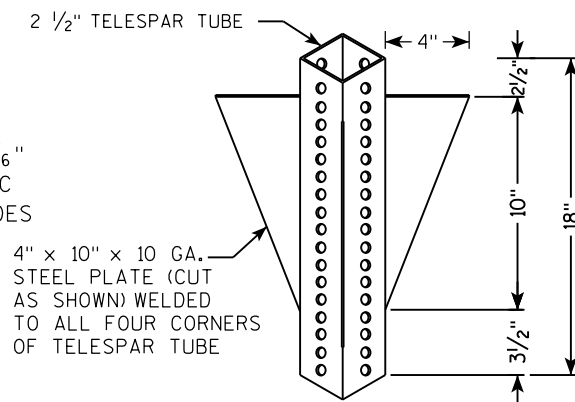

**DETAIL OF TUBULAR STEEL SIGN POST
(IN POURED CONCRETE OR ASPHALT)**

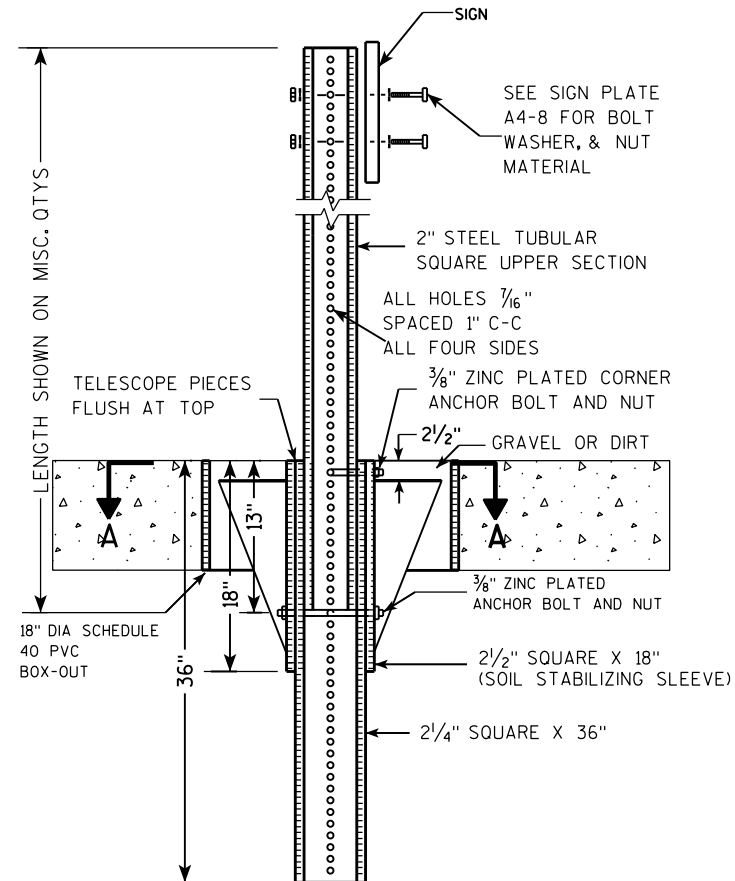

**DETAIL OF TUBULAR STEEL SIGN POST
(IN LOCATIONS OTHER THAN POURED CONCRETE OR ASPHALT)**

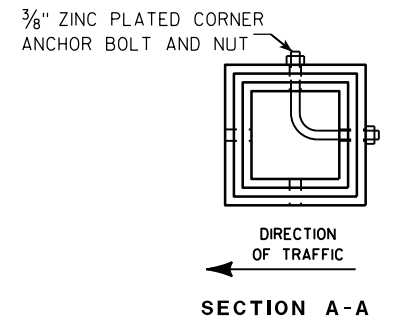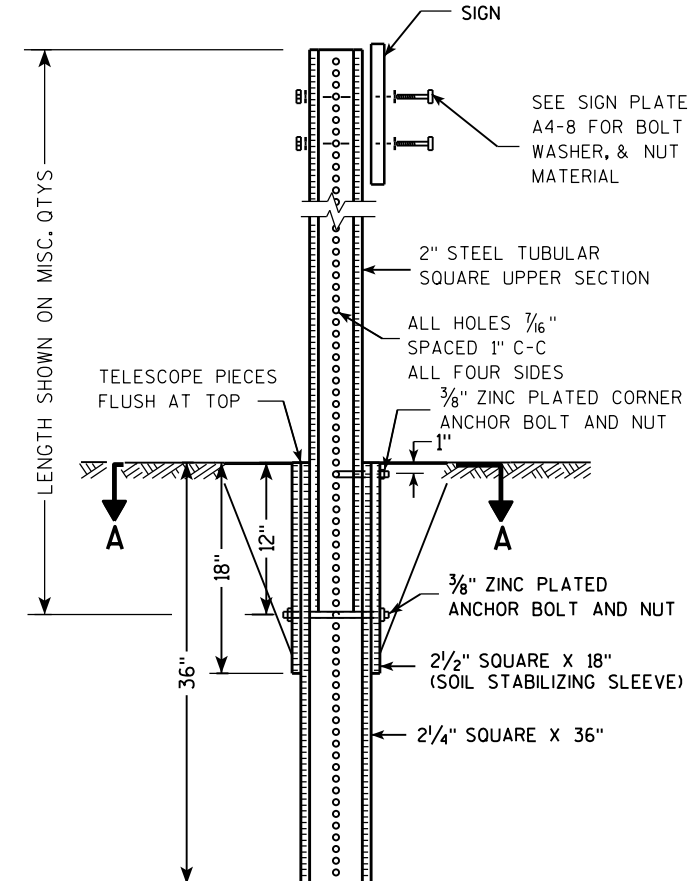

Area of Sign Installation (Sq. Ft.)	Number of Required Posts
9 or less	1
Greater than 9 less than or equal to 18	2
Greater than 18 less than or equal to 27	3

Signs wider than 3 feet or larger than 9 sq. ft shall be mounted on multiple posts (see above table).

**TUBULAR STEEL
SIGN POST
A4-9**

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 2/05/15 PLATE NO. A4-9.9



PROJECT NO:

HWY:

COUNTY:

SHEET NO:

E

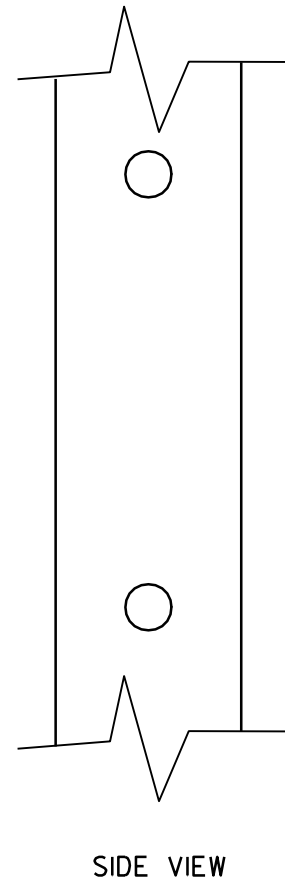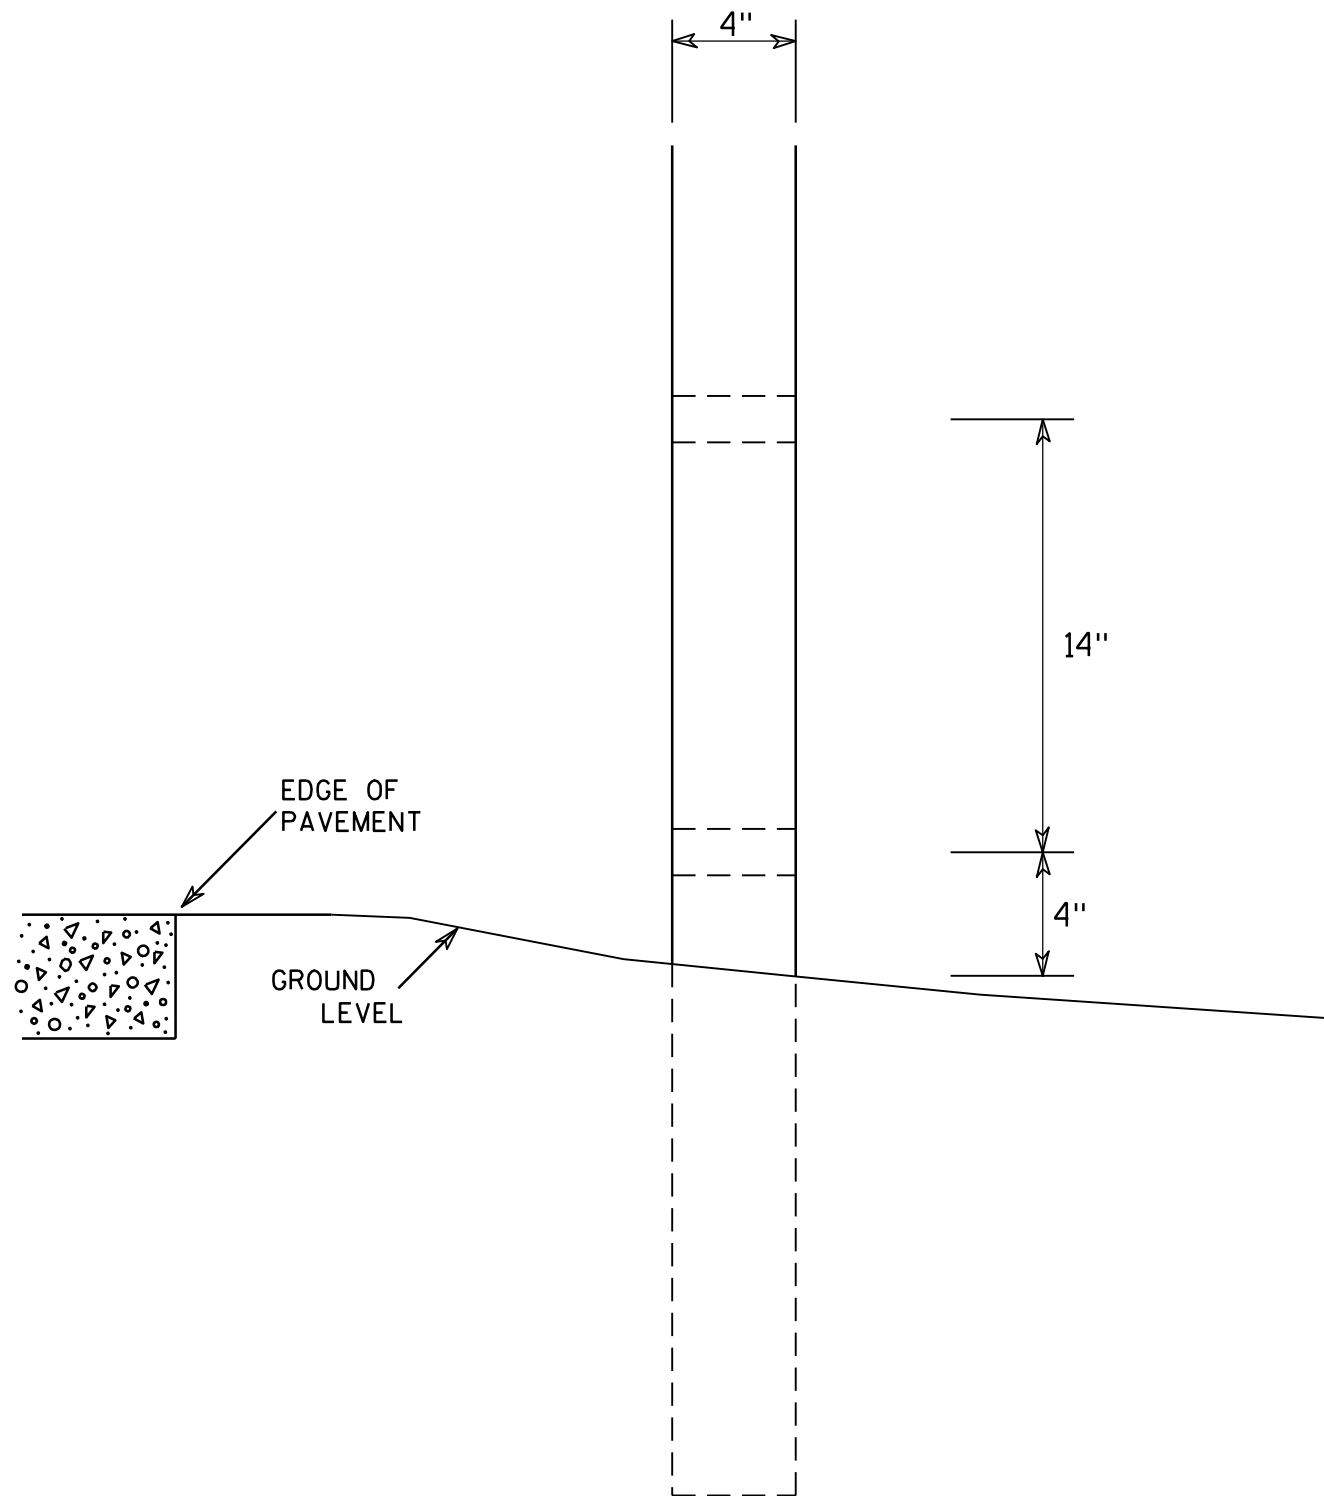

GENERAL NOTES

1. All 4 x 6 Wood Posts shall be modified by having two 1½" diameter holes drilled perpendicular to the roadway centerline.




7

7


4 X 6 WOOD POST MODIFICATIONS	
<i>WISCONSIN DEPT OF TRANSPORTATION</i>	
APPROVED	<i>Chester J Spang</i> for State Traffic Engineer
DATE <u>3/27/97</u>	PLATE NO. <u>A4-11.2</u>

BANDING


SINGLE SIGN

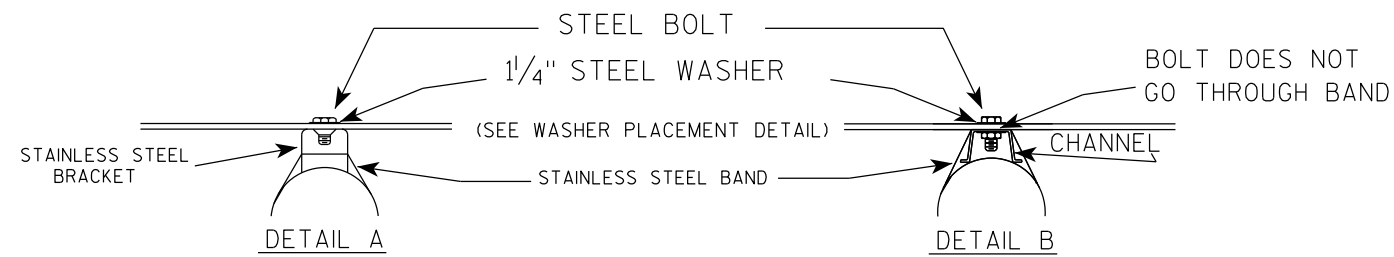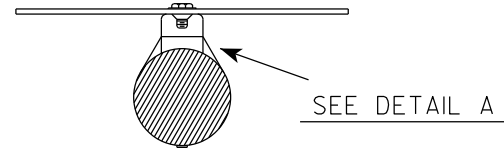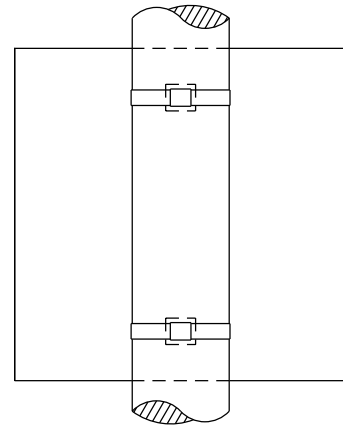

"J" ASSEMBLY

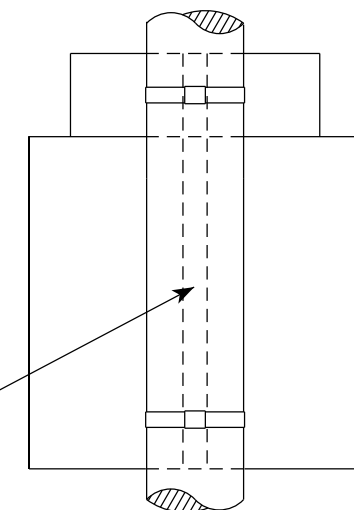


CHANNEL
SEE TYPICAL PANEL
INSTALLATION SHEET



- GENERAL NOTES**
1. Any sign over 3 feet in width shall use the V-Block banding method. See A5-10 standard plate.
 2. Signs 3 feet or greater in height shall have three bracket bands installed. Signs less than 3 feet in height shall have two bracket bands installed.
 3. Banding and assembly bracket shall be stainless steel. All bands shall be $\frac{3}{4}$ " in width and 0.025" thickness.
 4. ALL SIGN MOUNTING BOLTS AND WASHERS SHALL BE EITHER:
 - a. Hot dip or mechanically galvanized in accordance with ASTM Designation: A 153, Class D
 - b. Electro-galvanized in accordance with ASTM designation: B 633, Type III, SC 3

WASHER PLACEMENT

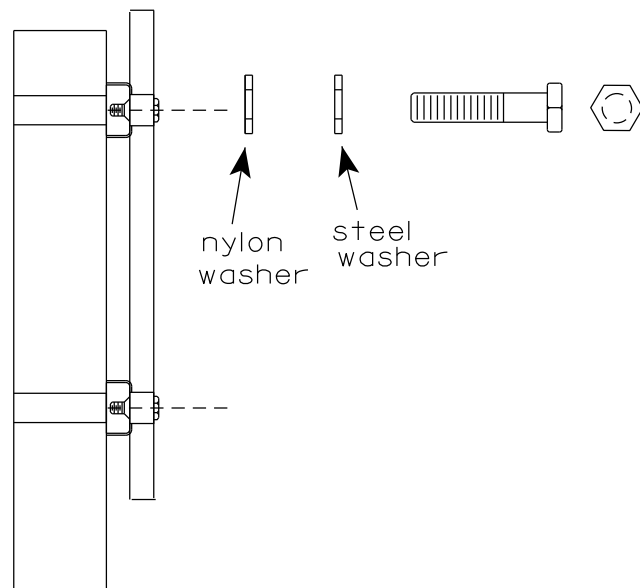


WASHERS (ALL POSTS) -
 1-1/4" O.D. X 3/8" I.D. X 1/16" STEEL
 1-1/4" O.D. X 3/8" I.D. X .080 NYLON
 FOR ALL TYPE H SIGNS

STANDARD SIGN
SIGN BANDING DETAILS

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer


DATE 6/10/19 PLATE NO. A5-9.4

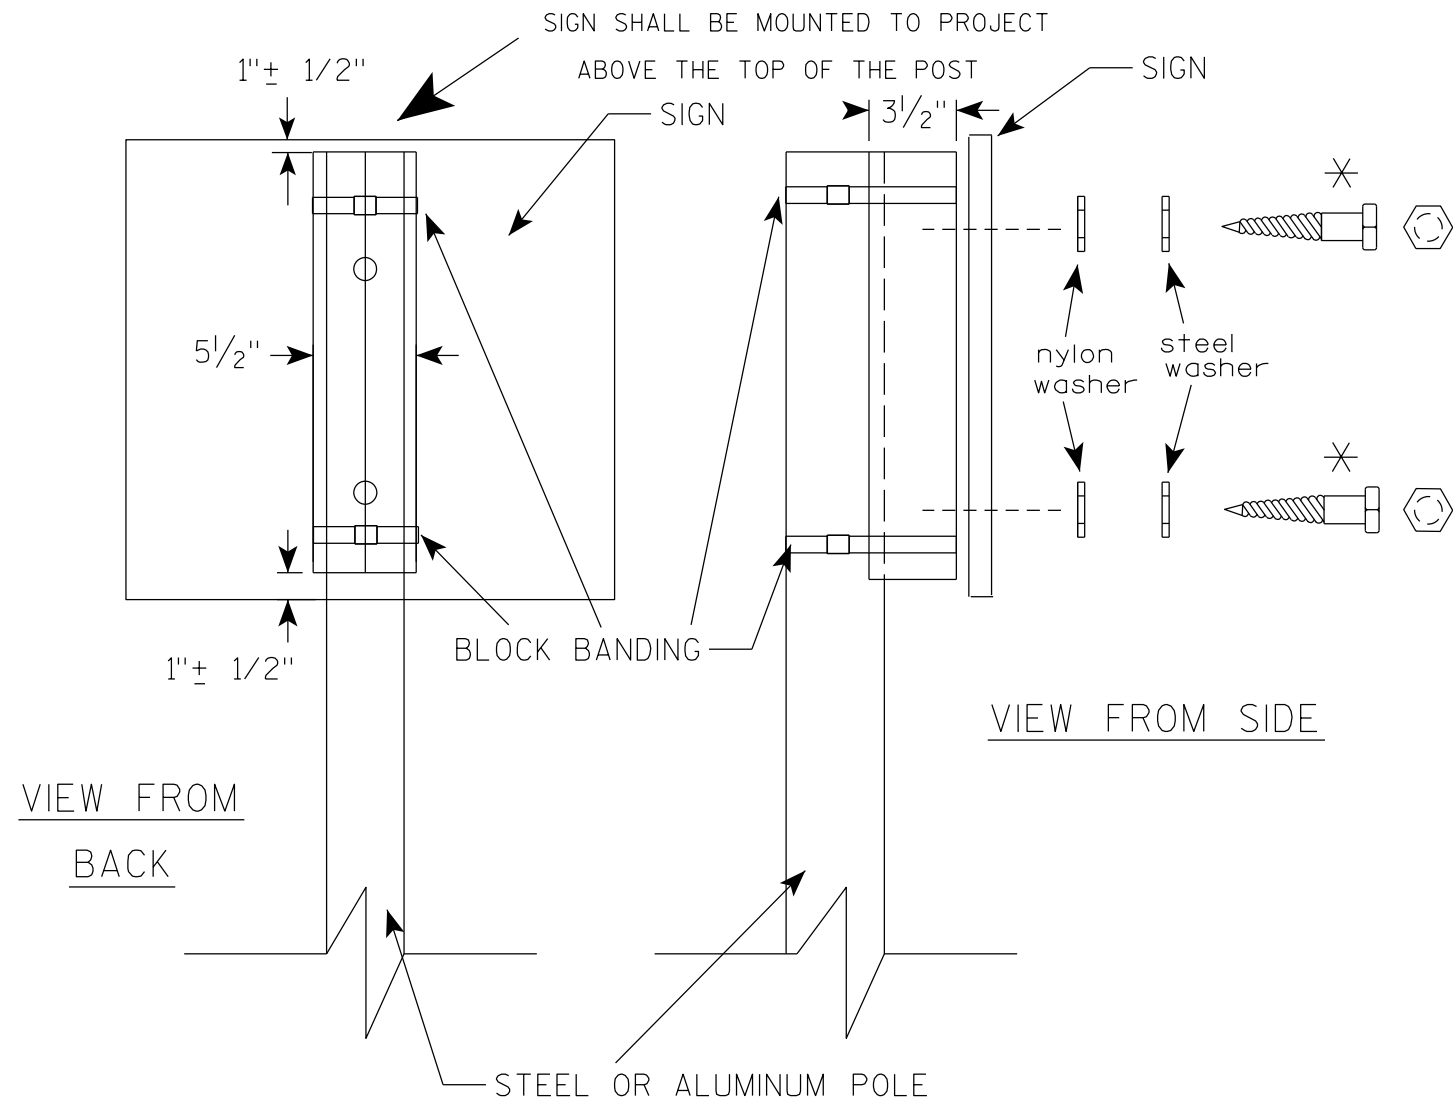

GENERAL NOTES

1. WOOD 4"X6" POST MATERIAL SHALL CONFORM TO 507.2.2 OF THE WISDOT STANDARD SPECIFICATIONS
2. BLOCK BANDING AND CLIPS SHALL BE STAINLESS STEEL, 3/4" WIDTH AND 0.025" THICKNESS
3. SIGNS 3' OR GREATER IN HEIGHT SHALL UTILIZE 3 BLOCK BANDS. SIGNS UNDER 3' IN HEIGHT SHALL UTILIZE 2 BLOCK BANDS
4. ACTUAL NUMBER OF FASTENERS PER SIGN VARIES WITH THE SIGN AREA, BUT NORMALLY THERE ARE TWO. FOR SIGNS GREATER THAN 9 S.F. 3 FASTENERS SHALL BE USED.
5. ALL SIGN MOUNTING BOLTS AND WASHERS SHALL BE EITHER:
 - a. Hot dip or mechanically galvanized in accordance with ASTM Designation: A 153, Class D
 - b. Electro-galvanized in accordance with ASTM Designation : B 633, TYPE III, SC 3
6. ALL BOLTS SHALL HAVE HEXAGONAL HEADS.
7. STEEL WASHERS SHALL BE 1/4" O.D. X 3/8" I.D. X 1/16"
8. NYLON WASHERS SHALL BE 1/4" O.D. X 3/8" I.D. X .080 FOR TYPE H OR TYPE F FACE SIGN

* LAG BOLTS SHALL BE 3/8" X 2 1/2"

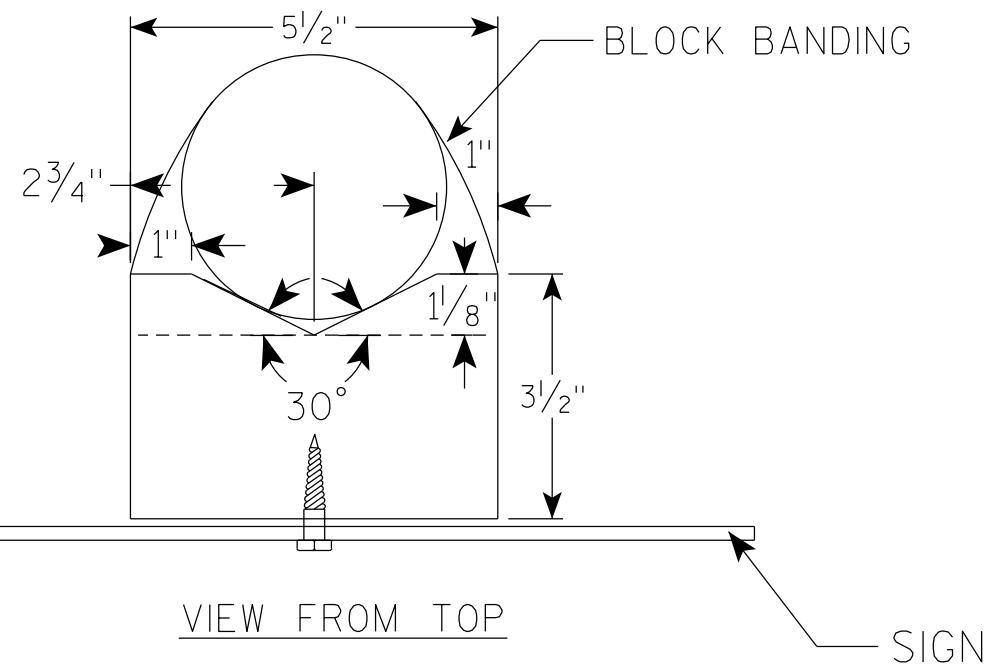

BLOCK BANDING DETAIL
(V-BLOCK OPTION)


WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 4/19/2022 PLATE NO. A5-10.3

NOTES

1. Sign is Type II - Type F Reflective - reference WIS DOT Standard Specification for HIGHWAY and STRUCTURE CONSTRUCTION latest edition.
2. Color:
Background - Orange
Message - Black
3. Message Series - C
4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.

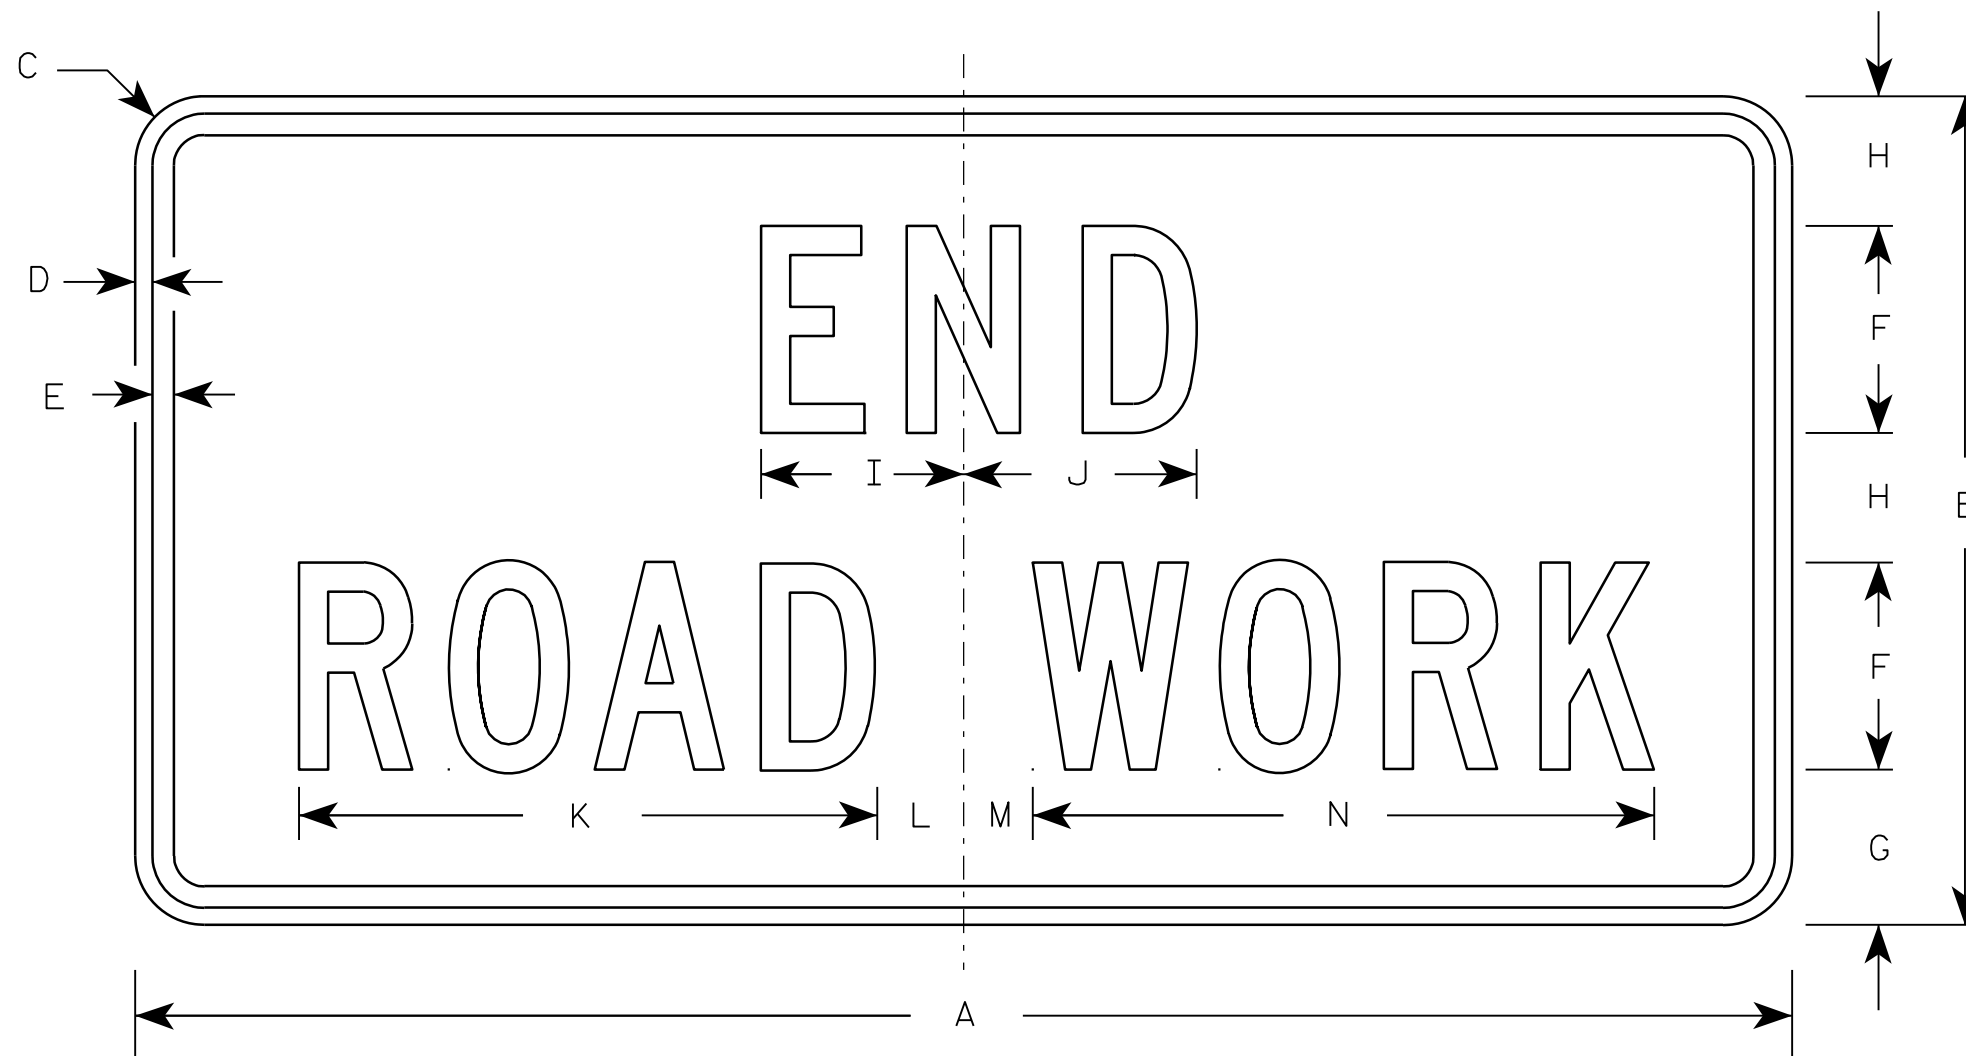

G20-2A

Metric equivalent
for this sign is:


SIZE	
1	900 mm X 450 mm
2	1200 mm X 600 mm
3	1200 mm X 600 mm
4	1200 mm X 600 mm
5	1200 mm X 600 mm

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.	Area sq.
1	36	18	1 1/8	3/8	1/2	4	3 3/4	2 1/2	4 1/8	4 1/8	11 1/8	2	1	12 1/8													4.5	0.41
2	48	24	1 1/2	1/2	5/8	6	4 1/2	3 3/4	5 7/8	6 3/4	16 3/4	2 1/2	1 3/4	18 1/2													8.0	0.72
3	48	24	1 1/2	1/2	5/8	6	4 1/2	3 3/4	5 7/8	6 3/4	16 3/4	2 1/2	1 3/4	18 1/2													8.0	0.72
4	48	24	1 1/2	1/2	5/8	6	4 1/2	3 3/4	5 7/8	6 3/4	16 3/4	2 1/2	1 3/4	18 1/2													8.0	0.72
5	48	24	1 1/2	1/2	5/8	6	4 1/2	3 3/4	5 7/8	6 3/4	16 3/4	2 1/2	1 3/4	18 1/2													8.0	0.72




STANDARD SIGN G20-2A	
WISCONSIN DEPT OF TRANSPORTATION	
APPROVED	<i>Matthew R. Rauch</i> For State Traffic Engineer
DATE 9/30/09	PLATE NO. G20-2A.8

NOTES

1. Sign is Type II - see Note 7 - reference WIS DOT Standard Specification for HIGHWAY and STRUCTURE CONSTRUCTION latest edition.
2. Color:
Background - White & Black - See Note 7
Message - Black
3. Message Series - see Note 5
4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
5. Message Series E for 1 letter.
Message Series D for 2 letters unless message is too big then Series C.
Message Series C for 3 letters unless message is too big then Series B.
6. Substitute appropriate letters & optically center to achieve proper balance.
7. Permanent Signs
Background - Type H Reflective
Detour or temporary Signs
Background - Reflective

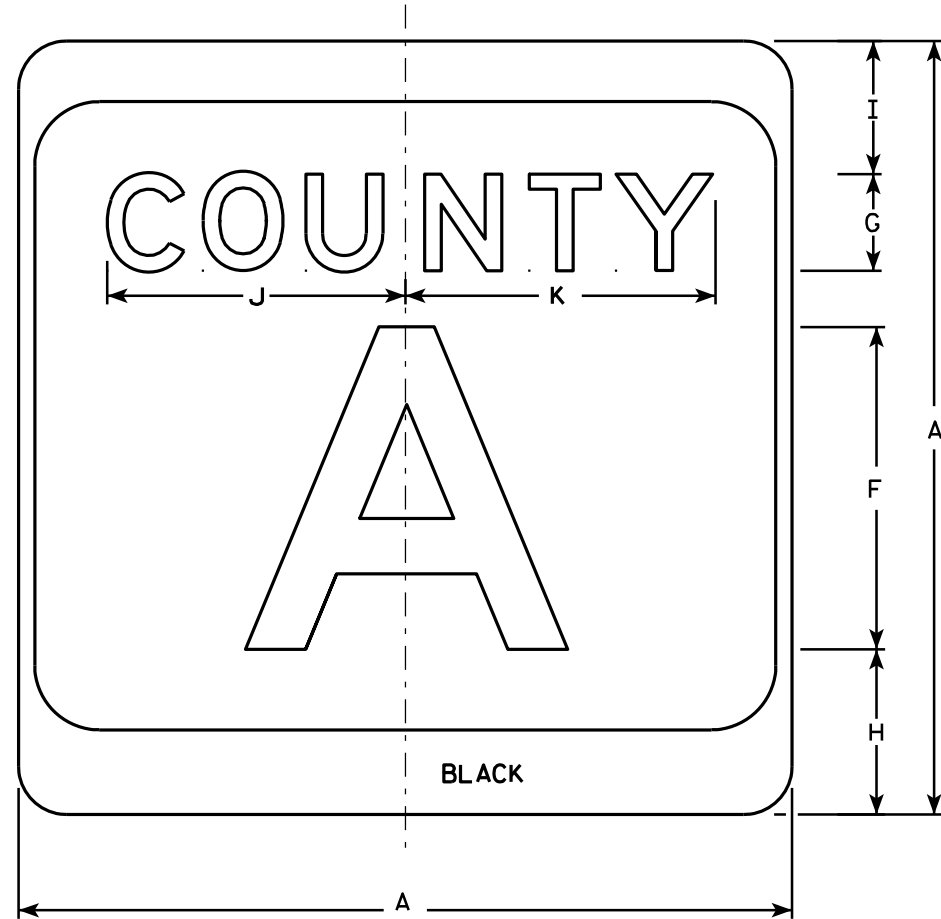

M1-5A

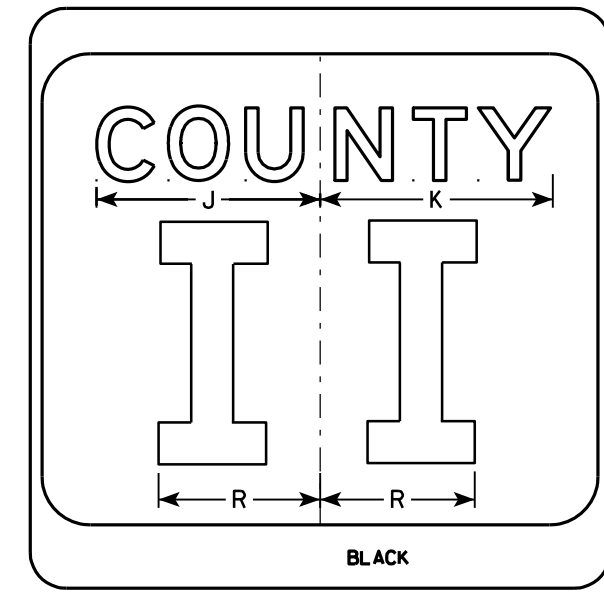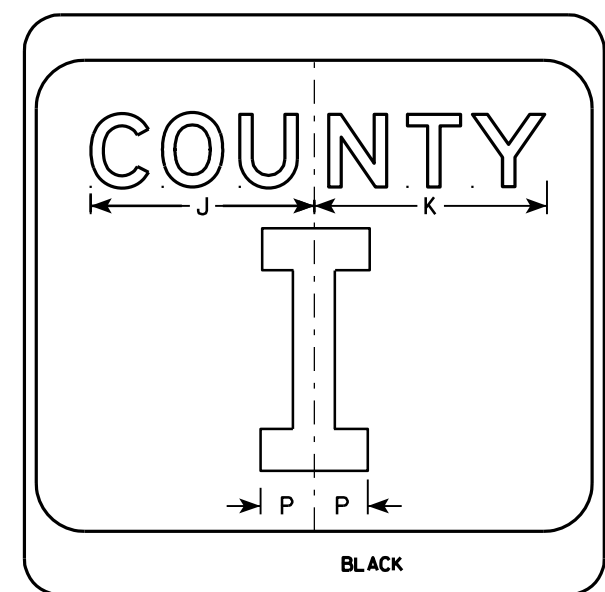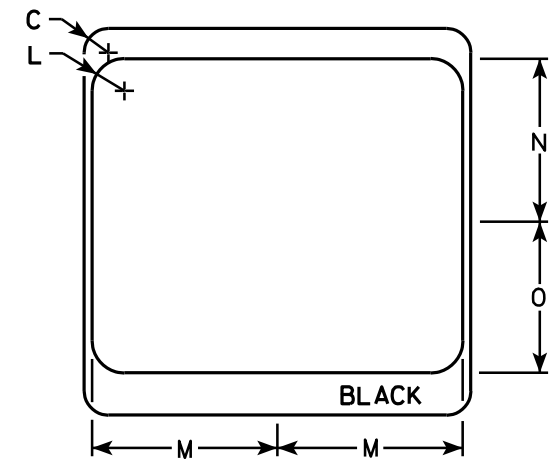

7

7

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2	24		1 1/2			10	3	5 1/8	4 1/8	9 1/4	9 5/8	2	11 1/2	10 1/8	9 3/8	2 1/4		6 5/8									4.0
3	36		2 1/4			16	4	7 5/8	5 5/8	12 1/4	12 7/8	3	17 1/8	15 1/4	14	3 3/8		10									9.0
4	36		2 1/4			16	4	7 5/8	5 5/8	12 1/4	12 7/8	3	17 1/8	15 1/4	14	3 3/8		10									9.0
5	36		2 1/4			16	4	7 5/8	5 5/8	12 1/4	12 7/8	3	17 1/8	15 1/4	14	3 3/8		10									9.0

CTH MARKER
M1-5A FOR ASSEMBLIES

WISCONSIN DEPT OF TRANSPORTATION


APPROVED *Matthew R. Raub*
For State Traffic Engineer

DATE 9/27/11 PLATE NO. MI-5A.8

PROJECT NO: _____ HWY: _____ COUNTY: _____ SHEET NO: **E**

NOTES

1. Sign is Type II - See Note 5 - reference WIS DOT Standard Specification for HIGHWAY and STRUCTURE CONSTRUCTION latest edition.
2. Color:
Background - White - See Note 5
Message - Black
3. Message Series - C
4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
5. Permanent Signs
Background - Type H Reflective
Temporary or other temporary Signs
Background - Reflective

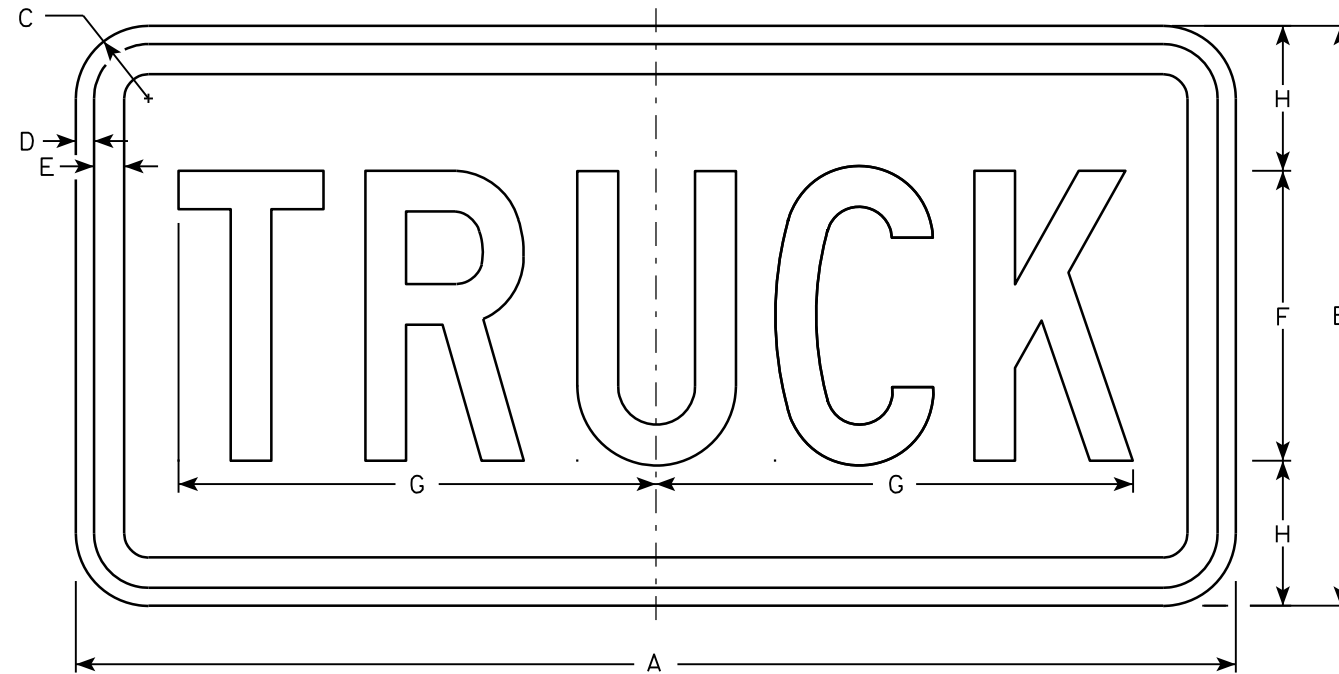

M4-4

7

7

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2	24	12	1 1/2	3/8	3/8	6	9 7/8	3																			2.0
3	36	18	1 1/2	3/8	1/2	9	15 5/8	4 1/2																			4.5
4																											
5																											


STANDARD SIGN
M4-4

WISCONSIN DEPT OF TRANSPORTATION


APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 11/10/10 PLATE NO. M4-4.3

PROJECT NO: _____ HWY: _____ COUNTY: _____ SHEET NO: **E**

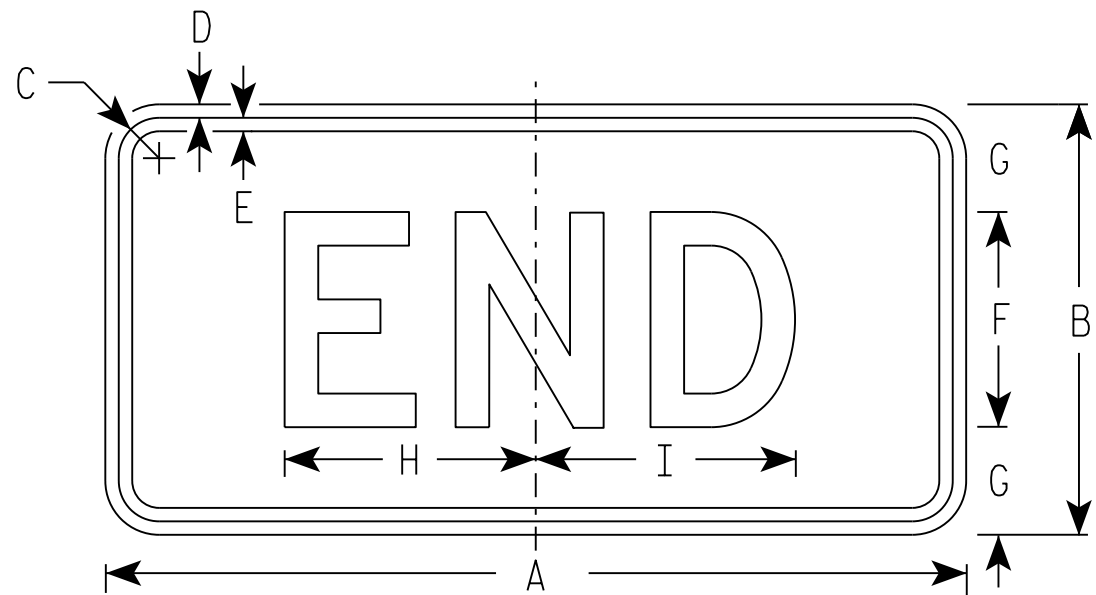

M4-6
MM4-6
MP4-6

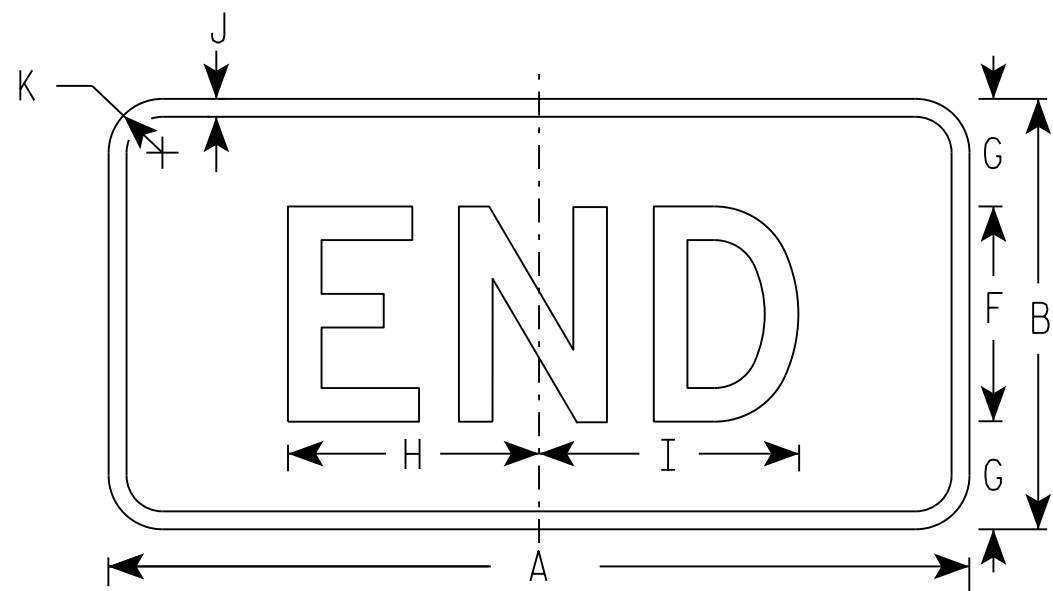

MB4-6
MK4-6
MN4-6
MR4-6

NOTES

1. Sign is Type II - Type H
2. Color:
 - Background - See note 5
 - Message - See note 5
3. Message Series - D
4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
5. M4-6 Background - White
Message - Black
- MB4-6 Background - Blue
Message - White
- MK4-6 Background - Green
Message - White
- MM4-6 Background - White
Message - Green
- MN4-6 Background - Brown
Message - White
- MP4-6 Background - White
Message - Blue
- MR4-6 Background - Brown
Message - Yellow

7

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2	24	12	1 1/8	3/8	3/8	6	3	7	7 1/4	1/2	1 1/2																2.00
3	36	18	1 1/8	3/8	1/2	9	4 1/2	12	11 7/8	1/2	1 1/2																4.5
4	36	18	1 1/8	3/8	1/2	9	4 1/2	12	11 7/8	1/2	1 1/2																4.5
5	36	18	1 1/8	3/8	1/2	9	4 1/2	12	11 7/8	1/2	1 1/2																4.5

STANDARD SIGN
M4-6


WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R Rauch*
for State Traffic Engineer

DATE 10/15/15 PLATE NO. M4-7.9

NOTES

1. Sign is Type II - Type F Reflective - reference WIS DOT Standard Specification for HIGHWAY and STRUCTURE CONSTRUCTION latest edition.
2. Color:
Background - Orange
Message - Black
3. Message Series - B
4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.

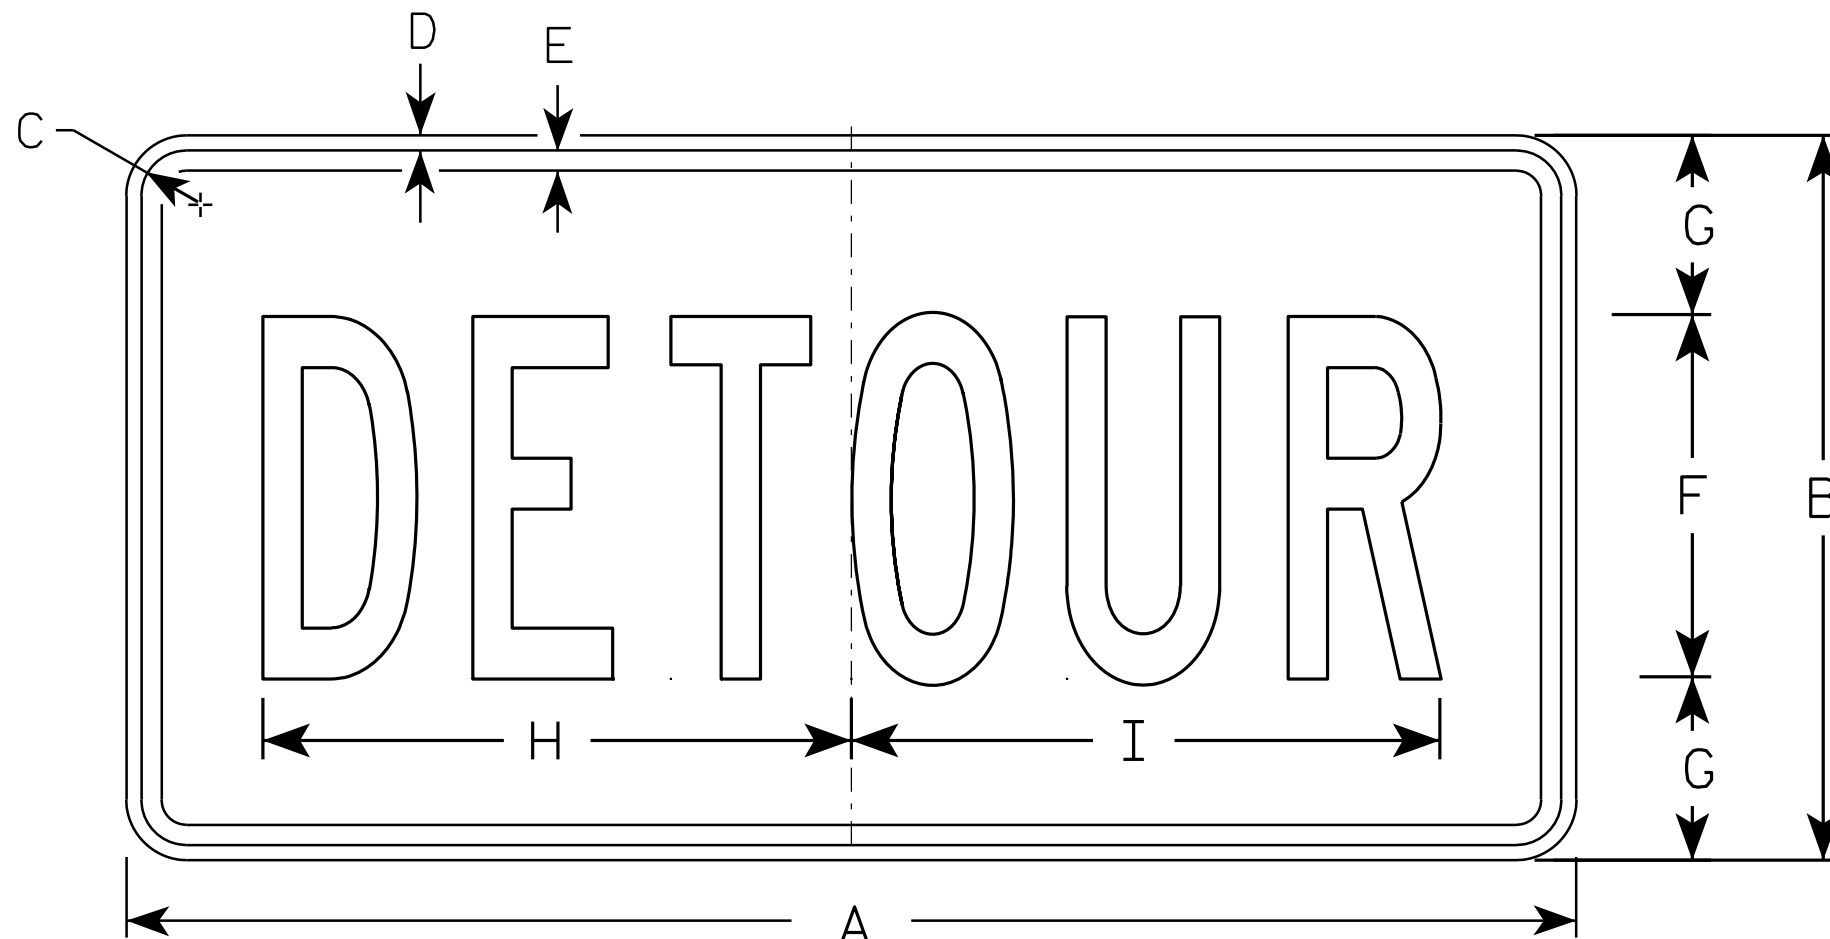

M4-8

7

7

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2	24	12	1 1/8	3/8	3/8	6	3	10	10 1/4																		2.0
3	36	18	1 1/8	3/8	1/2	9	4 1/2	14 5/8	14 1/2																		4.5
4																											
5																											


STANDARD SIGN
M4-8

WISCONSIN DEPT OF TRANSPORTATION


APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 11/10/10 PLATE NO. M4-8.2


PROJECT NO: _____ HWY: _____ COUNTY: _____ SHEET NO: **E**

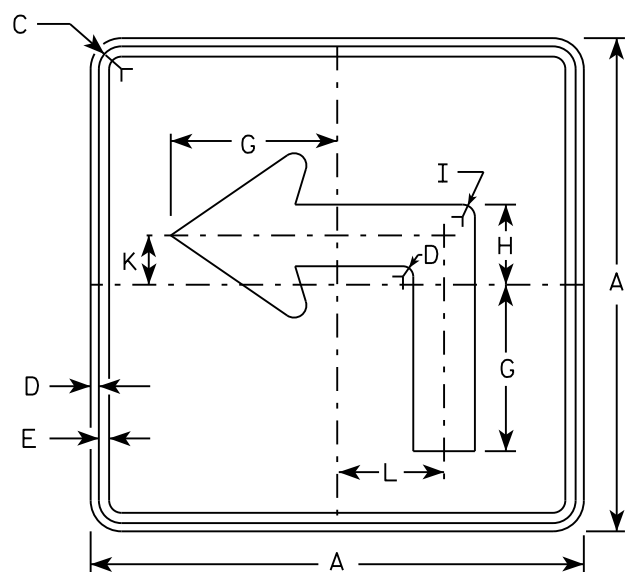


M5-1L
MM5-1L
M05-1L
MP5-1L

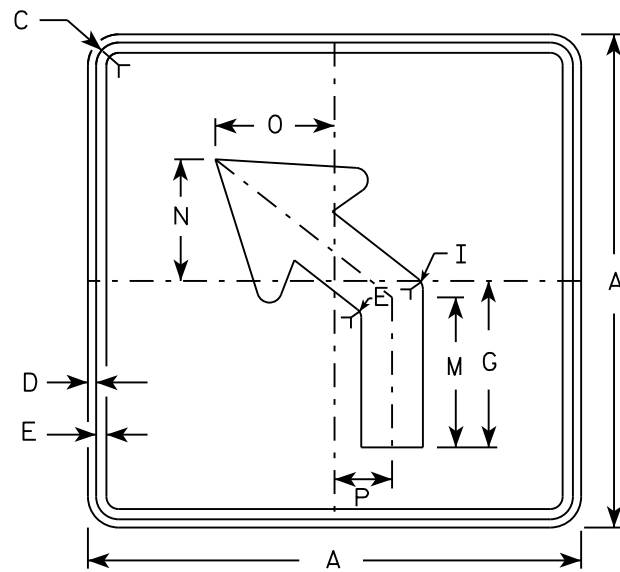


M5-2L
MM5-2L
M05-2L
MP5-2L

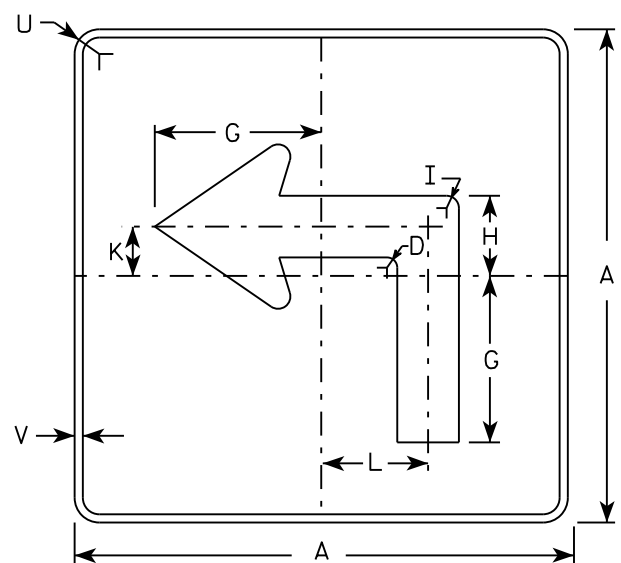

MB5-1L
MK5-1L
MN5-1L
MR5-1L

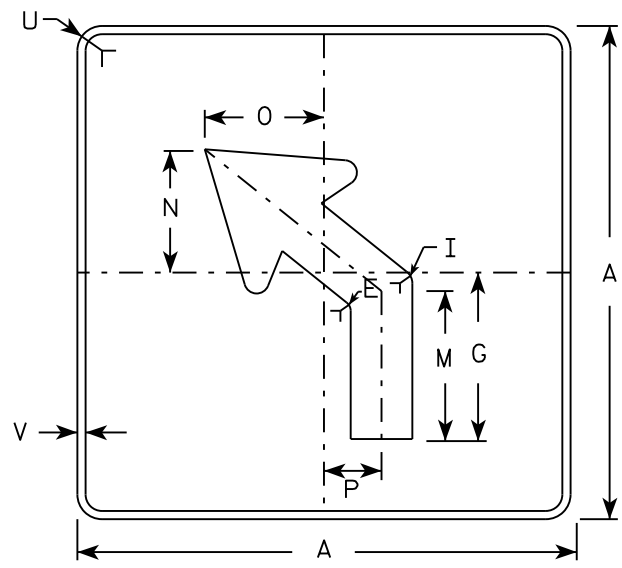

MB5-2L
MK5-2L
MN5-2L
MR5-2L

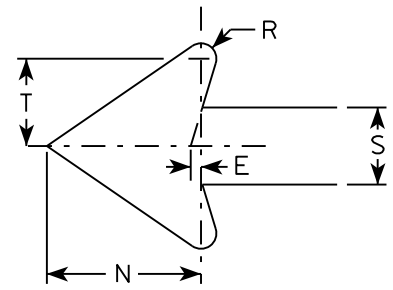

NOTES

- Signs are Type II - Type H reflective except as shown
- Color:
 - Background - See note 4
 - Message - See note 4
- Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
- | | |
|-----------------|---|
| M5-1 and M5-2 | Background - White |
| | Message - Black |
| MB5-1 and MB5-2 | Background - Blue |
| | Message - White |
| MK5-1 and MK5-2 | Background - Green |
| | Message - White |
| MM5-1 and MM5-2 | Background - White |
| | Message - Green |
| MN5-1 and MN5-2 | Background - Brown |
| | Message - White |
| M05-1 and M05-2 | Background - Orange - Type F Reflective |
| | Message - Black |
| MP5-1 and MP5-2 | Background - White - Type H Reflective |
| | Message - Blue |
| MR5-1 and MR5-2 | Background - Brown |
| | Message - Yellow |
- M5-1R same as M5-1L except arrow points right.
- M5-2R same as M5-2L except arrow tilts right.


SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2	21		1 1/8	3/8	3/8		7	3 3/8	5/8		2 1/8	4 1/2	6 3/8	5 1/4	5	2 1/2		1/2	2 5/8	3	1 1/2	1/2					3.06
3	30		1 3/8	1/2	5/8		10 1/8	4 7/8	7/8		3	6 1/2	9 1/8	7 1/2	7 1/4	3 1/2		3/4	3 3/4	4 1/4	1 7/8	1/2					6.25
4	30		1 3/8	1/2	5/8		10 1/8	4 7/8	7/8		3	6 1/2	9 1/8	7 1/2	7 1/4	3 1/2		3/4	3 3/4	4 1/4	1 7/8	1/2					6.25
5	30		1 3/8	1/2	5/8		10 1/8	4 7/8	7/8		3	6 1/2	9 1/8	7 1/2	7 1/4	3 1/2		3/4	3 3/4	4 1/4	1 7/8	1/2					6.25

STANDARD SIGN
M5-1 & M5-2


WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer


DATE 10/15/15 PLATE NO. M5-1.13

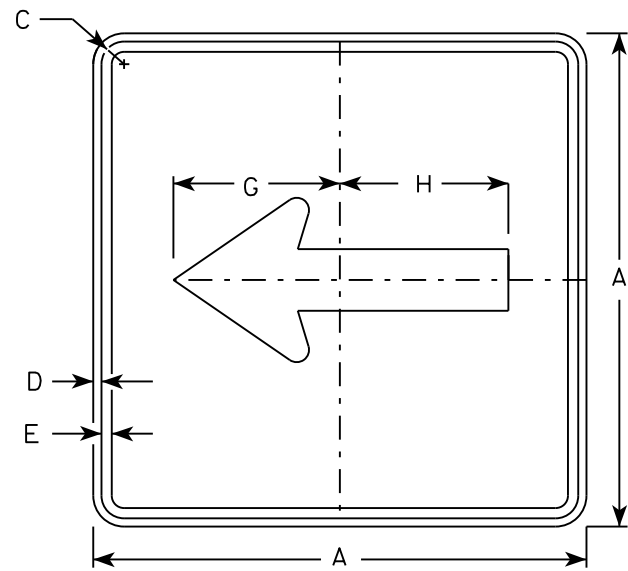


M6-1
MM6-1
M06-1
MP6-1

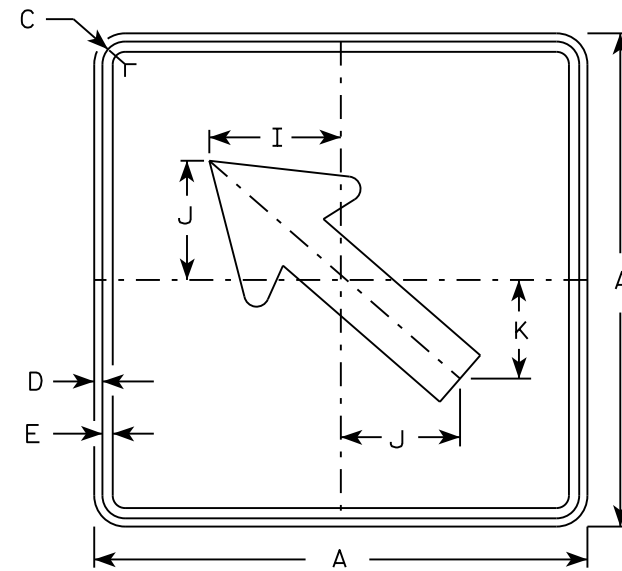


M6-2
MM6-2
M06-2
MP6-2

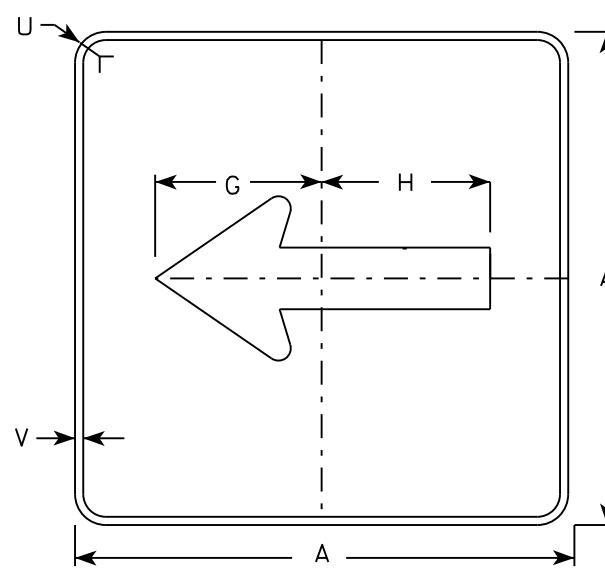

MB6-1
MK6-1
MN6-1
MR6-1

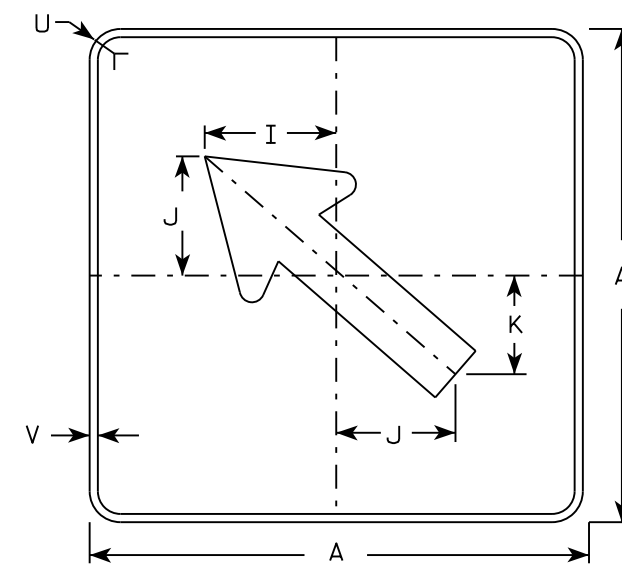

MB6-2
MK6-2
MN6-2
MR6-2

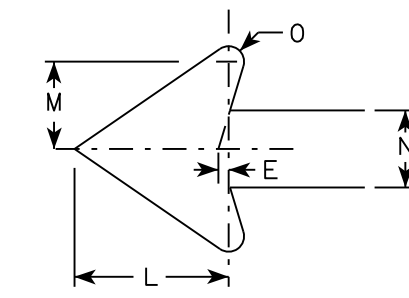

NOTES

- Signs are Type II - Type H except as Shown
- Color:
Background - See note 4
Message - See note 4
- Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
- M6-1 and M6-2 Background - White
Message - Black
MB6-1 and MB6-2 Background - Blue
Message - White
MK6-1 and MK6-2 Background - Green
Message - White
MM6-1 and MM6-2 Background - White
Message - Green
MN6-1 and MN6-2 Background - Brown
Message - White
M06-1 and M06-2 Background - Orange - Type F Reflective
Message - Black
MP6-1 and MP6-2 Background - White
Message - Blue
MR6-1 and MR6-2 Background - Brown
Message - Yellow

7


SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2	21		1 1/8	3/8	3/8		7 1/2	7 1/8	5 5/8	5	4 1/4	5 1/4	3	2 5/8	1/2						1 1/2	1/2					3.06
3	30		1 3/8	1/2	5/8		10 3/4	10 1/4	8	7 1/4	6	7 1/2	4 1/4	3 3/4	3/4						1 7/8	1/2					6.25
4	30		1 3/8	1/2	5/8		10 3/4	10 1/4	8	7 1/4	6	7 1/2	4 1/4	3 3/4	3/4						1 7/8	1/2					6.25
5	30		1 3/8	1/2	5/8		10 3/4	10 1/4	8	7 1/4	6	7 1/2	4 1/4	3 3/4	3/4						1 7/8	1/2					6.25

STANDARD SIGN
M6-1 & M6-2
SERIES


WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer


DATE 10/15/15 PLATE NO. M6-1.15

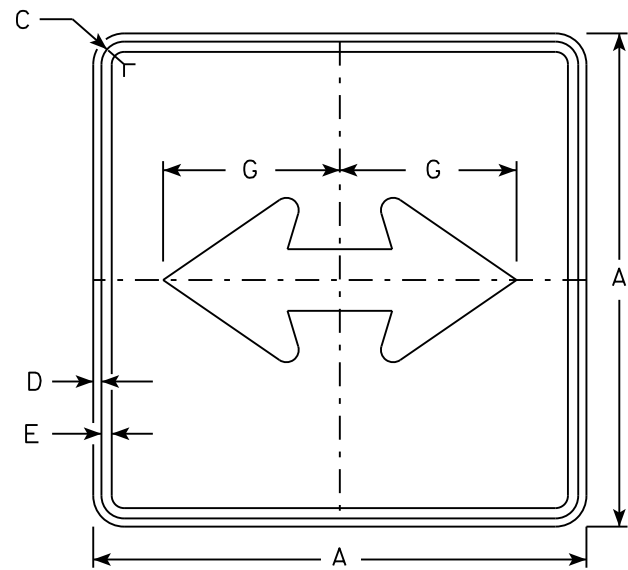


M6-4
MM6-4
M06-4
MP6-4

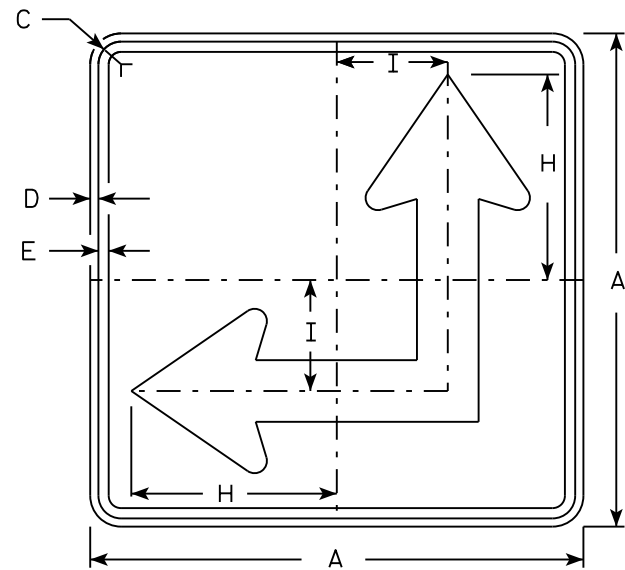

M6-6
MM6-6
M06-6
MP6-6

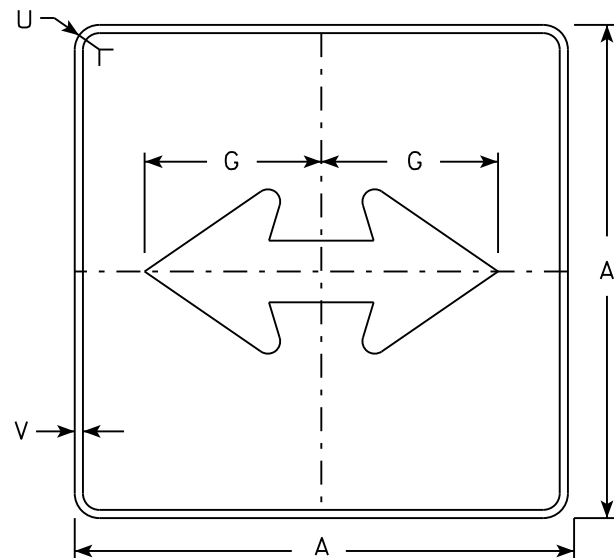


MB6-4
MK6-4
MN6-4
MR6-4

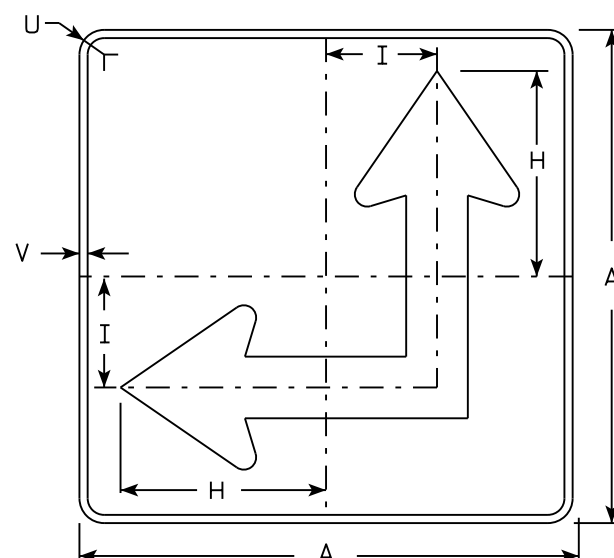

MB6-6
MK6-6
MN6-6
MR6-6

NOTES

- Signs are Type II - Type H except as Shown
- Color:
Background - See Note 4
Message - See Note 4
- Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
- M6-4 and M6-6 Background - White
Message - Black
MB6-4 and MB6-6 Background - Blue
Message - White
MK6-4 and MK6-6 Background - Green
Message - White
MM6-4 and MM6-6 Background - White
Message - Green
MN6-4 and MN6-6 Background - Brown
Message - White
M06-4 and M06-6 Background - Orange - Type F Reflective
Message - Black
MP6-4 and MP6-6 Background - White
Message - Blue
MR6-4 and MR6-6 Background - Brown
Message - Yellow
- M6-6R same as M6-6L except arrow points ahead and right.

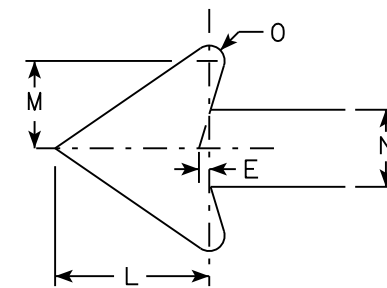

7



SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2	21		1 1/8	3/8	3/8		7 1/2	8 3/4	4 1/4			5 1/4	3	2 5/8	1/2						1 1/2	1/2					3.06
3	30		1 3/8	1/2	5/8		10 3/4	12 1/2	6 3/4			7 1/2	4 1/4	3 3/4	3/4						1 7/8	1/2					6.25
4	30		1 3/8	1/2	5/8		10 3/4	12 1/2	6 3/4			7 1/2	4 1/4	3 3/4	3/4						1 7/8	1/2					6.25
5	30		1 3/8	1/2	5/8		10 3/4	12 1/2	6 3/4			7 1/2	4 1/4	3 3/4	3/4						1 7/8	1/2					6.25

STANDARD SIGN
M6-4 & M6-6
SERIES

WISCONSIN DEPT OF TRANSPORTATION





APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 10/15/15 PLATE NO. M6-4.10

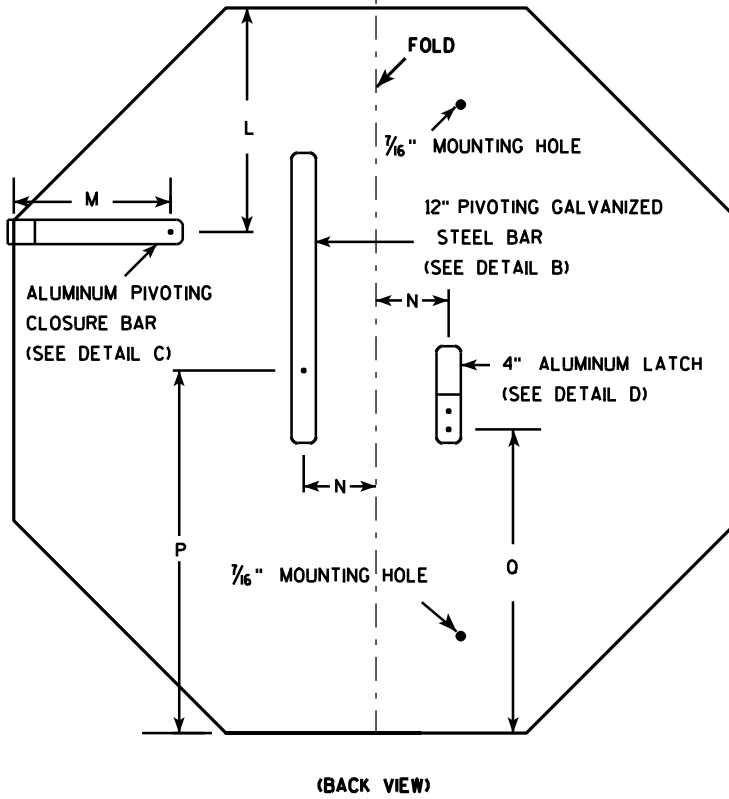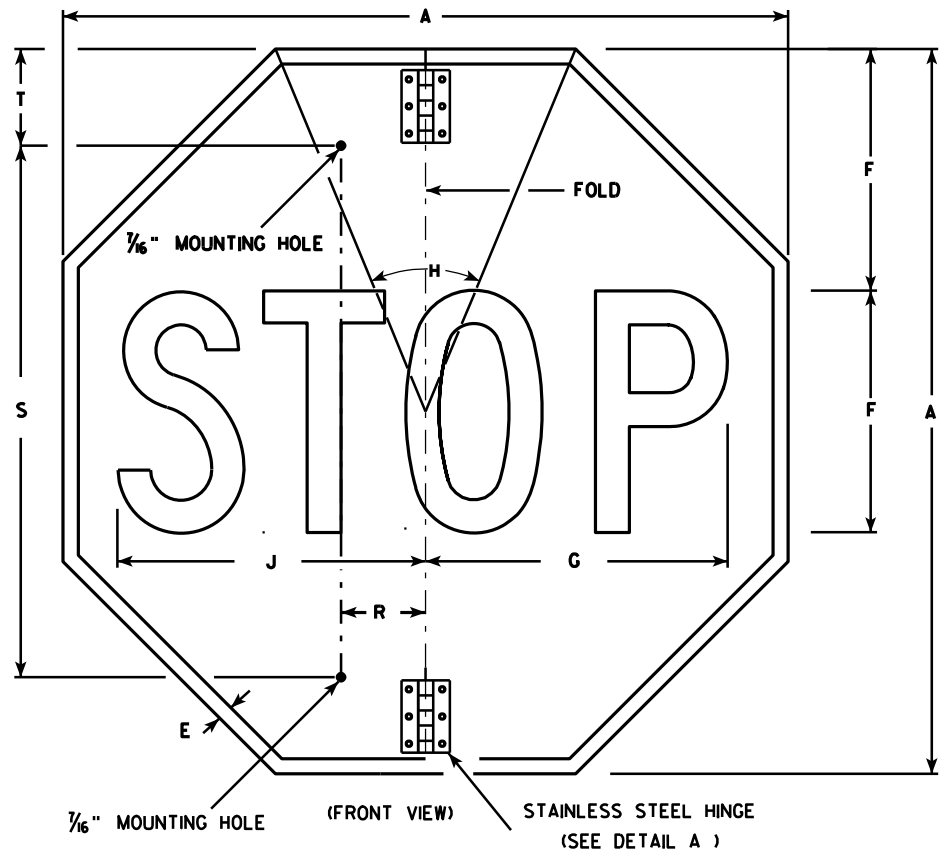

NOTES

1. Sign is Type II - Type H Reflective - reference WIS DOT Standard Specification for HIGHWAY and STRUCTURE CONSTRUCTION latest edition.
2. Color:
Background - Red
Message - White
3. Message Series - C
4. All hardware used on the folding STOP sign installation shall conform to 637.2.4 of the WIS DOT Standard Specification.

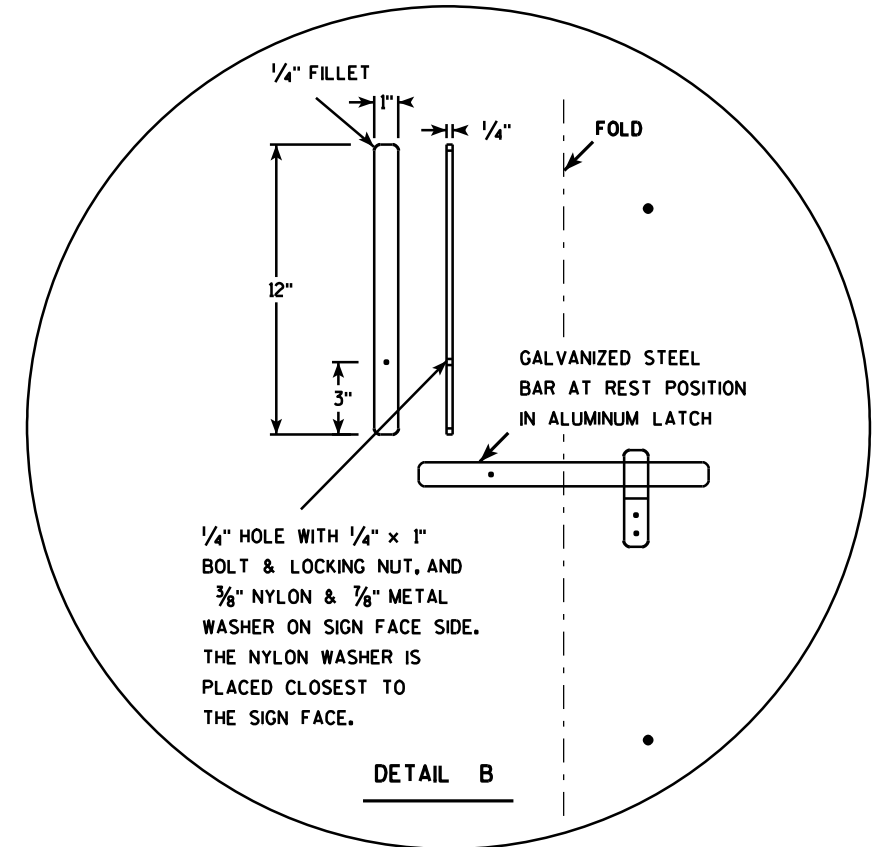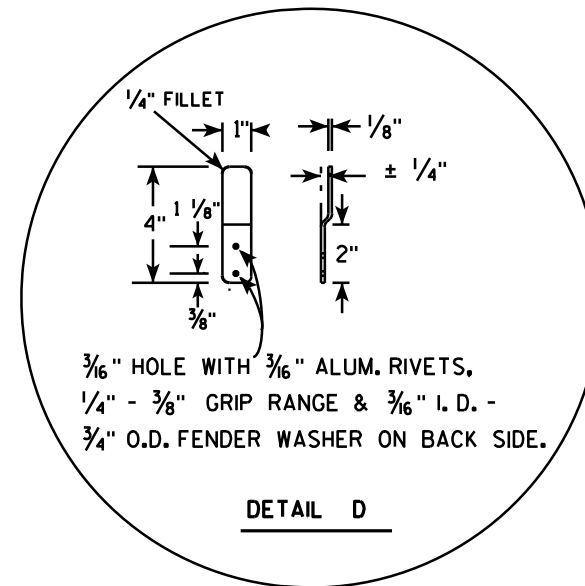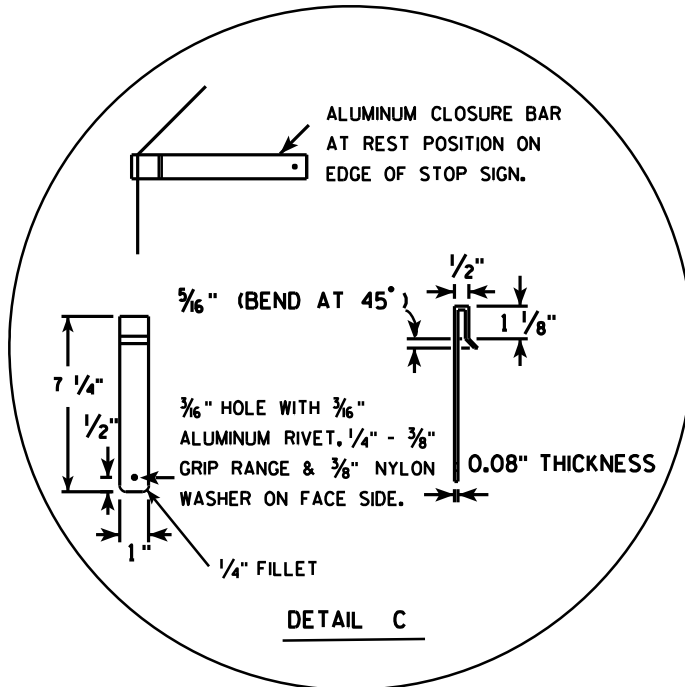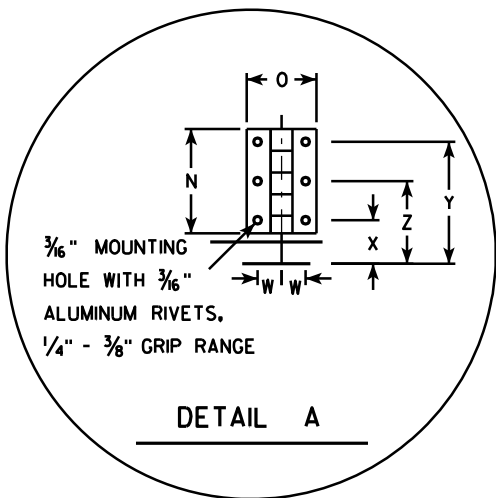

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2S	30				5/8	10	12 1/2	45		12 3/4		9 1/4	6 1/2	3	2	15	12 3/8	2 1/2	22	5		1/16	1 1/4	3 1/2	2 3/8	5.18	
2M	36				3/4	12	15	45		15 3/8		11	6 1/2	3	2	18	15 3/8	2 1/2	26	5		1/16	1 1/4	3 1/2	2 3/8	7.46	
3	36				3/4	12	15	45		15 3/8		11	6 1/2	3	2	18	15 3/8	2 1/2	26	5		1/16	1 1/4	3 1/2	2 3/8	7.46	
4																											
5																											


STANDARD SIGN
R1-1F

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 12/03/10 PLATE NO. R1-1F.3

PROJECT NO: _____ HWY: _____ COUNTY: _____ SHEET NO: **E**

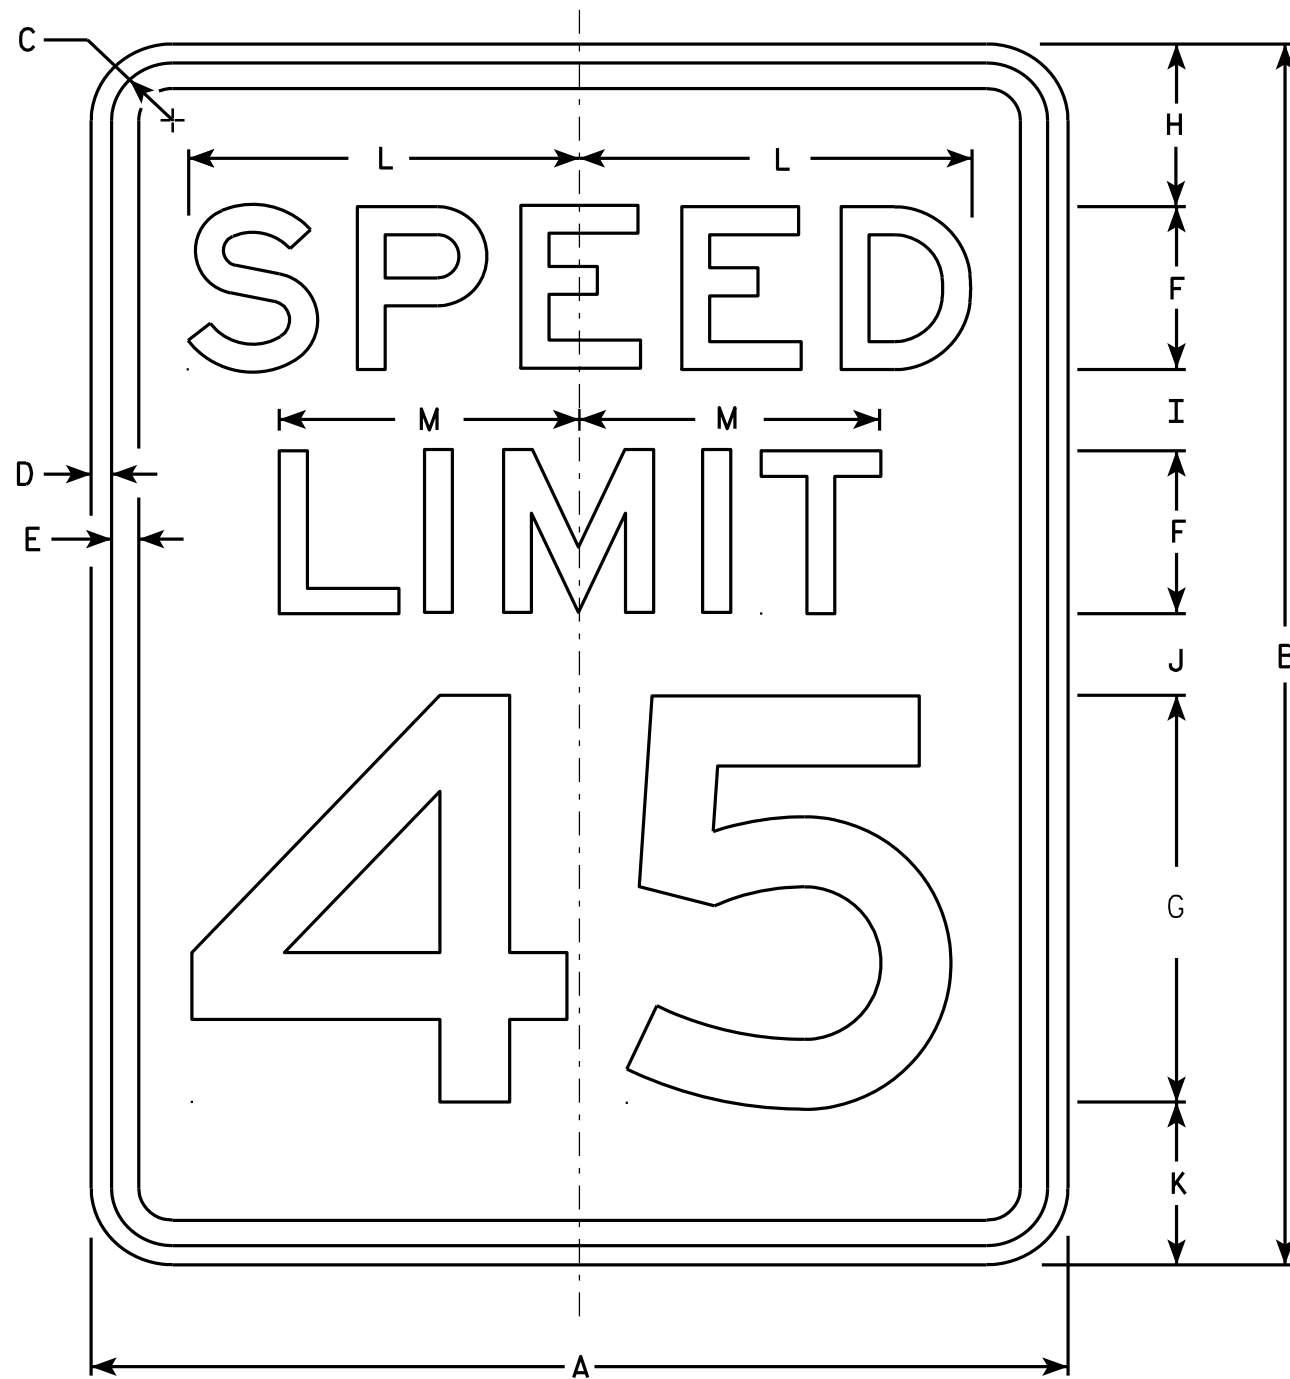

R2-1

NOTES

1. Sign is Type II - Type H Reflective - reference WIS DOT Standard Specification for HIGHWAY and STRUCTURE CONSTRUCTION latest edition.
2. Color:
Background - White
Message - Black
3. Message Series - E
4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
5. Substitute appropriate numerals and optically adjust spacing to achieve proper balance.

7

7

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1	18	24	1 1/8	3/8	1/2	3	8	3	2	2	3	7 1/4	5 1/2														3.0
2S	24	30	1 1/8	3/8	1/2	4	10	3	2 1/4	3 3/8	3 3/8	9 5/8	7 3/8														5.0
2M	30	36	1 3/8	1/2	5/8	5	12	5	2 1/2	2 1/2	4	12	9 1/4														7.5
3	36	48	1 3/8	1/2	5/8	6	14	6	5	5	6	14 3/8	11														12.0
4	36	48	1 3/8	1/2	5/8	6	14	6	5	5	6	14 3/8	11														12.0
5	48	60	2 1/4	3/4	1	8	20	6	4 1/2	6 3/4	6 3/4	19 1/4	14 5/8														20.0

STANDARD SIGN
R2-1

WISCONSIN DEPT OF TRANSPORTATION


APPROVED *Matthew R. Rauch*
For State Traffic Engineer

DATE 5/26/10 PLATE NO. R2-1.13


PROJECT NO: _____ HWY: _____ COUNTY: _____ SHEET NO: _____ E

NOTES

1. Sign is Type II - Type H Reflective - reference WIS DOT Standard Specification for HIGHWAY and STRUCTURE CONSTRUCTION latest edition.
2. Color:
Background - White
Message - Black
3. Corners may be square or rounded when base material is plywood. When base material is metal, the corners shall be rounded.
4. R3-6R is the same as R3-6L except curved portion of arrow points right.
5. The 6" border is non-reflective black.

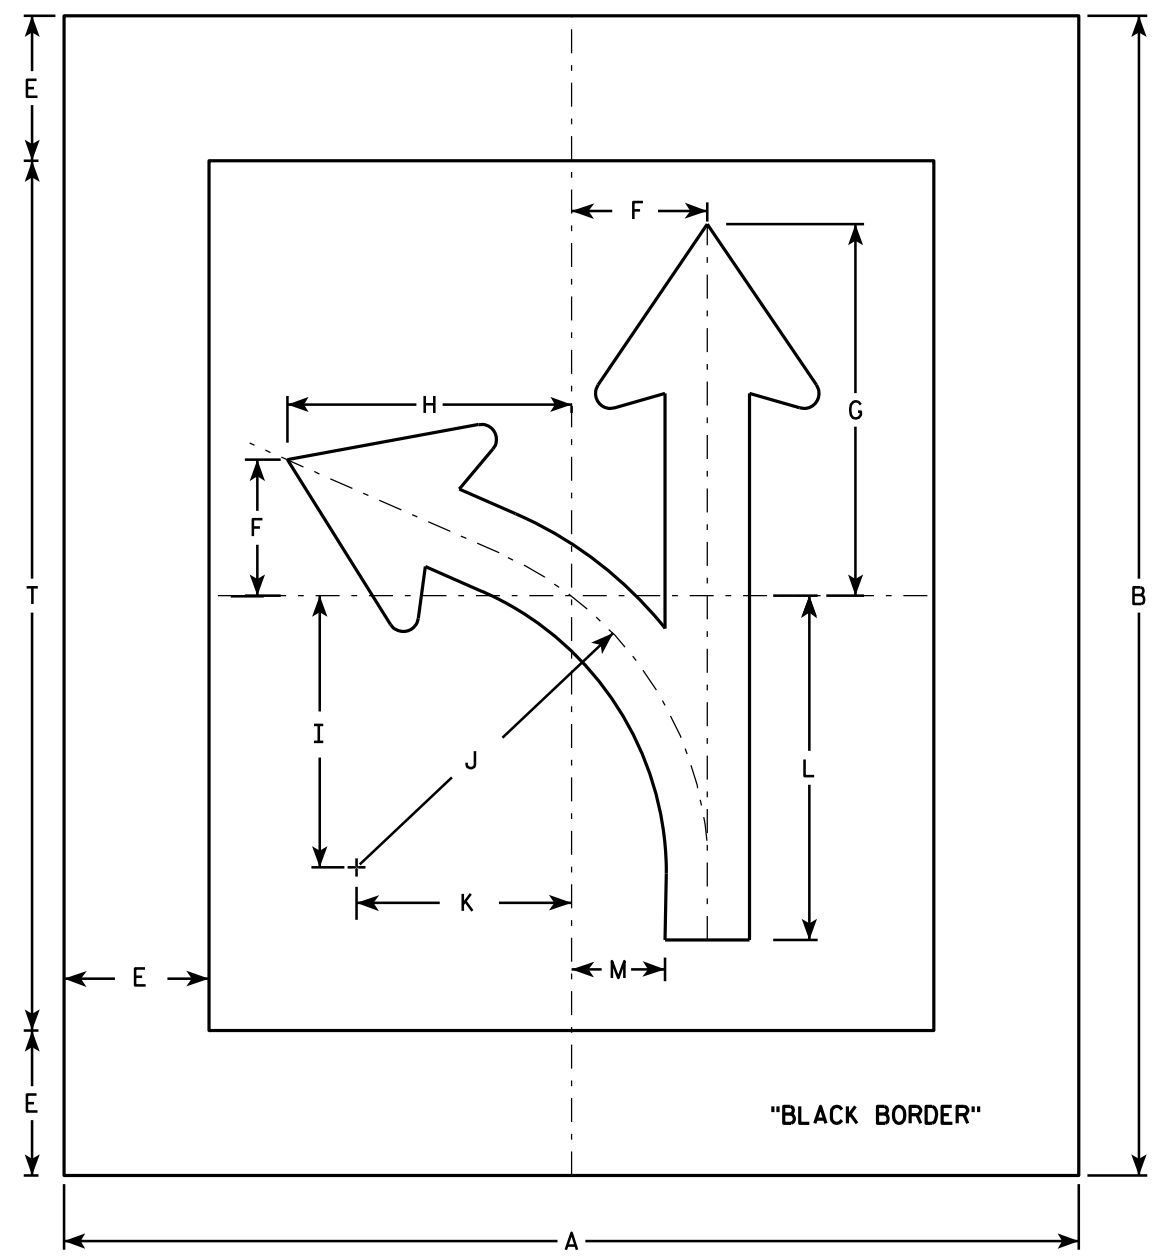

R3-6L

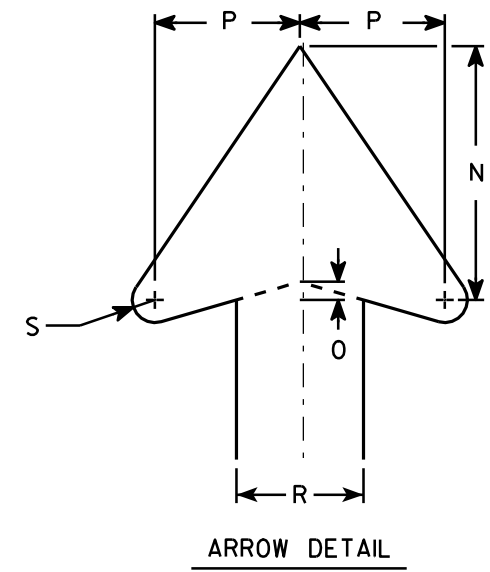

ARROW DETAIL

7

7

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2S	42	48			6	5 5/8	15 3/8	11 3/4	11 1/4	14 1/2	8 7/8	14 1/4	3 7/8	7	1/2	4		3 1/2	5/8	36							14.0
2M	42	48			6	5 5/8	15 3/8	11 3/4	11 1/4	14 1/2	8 7/8	14 1/4	3 7/8	7	1/2	4		3 1/2	5/8	36							14.0
3																											
4																											
5																											

STANDARD SIGN
R3-6

WISCONSIN DEPT OF TRANSPORTATION


APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 3/17/2011 PLATE NO. R3-6.5


PROJECT NO: _____ HWY: _____ COUNTY: _____ SHEET NO: _____ E

NOTES

1. Sign is Type II - Type H Reflective - reference WIS DOT Standard Specification for HIGHWAY and STRUCTURE CONSTRUCTION latest edition.
2. Color:
Background - White
Message - Black
3. Message Series - Line 1 is Series B.
Line 2 is Series C.
Line 3 on plate R3-7R is Series B and Series C on plate R3-7L.
4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.

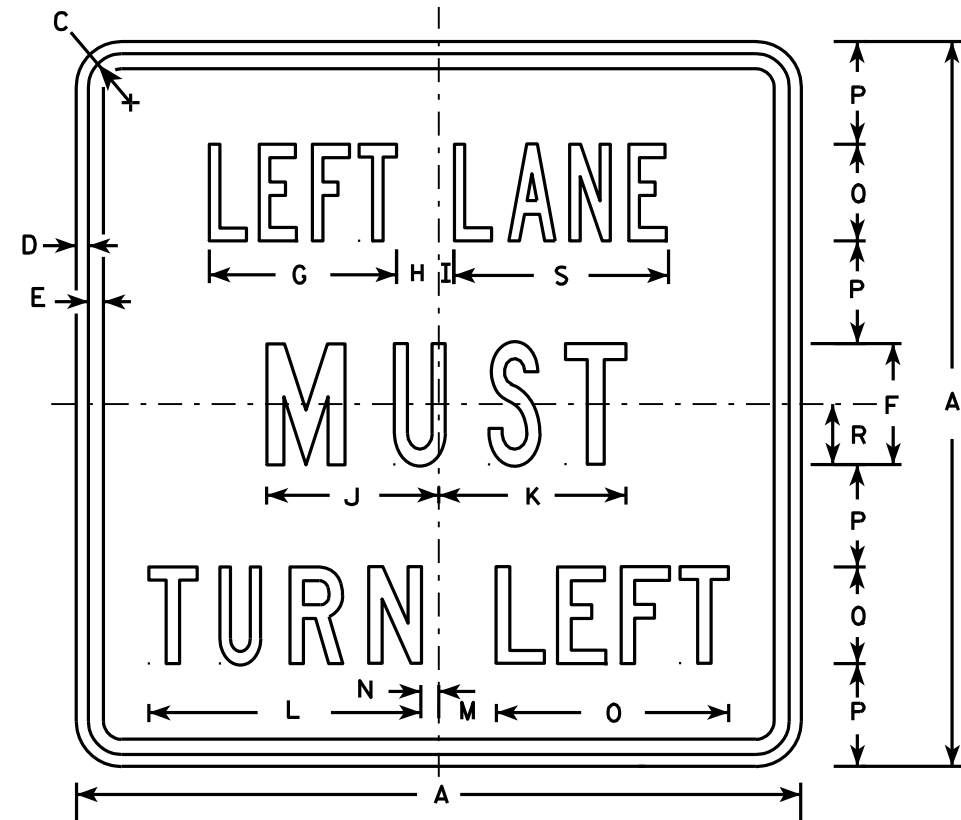

R3-7L

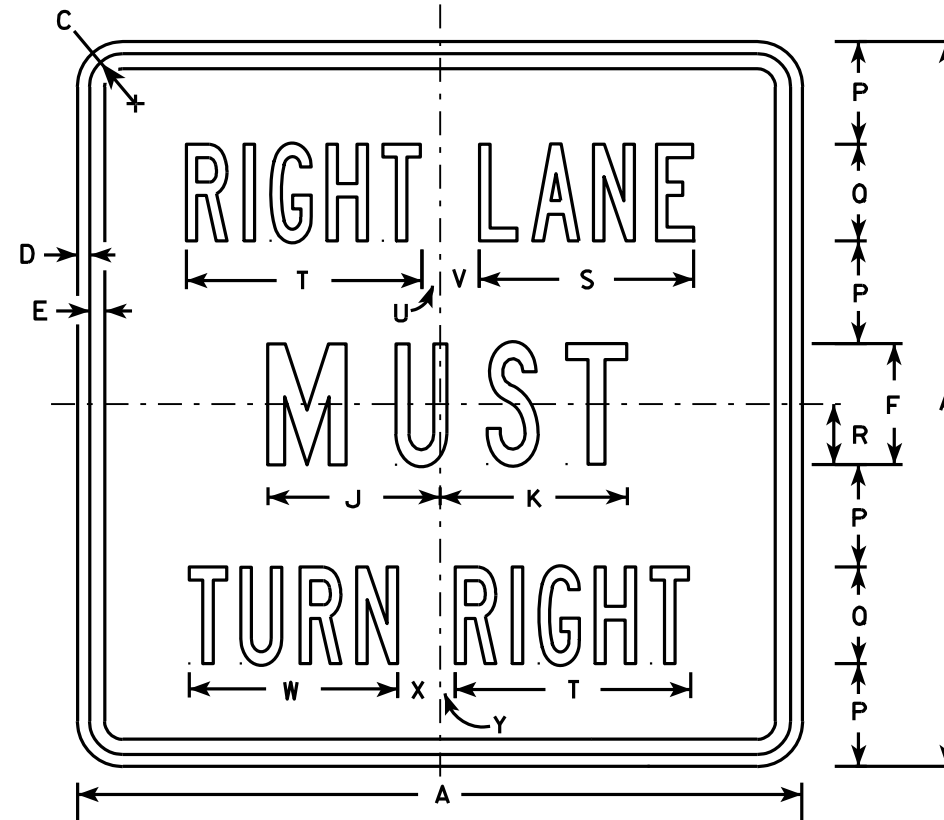

R3-7R

7

7

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1	30		1 3/8	1/2	5/8	5	7 3/4	1 3/4	5/8	7 1/8	7 3/4	11 1/4	2 3/8	3/4	9 5/8	4 1/4	4	2 1/2	8 7/8	9 3/4	3/4	1 5/8	8 5/8	1 5/8	5/8		6.25
2S	30		1 3/8	1/2	5/8	5	7 3/4	1 3/4	5/8	7 1/8	7 3/4	11 1/4	2 3/8	3/4	9 5/8	4 1/4	4	2 1/2	8 7/8	9 3/4	3/4	1 5/8	8 5/8	1 5/8	5/8		6.25
2M	30		1 3/8	1/2	5/8	5	7 3/4	1 3/4	5/8	7 1/8	7 3/4	11 1/4	2 3/8	3/4	9 5/8	4 1/4	4	2 1/2	8 7/8	9 3/4	3/4	1 5/8	8 5/8	1 5/8	5/8		6.25
3	36		1 5/8	5/8	3/4	6	9 5/8	2	1 1/8	8 3/4	9	13 1/2	3 7/8	1 1/2	12 1/2	5	5	3	10 5/8	12	7/8	2 1/4	10 5/8	2 1/8	1		9.00
4	48		2 1/4	3/4	1	8	13 1/2	2 3/8	1 1/2	11 1/2	11 7/8	17 3/4	3 5/8	2 1/2	16 3/8	6 1/2	7	4	14 3/8	16 7/8	5/8	3 1/4	15 1/8	2 3/4	1 1/8		16.00
5																											

STANDARD SIGN
R3-7L & R3-7R

WISCONSIN DEPT OF TRANSPORTATION



APPROVED *Matthew R. Rauch*
For State Traffic Engineer

DATE 3/18/2011 PLATE NO. R3-7.3

PROJECT NO: _____ HWY: _____ COUNTY: _____ SHEET NO: _____ E

NOTES

1. Sign is Type II - Type H Reflective - reference WIS DOT Standard Specification for HIGHWAY and STRUCTURE CONSTRUCTION latest edition.
2. Color:
Background - White
Message - Black
3. Message Series - E
4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.

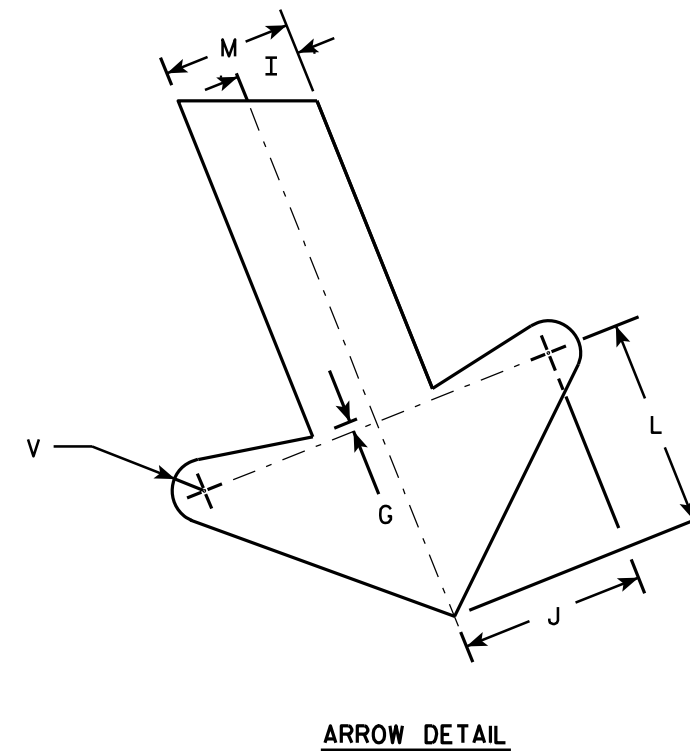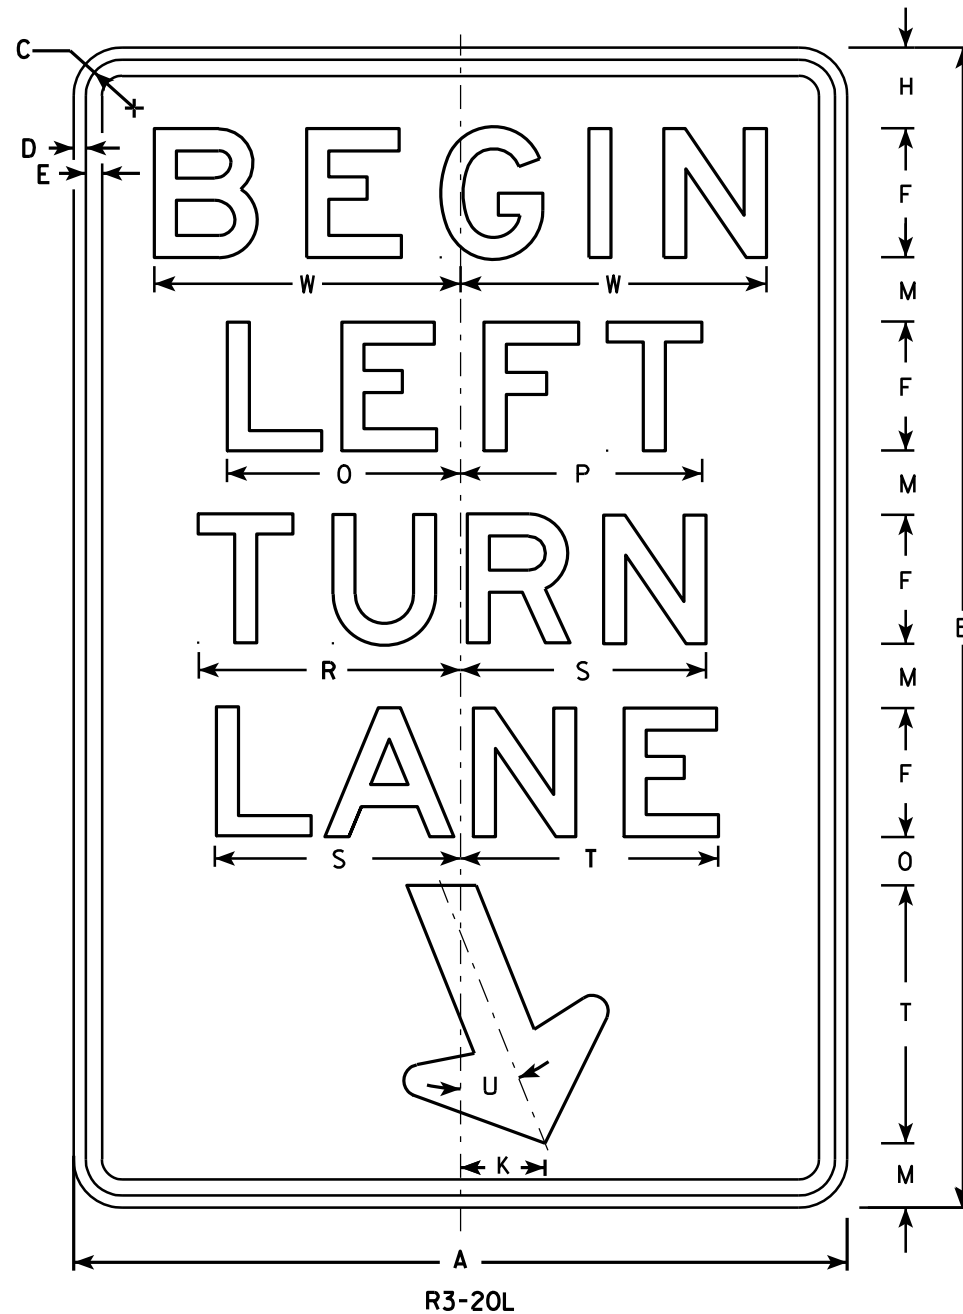

7

7

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.	
1																												
2S	24	36	1 1/8	3/8	1/2	4	1/4	2 1/2	1	2 7/8	2 5/8	3 1/4	2	1 1/2	7 1/4	7 1/2		8 1/8	7 5/8	8	22°	1/2	9 1/2				6.0	
2M	24	36	1 1/8	3/8	1/2	4	1/4	2 1/2	1	2 7/8	2 5/8	3 1/4	2	1 1/2	7 1/4	7 1/2		8 1/8	7 5/8	8	22°	1/2	9 1/2				6.0	
3	36	54	1 3/4	1/2	5/8	6	3/8	3 3/4	1 1/2	4 1/4	4	4 7/8	3	2 1/4	10 7/8	11 1/4		12 1/4	11 1/2	12	22°	3/4	13 1/4				13.5	
4																												
5																												

STANDARD SIGN
R3-20L

WISCONSIN DEPT OF TRANSPORTATION



APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 10/18/10 PLATE NO. R3-20L.7

PROJECT NO: _____ HWY: _____ COUNTY: _____ SHEET NO: _____ E

NOTES

1. Sign is Type II - Type H Reflective - reference WIS DOT Standard Specification for HIGHWAY and STRUCTURE CONSTRUCTION latest edition. material is plywood but borders shall be rounded
2. Color:
Background - White
Message - Black
3. Corners may be square or rounded when base as shown. When base material is metal, the corners and borders shall be rounded.
4. R4-8 is the same as R4-7 except Legend is reversed.

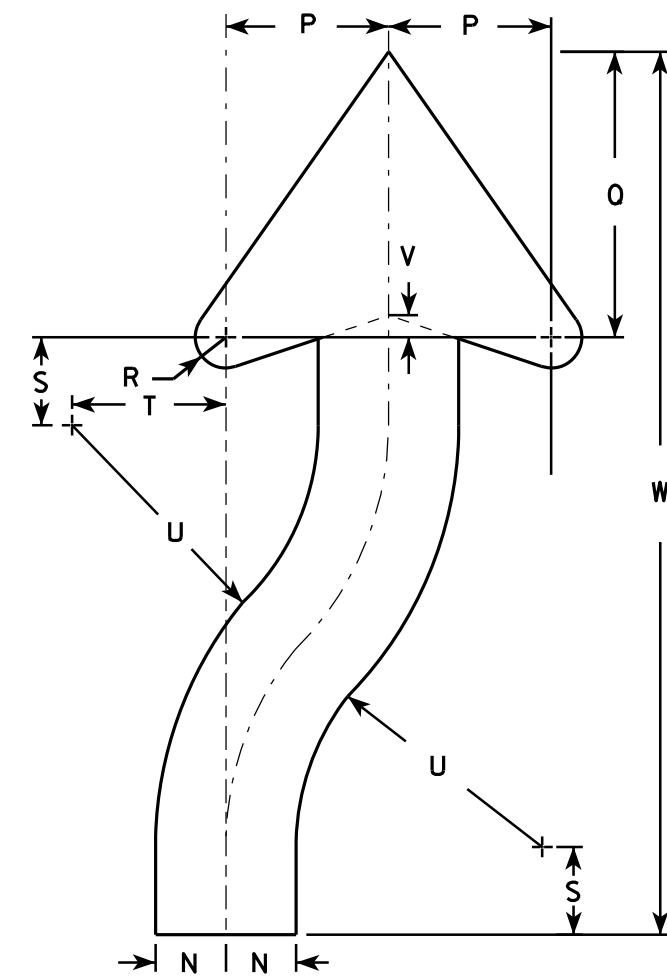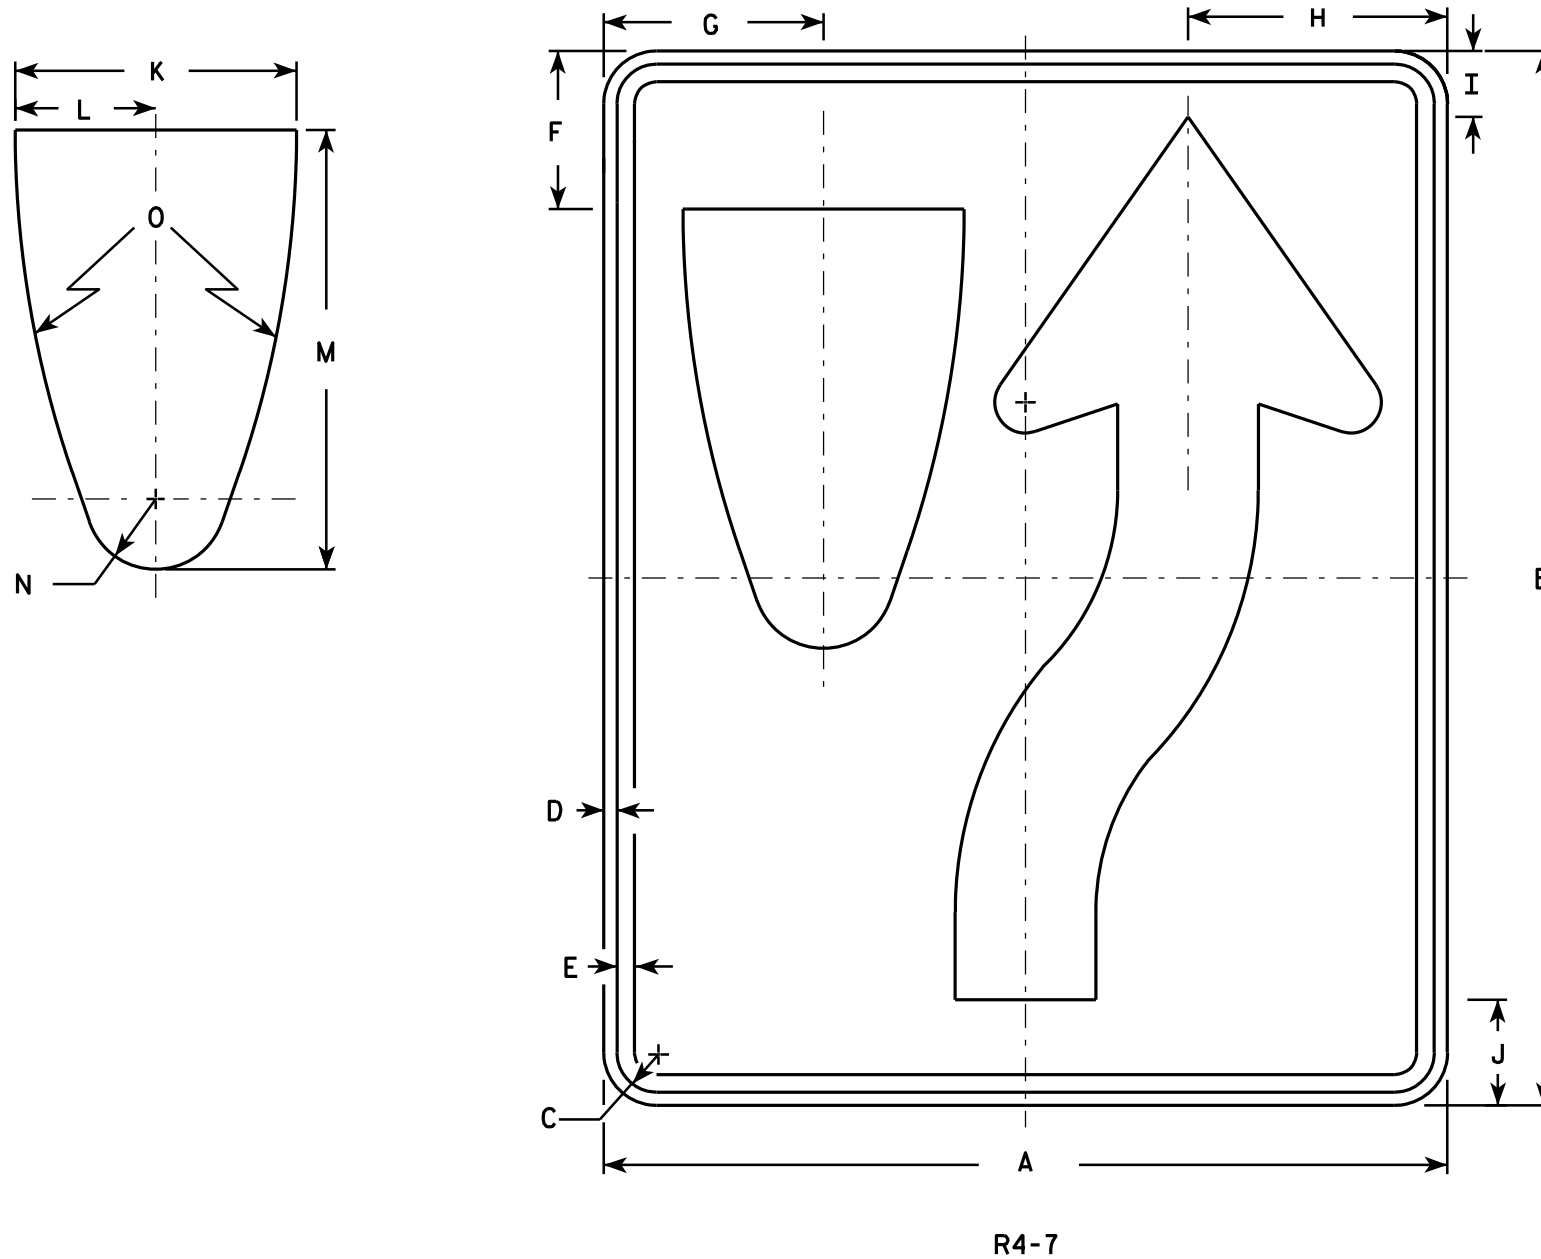

ARROW DETAIL

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1	18	24	1 1/8	3/8	1/2	3 3/8	4 3/4	5 1/2	1 3/8	2 1/4	6	3	9 3/8	1 1/2	22 1/2	3 1/2	6 1/8	5/8	1 7/8	3 1/4	6 3/4	1/2	20 3/8				3.0
2S	24	30	1 1/8	3/8	1/2	4 1/2	6 1/4	7 3/8	1 7/8	3	8	4	12 1/2	2	30	4 5/8	8 1/8	7/8	2 1/2	4 3/8	9	5/8	25 1/8				5.0
2M	24	30	1 1/8	3/8	1/2	4 1/2	6 1/4	7 3/8	1 7/8	3	8	4	12 1/2	2	30	4 5/8	8 1/8	7/8	2 1/2	4 3/8	9	5/8	25 1/8				5.0
3	36	48	1 3/4	1/2	5/8	6 3/4	9 3/8	11 1/8	2 7/8	4 1/2	12	6	18 3/4	3	45	6 7/8	12 1/4	1 1/4	3 3/4	6 5/8	13 1/2	1	40 3/4				12.0
4	36	48	1 3/4	1/2	5/8	6 3/4	9 3/8	11 1/8	2 7/8	4 1/2	12	6	18 3/4	3	45	6 7/8	12 1/4	1 1/4	3 3/4	6 5/8	13 1/2	1	40 3/4				12.0
5	48	60	2 1/4	3/4	1	9	12 1/2	14 3/4	3 3/4	6	16	8	25	4	60	9 1/4	16 1/4	1 5/8	5	8 3/4	18	1 1/4	50 1/4				20.0

STANDARD SIGN
R4-7 & R4-8

WISCONSIN DEPT OF TRANSPORTATION


APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 3/25/2011 PLATE NO. R4-7.8

PROJECT NO: _____ HWY: _____ COUNTY: _____ SHEET NO: _____ **E**

NOTES

1. Sign is Type II - Type H Reflective - reference WIS DOT Standard Specification for HIGHWAY and STRUCTURE CONSTRUCTION latest edition.
2. Color:
Background - White
Message - See Note 4
3. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
4. Circle & Diagonal - Reflective red.
Truck Symbol & Border - Non-reflective black.

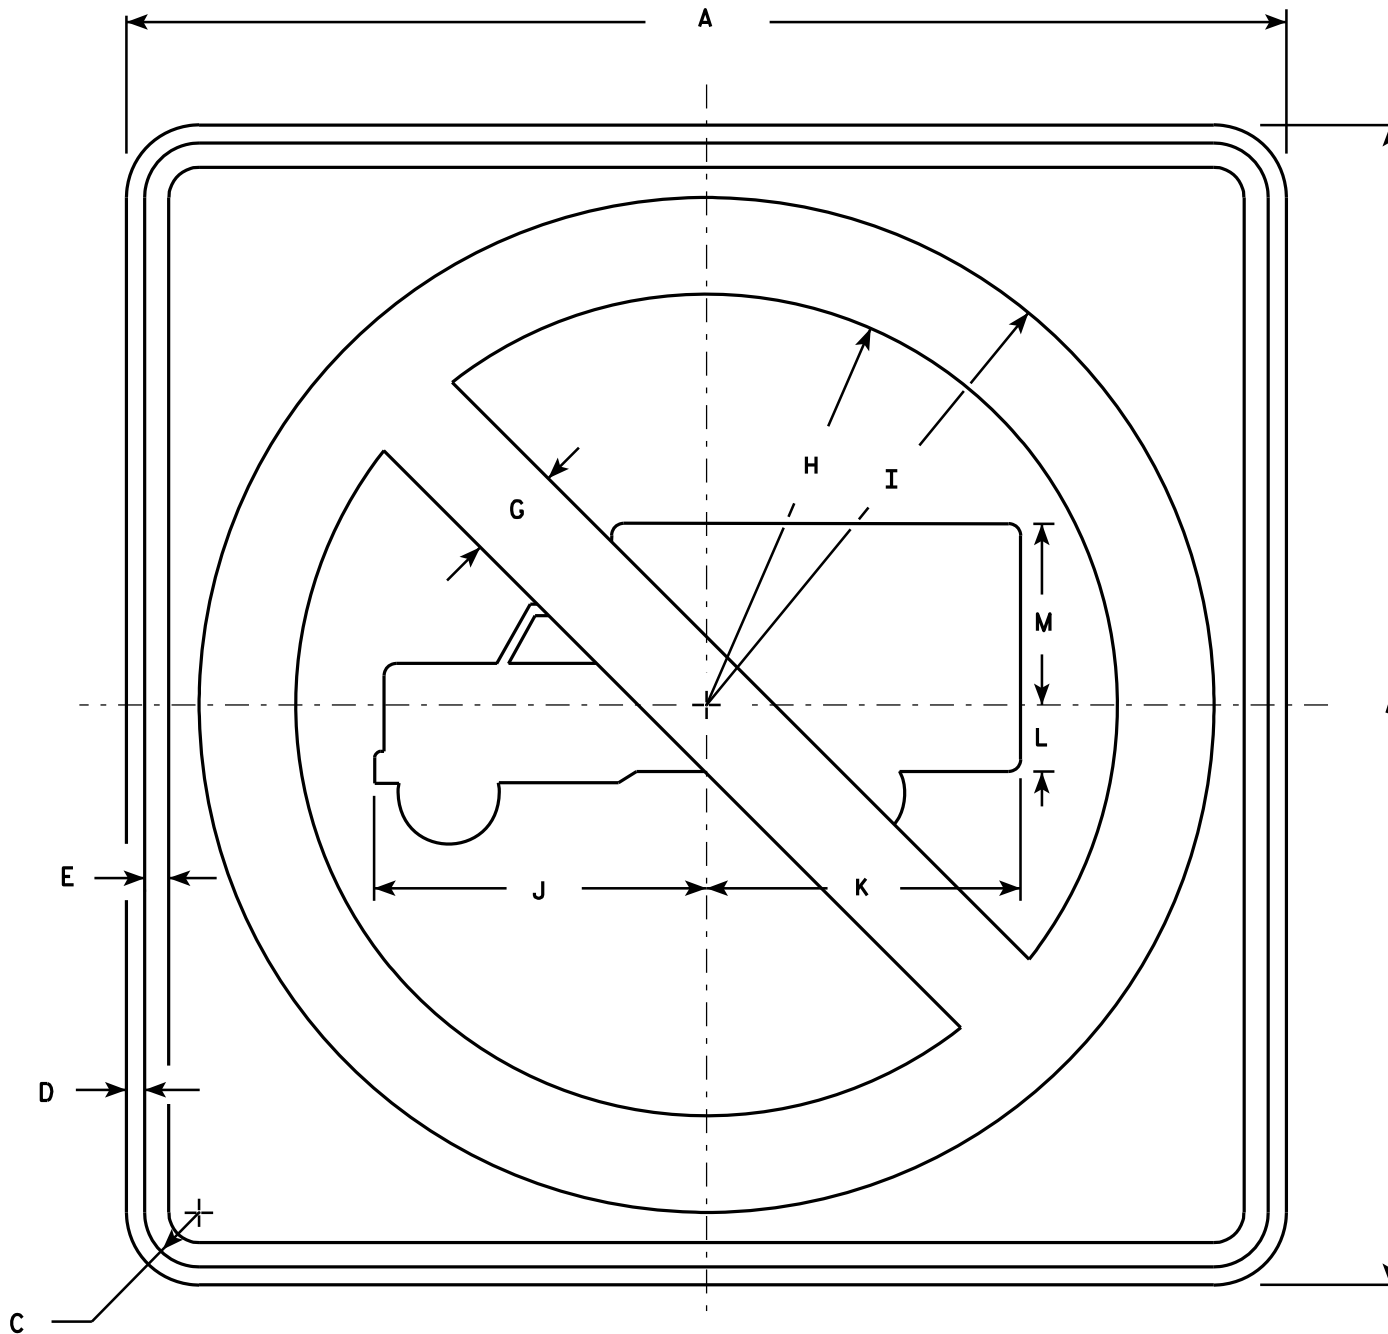

R5-2

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2S	24		1 1/8	3/8	1/2		2	8 1/2	10 1/2	6 7/8	6 1/2	1 3/8	3 3/4														4.0
2M	24		1 1/8	3/8	1/2		2	8 1/2	10 1/2	6 7/8	6 1/2	1 3/8	3 3/4														4.0
3	30		1 3/8	1/2	5/8		2 1/2	10 5/8	13 1/8	8 1/2	8 1/8	1 5/8	4 3/4														6.25
4	36		1 5/8	5/8	3/4		3	12 3/4	15 3/4	10 1/4	9 3/4	2	5 3/4														9.0
5	48		2 1/4	3/4	1		4	17	21	13 5/8	13	2 5/8	7 5/8														16.0


**STANDARD SIGN
R5-2**

WISCONSIN DEPT OF TRANSPORTATION
 APPROVED *Matthew R. Rauch*
 for State Traffic Engineer
 DATE 3/29/2011 PLATE NO. R5-2.6

PROJECT NO: _____ HWY: _____ COUNTY: _____ SHEET NO: **E**

NOTES

1. Sign is Type II - Type H Reflective - reference WIS DOT Standard Specification for HIGHWAY and STRUCTURE CONSTRUCTION latest edition.
2. Color:
Background - White
Message - Black
3. Message Series - C
4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
5. Use Size 2 for Sidewalks. Use Size 3 for Paths and Trails.

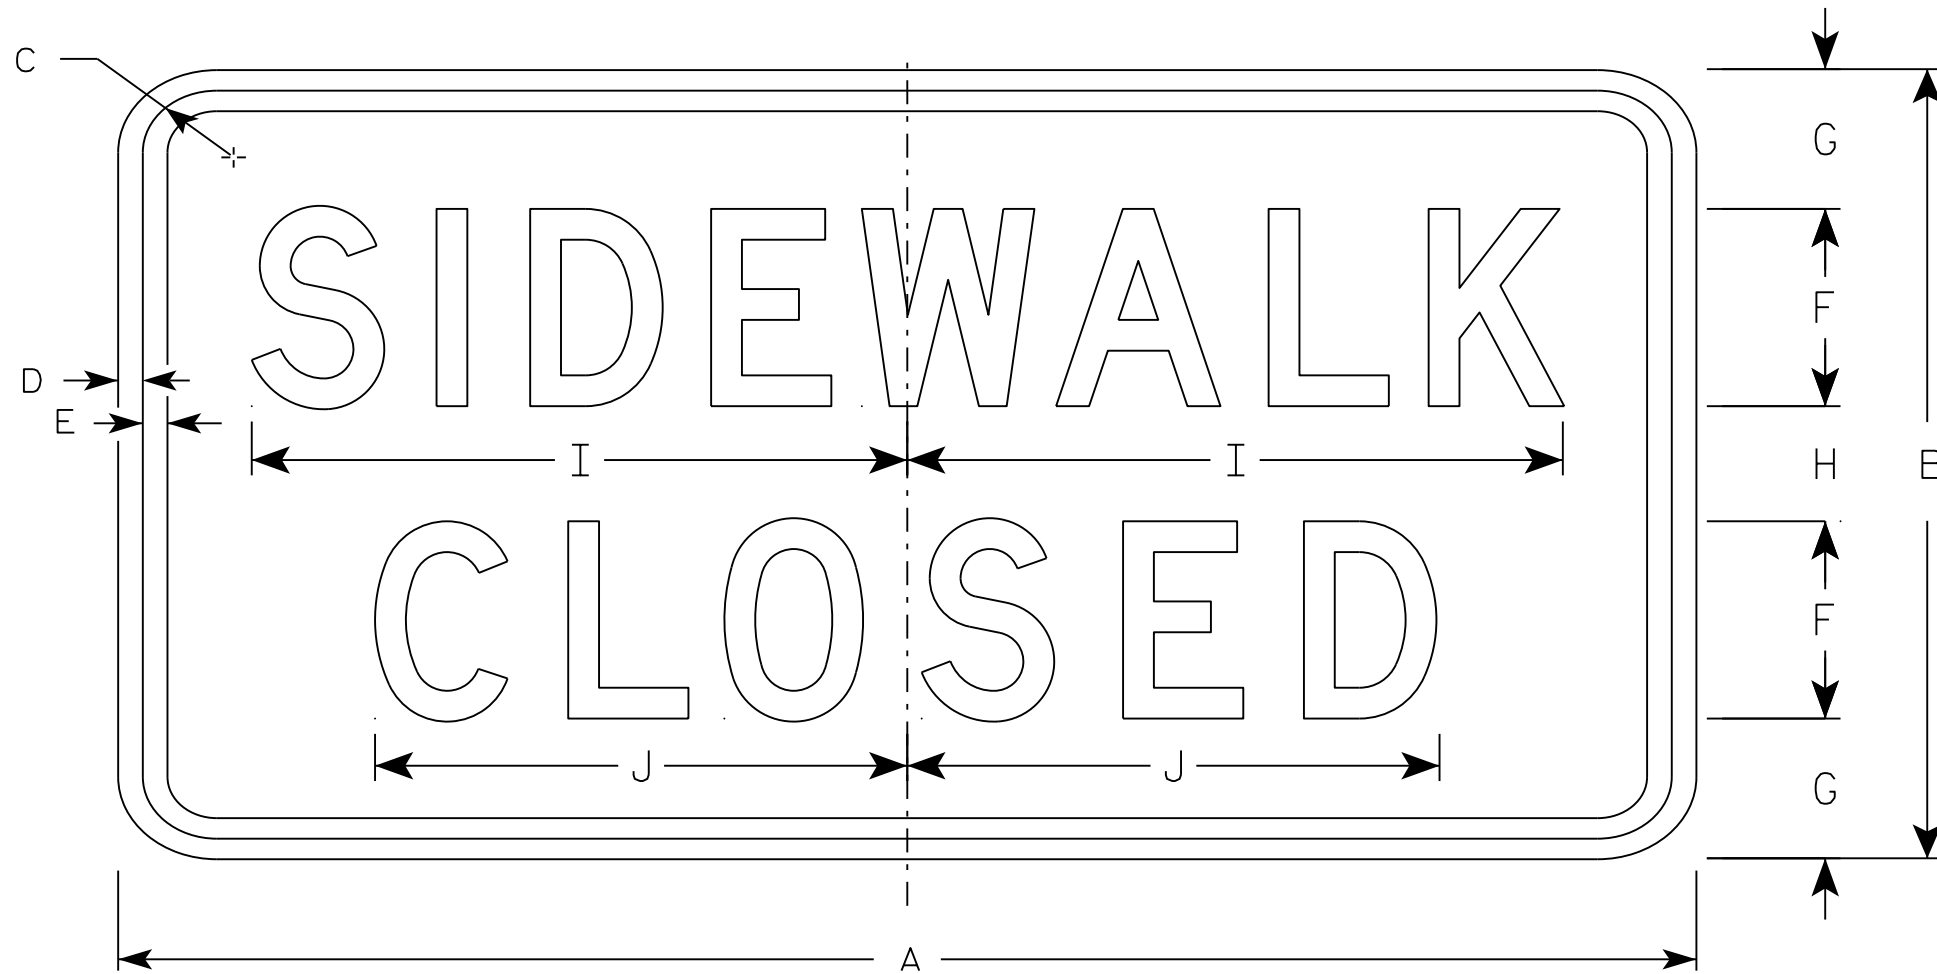

R9-9

7


SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2S	24	12	1 3/4	1/2	1/2	3	2 1/8	1 3/4	10	8 1/8																	2.0
2M	24	12	1 3/4	1/2	1/2	3	2 1/8	1 3/4	10	8 1/8																	2.0
3	30	18	1 3/4	1/2	1/2	4	3 1/2	3	12 1/2	10 1/4																	3.75
4																											
5																											

STANDARD SIGN
R9-9

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
For State Traffic Engineer


DATE 8/11/16 PLATE NO. R9-9.6

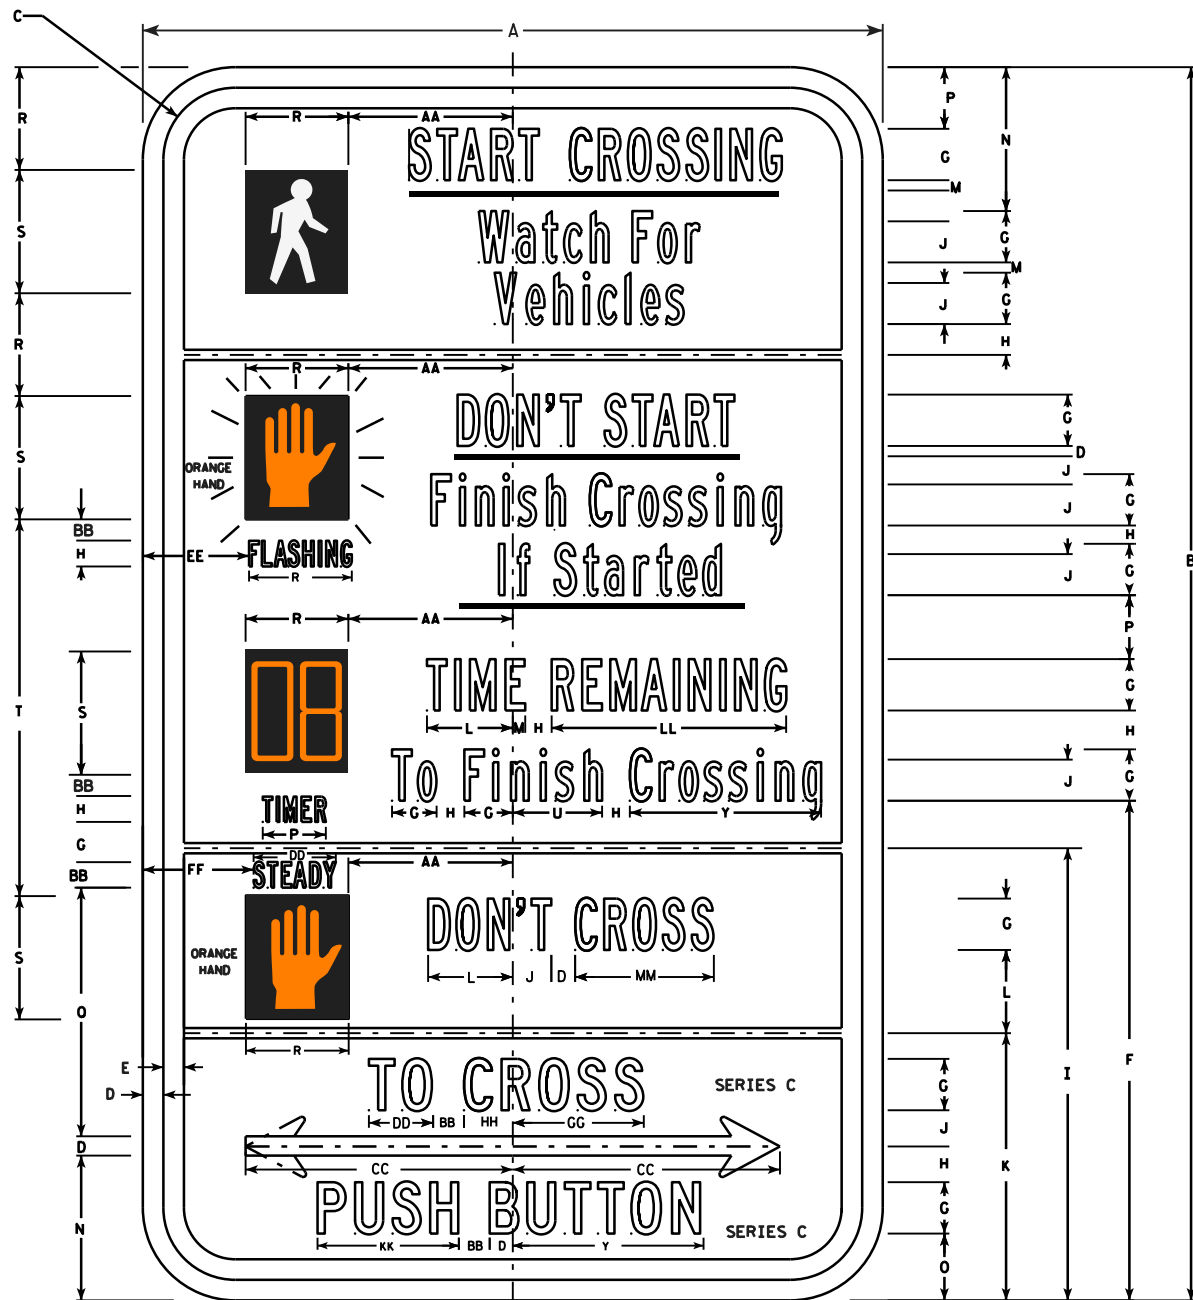

R10-3E

NOTES

1. All Signs Type II - Type H Reflective - reference WIS DOT Standard Specification for HIGHWAY and STRUCTURE CONSTRUCTION latest edition.
2. Color:
Background - WHITE
Message - BLACK except Hand Symbol which is Orange with black background.
3. Message Series - B or as noted on the sign.
4. R10-3ER (right arrow)
R10-3EL (left arrow)
R10-3ED (double arrow)

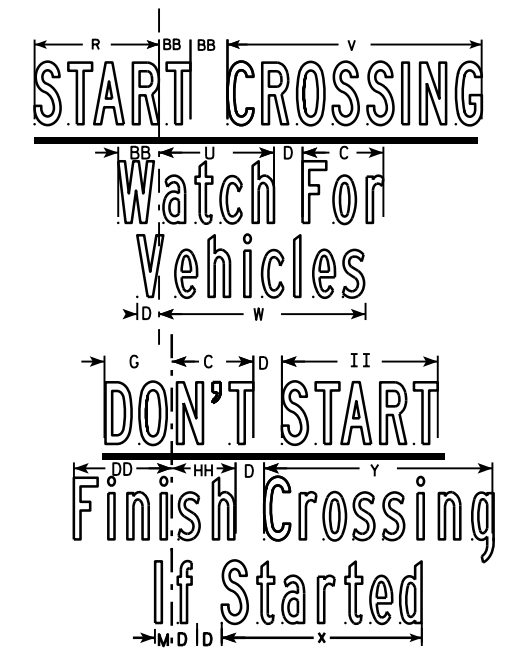

7

7

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1	6	10	1/2	1/8	1/8	4	3/8	1/4	4 1/8	1/4	2 1/8	3/4	1/8	1 1/8	1/2	1/2	2 1/4	7/8	1	3	3/4	1 3/4	1 5/8	1 3/8	1 1/2	5/8	0.42
2S	9	15	7/8	1/4	1/4	6 1/8	5/8	3/8	5 1/2	1/2	3 1/4	1	1/8	1 3/4	7/8	3/4	3	1 1/4	1 1/2	4 5/8	1 1/8	2 5/8	2 1/8	2	2 3/8	1 3/8	0.94
2M	9	15	7/8	1/4	1/4	6 1/8	5/8	3/8	5 1/2	1/2	3 1/4	1	1/8	1 3/4	7/8	3/4	3	1 1/4	1 1/2	4 5/8	1 1/8	2 5/8	2 1/8	2	2 3/8	1 3/8	0.94
3																											
4																											


SIZE	AA	BB	CC	DD	EE	FF	GG	HH	II	JJ	KK	LL	MM	NN	OO	PP	QQ	RR	SS	TT	UU	VV	WW	XX	YY	ZZ	Area sq. ft.
1	1 3/8	1/4	2 1/4	1/2	7/8	7/8	1 1/8	3/8	1	1/2	1 1/8	1 7/8	1 1/8														
2S	2	3/8	3 1/4	1	1 1/4	1 3/8	1 5/8	5/8	1 5/8	3/4	1 3/4	2 7/8	1 5/8														
2M	2	3/8	3 1/4	1	1 1/4	1 3/8	1 5/8	5/8	1 5/8	3/4	1 3/4	2 7/8	1 5/8														
3																											
4																											

STANDARD SIGN
R10-3EL,R,D

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 4/12/2011 PLATE NO. R10-3E.2

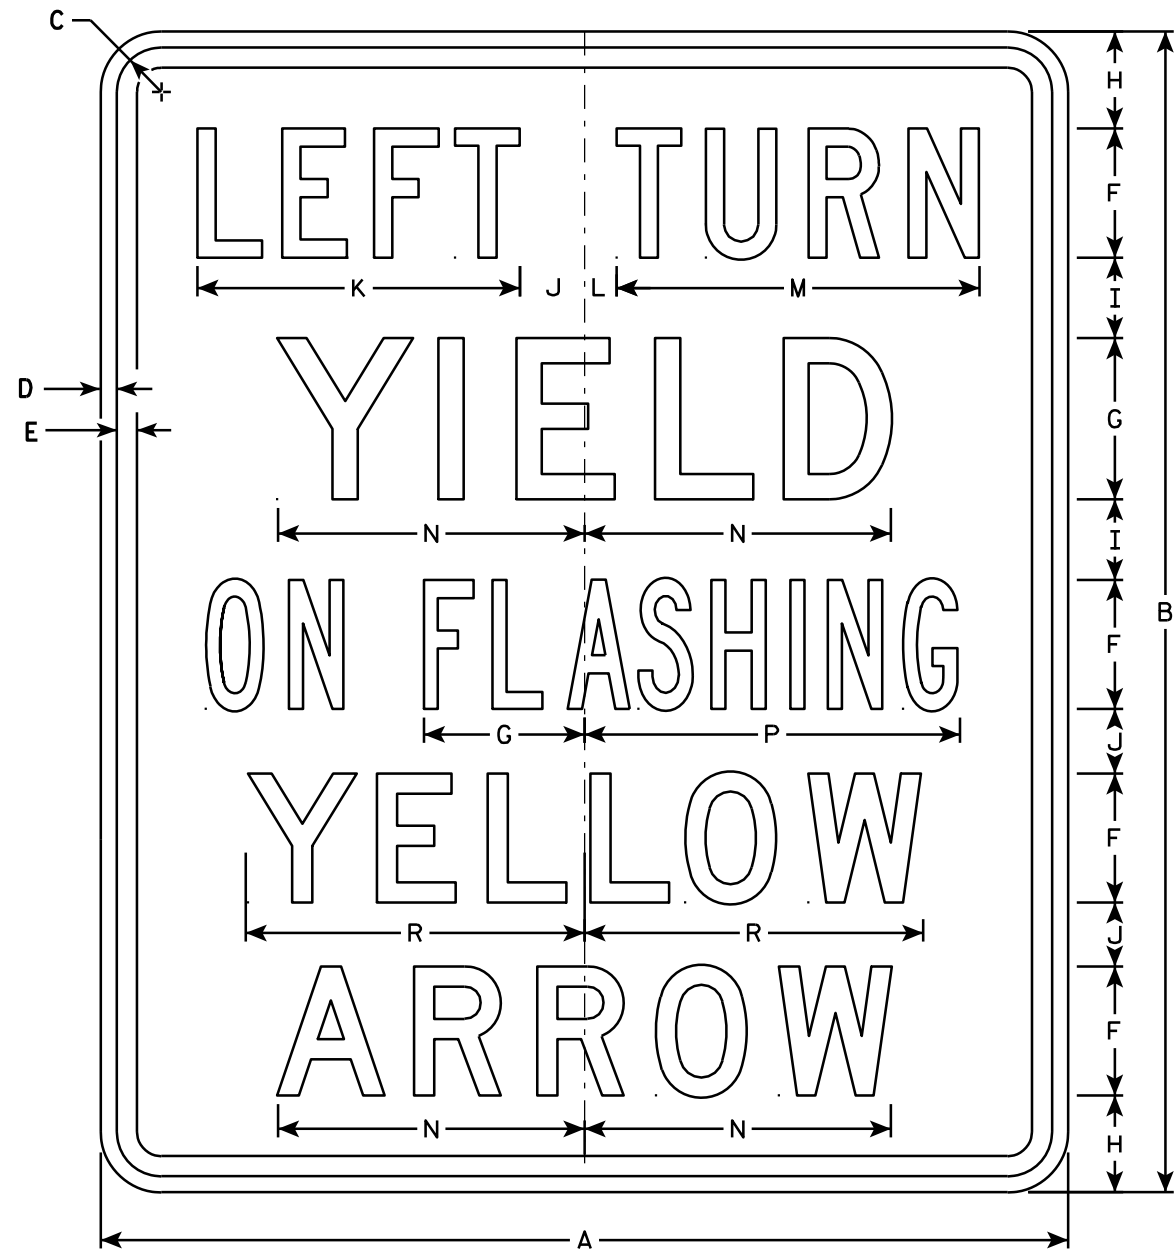


R10-50L

NOTES

1. Sign is Type II - Type H Reflective - reference WIS DOT Standard Specification for HIGHWAY and STRUCTURE CONSTRUCTION latest edition.
2. Color:
Background - White
Message - Black
3. Message Series - see note 5
4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
5. Line 1 is Series C.
Lines 2, 4 and 5 are Series D.
Line 3 is Series B.

"RIGHT" is Series B

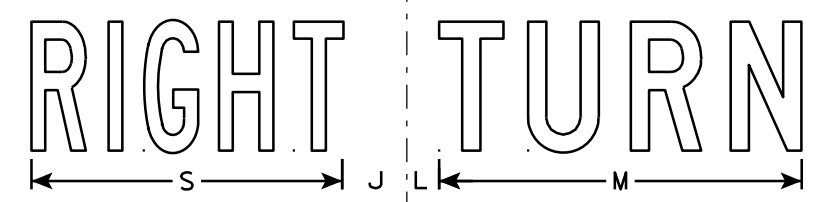

R10-50R

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2S	30	36	1 3/8	1/2	5/8	4	5	3	2 1/2	2	10	1	11 1/4	9 1/2	4 1/4	11 5/8		10 1/2	9 5/8								7.5
2M	30	36	1 3/8	1/2	5/8	4	5	3	2 1/2	2	10	1	11 1/4	9 1/2	4 1/4	11 5/8		10 1/2	9 5/8								7.5
3																											
4																											
5																											


STANDARD SIGN
R10-50

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 4/11/13 PLATE NO. R10-50.2


PROJECT NO: _____ HWY: _____ COUNTY: _____ SHEET NO: _____ **E**

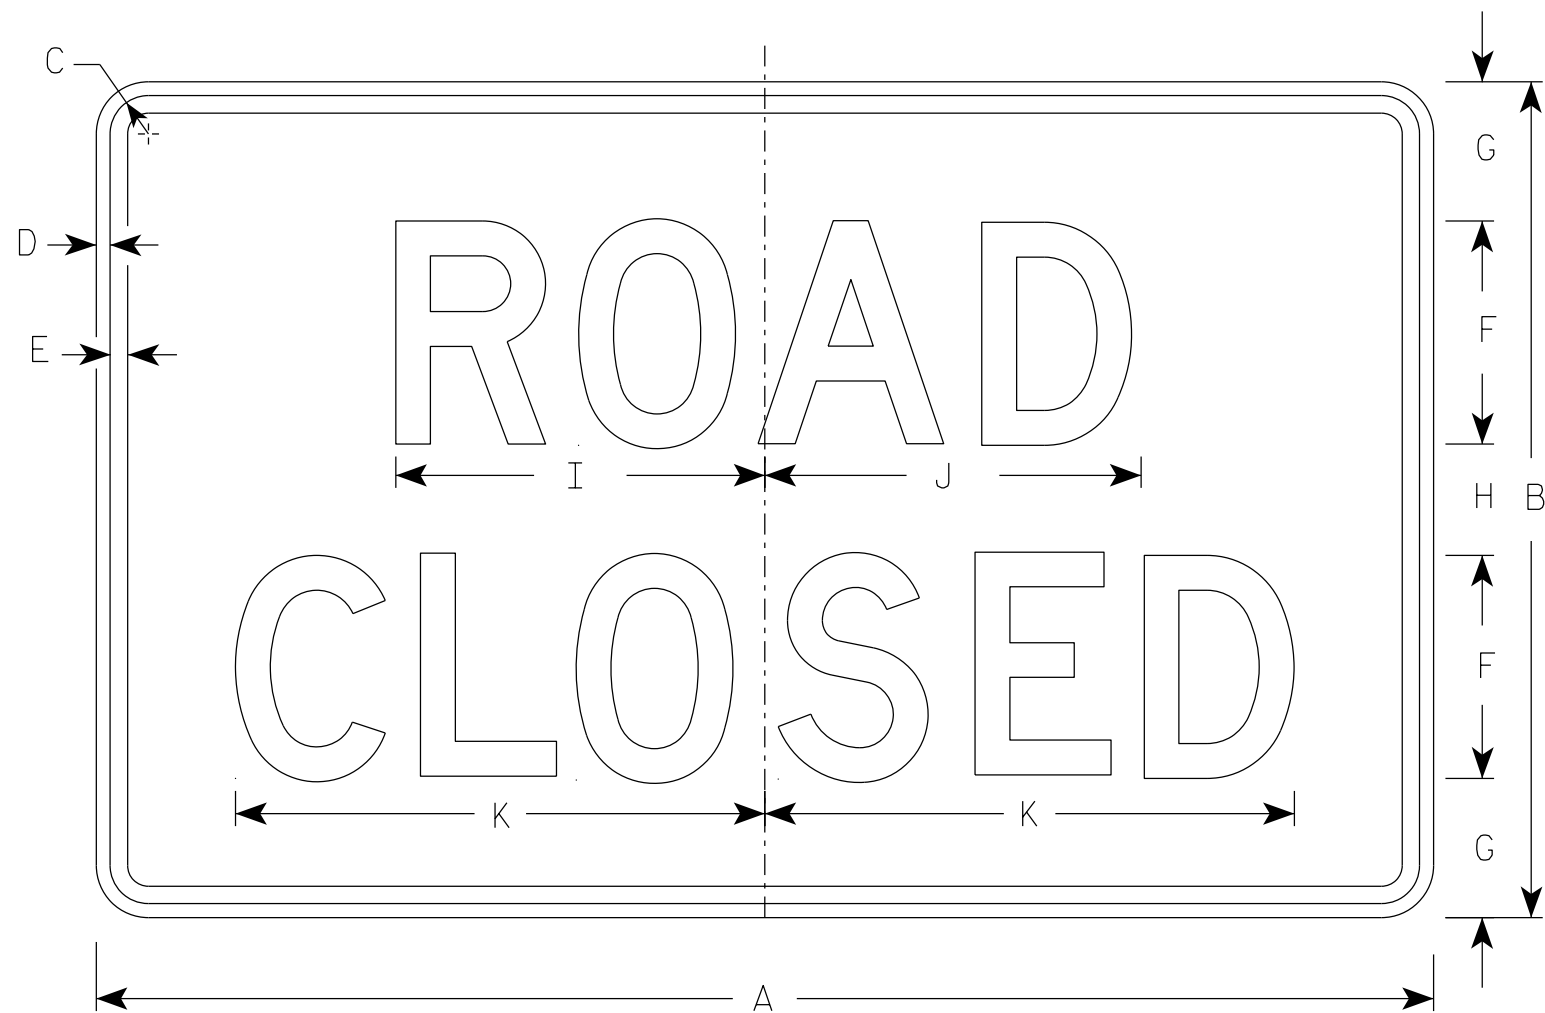


R11-2



R11-2R

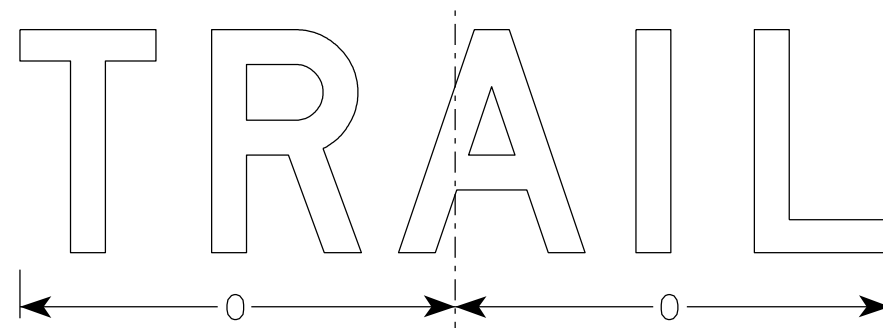

R11-2T

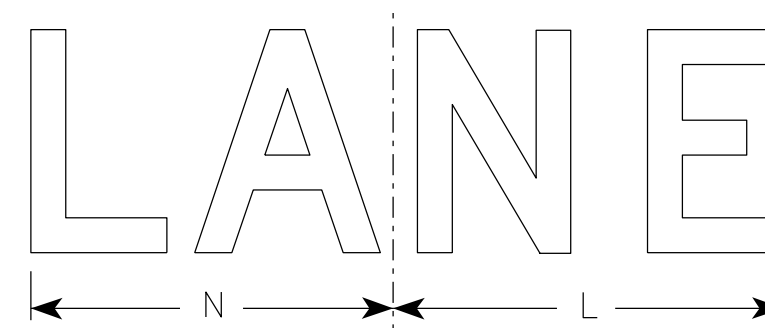

R11-2L

NOTES

1. Sign is Type II - Type H Reflective
2. Color:
Background - White
Message - Black
3. Message Series - D
4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
5. Modify the message as required.

7

7

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2S	48	30	1 3/8	1/2	5/8	8	5	4	13 1/4	13 1/2	19	14	15	13	15 5/8												10.0
2M	48	30	1 3/8	1/2	5/8	8	5	4	13 1/4	13 1/2	19	14	15	13	15 5/8												10.0
3	48	30	1 3/8	1/2	5/8	8	5	4	13 1/4	13 1/2	19	14	15	13	15 5/8												10.0
4	48	30	1 3/8	1/2	5/8	8	5	4	13 1/4	13 1/2	19	14	15	13	15 5/8												10.0
5	48	30	1 3/8	1/2	5/8	8	5	4	13 1/4	13 1/2	19	14	15	13	15 5/8												10.0

STANDARD SIGN
R11-2

WISCONSIN DEPT OF TRANSPORTATION









APPROVED *Matthew R Rauch*
for State Traffic Engineer

DATE 3/29/2021 PLATE NO. R11-2.11

PROJECT NO: _____ HWY: _____ COUNTY: _____ SHEET NO: **E**

NOTES

1. Sign is Type II - Type F Reflective
2. Color:
Background - Orange
Message - Black
3. Message Series - C
4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.

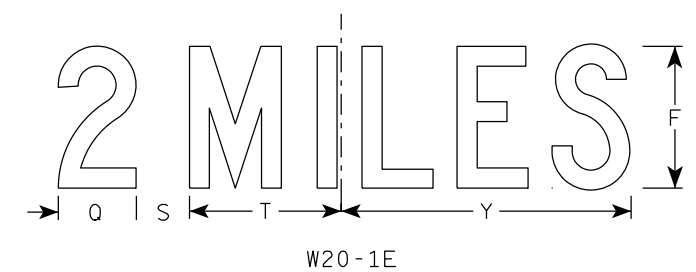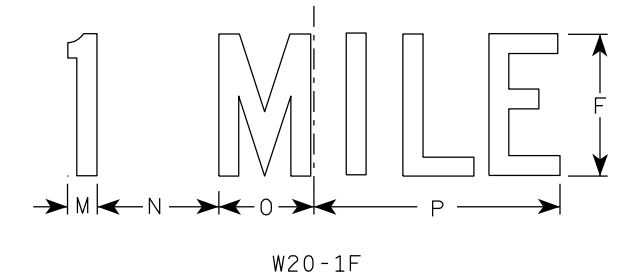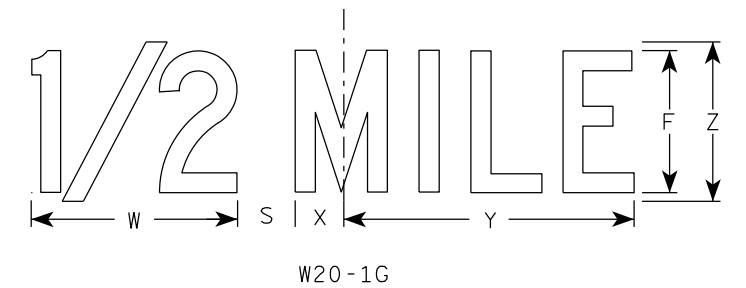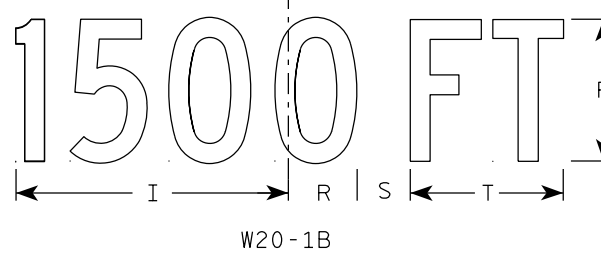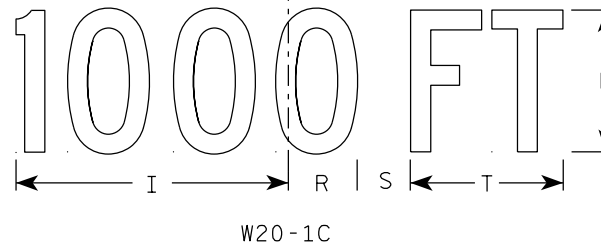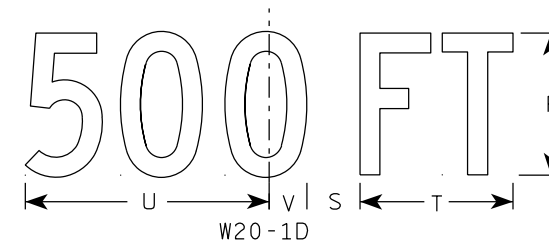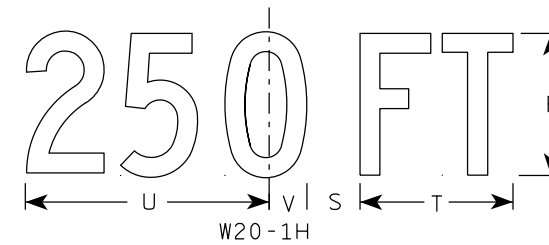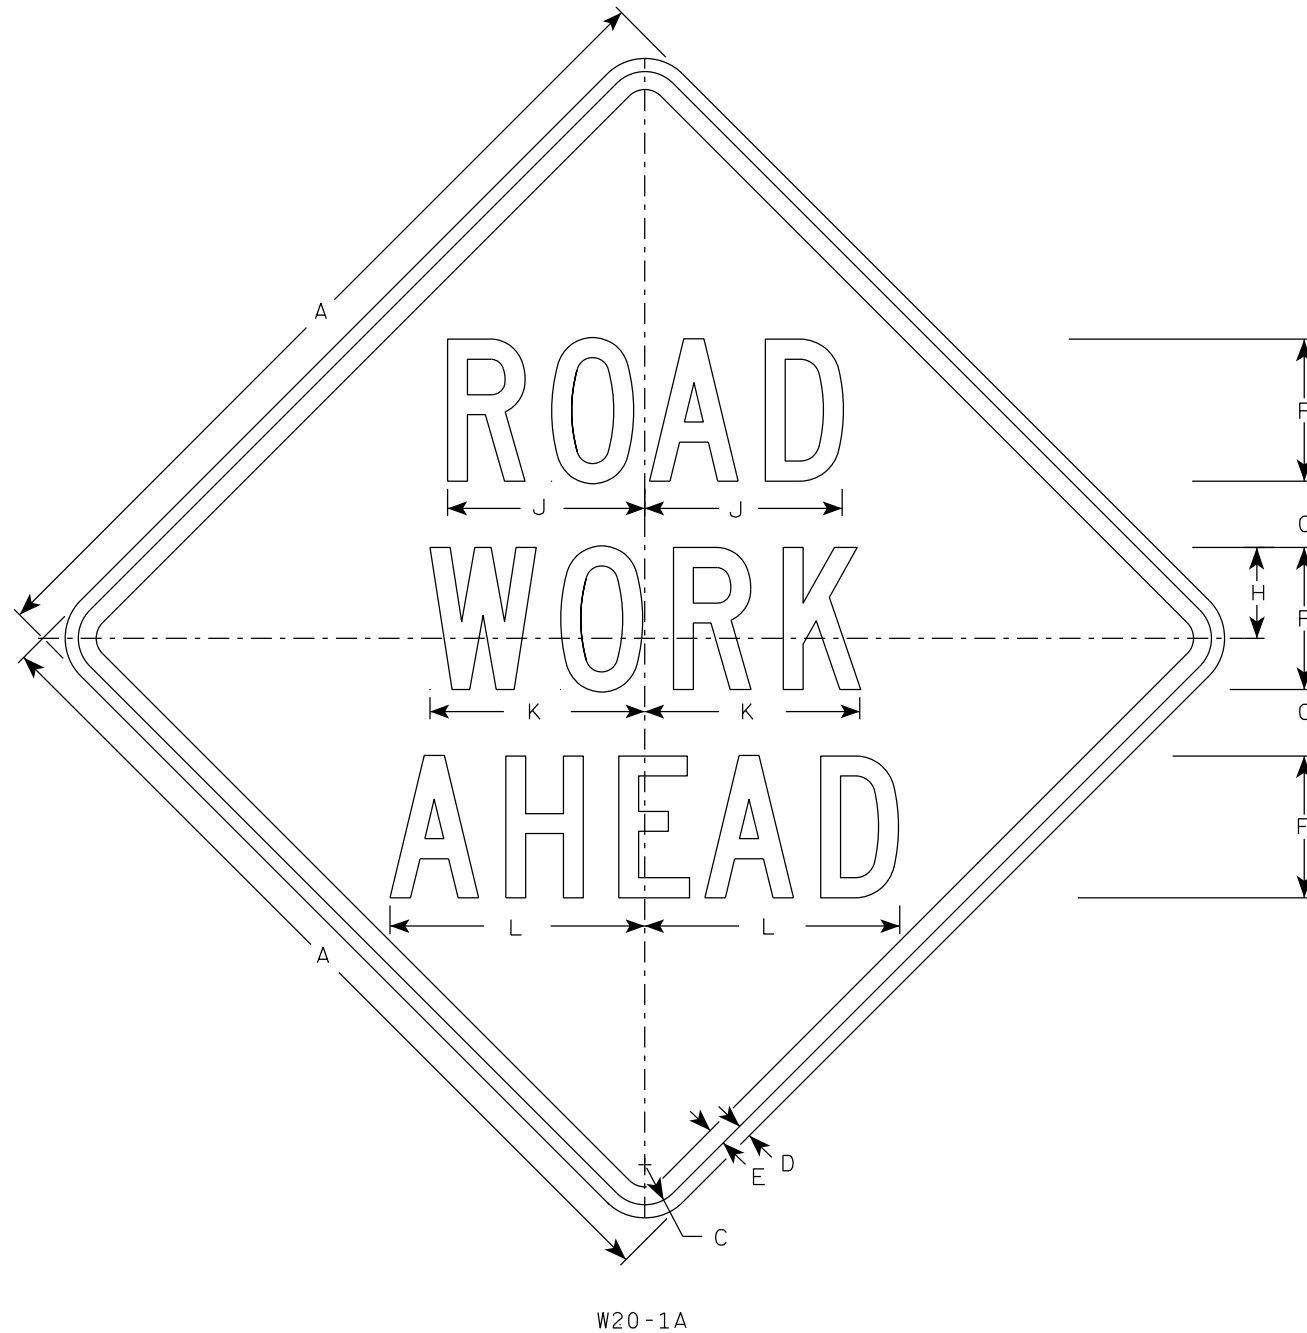







SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1	36		1 5/8	5/8	3/4	5	2 5/8	3 1/4	10 1/8	7	7 5/8	8 7/8	1 1/8	4 1/2	3 1/2	9	3 1/4	2 1/2	2 1/4	5 5/8	9	1 3/8	8	1 3/4	10 3/4	6	9.0
2S	48		2 1/4	3/4	1	8	3 3/4	5 1/8	15 3/8	11 1/8	12 1/8	14 3/8	1 5/8	6 7/8	5 3/8	13 7/8	4 3/8	3 7/8	3	8 5/8	13 3/4	2 1/8	11 7/8	2 3/4	16 3/8	9	16.0
2M	48		2 1/4	3/4	1	8	3 3/4	5 1/8	15 3/8	11 1/8	12 1/8	14 3/8	1 5/8	6 7/8	5 3/8	13 7/8	4 3/8	3 7/8	3	8 5/8	13 3/4	2 1/8	11 7/8	2 3/4	16 3/8	9	16.0
3	48		2 1/4	3/4	1	8	3 3/4	5 1/8	15 3/8	11 1/8	12 1/8	14 3/8	1 5/8	6 7/8	5 3/8	13 7/8	4 3/8	3 7/8	3	8 5/8	13 3/4	2 1/8	11 7/8	2 3/4	16 3/8	9	16.0
4	48		2 1/4	3/4	1	8	3 3/4	5 1/8	15 3/8	11 1/8	12 1/8	14 3/8	1 5/8	6 7/8	5 3/8	13 7/8	4 3/8	3 7/8	3	8 5/8	13 3/4	2 1/8	11 7/8	2 3/4	16 3/8	9	16.0
5	48		2 1/4	3/4	1	8	3 3/4	5 1/8	15 3/8	11 1/8	12 1/8	14 3/8	1 5/8	6 7/8	5 3/8	13 7/8	4 3/8	3 7/8	3	8 5/8	13 3/4	2 1/8	11 7/8	2 3/4	16 3/8	9	16.0

STANDARD SIGN
W20-1A, B, C, D, E, F, G & H

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
For State Traffic Engineer

DATE 3/25/2020 PLATE NO. W20-1.11

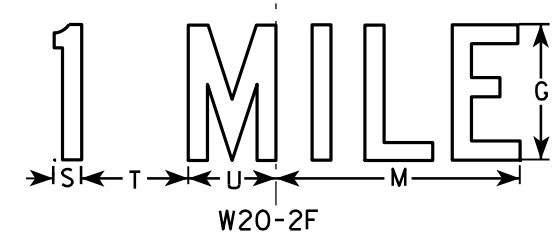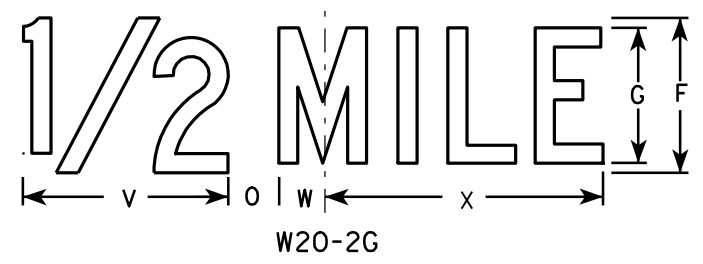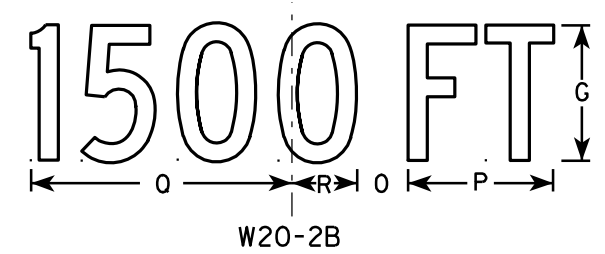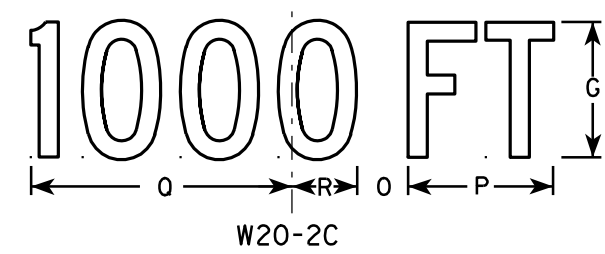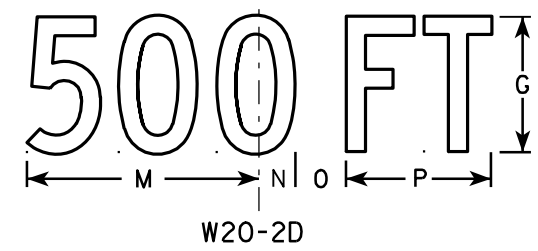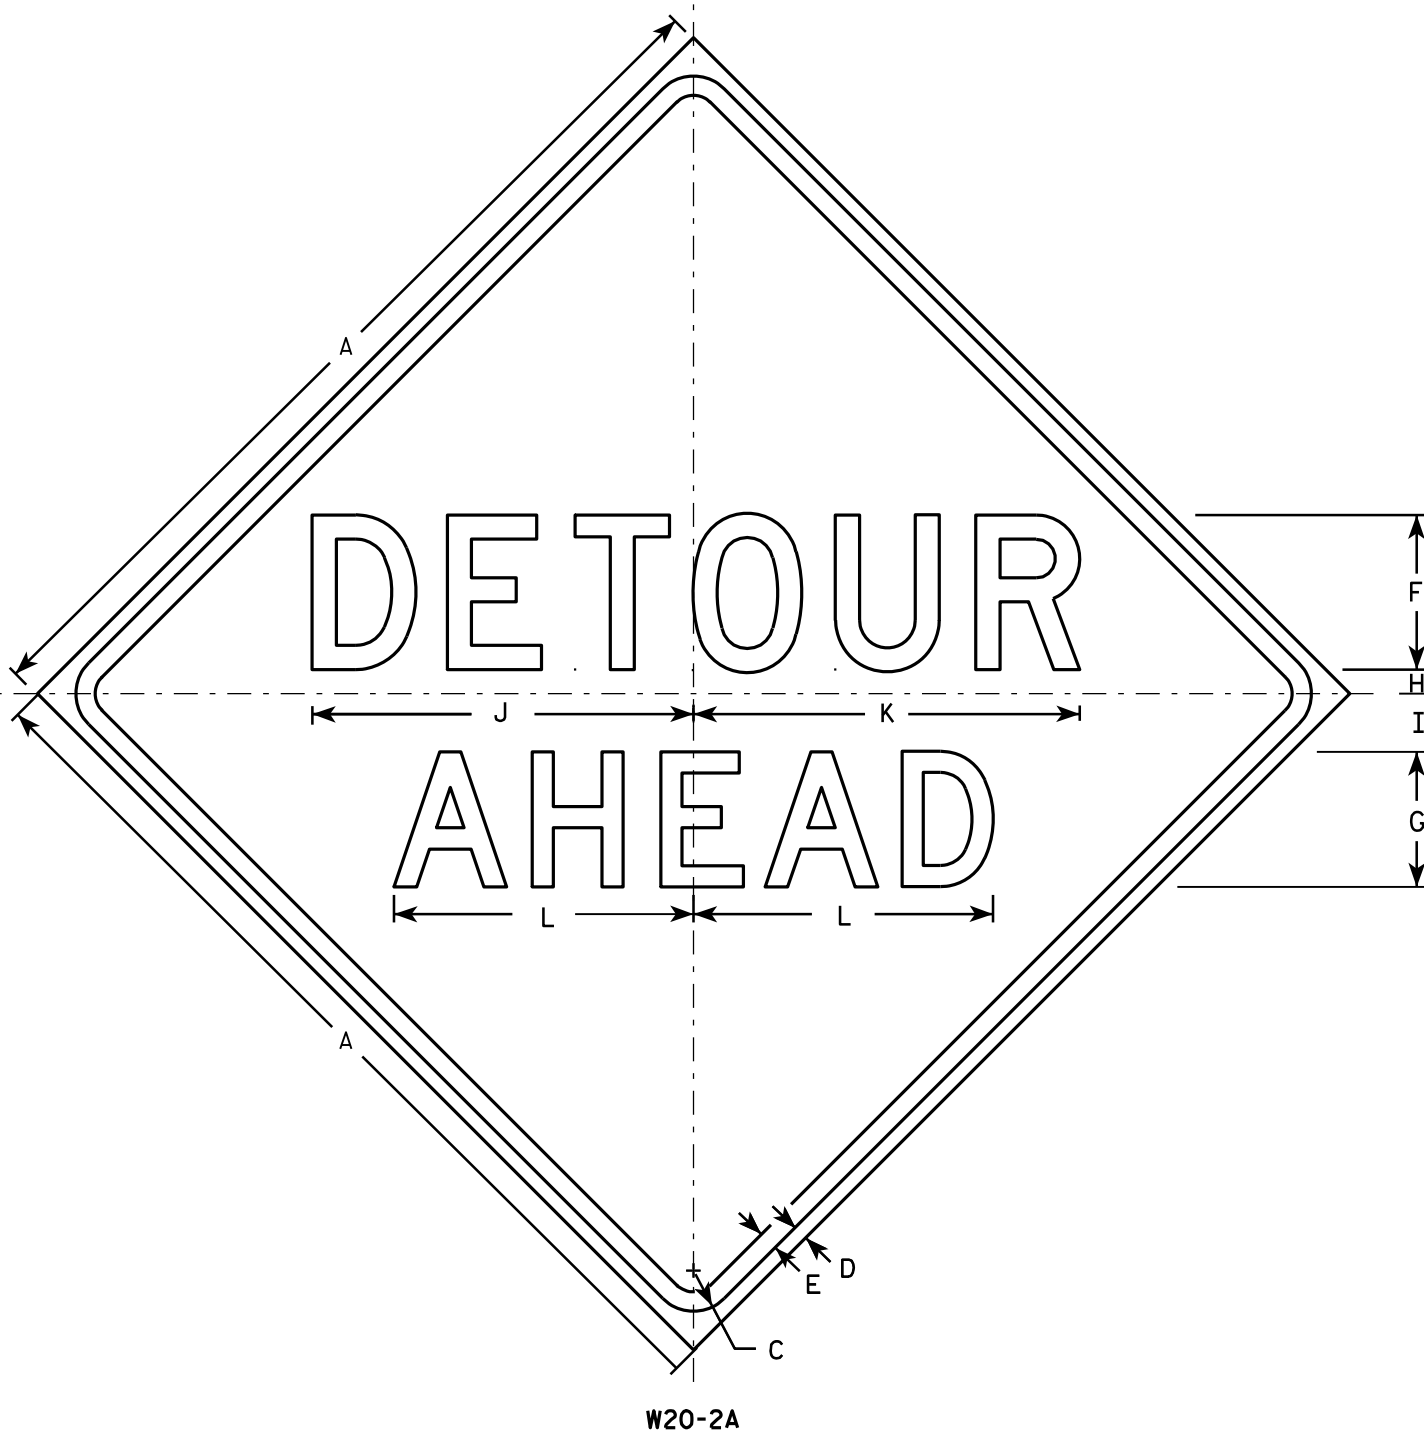

NOTES

1. Sign is Type II - Type F Reflective - reference WIS DOT Standard Specification for HIGHWAY and STRUCTURE CONSTRUCTION latest edition.
2. Color:
Background - Orange
Message - Black
3. Message Series - See note 5
4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
5. Line 1 is Series D.
Line 2 is Series D for AHEAD and Series C for all other distances.

7

7

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1	36		1 5/8	5/8	3/4	6	5	1	2 1/4	14 3/4	15	11 5/8	9	1 3/8	1 7/8	5 5/8	10 1/8	2 1/2	1 1/8	4 1/2	3 1/2	8	1 3/4	10 3/4			9.0
2S	48		2 1/4	3/4	1	8	7	1 1/4	3	19 3/4	20	15 1/2	12	1 7/8	2 5/8	7 1/2	13 1/2	3 3/8	1 1/2	6	4 5/8	10 5/8	2 3/8	14 3/8			16.0
2M	48		2 1/4	3/4	1	8	7	1 1/4	3	19 3/4	20	15 1/2	12	1 7/8	2 5/8	7 1/2	13 1/2	3 3/8	1 1/2	6	4 5/8	10 5/8	2 3/8	14 3/8			16.0
3	48		2 1/4	3/4	1	8	7	1 1/4	3	19 3/4	20	15 1/2	12	1 7/8	2 5/8	7 1/2	13 1/2	3 3/8	1 1/2	6	4 5/8	10 5/8	2 3/8	14 3/8			16.0
4	48		2 1/4	3/4	1	8	7	1 1/4	3	19 3/4	20	15 1/2	12	1 7/8	2 5/8	7 1/2	13 1/2	3 3/8	1 1/2	6	4 5/8	10 5/8	2 3/8	14 3/8			16.0
5	48		2 1/4	3/4	1	8	7	1 1/4	3	19 3/4	20	15 1/2	12	1 7/8	2 5/8	7 1/2	13 1/2	3 3/8	1 1/2	6	4 5/8	10 5/8	2 3/8	14 3/8			16.0

STANDARD SIGN
W20-2A, B, C, D, F & G

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Raub*
for State Traffic Engineer

DATE 3/18/11 PLATE NO. W20-2.6


PROJECT NO: _____ HWY: _____ COUNTY: _____ SHEET NO: _____ E

CENTER LANE

W20-56A

LEFT LANE

W20-55A

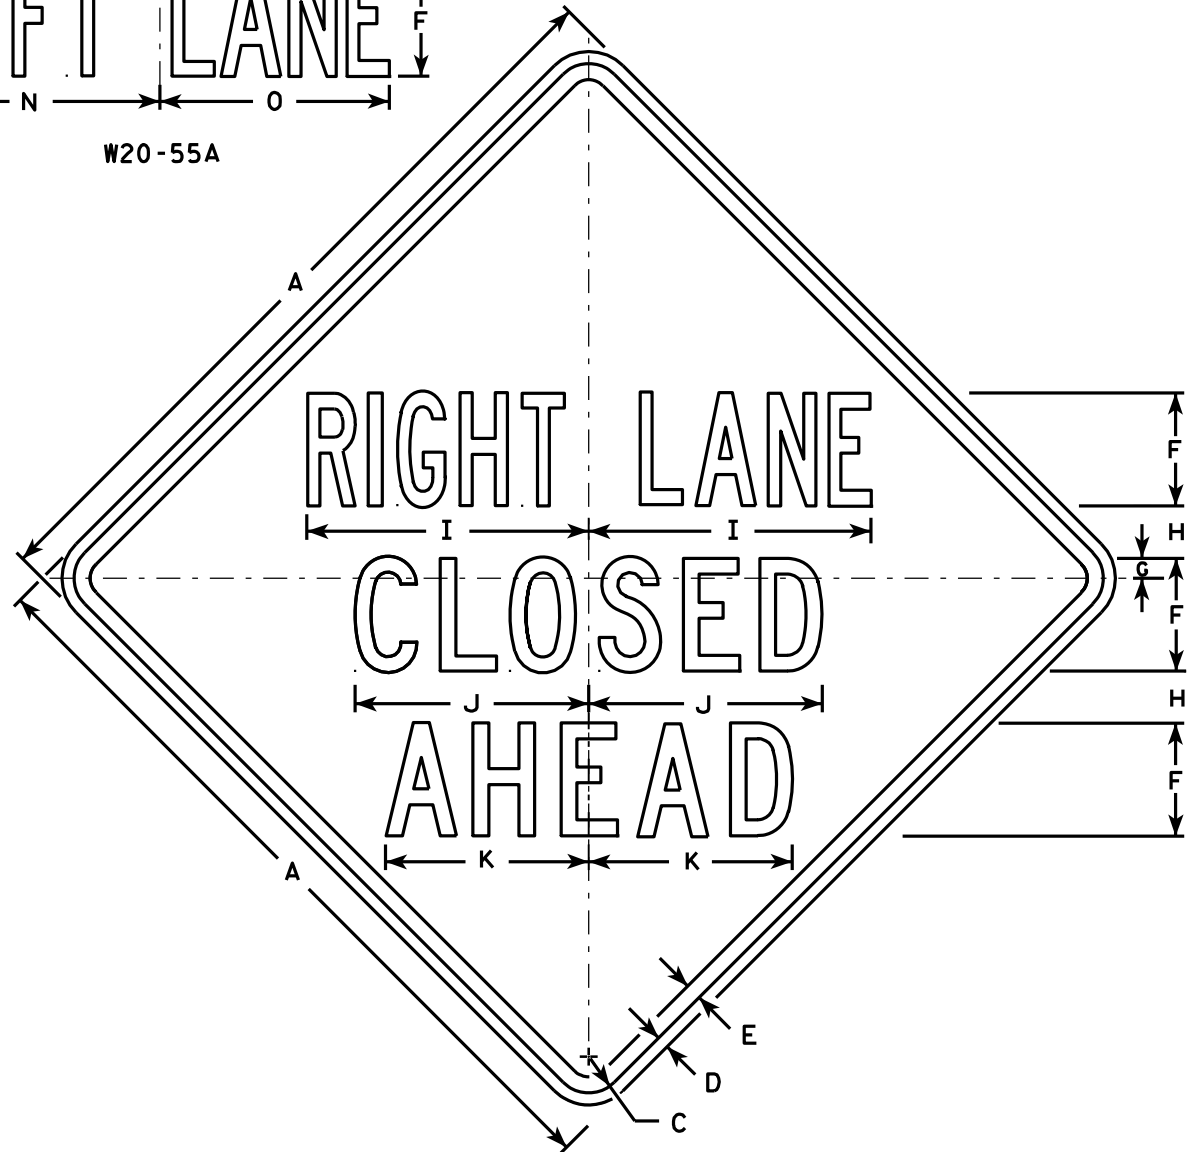

W20-5A

NOTES

1. Sign is Type II - Type F Reflective - reference WIS DOT Standard Specification for HIGHWAY and STRUCTURE CONSTRUCTION latest edition.
2. Color:
Background - Orange
Message - Black
3. Message Series - See Note 5
4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
5. "-----LANE" is Series B.
All other copy is Series C.

500 FT

W20-5D

1000 FT

W20-5C

1500 FT

W20-5B

1/2 MILE

W20-5G

1 MILE

W20-5F

7

7

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1	36	6	1 5/8	5/8	3/4	5	7/8	2 1/2	13 1/8	10 3/4	9 1/2	14 1/4	13 5/8	12	12	1 3/8	1 1/8	4 1/2	3 1/2	9	1 7/8	5 5/8	10 1/8	2 1/2	1 3/4	8	9.0
2S	48	8	2 1/4	3/4	1	7	1 1/4	3 1/4	17 1/2	14 3/8	12 5/8	19	18 3/8	16	14 1/4	1 7/8	1 1/2	6	4 5/8	12	2 5/8	7 1/2	13 1/2	3 3/8	2 3/8	10 5/8	16.0
2M	48	8	2 1/4	3/4	1	7	1 1/4	3 1/4	17 1/2	14 3/8	12 5/8	19	18 3/8	16	14 1/4	1 7/8	1 1/2	6	4 5/8	12	2 5/8	7 1/2	13 1/2	3 3/8	2 3/8	10 5/8	16.0
3	48	8	2 1/4	3/4	1	7	1 1/4	3 1/4	17 1/2	14 3/8	12 5/8	19	18 3/8	16	14 1/4	1 7/8	1 1/2	6	4 5/8	12	2 5/8	7 1/2	13 1/2	3 3/8	2 3/8	10 5/8	16.0
4	48	8	2 1/4	3/4	1	7	1 1/4	3 1/4	17 1/2	14 3/8	12 5/8	19	18 3/8	16	14 1/4	1 7/8	1 1/2	6	4 5/8	12	2 5/8	7 1/2	13 1/2	3 3/8	2 3/8	10 5/8	16.0
5	48	8	2 1/4	3/4	1	7	1 1/4	3 1/4	17 1/2	14 3/8	12 5/8	19	18 3/8	16	14 1/4	1 7/8	1 1/2	6	4 5/8	12	2 5/8	7 1/2	13 1/2	3 3/8	2 3/8	10 5/8	16.0

PROJECT NO: _____ HWY: _____ COUNTY: _____ SHEET NO: _____ E

STANDARD SIGN
W20-5A, B, C, D, F & G


WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
For State Traffic Engineer

DATE 3/18/11 PLATE NO. W20-5.11

NOTES

1. Sign is Type II - Type F Reflective - reference WIS DOT Standard Specification for HIGHWAY and STRUCTURE CONSTRUCTION latest edition.
2. Color:
Background - Orange
Message - Black
3. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
4. W01-1L is the same as W01-1R except the arrow is reversed along the vertical centerline.

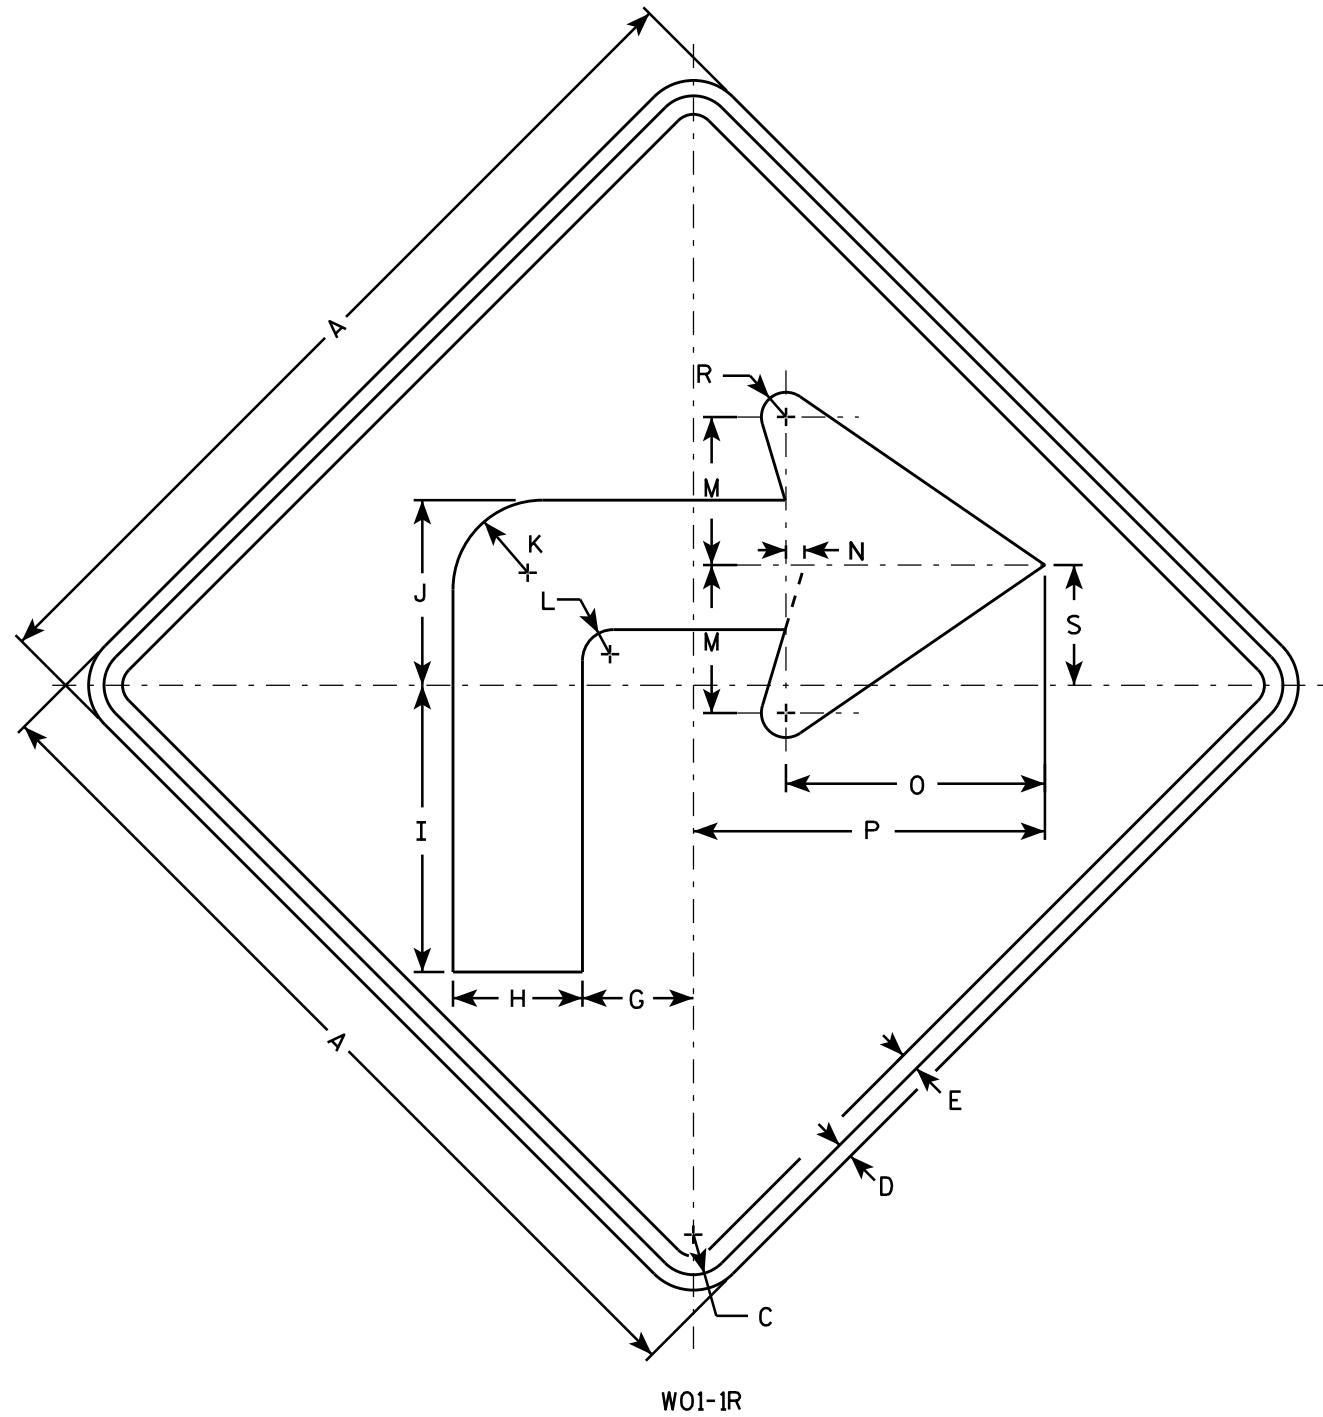

W01-1R

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1	36		1 5/8	5/8	3/4		4 1/2	5 1/4	11 5/8	7 1/2	3 5/8	1 1/4	6	3/4	10 1/2	14 1/4		1	4 7/8								9.0
2S	48		2 1/4	3/4	1		6	7	15 1/2	10	4 7/8	1 5/8	8	1	14	19		1 1/4	6 1/2								16.0
2M	48		2 1/4	3/4	1		6	7	15 1/2	10	4 7/8	1 5/8	8	1	14	19		1 1/4	6 1/2								16.0
3	48		2 1/4	3/4	1		6	7	15 1/2	10	4 7/8	1 5/8	8	1	14	19		1 1/4	6 1/2								16.0
4	48		2 1/4	3/4	1		6	7	15 1/2	10	4 7/8	1 5/8	8	1	14	19		1 1/4	6 1/2								16.0
5	48		2 1/4	3/4	1		6	7	15 1/2	10	4 7/8	1 5/8	8	1	14	19		1 1/4	6 1/2								16.0

STANDARD SIGN
W01-1


WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
For State Traffic Engineer

DATE 11/18/13 PLATE NO. W01-1.1

NOTES

1. Sign is Type II - Type F Reflective - reference WIS DOT Standard Specification for HIGHWAY and STRUCTURE CONSTRUCTION latest edition.
2. Color:
Background - Orange
Message - Black
3. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.

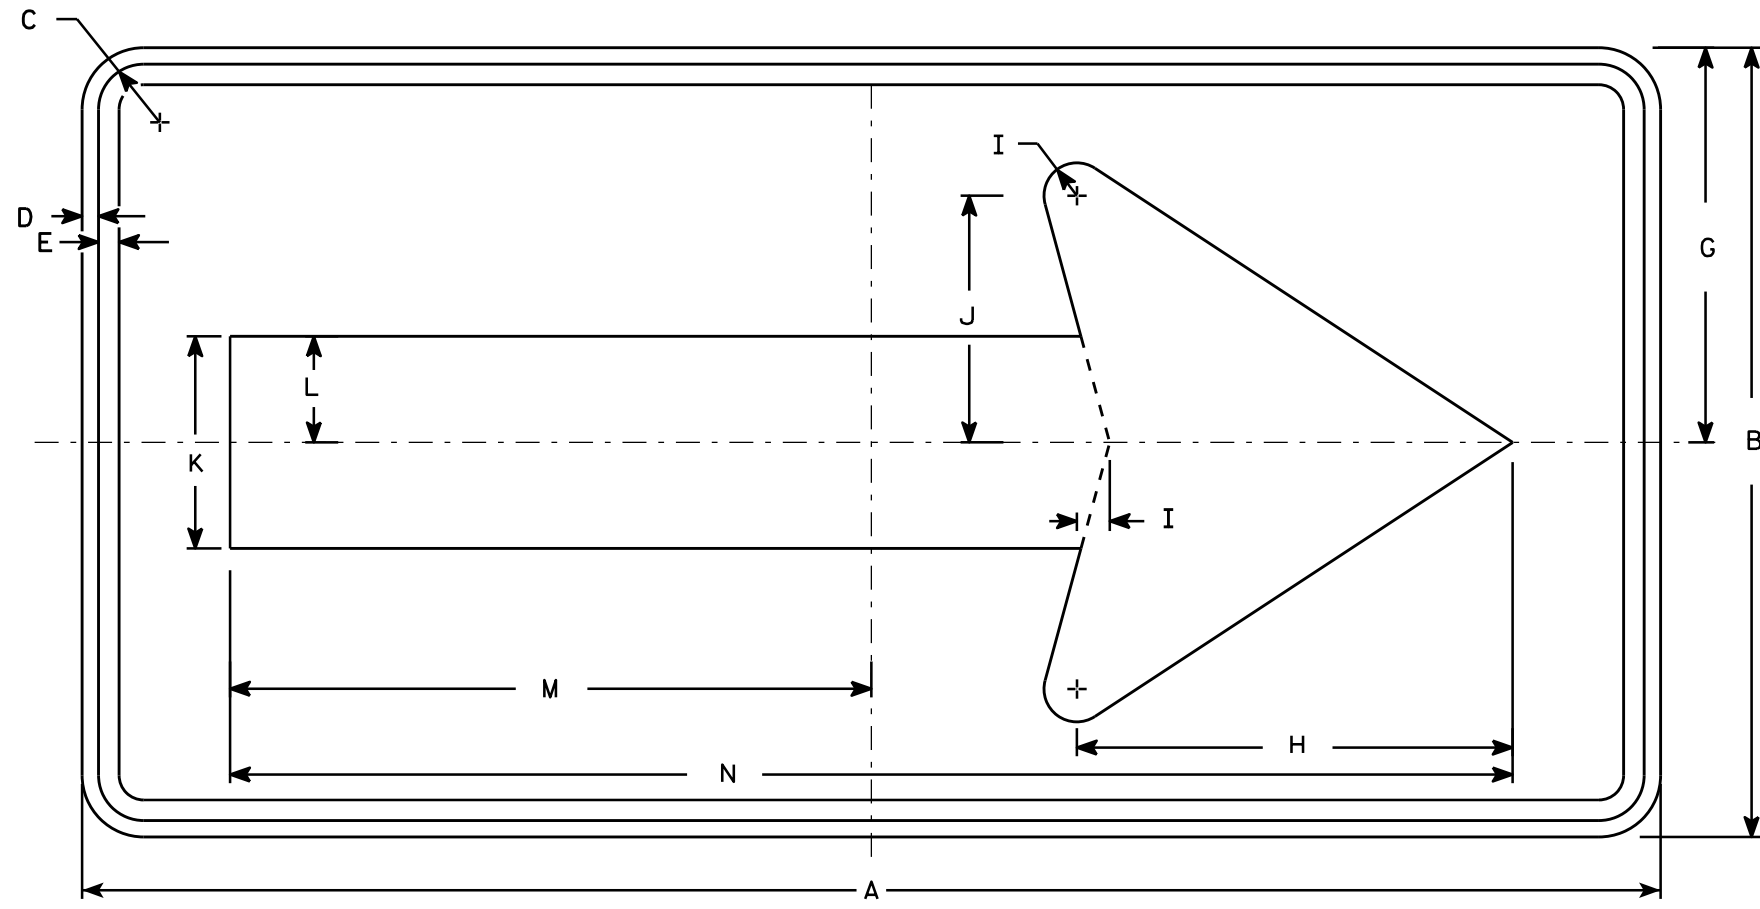

W01-6

7

7

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2S	48	24	1 3/8	1/2	5/8		12	13 1/4	1	7 1/2	6 1/2	3 1/4	19 1/2	39													8.0
2M	48	24	1 3/8	1/2	5/8		12	13 1/4	1	7 1/2	6 1/2	3 1/4	19 1/2	39													8.0
3	60	30	1 3/8	1/2	5/8		15	16 1/4	1 1/4	9 1/4	8	4	24 3/8	48 3/4													12.5
4	60	30	1 3/8	1/2	5/8		15	16 1/4	1 1/4	9 1/4	8	4	24 3/8	48 3/4													12.5
5	60	30	1 3/8	1/2	5/8		15	16 1/4	1 1/4	9 1/4	8	4	24 3/8	48 3/4													12.5


STANDARD SIGN
W01-6

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 11/18/13 PLATE NO. W01-6.1


PROJECT NO: _____ HWY: _____ COUNTY: _____ SHEET NO: **E**

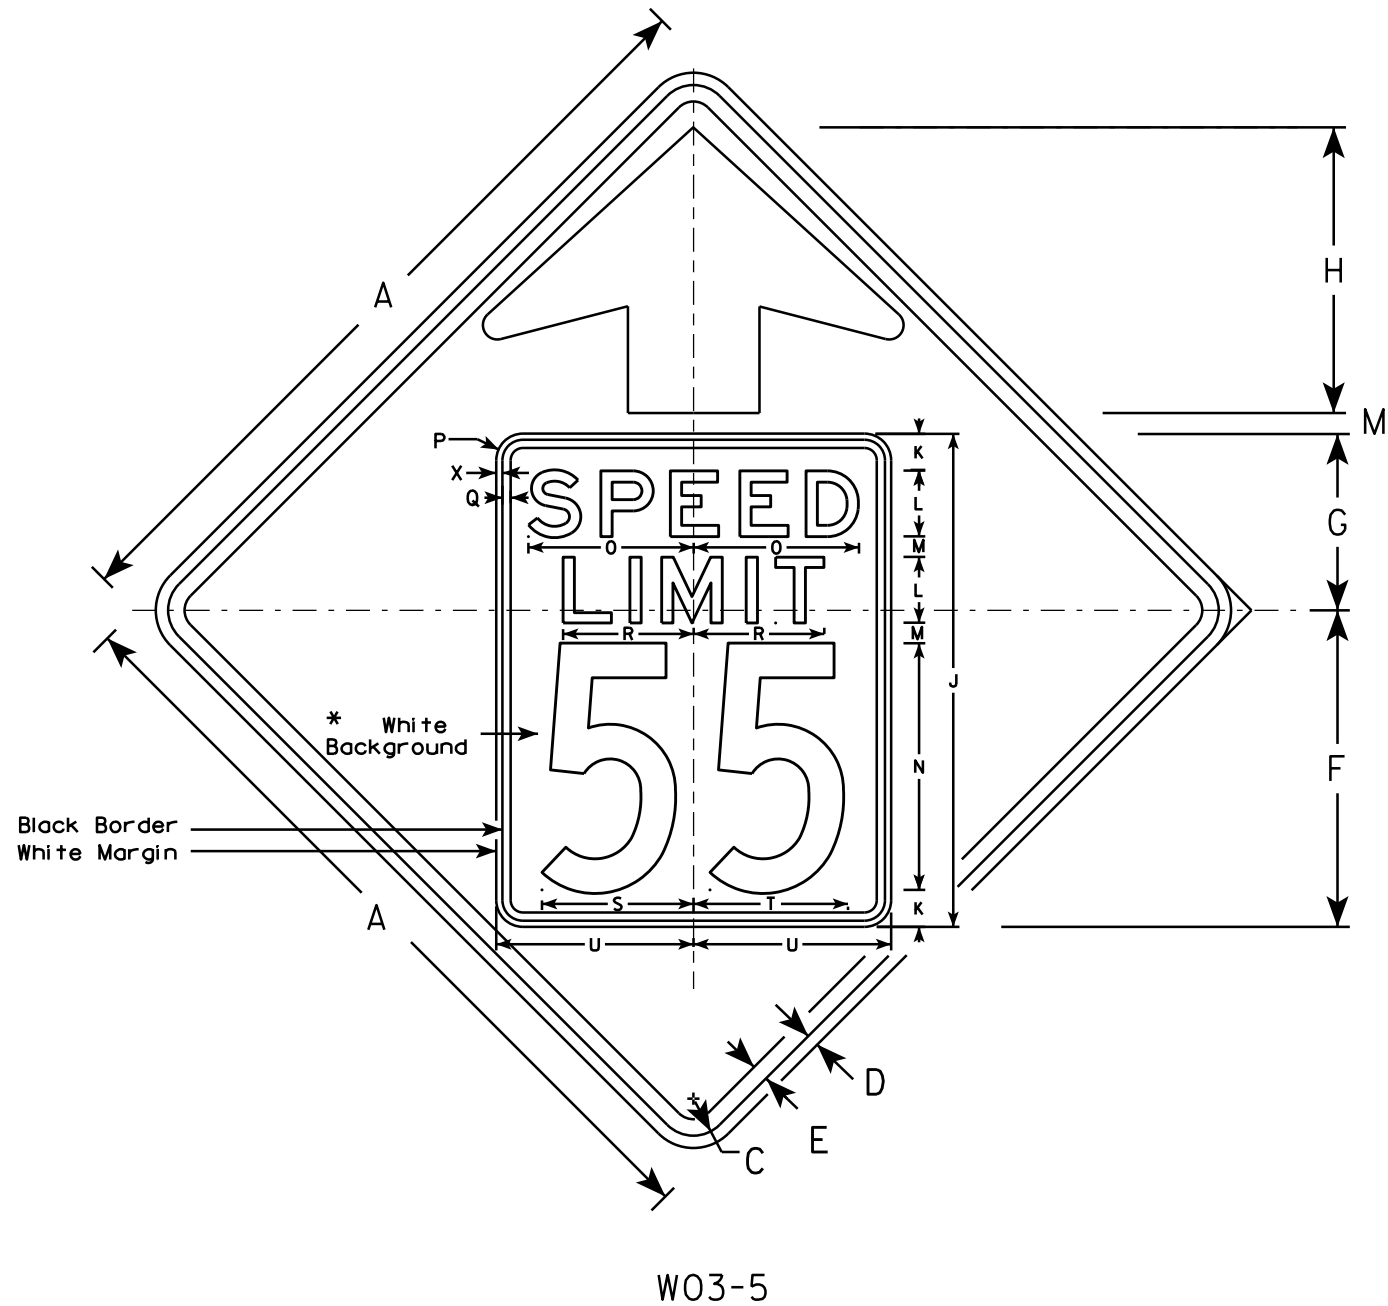

NOTES

1. Sign is Type II - Type F Reflective - reference WIS DOT Standard Specification for HIGHWAY and STRUCTURE CONSTRUCTION latest edition.
2. Color: *
Background - ORANGE*
Message - BLACK
3. Message Series - C for numbers Series E for wording
4. Substitute appropriate numerals and optically adjust spacing to achieve proper balance

*Speed Limit Sign shall have a White Background

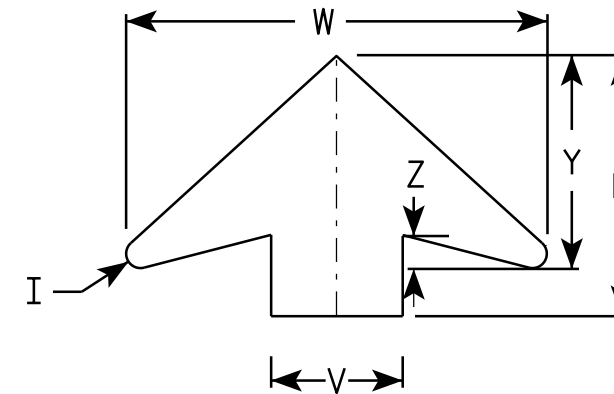

ARROW DETAIL


SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	O	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1	36		1 5/8	5/8	3/4	14 1/2	9 1/2	11 1/2	5/8	24	2	3	1	12	7 1/8	1 1/2	3/8	5 3/4	7 1/4	7 1/8	9	6	19 1/4	3/8	9 3/4	1 5/8	9.0
2S	48		2 1/4	3/4	1	19 1/4	10 3/4	17 3/8	7/8	30	2 1/4	4	1 1/4	15	10	1 5/8	1/2	8	9 1/4	9 3/8	12	8	25 5/8	3/8	13	2	16.0
2M	48		2 1/4	3/4	1	19 1/4	10 3/4	17 3/8	7/8	30	2 1/4	4	1 1/4	15	10	1 5/8	1/2	8	9 1/4	9 3/8	12	8	25 5/8	3/8	13	2	16.0
3	48		2 1/4	3/4	1	19 1/4	10 3/4	17 3/8	7/8	30	2 1/4	4	1 1/4	15	10	1 5/8	1/2	8	9 1/4	9 3/8	12	8	25 5/8	3/8	13	2	16.0
4	48		2 1/4	3/4	1	19 1/4	10 3/4	17 3/8	7/8	30	2 1/4	4	1 1/4	15	10	1 5/8	1/2	8	9 1/4	9 3/8	12	8	25 5/8	3/8	13	2	16.0
5	48		2 1/4	3/4	1	19 1/4	10 3/4	17 3/8	7/8	30	2 1/4	4	1 1/4	15	10	1 5/8	1/2	8	9 1/4	9 3/8	12	8	25 5/8	3/8	13	2	16.0

STANDARD SIGN
W03-5

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
For State Traffic Engineer

DATE 11/20/13 PLATE NO. W03-5.1

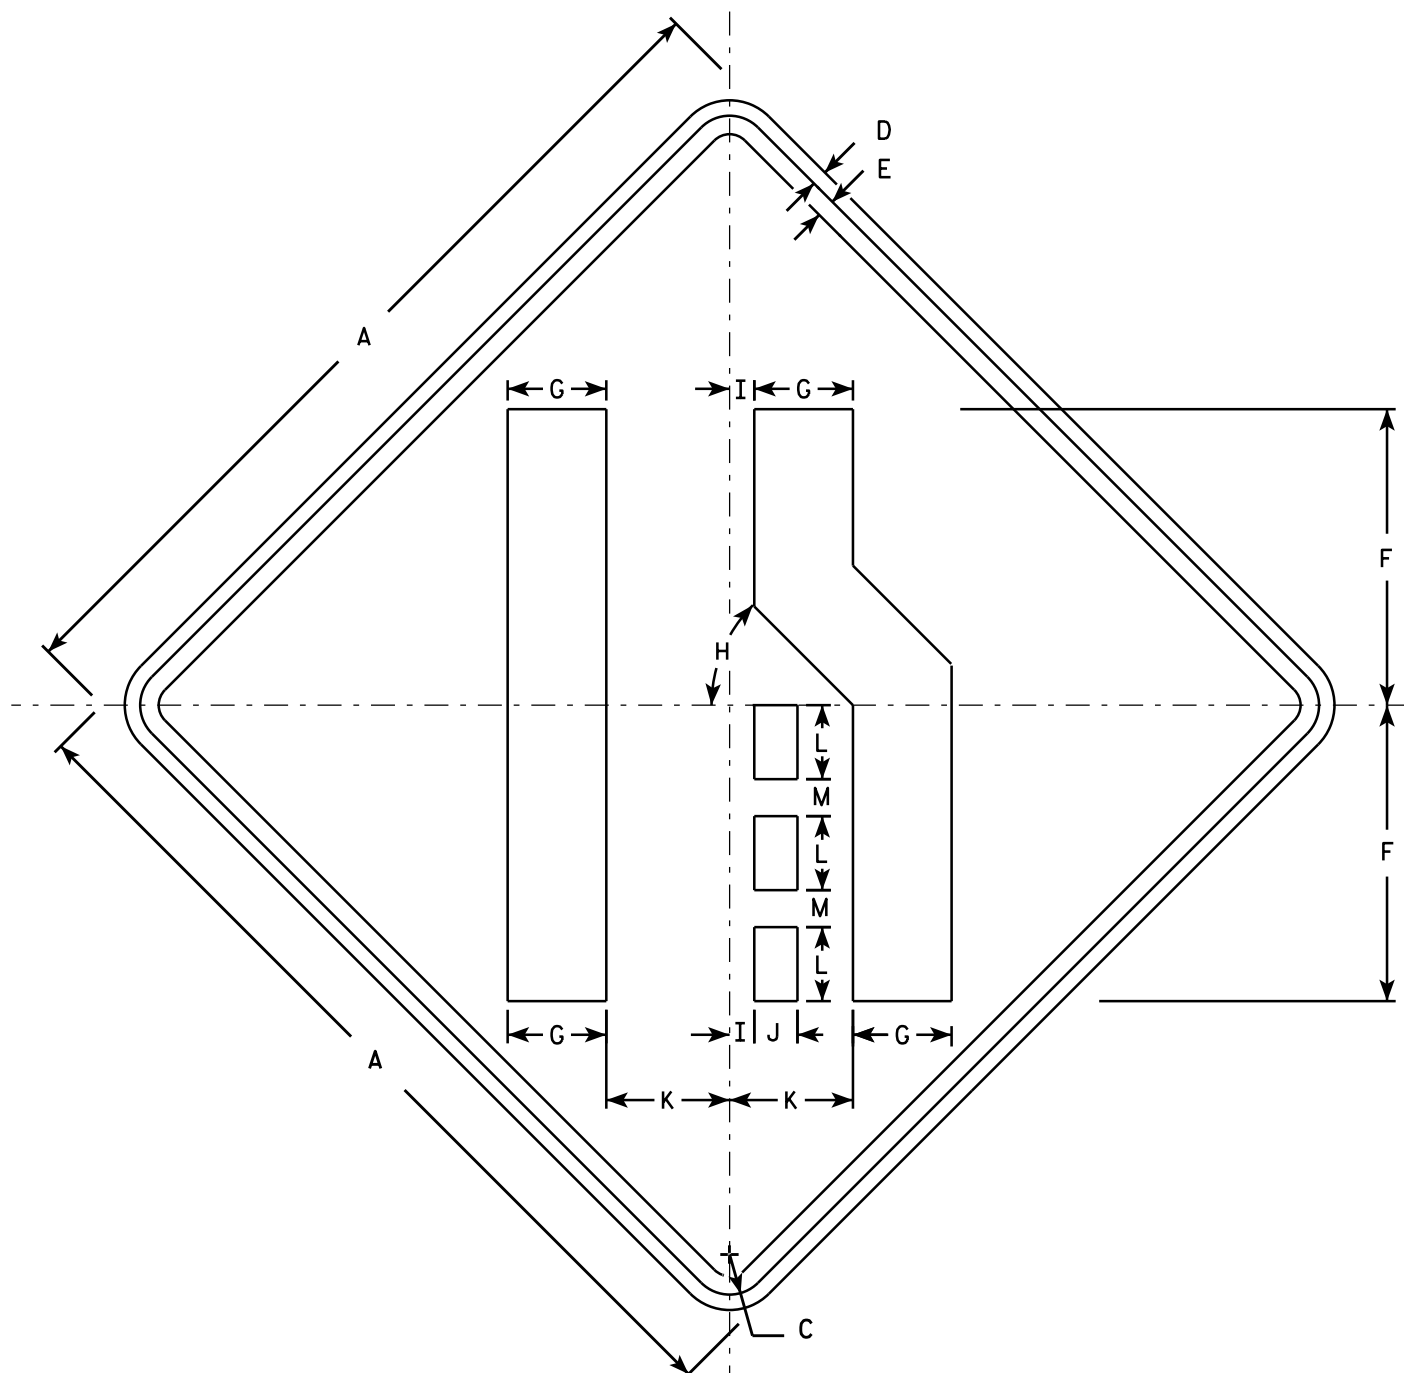

W04-2R

NOTES

1. Sign is Type II - Type F Reflective - reference WIS DOT Standard Specification for HIGHWAY and STRUCTURE CONSTRUCTION latest edition.
2. Color:
Background - Orange
Message - Black
3. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
4. W04-2L is the same as W04-2R except the symbol is reversed along the vertical centerline.

7

7


SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1	36		1 5/8	5/8	3/4	12	4	45°	1	1 3/4	5	3	1 1/2														9.0
2S	48		2 1/4	3/4	1	16	5 3/8	45°	1 1/4	2 3/8	6 3/4	4	2														16.0
2M	48		2 1/4	3/4	1	16	5 3/8	45°	1 1/4	2 3/8	6 3/4	4	2														16.0
3	48		2 1/4	3/4	1	16	5 3/8	45°	1 1/4	2 3/8	6 3/4	4	2														16.0
4	48		2 1/4	3/4	1	16	5 3/8	45°	1 1/4	2 3/8	6 3/4	4	2														16.0
5	48		2 1/4	3/4	1	16	5 3/8	45°	1 1/4	2 3/8	6 3/4	4	2														16.0

STANDARD SIGN
W04-2

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
For State Traffic Engineer

DATE 11/20/13 PLATE NO. W04-2.1

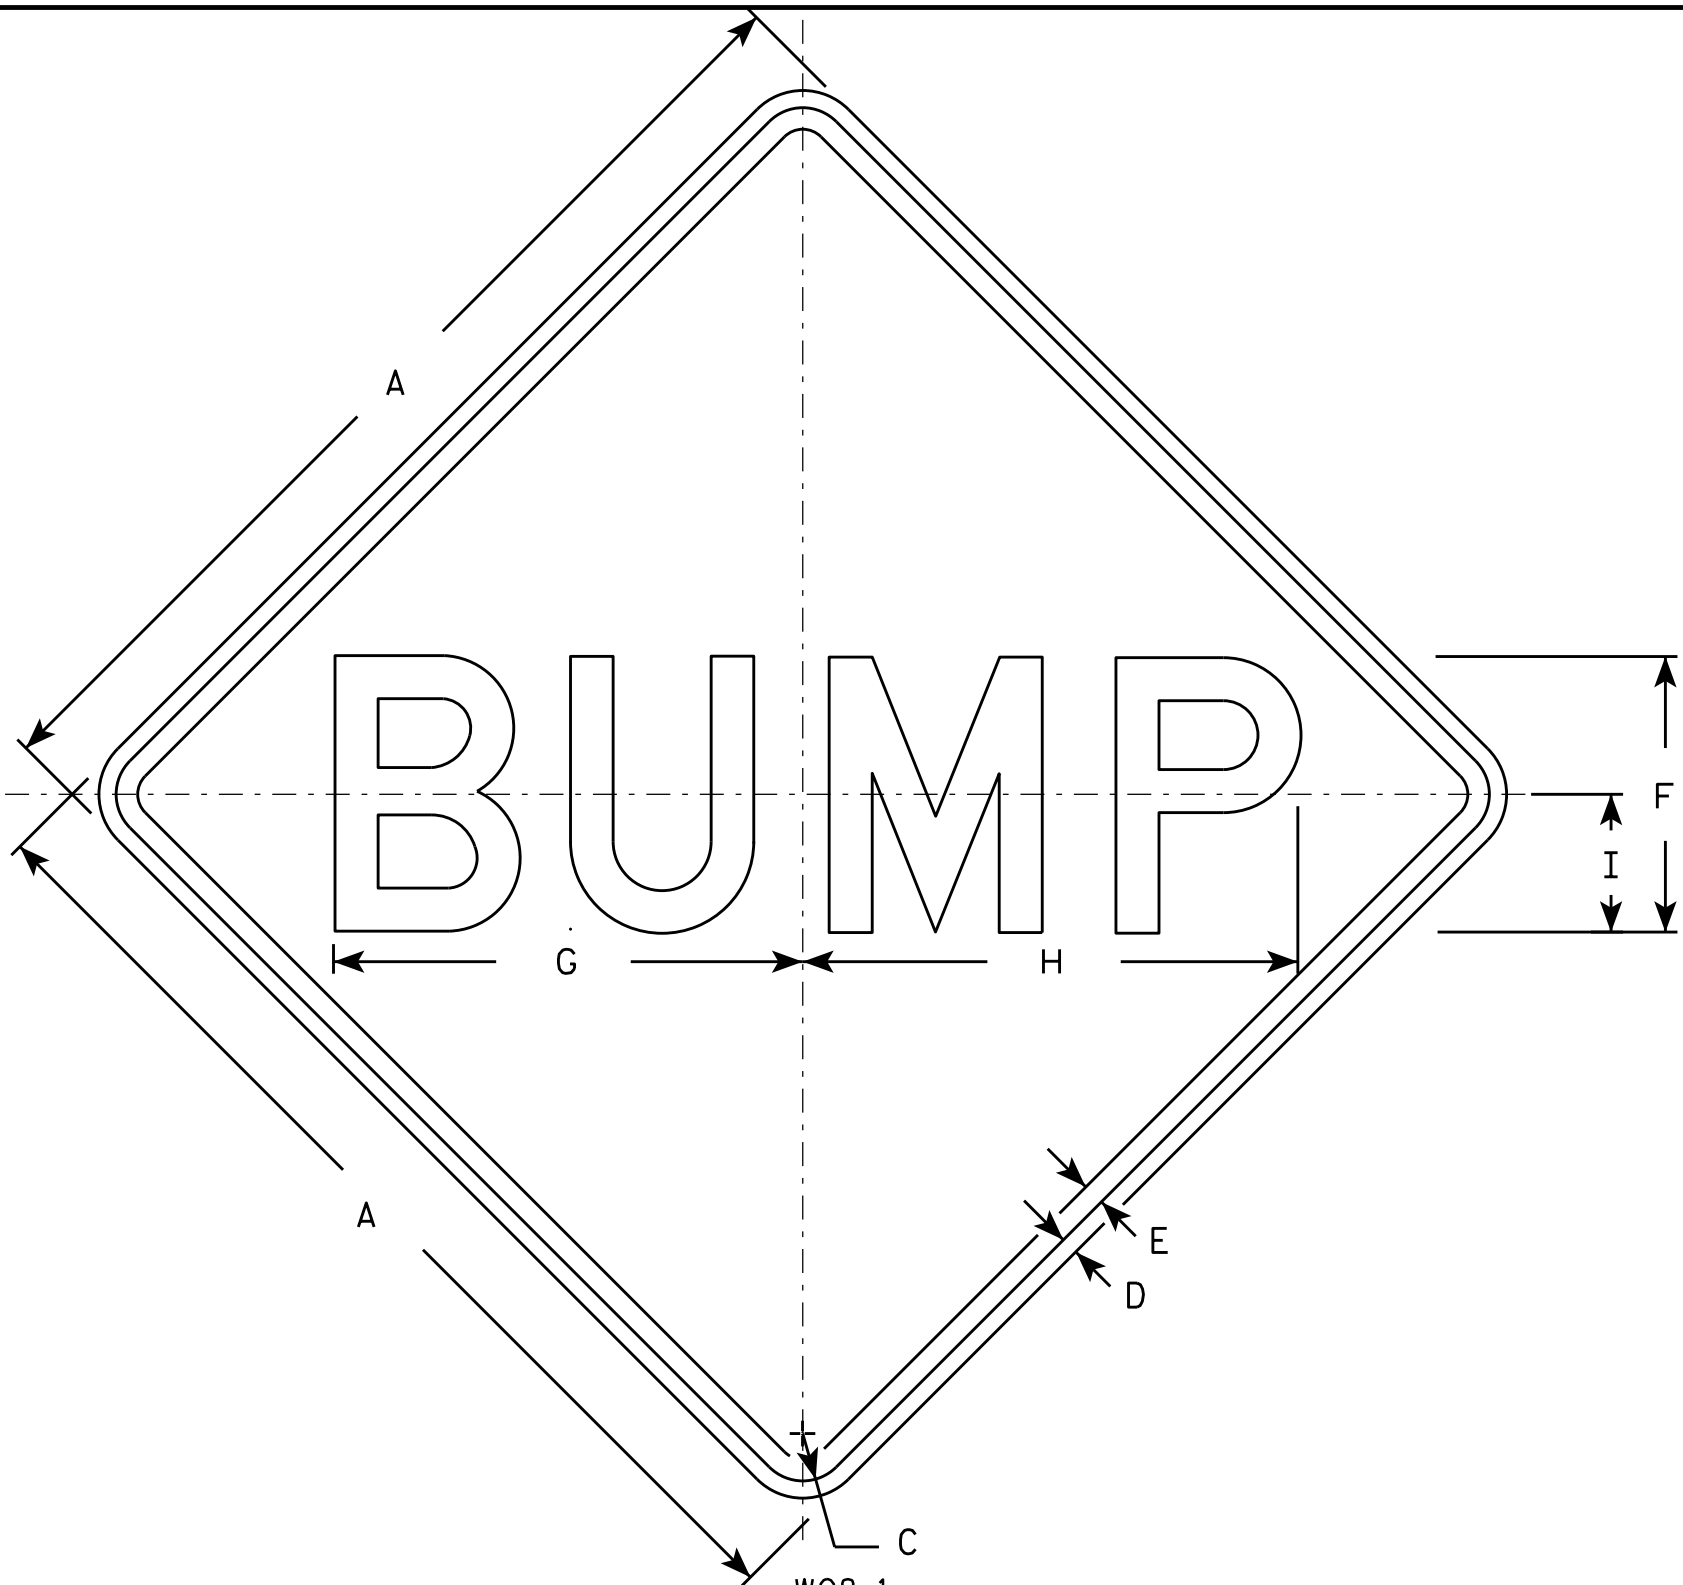

NOTES

1. Sign is Type II - Type F Reflective - reference WIS DOT Standard Specification for HIGHWAY and STRUCTURE CONSTRUCTION latest edition.
2. Color:
Background - Orange
Message - Black
3. Message Series - D
4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.

7

7

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1	36		1 5/8	5/8	3/4	10	16 7/8	17 7/8	5																		9.0
2S	48		2 1/4	3/4	1	12	20 3/8	21 5/8	6																		16.0
2M	48		2 1/4	3/4	1	12	20 3/8	21 5/8	6																		16.0
3	48		2 1/4	3/4	1	12	20 3/8	21 5/8	6																		16.0
4	48		2 1/4	3/4	1	12	20 3/8	21 5/8	6																		16.0
5	48		2 1/4	3/4	1	12	20 3/8	21 5/8	6																		16.0


STANDARD SIGN
W08-1

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R Rauch*
For State Traffic Engineer

DATE 11/20/13 PLATE NO. W08-1.1

PROJECT NO: _____ HWY: _____ COUNTY: _____ SHEET NO: **E**

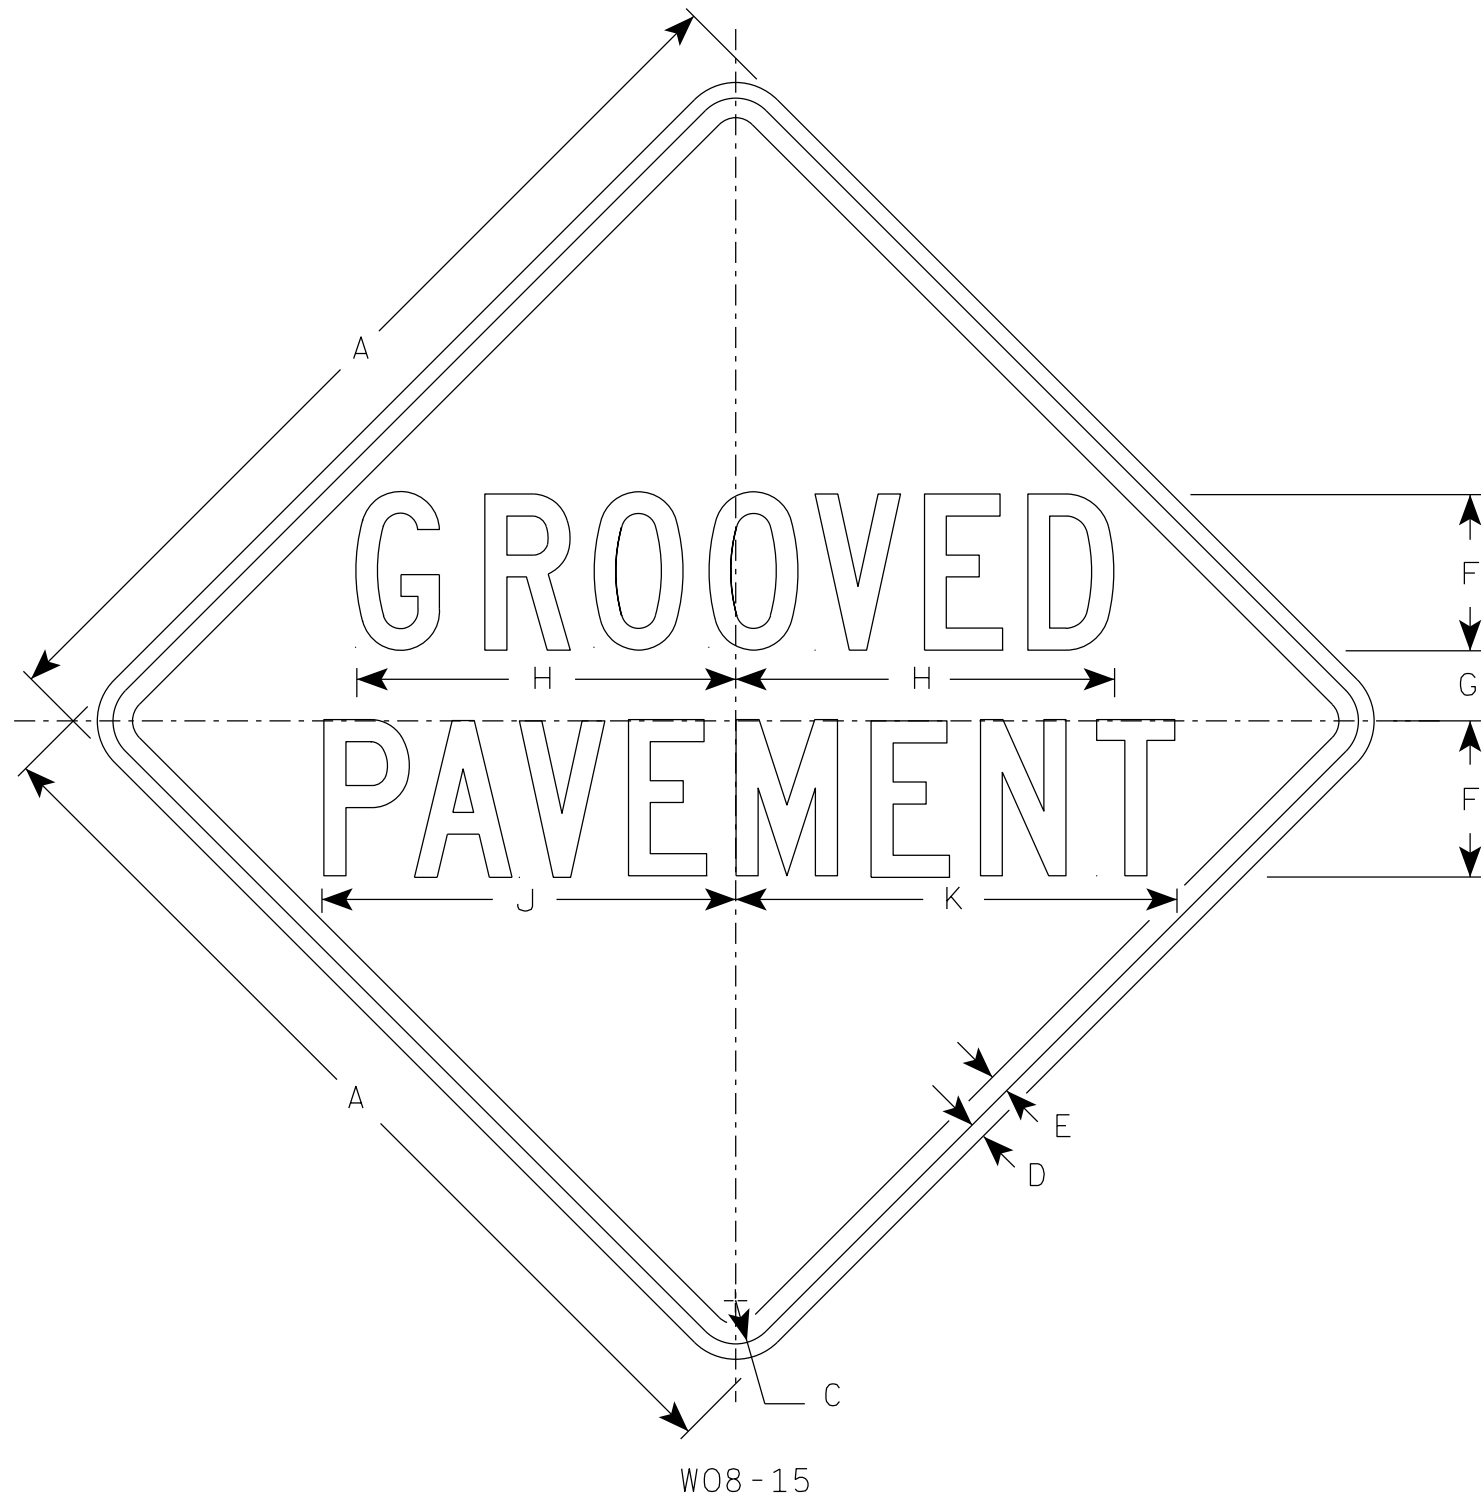

W08-15

NOTES

1. Sign is Type II - Type F Reflective
2. Color:
Background - Orange
Message - Black
3. Message Series - C
4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.

7

7

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1	36		1 5/8	5/8	3/4	6	2 5/8	14 1/2		15 7/8	17																9.0
2S	48		2 1/4	3/4	1	8	3 1/2	19 3/8		21 1/4	22 5/8																16.0
2M	48		2 1/4	3/4	1	8	3 1/2	19 3/8		21 1/4	22 5/8																16.0
3	48		2 1/4	3/4	1	8	3 1/2	19 3/8		21 1/4	22 5/8																16.0
4	48		2 1/4	3/4	1	8	3 1/2	19 3/8		21 1/4	22 5/8																16.0
5	48		2 1/4	3/4	1	8	3 1/2	19 3/8		21 1/4	22 5/8																16.0

STANDARD SIGN
W08-15

WISCONSIN DEPT OF TRANSPORTATION


APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 4/16/2020 PLATE NO. W08-15.1

PROJECT NO: _____ HWY: _____ COUNTY: _____ SHEET NO: **E**

NOTES

1. Sign is Type II - Type F Reflective
2. Color:
Background - Orange
Message - Black
3. Corners may be square or rounded but corners shall be rounded when base material is metal.
4. W016-7R is the same as W016-L except the arrow is reversed along the vertical centerline.

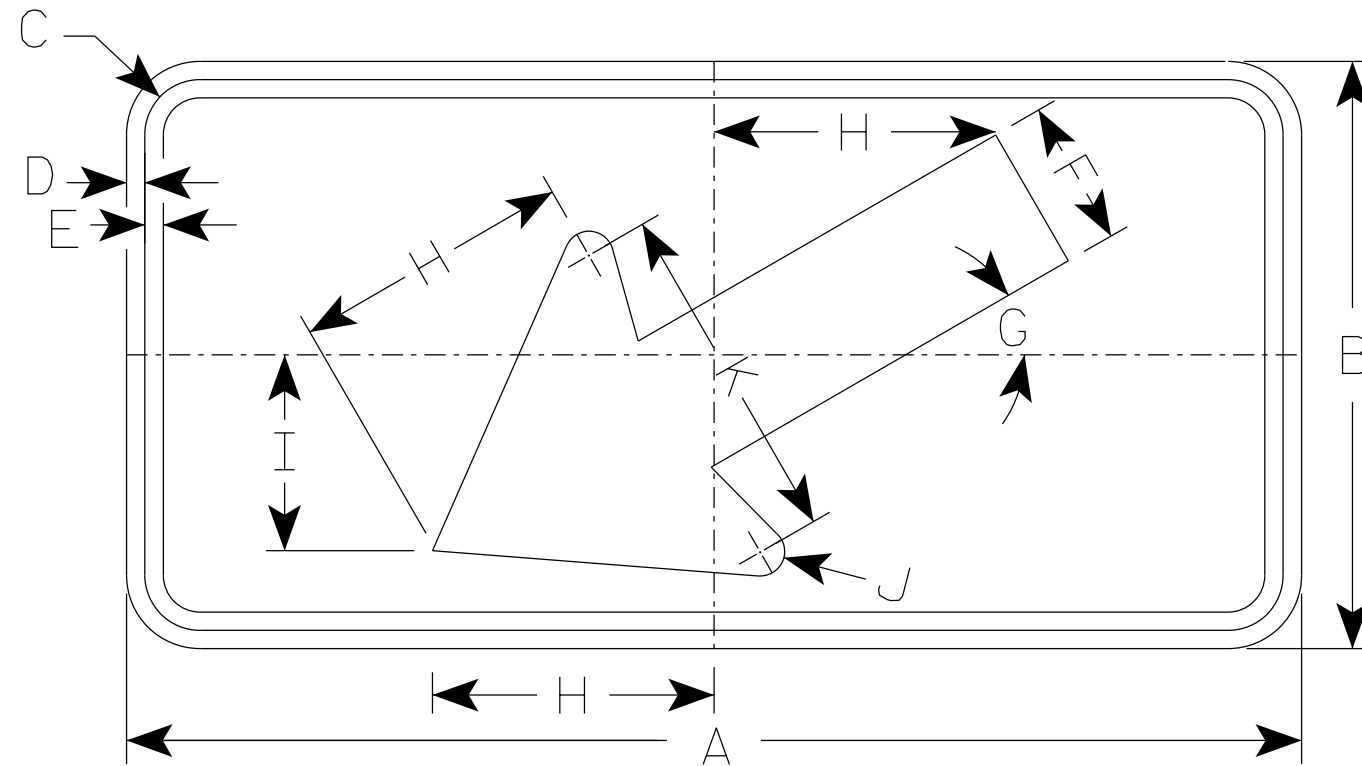

W016-7L

7

7

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1	30	18	1 1/8	3/8	1/2	4 1/2	30°	8 1/2	6	5/8	10 1/4																3.75
2S	48	24	1 3/8	1/2	5/8	6	30°	11 1/2	8	1	14																8.0
2M	48	24	1 3/8	1/2	5/8	6	30°	11 1/2	8	1	14																8.0
3	48	24	1 3/8	1/2	5/8	6	30°	11 1/2	8	1	14																8.0
4	48	24	1 3/8	1/2	5/8	6	30°	11 1/2	8	1	14																8.0
5	48	24	1 3/8	1/2	5/8	6	30°	11 1/2	8	1	14																8.0


STANDARD SIGN
W016-7

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R Rauch*
for State Traffic Engineer

DATE 3/16/2021 PLATE NO. W016-7.2


PROJECT NO:	HWY:	COUNTY:	SHEET NO:	E
-------------	------	---------	-----------	----------

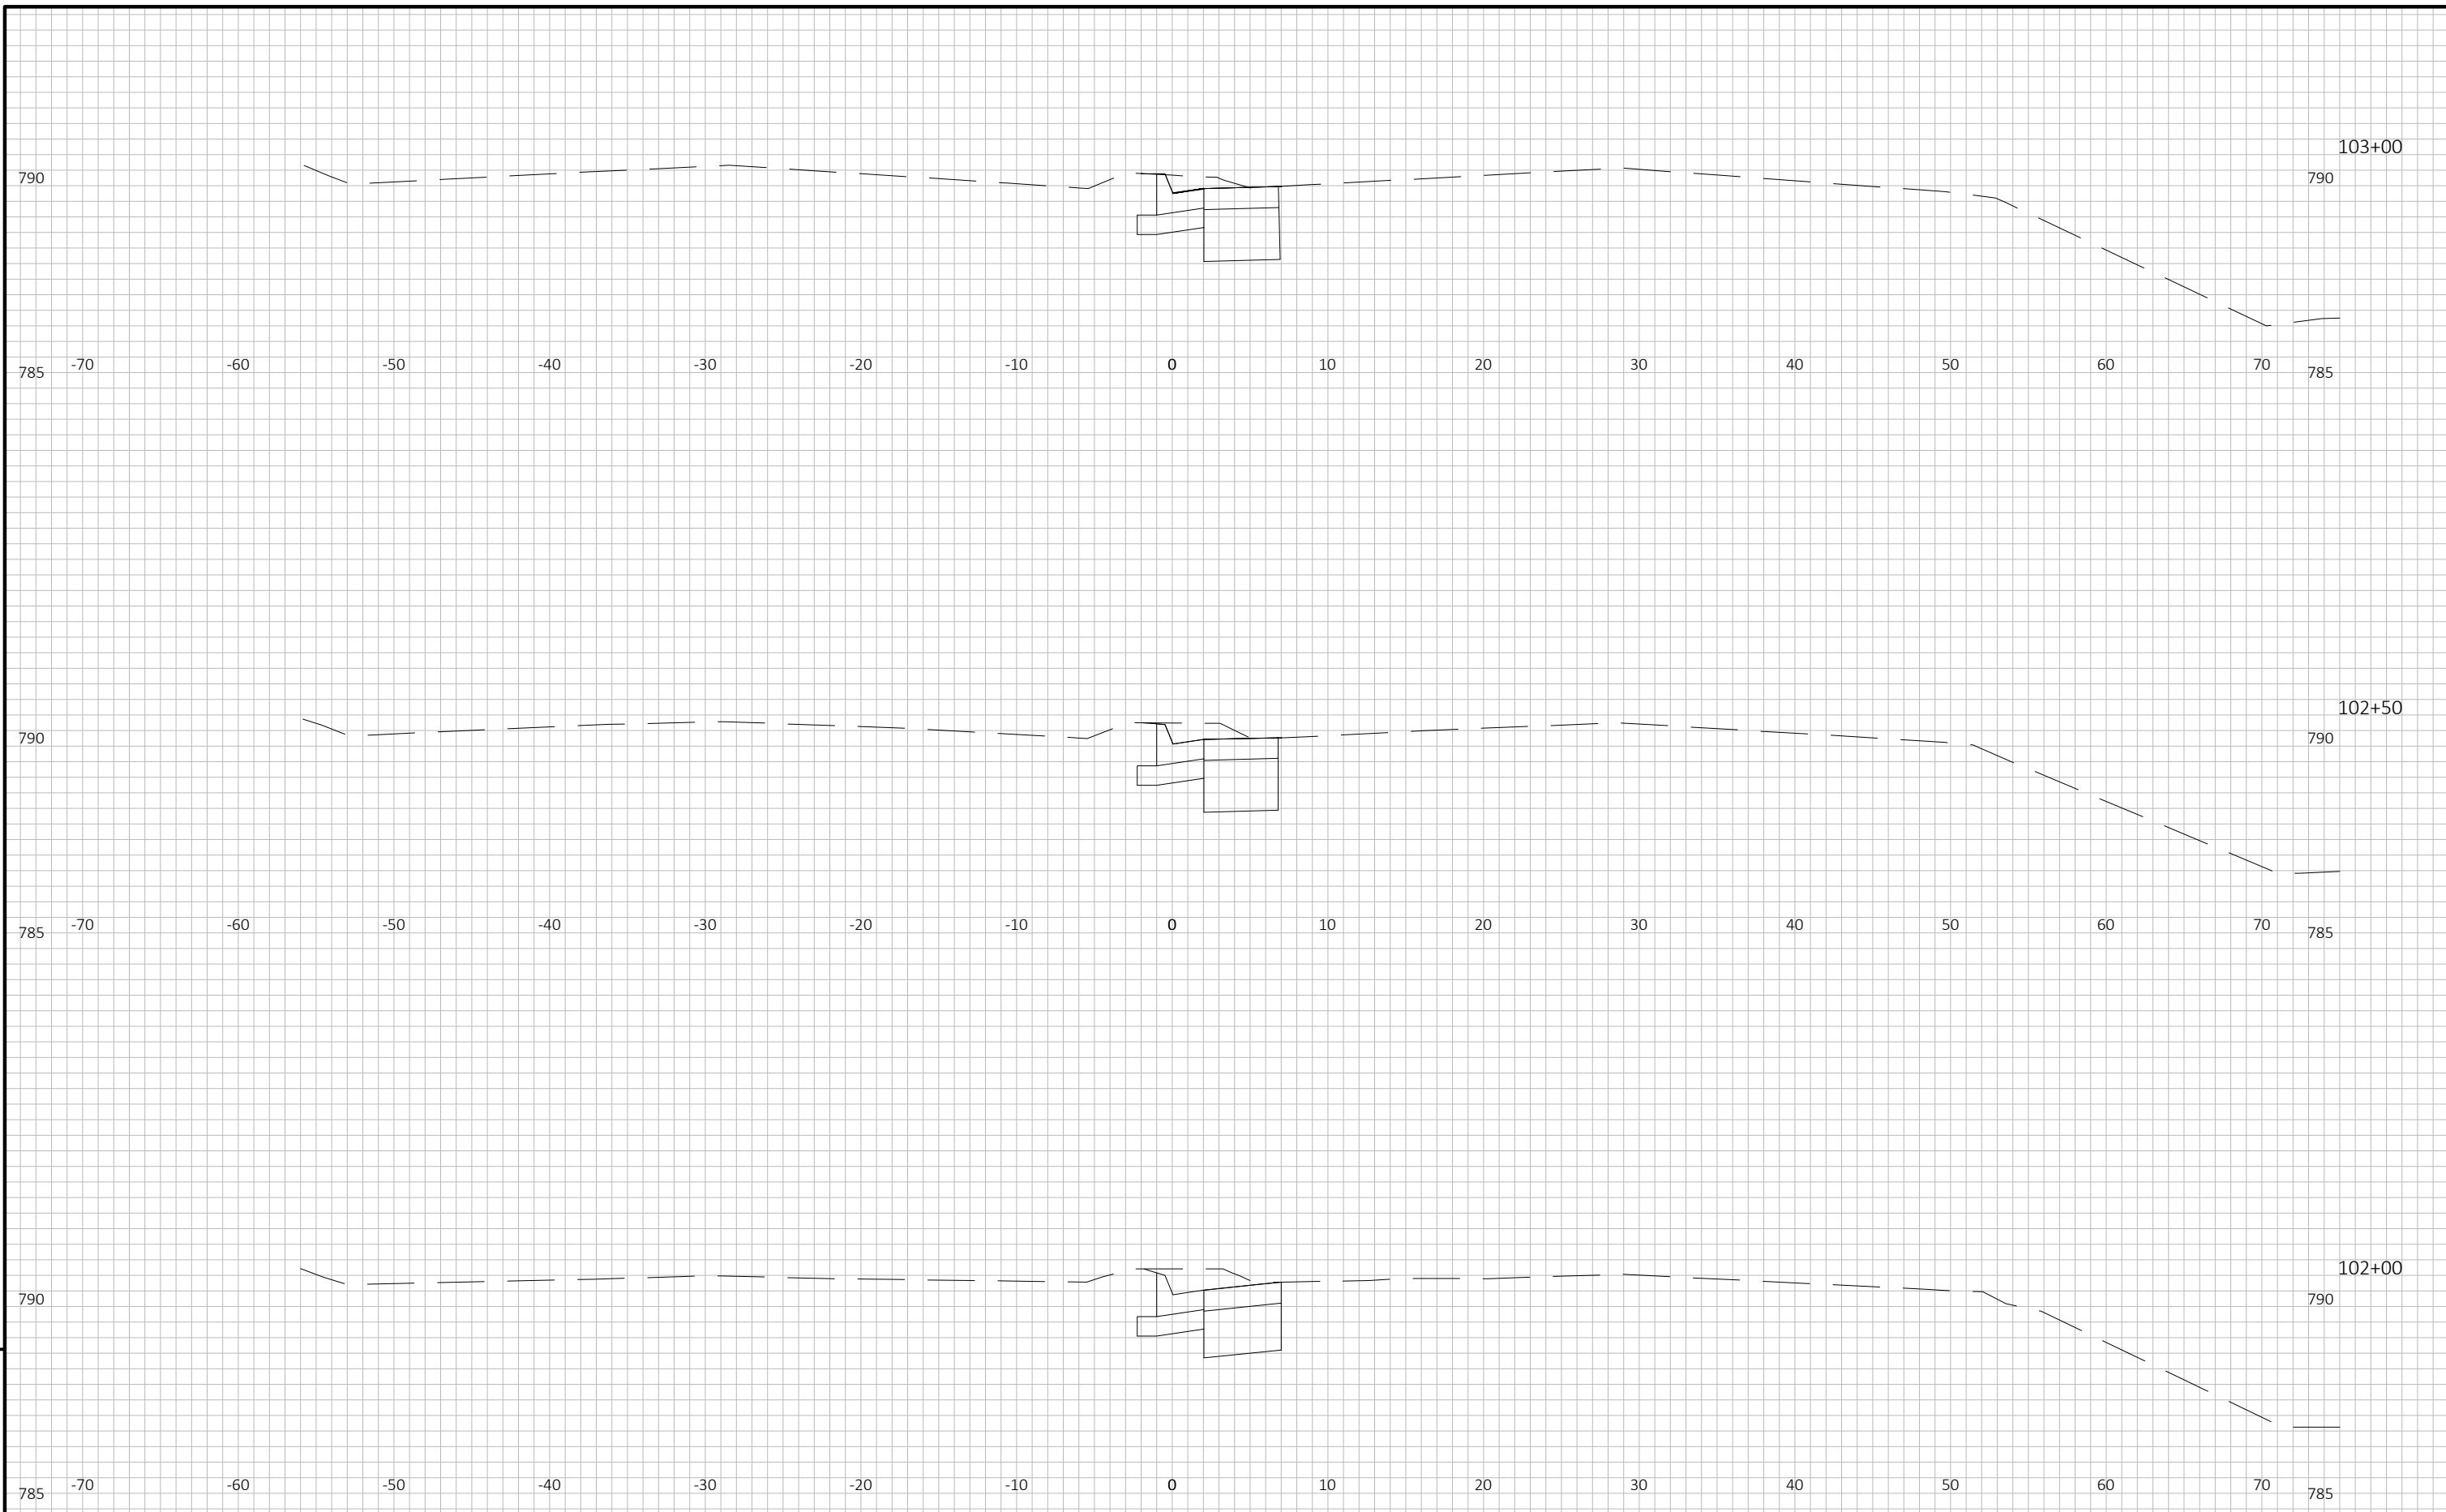

9

9


PROJECT NO: 2753-08-70	HWY: CTH VV	COUNTY: WAUKESHA COUNTY	CROSS SECTIONS: CTH VV	SHEET 52	E
------------------------	-------------	-------------------------	------------------------	----------	---

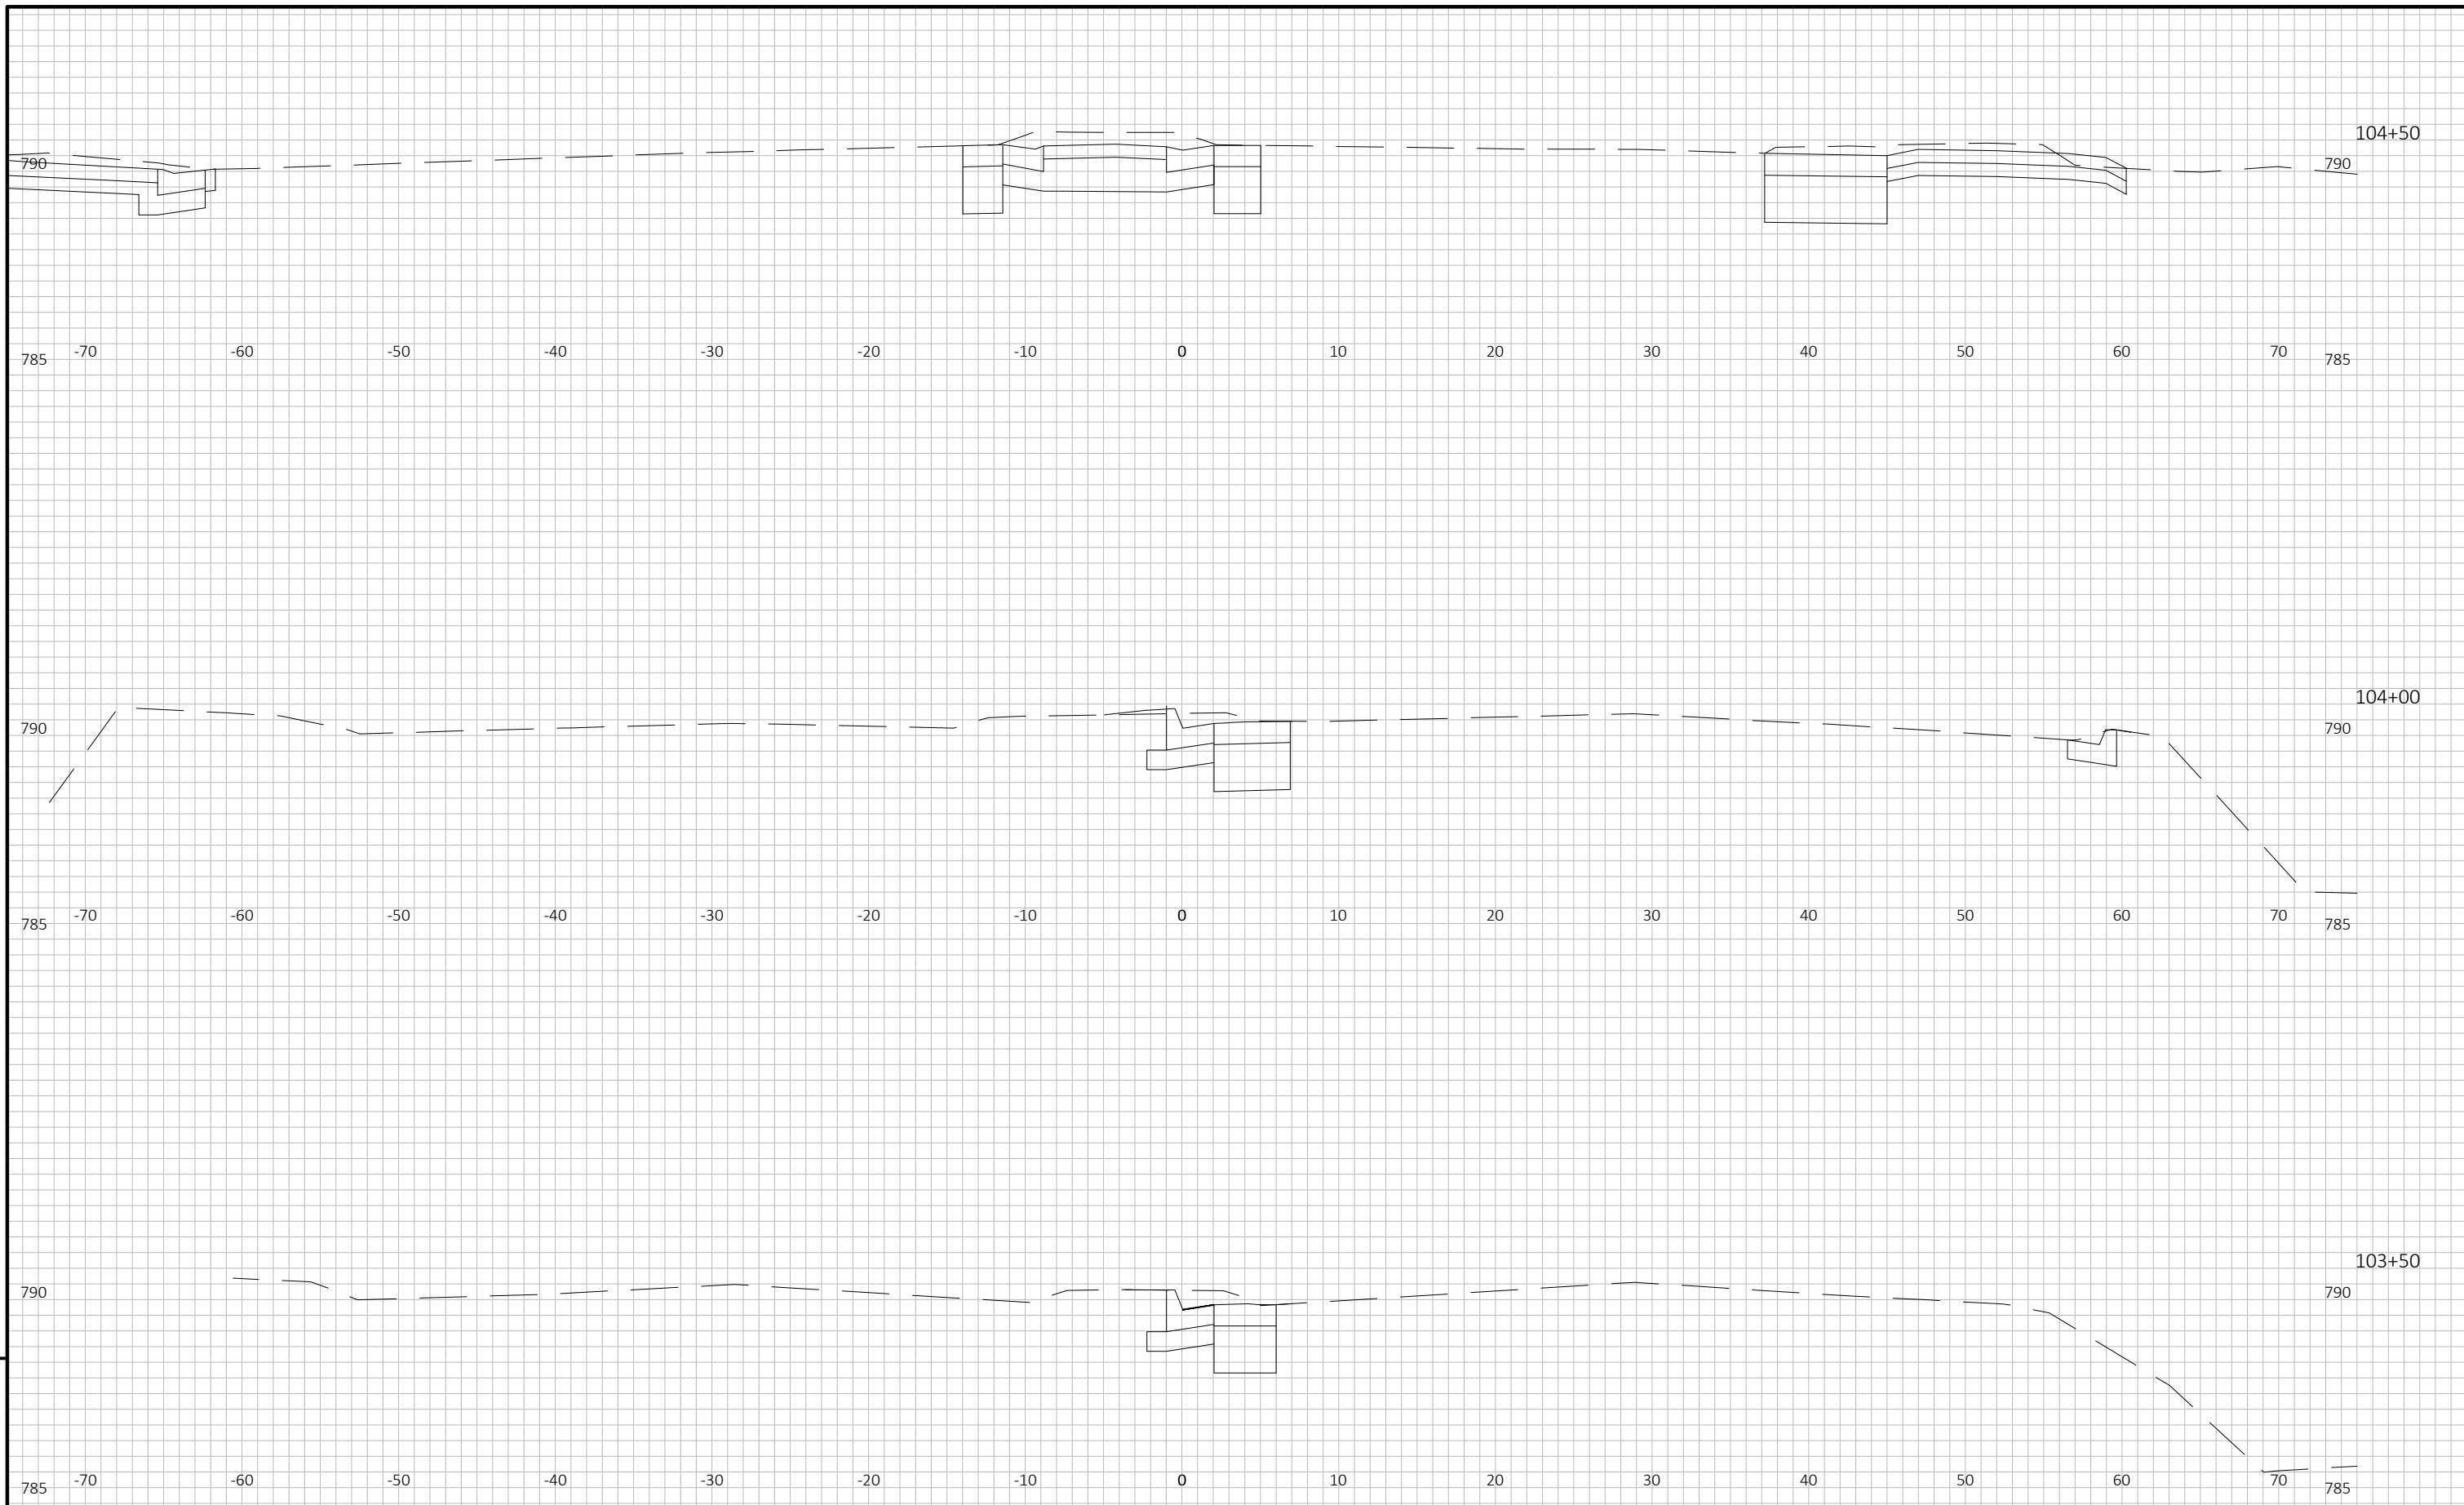

9

9


PROJECT NO: 2753-08-70	HWY: CTH VV	COUNTY: WAUKESHA COUNTY	CROSS SECTIONS: CTH VV	SHEET 53	E
------------------------	-------------	-------------------------	------------------------	----------	---

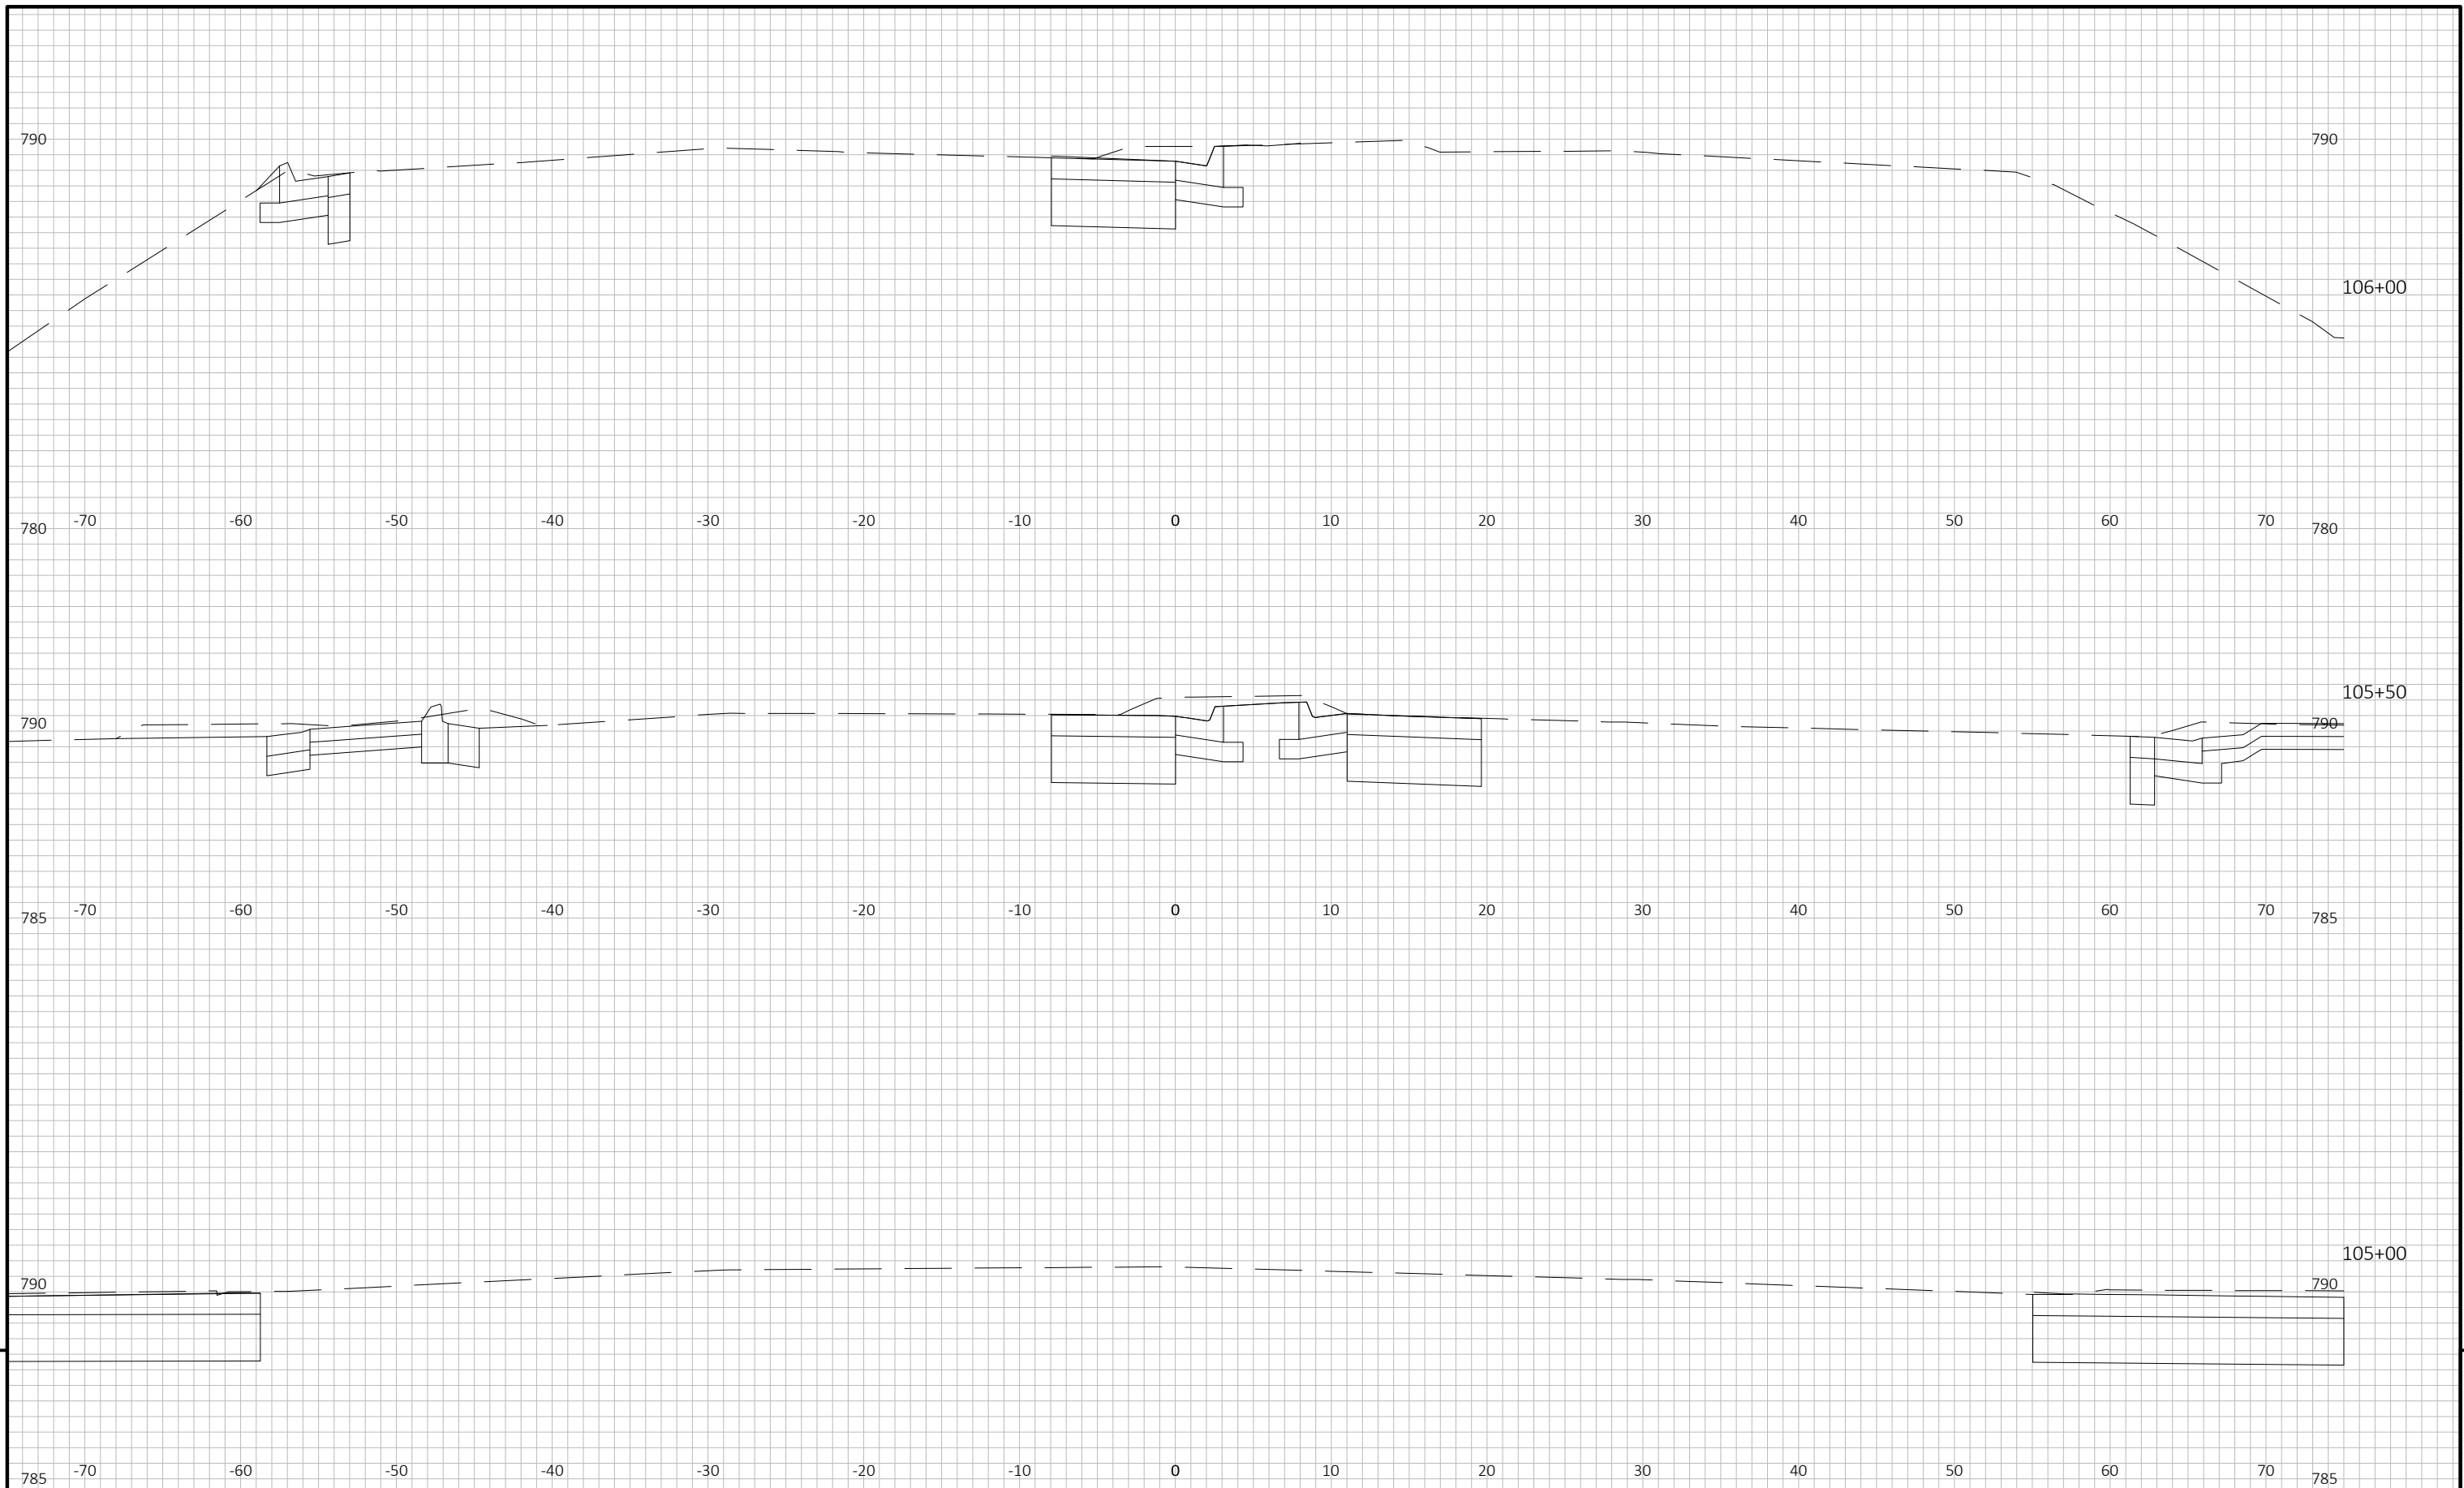

9

9


PROJECT NO: 2753-08-70	HWY: CTH VV	COUNTY: WAUKESHA COUNTY	CROSS SECTIONS: CTH VV	SHEET 54	E
------------------------	-------------	-------------------------	------------------------	----------	---

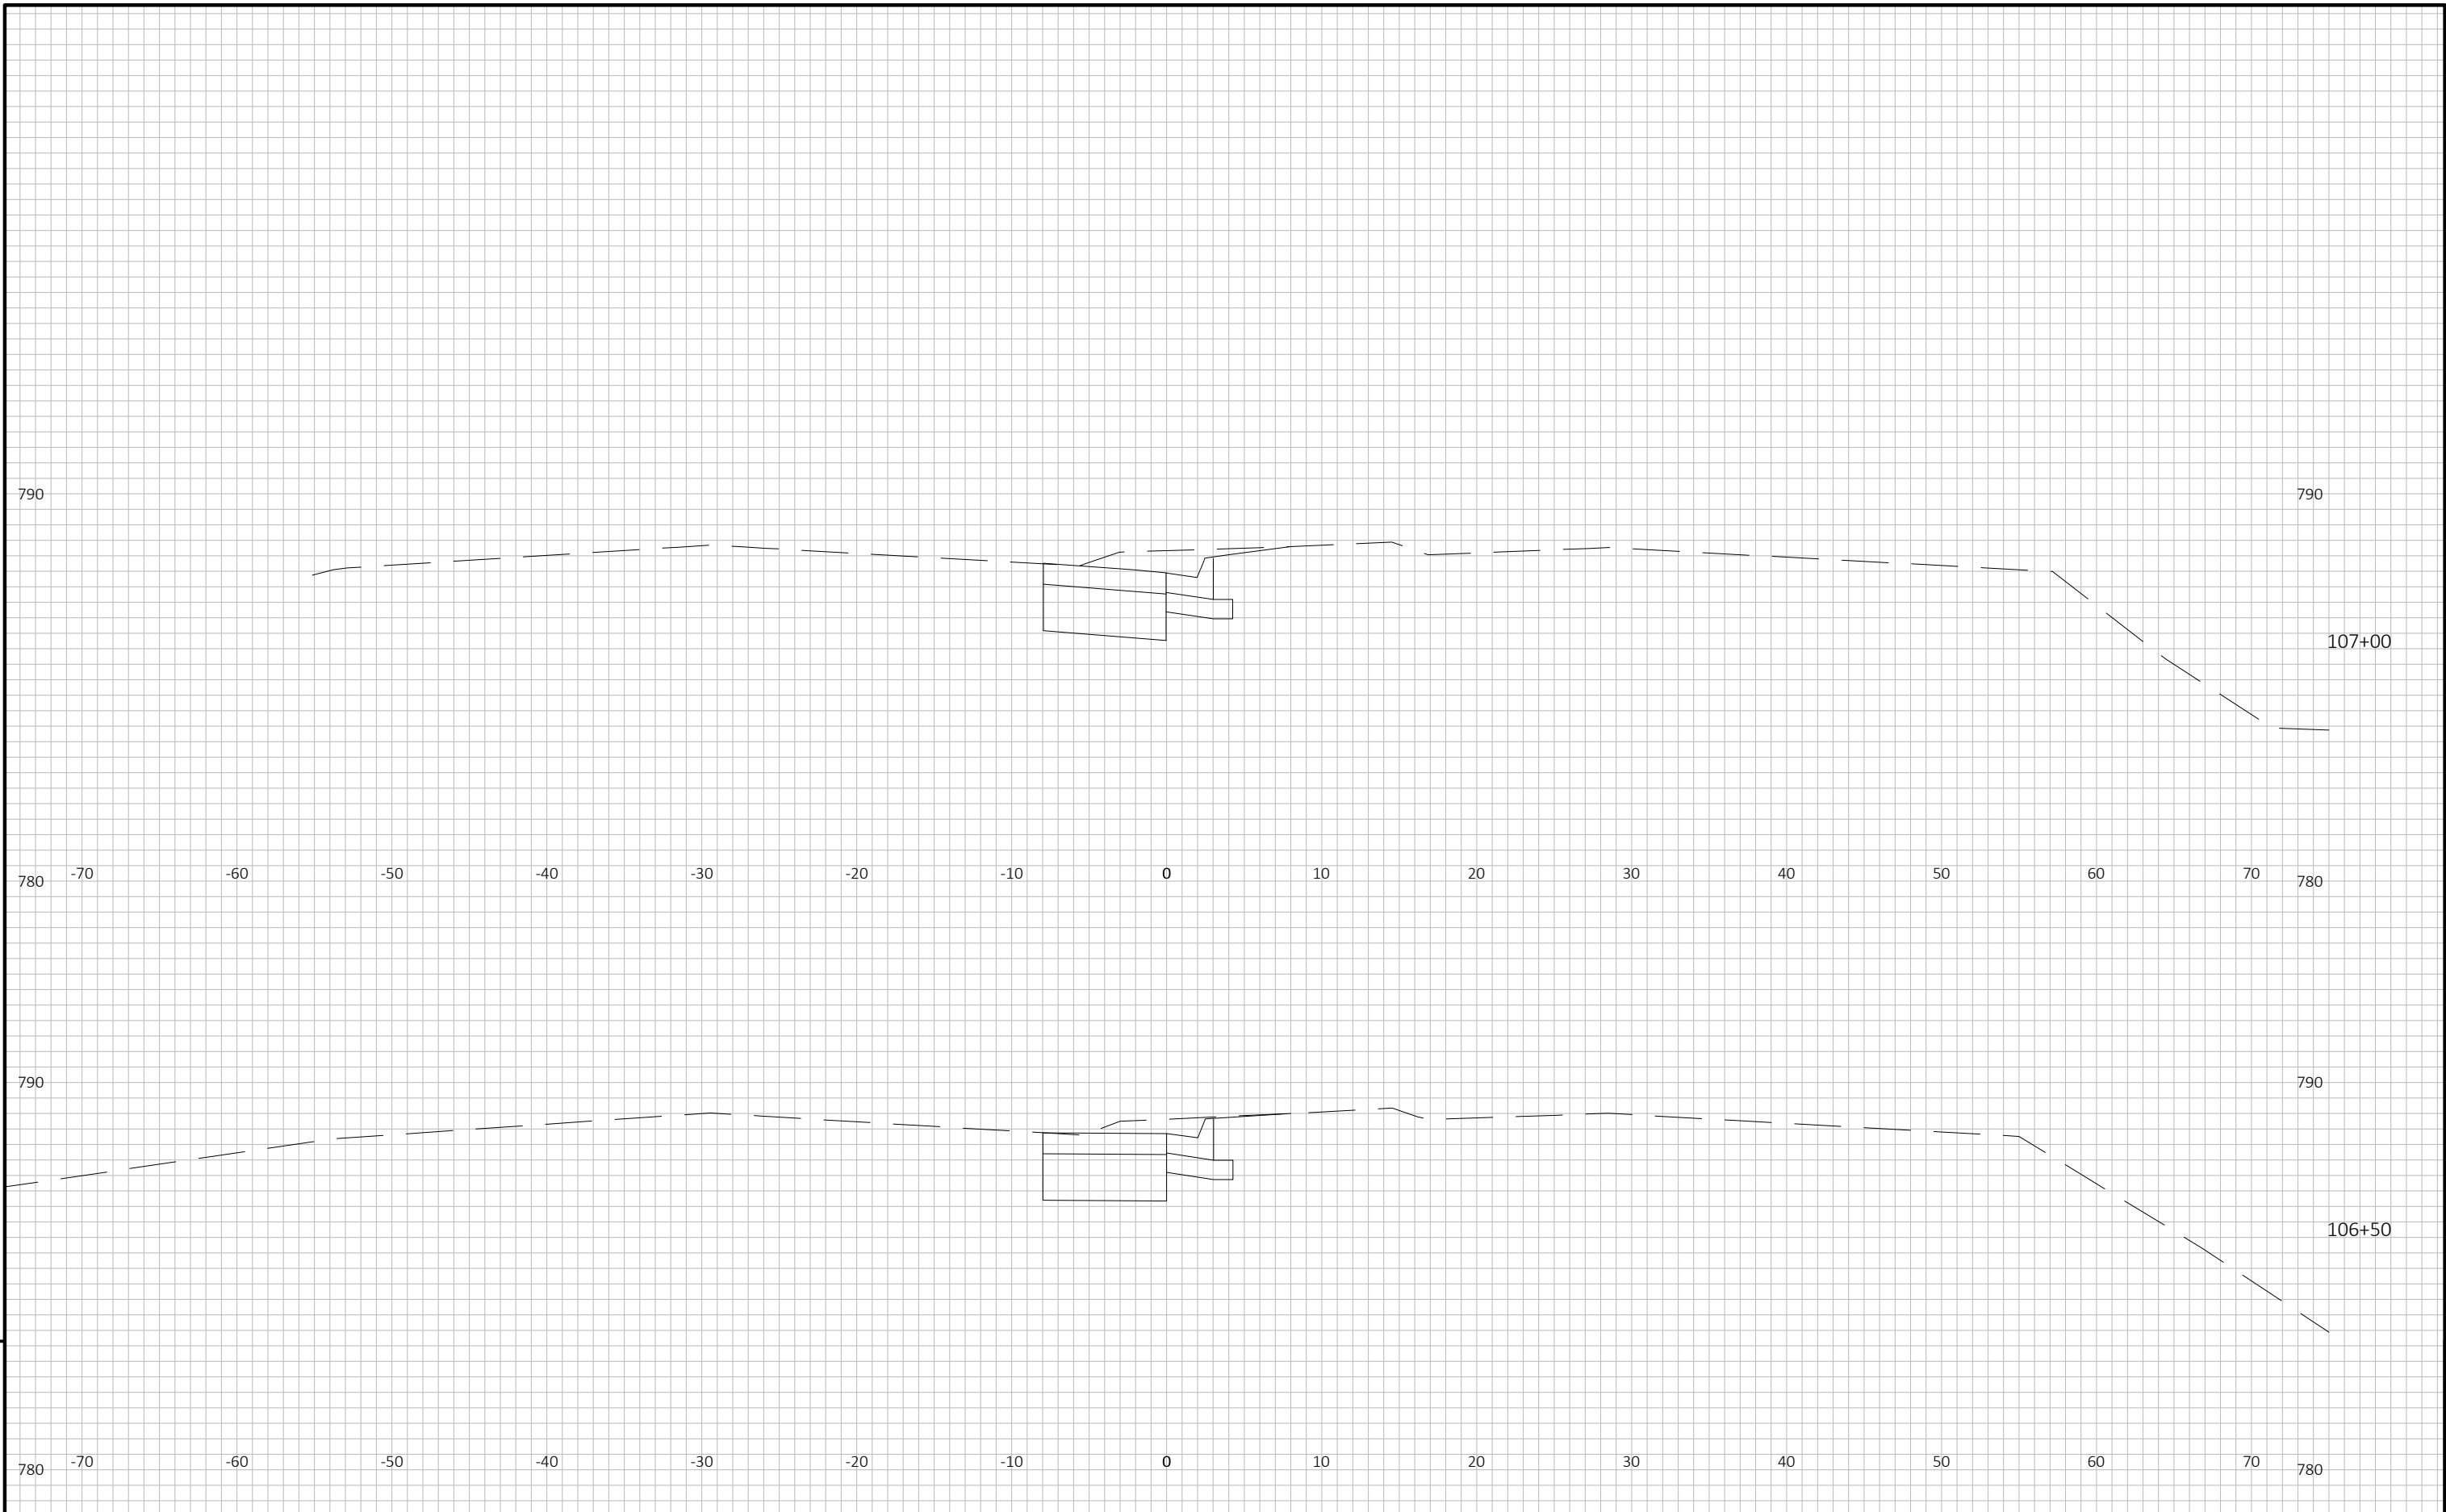

9

9


PROJECT NO: 2753-08-70	HWY: CTH VV	COUNTY: WAUKESHA COUNTY	CROSS SECTIONS: CTH VV	SHEET 55	E
------------------------	-------------	-------------------------	------------------------	----------	---

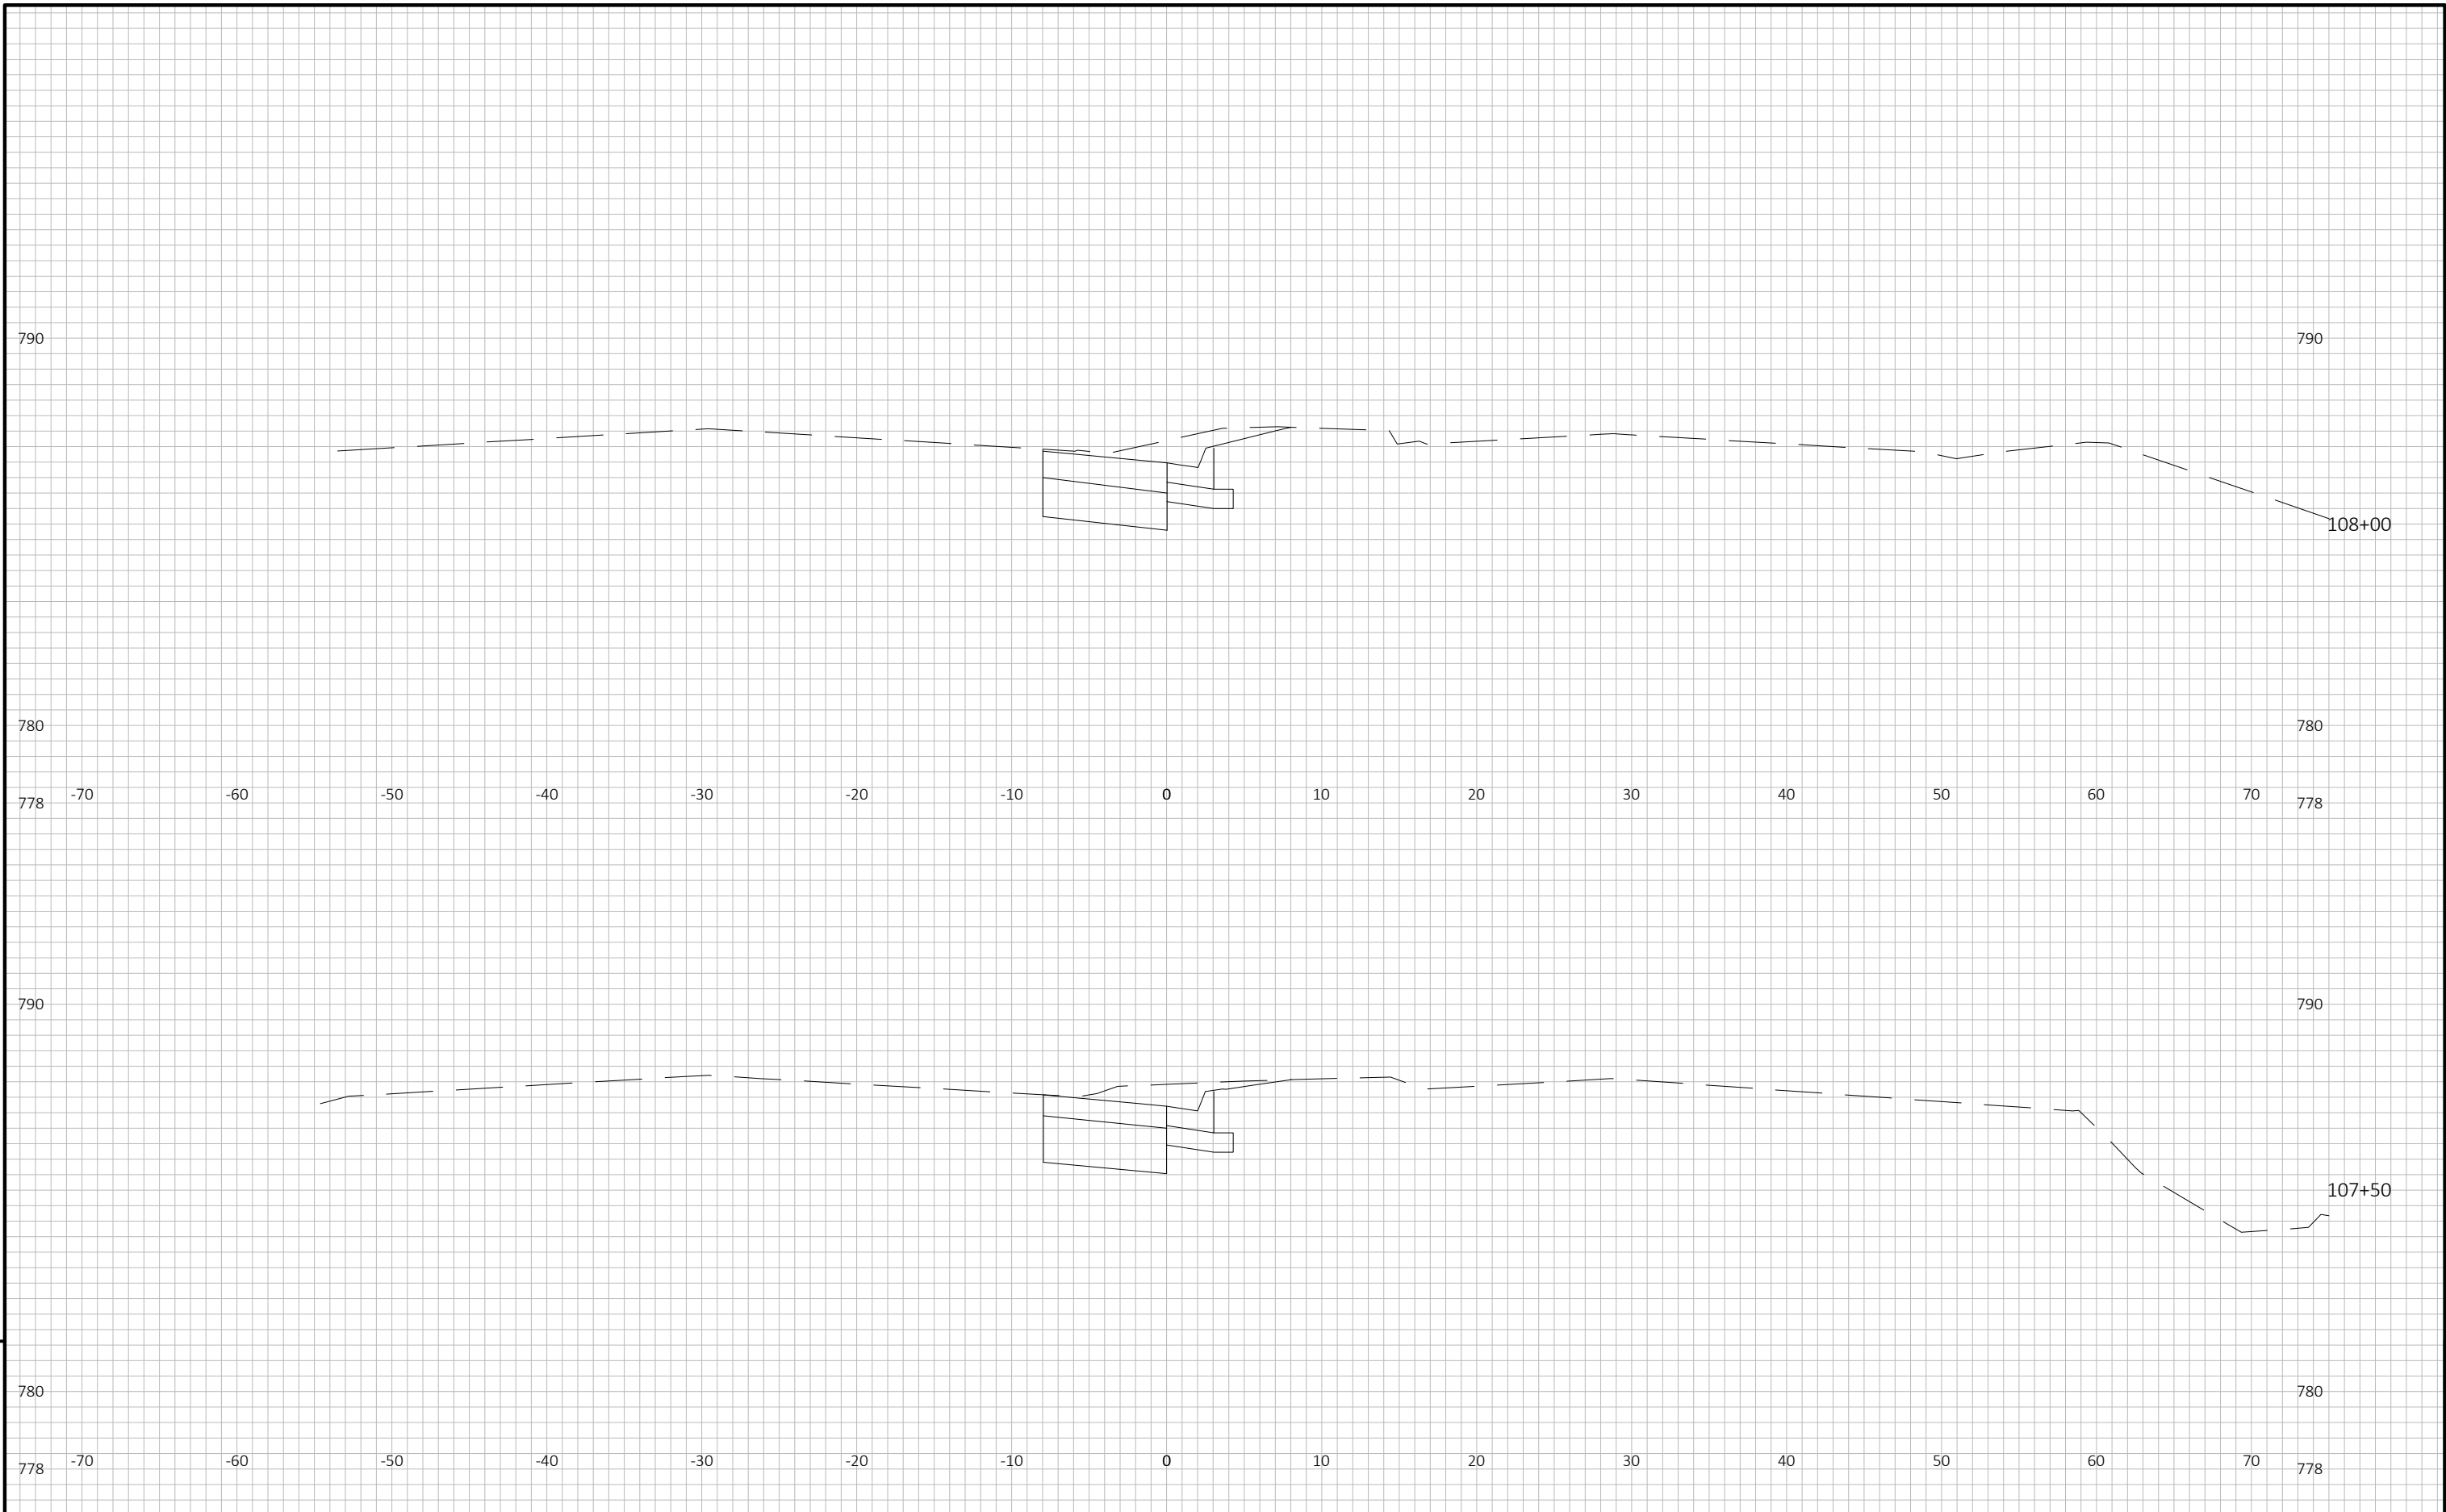

9

9


PROJECT NO: 2753-08-70	HWY: CTH VV	COUNTY: WAUKESHA COUNTY	CROSS SECTIONS: CTH VV	SHEET 56	E
------------------------	-------------	-------------------------	------------------------	----------	---

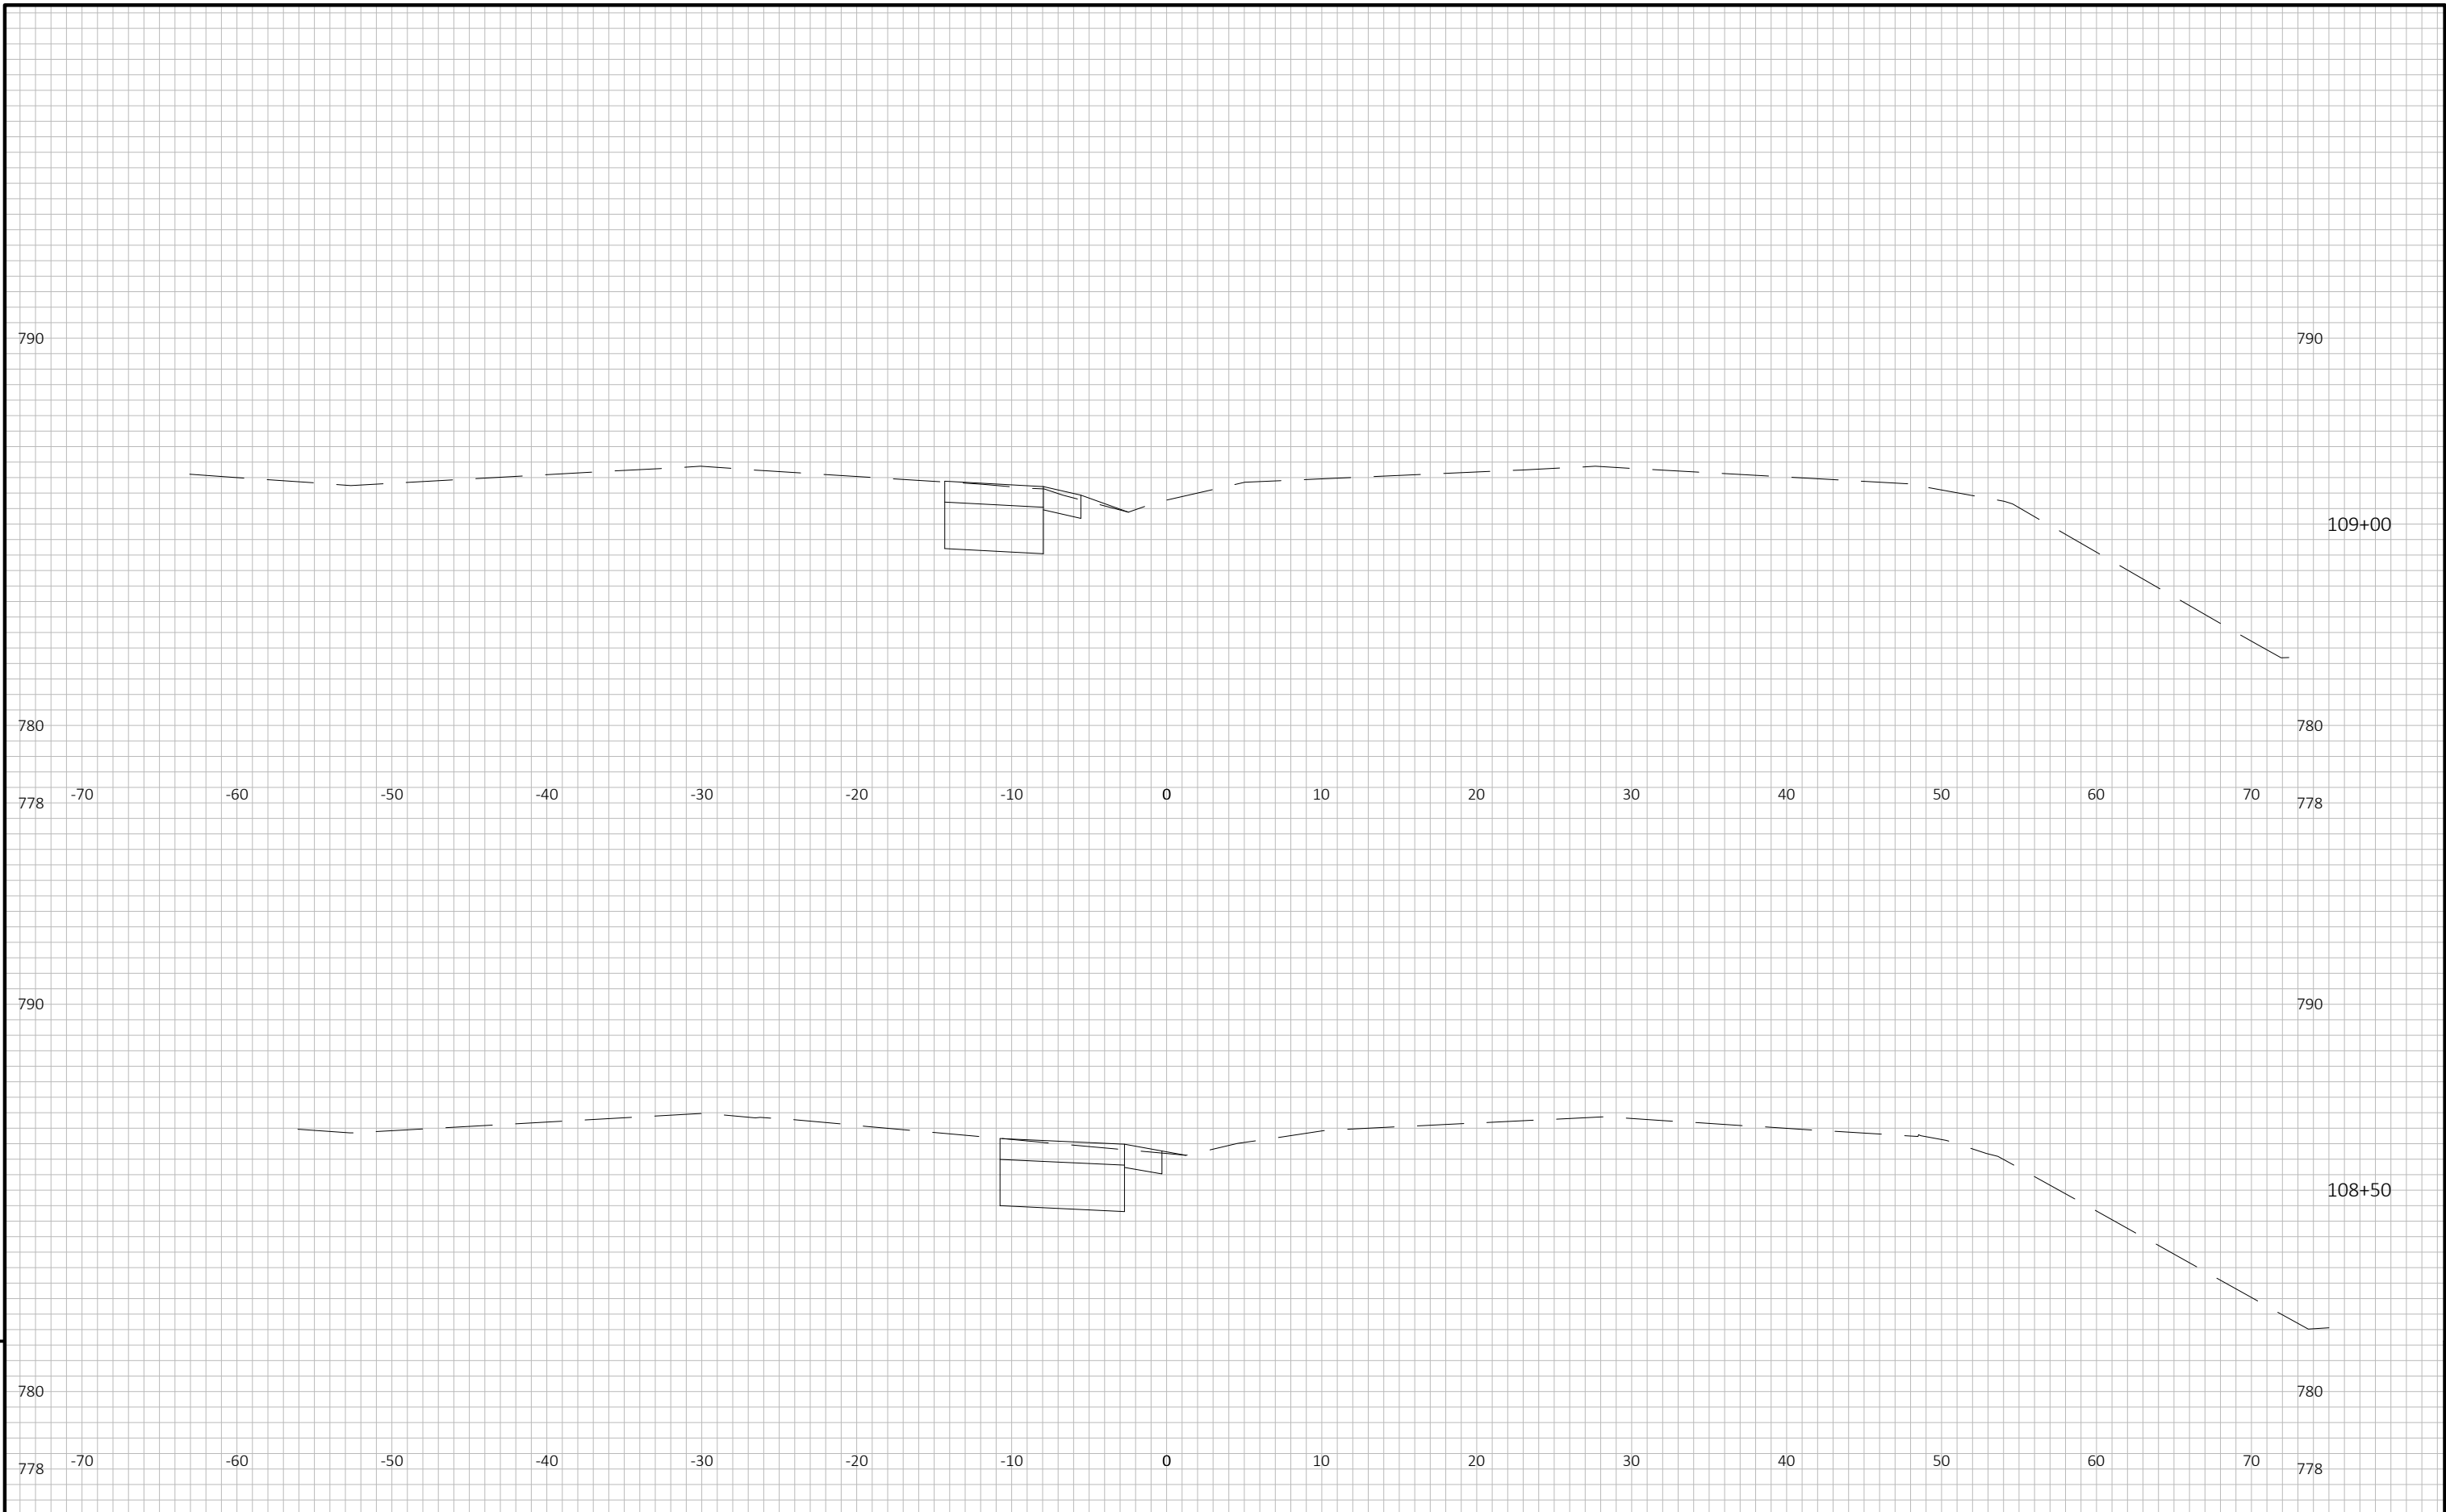

9

9

PROJECT NO: 2753-08-70	HWY: CTH VV	COUNTY: WAUKESHA COUNTY	CROSS SECTIONS: CTH VV	SHEET 57	E
------------------------	-------------	-------------------------	------------------------	----------	---

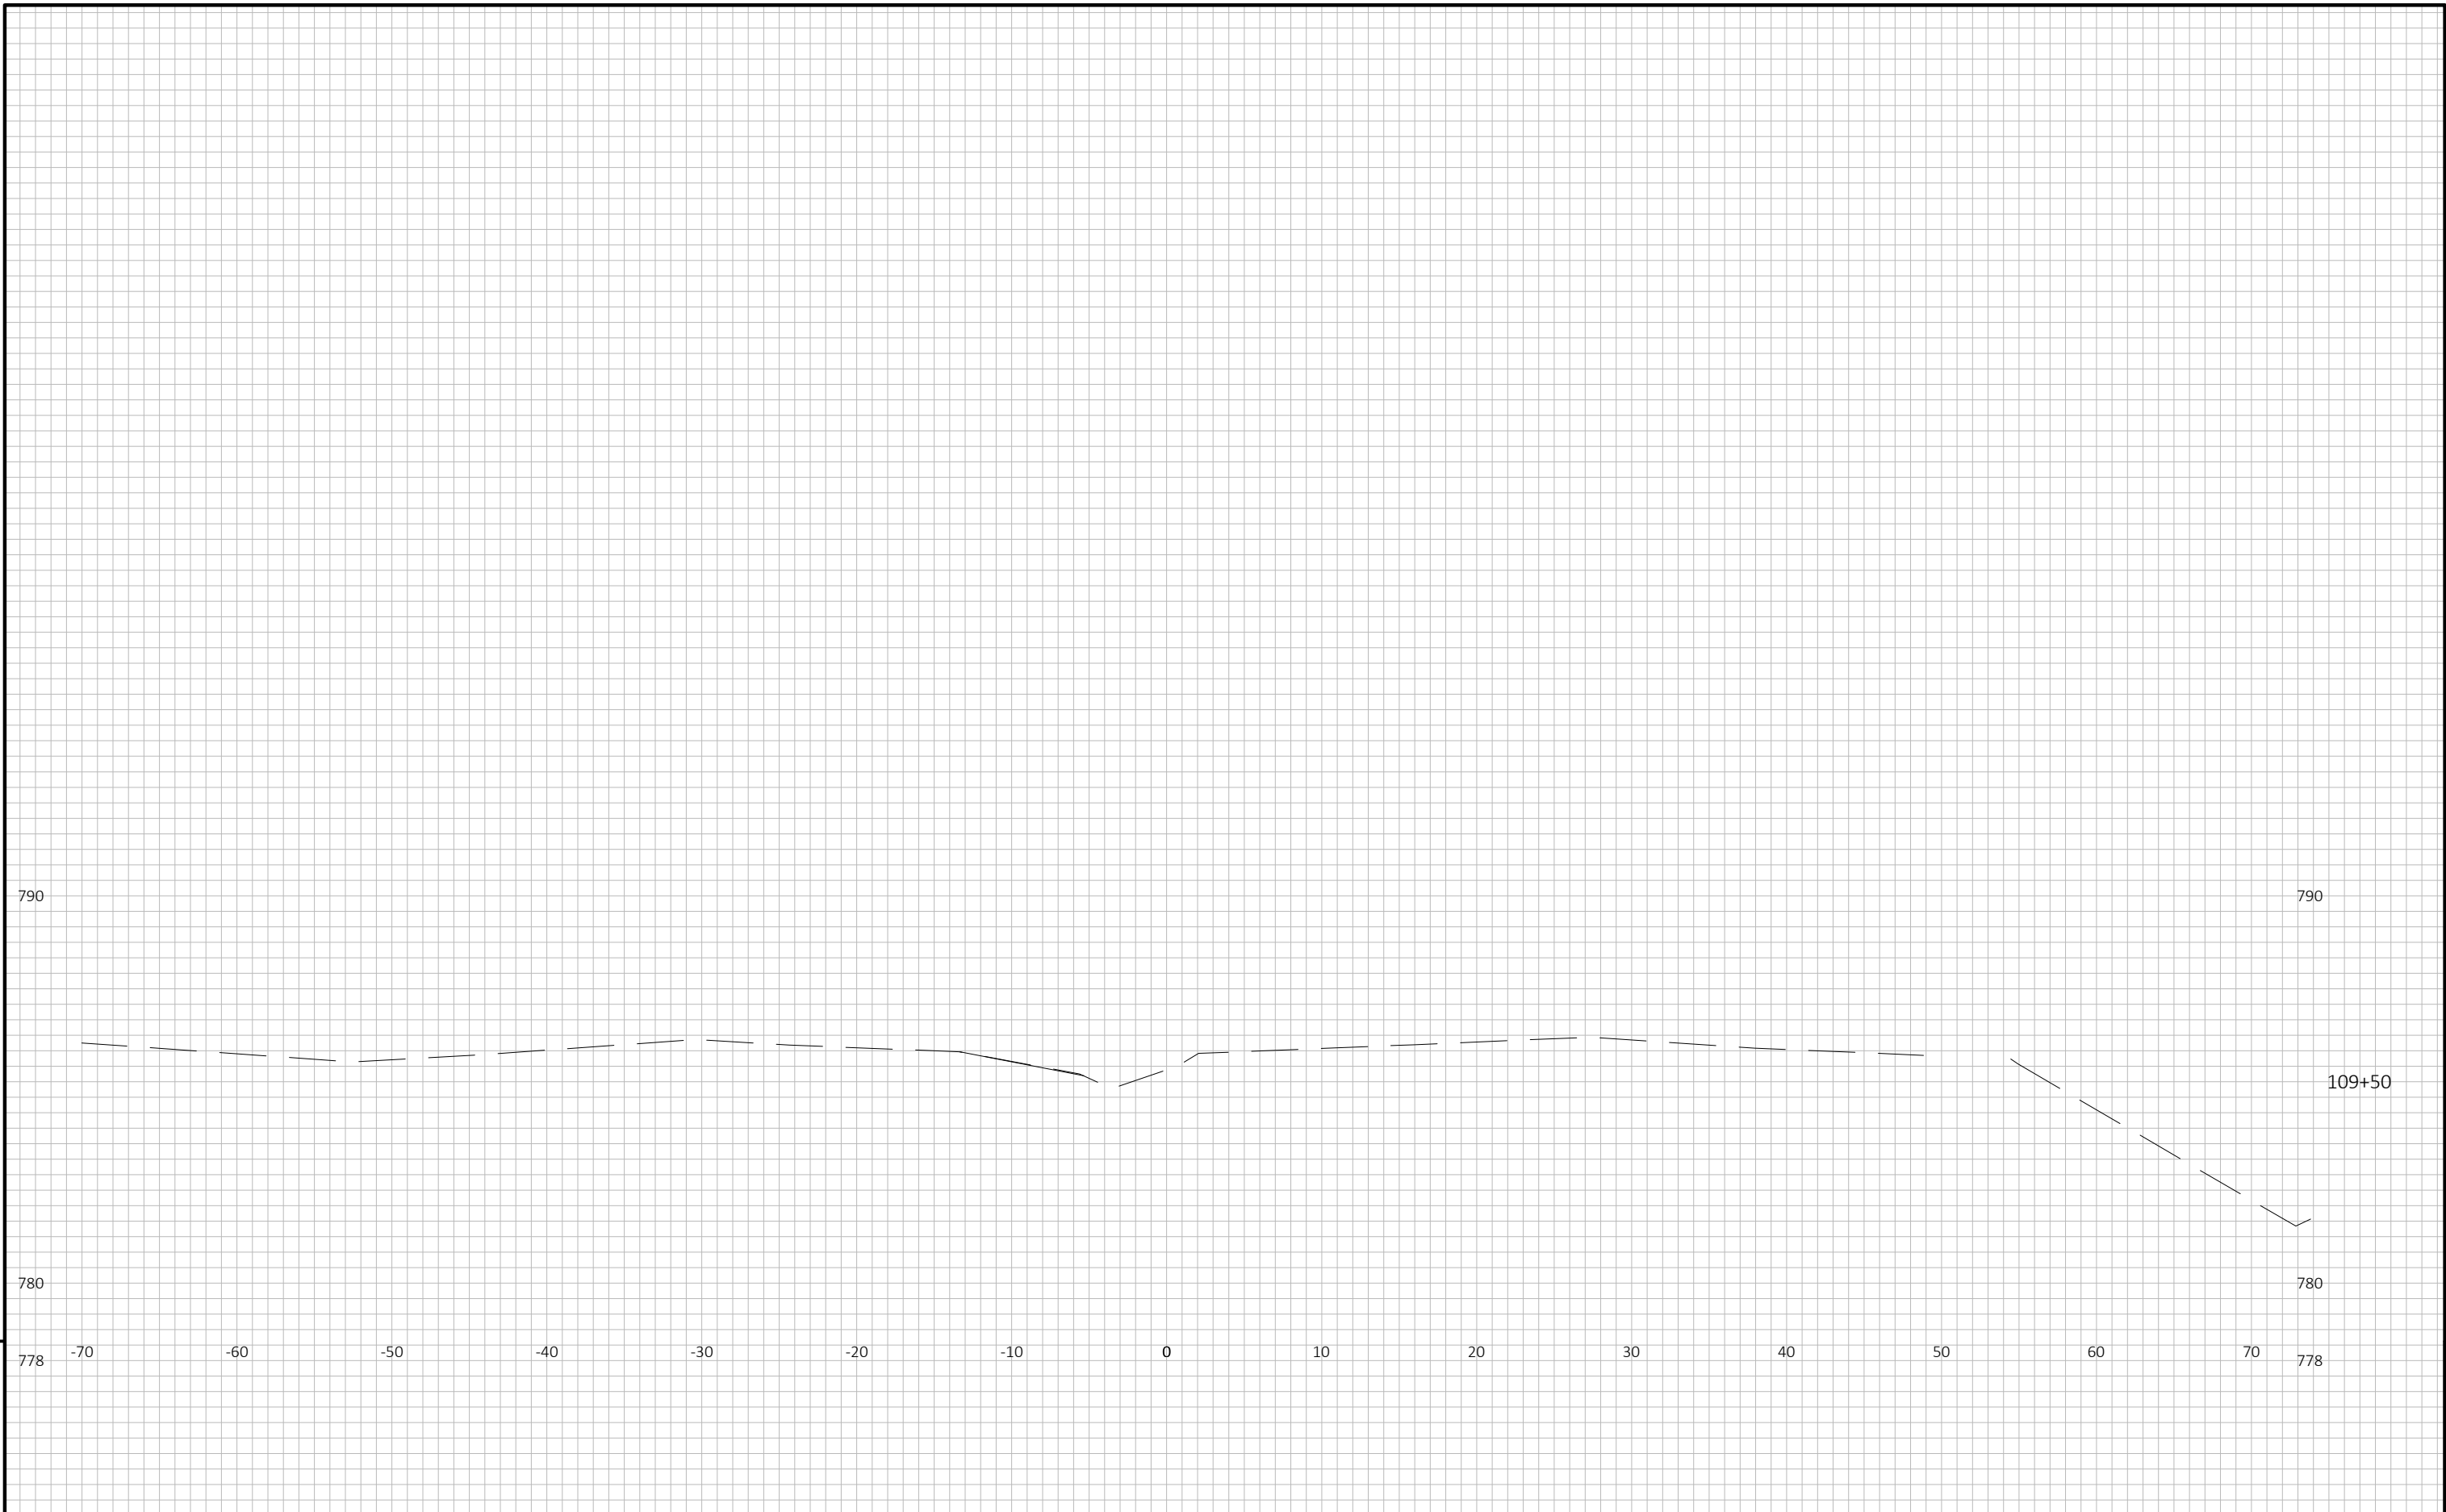

9

9

PROJECT NO: 2753-08-70	HWY: CTH VV	COUNTY: WAUKESHA COUNTY	CROSS SECTIONS: CTH VV	SHEET 58	E
------------------------	-------------	-------------------------	------------------------	----------	---



9

9


PROJECT NO: 2753-08-70	HWY: CTH VV	COUNTY: WAUKESHA COUNTY	CROSS SECTIONS: CTH YY	SHEET 59	E
------------------------	-------------	-------------------------	------------------------	----------	---



9

9

PROJECT NO: 2753-08-70	HWY: CTH VV	COUNTY: WAUKESHA COUNTY	CROSS SECTIONS: CTH YY	SHEET 60	E
------------------------	-------------	-------------------------	------------------------	----------	---

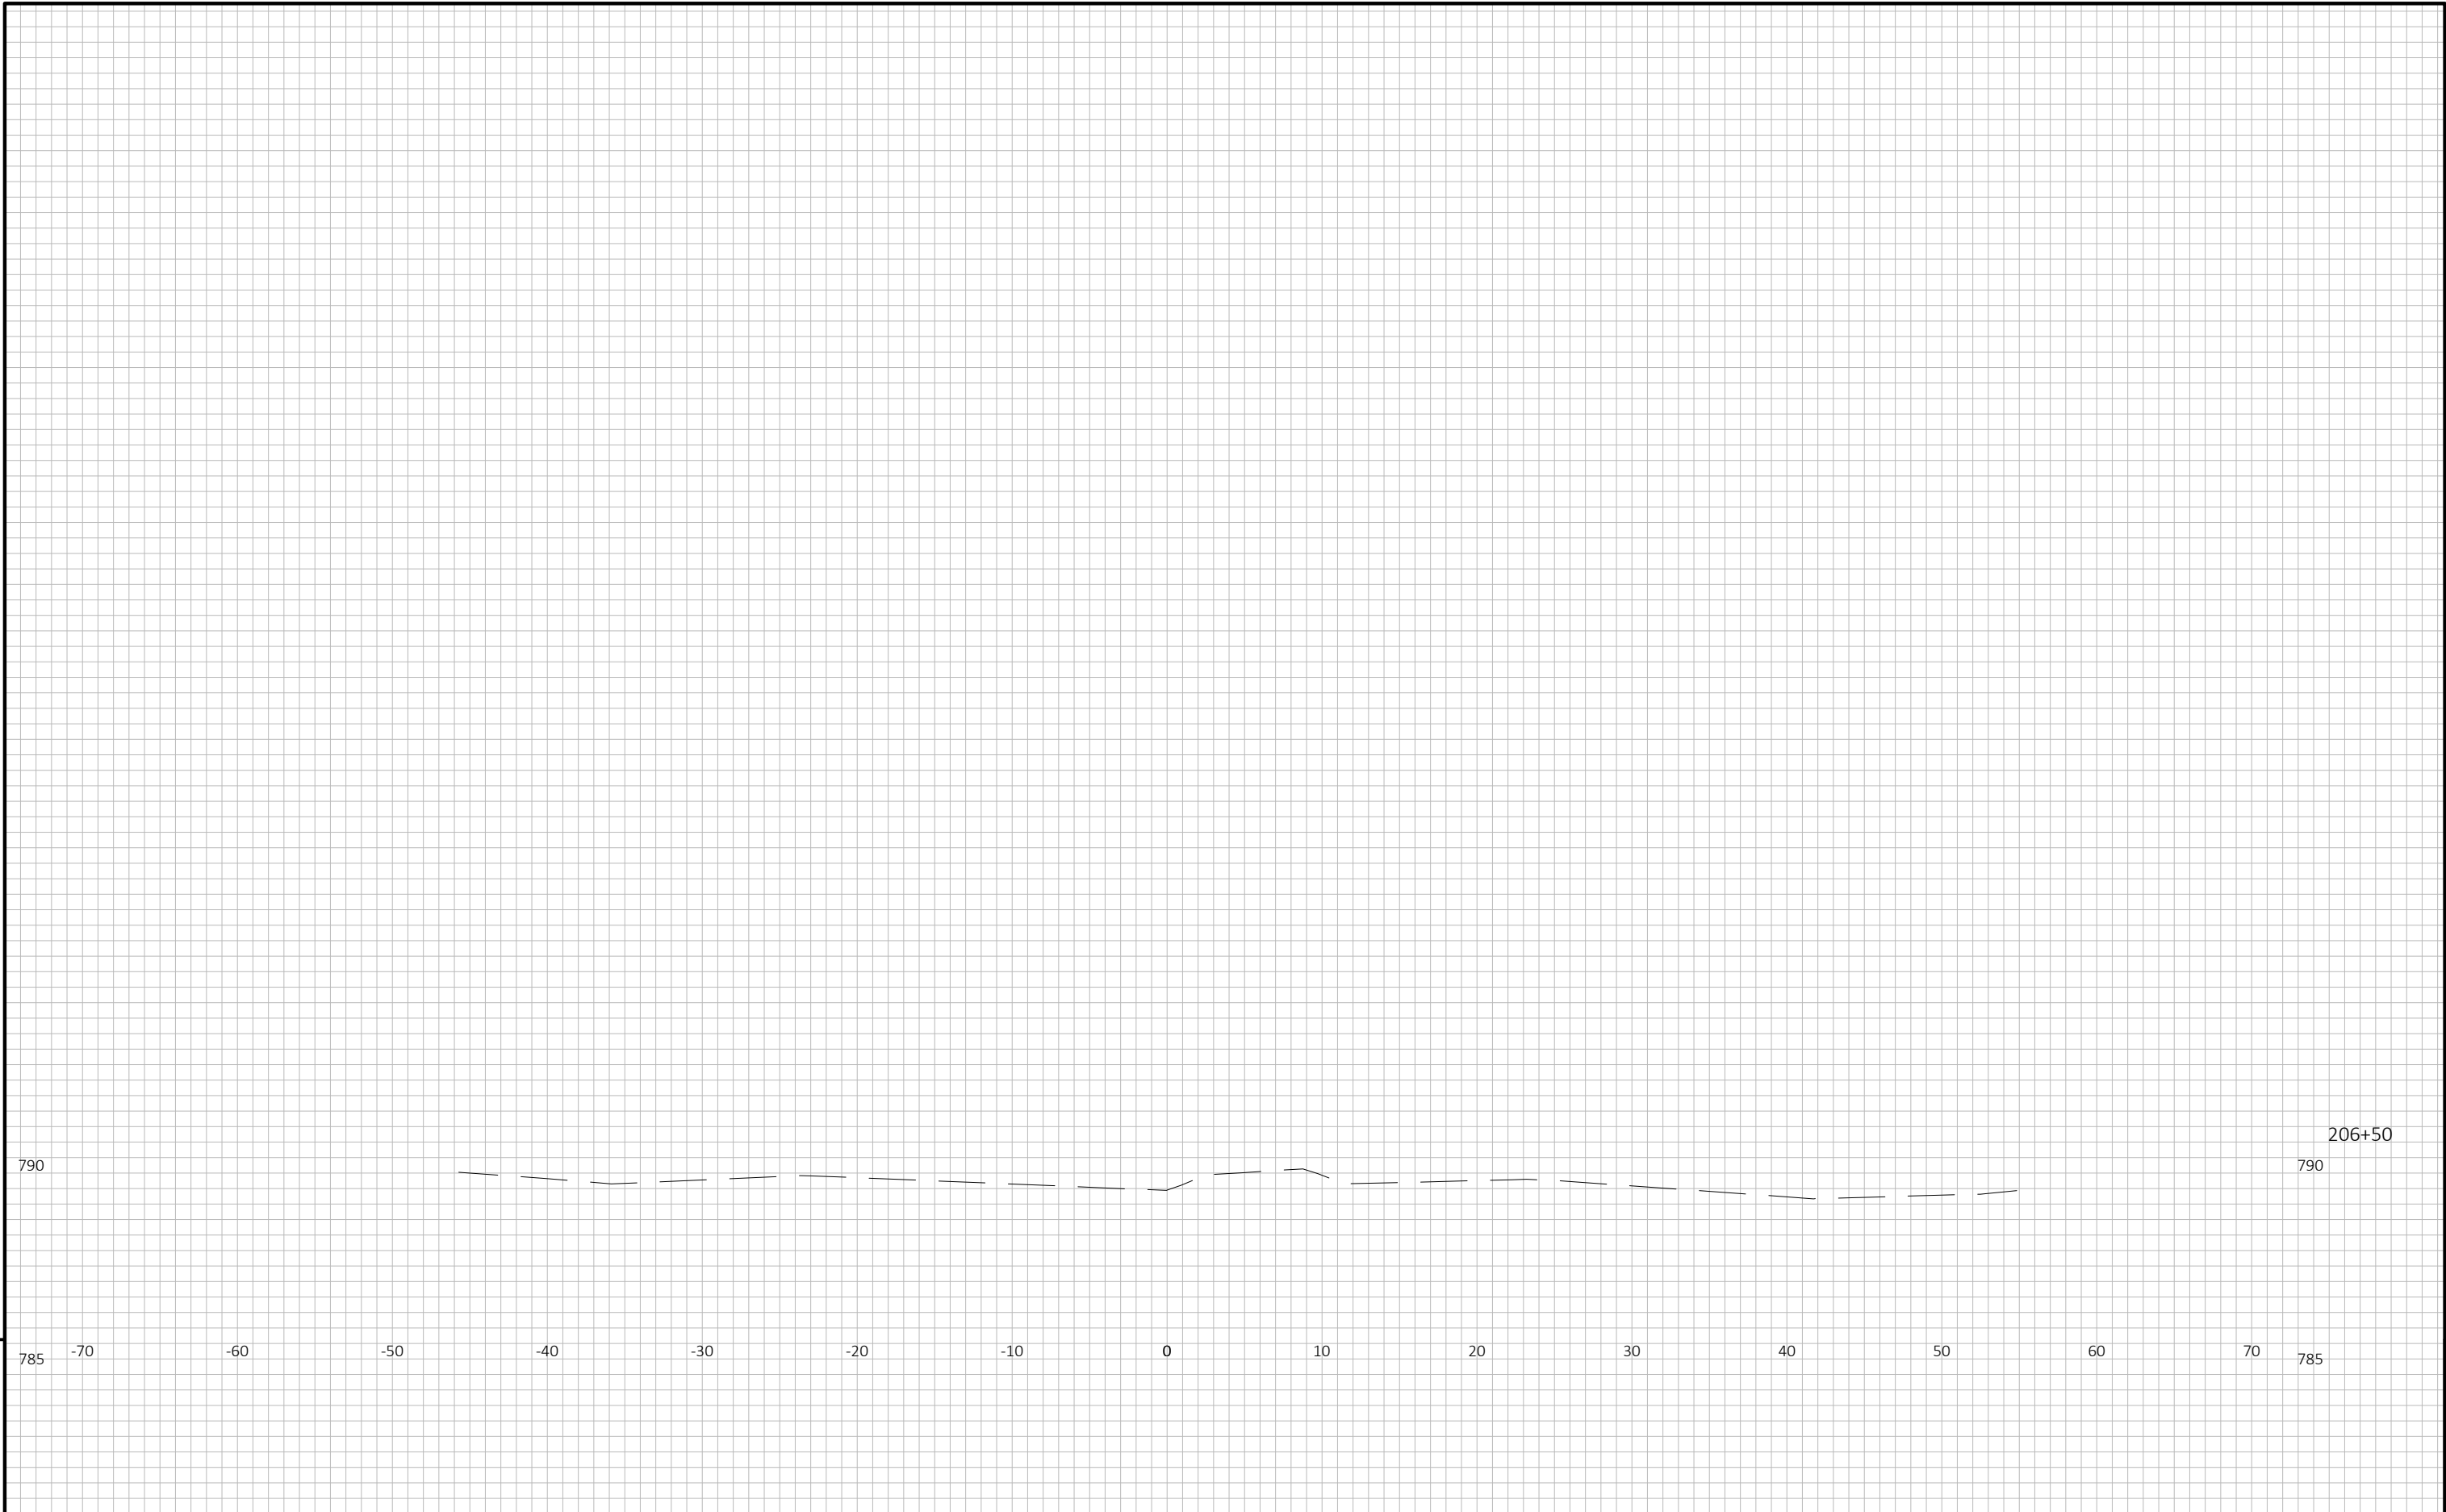


9

9

PROJECT NO: 2753-08-70	HWY: CTH VV	COUNTY: WAUKESHA COUNTY	CROSS SECTIONS: CTH YY	SHEET 61	E
------------------------	-------------	-------------------------	------------------------	----------	---

Notes

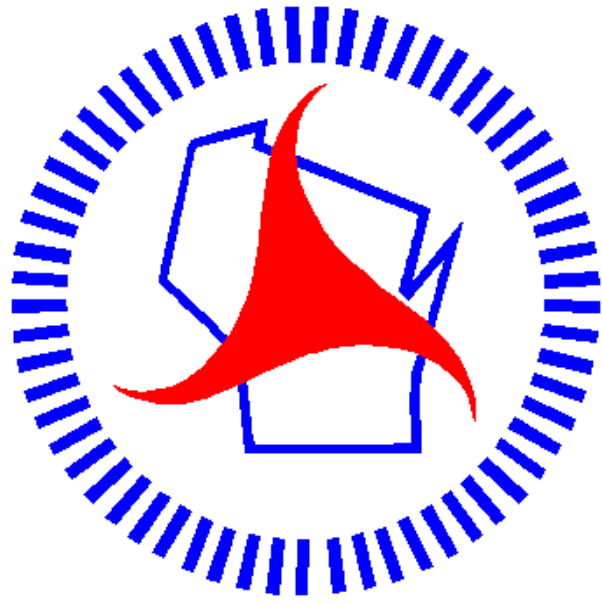

Wisconsin Department of Transportation

Dedicated people creating transportation solutions through innovation and exceptional service.

<http://www.dot.wisconsin.gov>