



Wisconsin Department of Transportation

August 28, 2025

Division of Transportation Systems Development

Bureau of Project Development
4822 Madison Yards Way, 4th Floor South
Madison, WI 53705

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

Proposal #06: 1060-27-71, WISC 2025596
I-94 East West, West Leg
70th Street to Zablocki Drive
IH 094
Milwaukee County

Letting of September 9, 2025

This is Addendum No. 02, which provides for the following:

Special Provisions:

Revised Special Provisions	
Article No.	Description
9	Other Contracts.
35	Contract Award and Execution
255	Ductile Iron Water Main 36-Inch, Item SPV.0090.5002; Ductile Iron Water Main 48-Inch, Item SPV.0090.5003; Ductile Iron Water Main 12-Inch, Item SPV.0090.5007.
275	Wall Concrete Panel Mechanically Stabilized Earth R-40-734, Item SPV.0165.4734; Wall Concrete Panel Mechanically Stabilized Earth R-40-735, Item SPV.0165.4735; Wall Concrete Panel Mechanically Stabilized Earth R-40-736, Item SPV.0165.4736; Wall Concrete Panel Mechanically Stabilized Earth R-40-737, Item SPV.0165.4737; Wall Concrete Panel Mechanically Stabilized Earth R-40-739, Item SPV.0165.4739; Wall Concrete Panel Mechanically Stabilized Earth R-40-740, Item SPV.0165.4740; Wall Concrete Panel Mechanically Stabilized Earth R-40-741, Item SPV.0165.4741; Wall Concrete Panel Mechanically Stabilized Earth R-40-742, Item SPV.0165.4742; Wall Concrete Panel Mechanically Stabilized Earth R-40-744, Item SPV.0165.4744; Wall Concrete Panel Mechanically Stabilized Earth R-40-762, Item SPV.0165.4762.

Added Special Provisions	
Article No.	Description
284	Notice to Contractor – Cemetery Permits.

Schedule of Items:

Revised Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Proposal Quantity Change (-)	Proposal Total After Addendum
460.7223	HMA Pavement 3 HT 58-28 S	TON	2,627	300	2,927
460.7424	HMA Pavement 4 HT 58-28 H	TON	5,814	188	6,002
643.0300	Traffic Control Drums	DAYS	721,795	-8,600	713,195
643.0420	Traffic Control Barricades Type III	DAYS	50,880	10	50,890
643.0705	Traffic Control Warning Lights Type A	DAYS	98,410	20	98,440
643.0900	Traffic Control Signs	DAYS	1,241,610	-540	1,241,070
SPV.0060.1028	Hydro Excavation	EACH	11	5	16
SPV.0060.5200	Manholes Type TES 4-FT Diameter	EACH	6	1	7
SPV.0090.5201	4-Duct Conduit Cement Encased 4-Inch Conduit DB-60	LF	2,579	-3	2,576

Deleted Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Proposal Quantity Change (-)	Proposal Total After Addendum
460.6223	HMA Pavement 3 MT 58-28 S	TON	300	-300	0
460.7224	HMA Pavement 4 HT 58-28 S	TON	188	-188	0

Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
5	General Notes: Revised asphalt mixes and layers
35	Typical Finished Sections: Revised asphalt mixes and layers for Ramp FMD
132	Plan Details: Revised asphalt mixes and layers in legend
400	Hawley Road Watermain Plan: S Dana Ct Hydrant Location Updated
614	City Underground Conduit Plan 68 th ST-1: Updated Construction Note
615	City Underground Conduit Plan 68 th ST-2: Update Construction Note Added MH
616	City Underground Conduit Plan 68 th ST-3: Updated Construction Note
617	City Underground Conduit Plan 68 th ST-4: Updated Construction Note
618	City Underground Conduit Plan Hawley RD-1: Updated Construction Note
619	City Underground Conduit Plan Hawley RD-2: Updated Construction Note
620	City Underground Conduit Plan Hawley RD-3: Updated Construction Note
621	City Underground Conduit Plan Hawley RD-4: Updated Construction Note
697	Traffic Control – Stage 1B: Revised for Hawley Road Closure Update
712	Traffic Control – Stage 2A: Revised for Hawley Road Closure Update
727	Traffic Control – Stage 2B: Revised for Hawley Road Closure Update
742	Traffic Control – Stage 2C: Revised for Hawley Road Closure Update
931	Misc Quantities: Revised Asphaltic Pavement Items table
1030	Misc Quantities: Revised Station and Quantity
1079	Misc Quantities: Added Undistributed Hydro Excavation Quantity
1142	Misc Quantities: Revised Quantities for MHs and Conduit
1151	Misc Quantities: Revised Quantities for Hawley Road Closure Update
1152	Misc Quantities: Revised Quantities for Hawley Road Closure Update
1153	Misc Quantities: Revised Quantities for Hawley Road Closure Update
1156	Misc Quantities: Revised Quantities for Hawley Road Closure Update

Added Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of why sheet was added)
8A	Project Overview – Historic Cemetery Boundaries
8B	Project Overview – Historic and Landmark Boundaries

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman

Proposal Development Specialist
Proposal Management Section

ADDENDUM NO. 02

1060-27-71

August 28, 2025

Special Provisions

9. Other Contracts.

Replace paragraph nine with the following:

2995-27-70, W. Allis-Chalmers Dr, Washington S to 60th St, WisDOT Project Manager Chris Zacharias, Christopher.Zacharias@dot.wi.gov (262) 548-6716.

Add the following after paragraph nine:

WisDOT Projects

Prior to closing lanes on I-94 in Stage 1A, coordinate with 1090-03-75/1100-05-73, I-894 N-S Lincoln Ave to Hale Interchange project's weekend I-894 N-S full closures.

35. Contract Award and Execution.

Replace paragraph seven with the following:

The low bidder shall present authentic copies of their BED at the department's office, located at WisDOT Southeast Region Office, 141 NW Barstow Street, Waukesha WI, 53188, on Monday, September 15th, at 9:00 AM.

- 255. Ductile Iron Water Main 36-Inch, Item SPV.0090.5002;
Ductile Iron Water Main 48-Inch, Item SPV.0090.5003;
Ductile Iron Water Main 12-Inch, Item SPV.0090.5007.**

Replace entire article language with the following:

A Description

This special provision describes the installation of 12-inch Ductile Iron Water Main, 36-inch and 48-inch diameter Ductile Iron or Concrete water main.

A.1 General

Perform work under these items in accordance to the details as shown on the plans and the requirements of the City of Milwaukee Water Main Installation Specifications, dated January 2, 1987 (City Water Main Specifications). Additionally, perform all work in accordance to the City of Milwaukee - Milwaukee Water Works "Special Provisions for Water Main Construction". In case of conflicts between the City Water Main Specifications and the MWW Special Provisions or these special provisions, the requirements of the MWW Special Provisions and these special provisions shall govern.

The City of Milwaukee's installation specifications, special provisions for water main construction and material specifications can be found at the following website: <https://city.milwaukee.gov/water/PermitsSpecs>.

A.2 Submittals

Address all required submittals to Milwaukee Water Works as follows:

Superintendent
Milwaukee Water Works
Zeidler Municipal Building
841 North Broadway, Room 409
Milwaukee, WI 53202

Contractor shall submit to the superintendent of the Milwaukee water works for review and approval the proposed pipe laying schedule for the 36-inch and 48-inch water main, shop drawings and pipe specifications.

A.3 Sequence of Construction

Due to the nature of this work, including traffic staging and coordination with other work, the Contractor is advised there may be multiple mobilizations to complete the water main work. No additional payment will be made by the department for said mobilizations.

Determine sequence and schedule for water main construction, subject to the requirements herein.

Prepare and submit for review by the Superintendent of Milwaukee Water Works a detailed construction schedule stating the anticipated dates and duration of all interruptions in water service necessary to complete the work under the contract.

B Materials

B.1 General

The contractor shall furnish all fittings required for installation on this project. Contractor shall furnish all ductile iron or concrete water main conforming to the latest version of the City of Milwaukee's Material Specifications.

All materials will require inspection by the City.

The Contractor shall allow four (4) working day notice prior to start of construction for material inspection and for scheduling construction inspection. Contractor shall contact watengcon@milwaukee.gov for material inspection and construction inspection.

The Contractor shall submit to the Superintendent of Milwaukee Water Works a detailed construction schedule stating the anticipated dates and duration of all interruptions in water service necessary to complete the work under the contract. Provide a minimum one (1) week notice to the Milwaukee Water Works Distribution when requesting a shut-off, wet connection, safe water sample, pressure testing, and chlorination watengcon@milwaukee.gov

Milwaukee Water Works will test all pipe, in accordance to the City of Milwaukee Material Testing Specifications.

B.2 Valve Box Adapters

Install all valve boxes on gate valves with the use of valve box base adapters as detailed in the Milwaukee Water Works "Special Provisions for Water Main Construction". Install the adapter in addition to the hardwood blocking.

C Construction

All costs for completing the work required for valve installations are to be included in the price for the Ductile Iron or Concrete Water Main item(s).

Install fittings as shown on plans, incidental to respective ductile iron or concrete water main item(s). A list of fittings for ductile iron water main installation is provided on plans.

Contractor shall provide all surveying required to layout and construct the water main relocations.

The Milwaukee Water Works will shut off the water main to be altered and provide temporary hose connections to affected services as required.

The 36-inch water main installation includes two 36-inch butterfly valve installations. All costs for completing the work required for the 36-inch valve installations is to be included in the price for furnishing and installing 36-inch water main under this item.

The 48-inch water main installation includes one 48-inch butterfly valve installation. All costs for completing the work required for the 48-inch valve installation is to be included in the price for furnishing and installing 48-inch water main under this item.

If installing 36-inch and/or 48-inch concrete water main, the contractor shall excavate and verify the connect point locations, elevations and slope angles prior to ordering the pipe. The contractor shall submit results of this verification in writing to the pipe manufacturer, DOT project manager, and Superintendent of the Milwaukee water works. All costs for the connection verification shall be included in the unit bid price to furnish and install 36-inch and 48-inch water main bid item.

Per MWW material specifications 30-D-8 section III, manufacturer shall follow all requirements of inspection, notification, and testing. All cost for inspection, notification and testing of Concrete Water Main shall be included in the unit price bid for the respective 36-inch and 48-inch water main bid item.

Unless shown otherwise, backfill all water main excavations with granular backfill as specified in the City of Milwaukee - Milwaukee Water Works "Special Provisions for Water Main Construction".

Consolidate all backfill by mechanical compaction per specification 2.6.14(B) of the Standard Specifications for Sewer and Water Construction in Wisconsin. Per specification, the initial compacted lift shall be two (2) feet, and the specification shall be modified to read, "each subsequent compacted lift of material shall be one (1) foot". Costs are to be included in the unit price bid for the water main. Settling the trench by flooding the backfill will not be allowed.

D Measurement

The department will measure Ductile Iron Water Main 12-Inch, Ductile Iron or Concrete Water Main 36-Inch, and Ductile Iron or Concrete Water Main 48-Inch, by the linear foot of water main of the type and diameter specified acceptably completed, including all construction parameters and requirements as described in this special provision.

E Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBER	DESCRIPTION	UNIT
SPV.0090.5002	Ductile Iron or Concrete Water Main 36-Inch	LF
SPV.0090.5003	Ductile Iron or Concrete Water Main 48-Inch	LF
SPV.0090.5007	Ductile Iron Water Main 12-Inch	LF

Payment is full compensation for providing all labor, equipment, materials; for all surveying; for all excavating; for sheeting and shoring; for forming foundation; for laying pipe; for removing valves; for installing all valves and fittings; for concrete base, buttresses, and anchors; for strapping and rodding; for bulkheading and abandoning existing water mains; for sealing joints and making connections to new or existing facilities; for providing granular backfill material, including bedding material; for backfilling; for removing sheeting and shoring; for cleaning out the site of the work and incidentals necessary to complete the work.

- 275. Wall Concrete Panel Mechanically Stabilized Earth R-40-734, Item SPV.0165.4734;
Wall Concrete Panel Mechanically Stabilized Earth R-40-735, Item SPV.0165.4735;
Wall Concrete Panel Mechanically Stabilized Earth R-40-736, Item SPV.0165.4736;
Wall Concrete Panel Mechanically Stabilized Earth R-40-737, Item SPV.0165.4737;
Wall Concrete Panel Mechanically Stabilized Earth R-40-739, Item SPV.0165.4739;
Wall Concrete Panel Mechanically Stabilized Earth R-40-740, Item SPV.0165.4740;
Wall Concrete Panel Mechanically Stabilized Earth R-40-741, Item SPV.0165.4741;
Wall Concrete Panel Mechanically Stabilized Earth R-40-742, Item SPV.0165.4742;
Wall Concrete Panel Mechanically Stabilized Earth R-40-744, Item SPV.0165.4744;
Wall Concrete Panel Mechanically Stabilized Earth R-40-762, Item SPV.0165.4762.**

Replace paragraph one under section titled A Description with the following:

This special provision describes designing, furnishing materials and erecting a permanent earth retention system in accordance with the lines, dimension, elevations and details as shown on the plans and provided in the contract. The design life of the wall and all wall components shall be 100 years minimum.

284. Notice to Contractor – Cemetery Permits

Prior to performing any work within a delineated historic cemetery boundary verify WisDOT has received the following permits for said cemetery. All permits have been submitted by WisDOT and are awaiting approval, permits will be re-applied for annually by WisDOT.

Wood National Cemetery

Archaeological Resources Protection Act (ARPA)
Permit Issued by NCA
Expected October 2025
Request to Disturb Permit
Issued by Wisconsin SHPO
Expected October 2025

Spring Hill Cemetery

Request to Disturb permit
Issued by Wisconsin SHPO
Expected April 2026

Beth Hamedrosh Hagodel Cemetery

Request to Disturb permit
Issued by Wisconsin SHPO
Expected April 2026

Schedule of Items

Attached, dated August 28, 2025, are the revised Schedule of Items Pages 1 – 58.

Plan Sheets

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:

Revised: 5, 35, 132, 400, 614, 615, 616, 617, 618, 619, 620, 621, 697, 712, 727, 742, 931, 1030, 1079, 1142, 1151, 1152, 1153, 1156.

Added: 8A and 8B.

END OF ADDENDUM

GENERAL NOTES

THE LOCATIONS OF EXISTING AND PROPOSED UTILITY INSTALLATIONS AS SHOWN ON THE PLANS ARE APPROXIMATE. THERE MAY BE OTHER UTILITY INSTALLATIONS WITHIN THE PROJECT AREA THAT ARE NOT SHOWN. COORDINATE CONSTRUCTION ACTIVITIES WITH A CALL TO DIGGERS HOTLINE AND/OR A DIRECT CALL TO THE UTILITIES THAT HAVE FACILITIES IN THE AREA. NOT ALL UTILITIES ARE MEMBERS OF DIGGERS HOTLINE.

ANY REINFORCEMENT LOCATED IN EXISTING CONCRETE PAVEMENT SHALL BE CONSIDERED INCIDENTAL TO THE REMOVING PAVEMENT ITEM, AND NO ADDITIONAL COMPENSATION WILL BE GRANTED.

CURB AND GUTTER GRADES ARE GIVEN TO THE FLANGE OF CURB AND GUTTER. CURB AND GUTTER RADI ARE MEASURED TO THE FLANGE OF CURB AND GUTTER.

EXISTING PIPE CULVERT SIZES SHOWN ARE APPROXIMATE AND THE CONTRACTOR WILL BASE ITS BID ON THE ACTUAL FIELD CONDITIONS.

CONTACT THE PROJECT ENGINEER AND SEWRPC AT LEAST TWO WEEKS BEFORE WORKING NEAR ANY SECTION CORNER MONUMENT.

FOR SECTION CORNER REPLACEMENT CONTACT ANDY TRAEGER WITH SEWRPC AT PHONE: (262) 953-4296, CELL: (262) 853-8463 OR ATRAEGER@SEWRPC.ORG AT LEAST TWO WEEKS BEFORE STARTING CONSTRUCTION OPERATIONS.

VERIFY EXISTING PAVEMENT ELEVATIONS AT ALL TIE-INS TO EXISTING PAVEMENT PRIOR TO CONSTRUCTION. NOTIFY ENGINEER IF A DISCREPANCY IS FOUND BETWEEN PROPOSED PLAN ELEVATIONS AND EXISTING PAVEMENT ELEVATIONS.

SAWCUT EXISTING ASPHALT AND CONCRETE PAVEMENT AT THE MATCHLINE AS INDICATED ON THE PLAN OR AS DIRECTED BY THE ENGINEER.

RESHAPE, RESTORE AND FINISH ALL PREVIOUSLY GRASSED AREAS DISTURBED BY OPERATIONS OUTSIDE OF THE NORMAL CONSTRUCTION LIMITS AT NO EXPENSE TO THE DEPARTMENT.

PLACE TOPSOIL 1 INCH BELOW THE TOP OF ADJACENT CONCRETE CURBS OR SIDEWALKS IN SOD AREAS.

DISTURBED AREAS WITHIN THE RIGHT OF WAY ARE TO BE TOPSOILED, FERTILIZED, SEEDED, AND HAVE EROSION MAT INSTALLED; OR TOPSOILED, FERTILIZED, AND SODDED AS DIRECTED BY THE ENGINEER.

PRIOR TO THE PLACEMENT OF MGS GUARDRAIL, THE SHOULDERS SHALL BE IN PLACE, SHAPED AND COMPACTED UNLESS SHOWN OTHERWISE.

BROKEN CONCRETE CONTAINING RE-BAR SHALL NOT BE USED AS RIPRAP OR HEAVY RIPRAP OR EBS BACKFILL.

EXCAVATION BELOW SUBGRADE (EBS) IS NOT USED TO BALANCE EARTHWORK. EBS IS MEASURED AND PAID FOR AS EXCAVATION COMMON. EXACT LOCATIONS OF EBS WILL BE DETERMINED BY THE ENGINEER.

DO NOT REMOVE ANY TREES OR SHRUBS WITHOUT APPROVAL OF THE ENGINEER.

ALL SIGN LOCATIONS SHALL BE REVIEWED BY THE ENGINEER PRIOR TO INSTALLATION.

THE EXACT LOCATION OF PRIVATE ENTRANCES IS TO BE DETERMINED IN THE FIELD BY THE ENGINEER.

CROSS SECTIONS SHOWN INCLUDE THE THICKNESS OF TOPSOIL WHERE REQUIRED. TOPSOIL SHALL BE REPLACED WITH 6-INCH TYPICAL DEPTH.

INLET AND DISCHARGE ELEVATIONS FOR DRAINAGE STRUCTURES AND PIPES SHOWN ON THE PLANS MAY BE ADJUSTED BY THE ENGINEER TO FIT EXISTING FIELD CONDITIONS.

VERIFY THE EXISTING STORM SEWER SYSTEM CONNECTION LOCATIONS AND ELEVATIONS BEFORE ORDERING DRAINAGE STRUCTURES AND PIPES. NOTIFY THE ENGINEER OF ANY DEVIATIONS FROM THE INFORMATION SHOWN ON THE PLANS BEFORE INSTALLING THE PROPOSED STORM SEWER.

FERTILIZER SHALL NOT BE USED WITHIN 20 FEET OF NAVIGABLE WATERWAYS OR WETLANDS.

(P) UTILITY LINETYPE INDICATES A UTILITY THAT WAS DRAWN BASED ON FACILITY MAPPING AND NOT FIELD LOCATED.

ORDER OF SECTION 2 DETAIL SHEETS

- GENERAL NOTES
- PROJECT OVERVIEWS
- TYPICAL SECTIONS
- CONSTRUCTION DETAILS
- REMOVAL PLANS
- PLAN DETAILS
- PAVING GRADES
- CURB RAMP DETAILS
- THRESHOLD
- CONTRIBUTOR MAP
- CROSS SECTION MATCHLINES
- EROSION CONTROL
- STORM SEWER
- STORMWATER MANAGEMENT
- WATERMAIN PLANS
- EXISTING UTILITY PLANS
- SIGNING REMOVAL PLANS
- PERMANENT SIGNING PLANS
- LIGHTING
- TRAFFIC SIGNALS
- CITY UNDERGROUND CONDUIT PLANS
- PAVEMENT MARKING
- TRAFFIC CONTROL
- STAGE CONSTRUCTION
- DETOURS
- FENCING
- ALIGNMENT LAYOUT

Addendum No. 02
ID 1060-27-71
Revised Sheet 5
August 28, 2025

ALL TYPES OF HMA PAVEMENT SHALL BE CONSTRUCTED WITH THE FOLLOWING LAYERS:

PLAN DETAIL AND TYPICAL SECTION LEGEND CALLOUT	HMA PAVEMENT	TOTAL LAYER PAVEMENT THICKNESS	LAYERS
AP02	4 HT 58-28 H 3 HT 58-28 S 3 HT 58-28 S	7-1/2"	2" UPPER 2-3/4" LOWER 2-3/4" LOWER
AP04	4 HT 58-28 H 3 HT 58-28 S 3 HT 58-28 S	7"	2" UPPER 2-1/2" LOWER 2-1/2" LOWER
AP05	4 HT 58-28 H	2-1/2"	2-1/2" UPPER

PROJECT NO: 1060-27-71

HWY: IH 94

COUNTY: MILWAUKEE

GENERAL NOTES

SHEET

5

E

FILE NAME: C:\USERS\FERGUSON\10602703\PROJECT FILES\WEST SEGMENT\10602771\SHEETS\02.TPS\ANDDETAIL\10602707-020101-GNDWG

PLOT DATE: 8/27/2025 12:49 PM

PLOT BY: FERGUSON, JULIE

PLOT SCALE: 1 IN=100 FT

WISDOT-CADD SHEET 42




Addendum No. 02
ID 1060-27-71
Added Sheet 8A
August 28, 2025

NOTE
• HISTORIC CEMETERY BOUNDARIES SHOWN ARE ESTIMATED.

LEGEND

+	WOOD NATIONAL CEMETERY
///	SPRING HILL CEMETERY
xxx	BETH HAMEDROSH HAGODEL CEMETERY

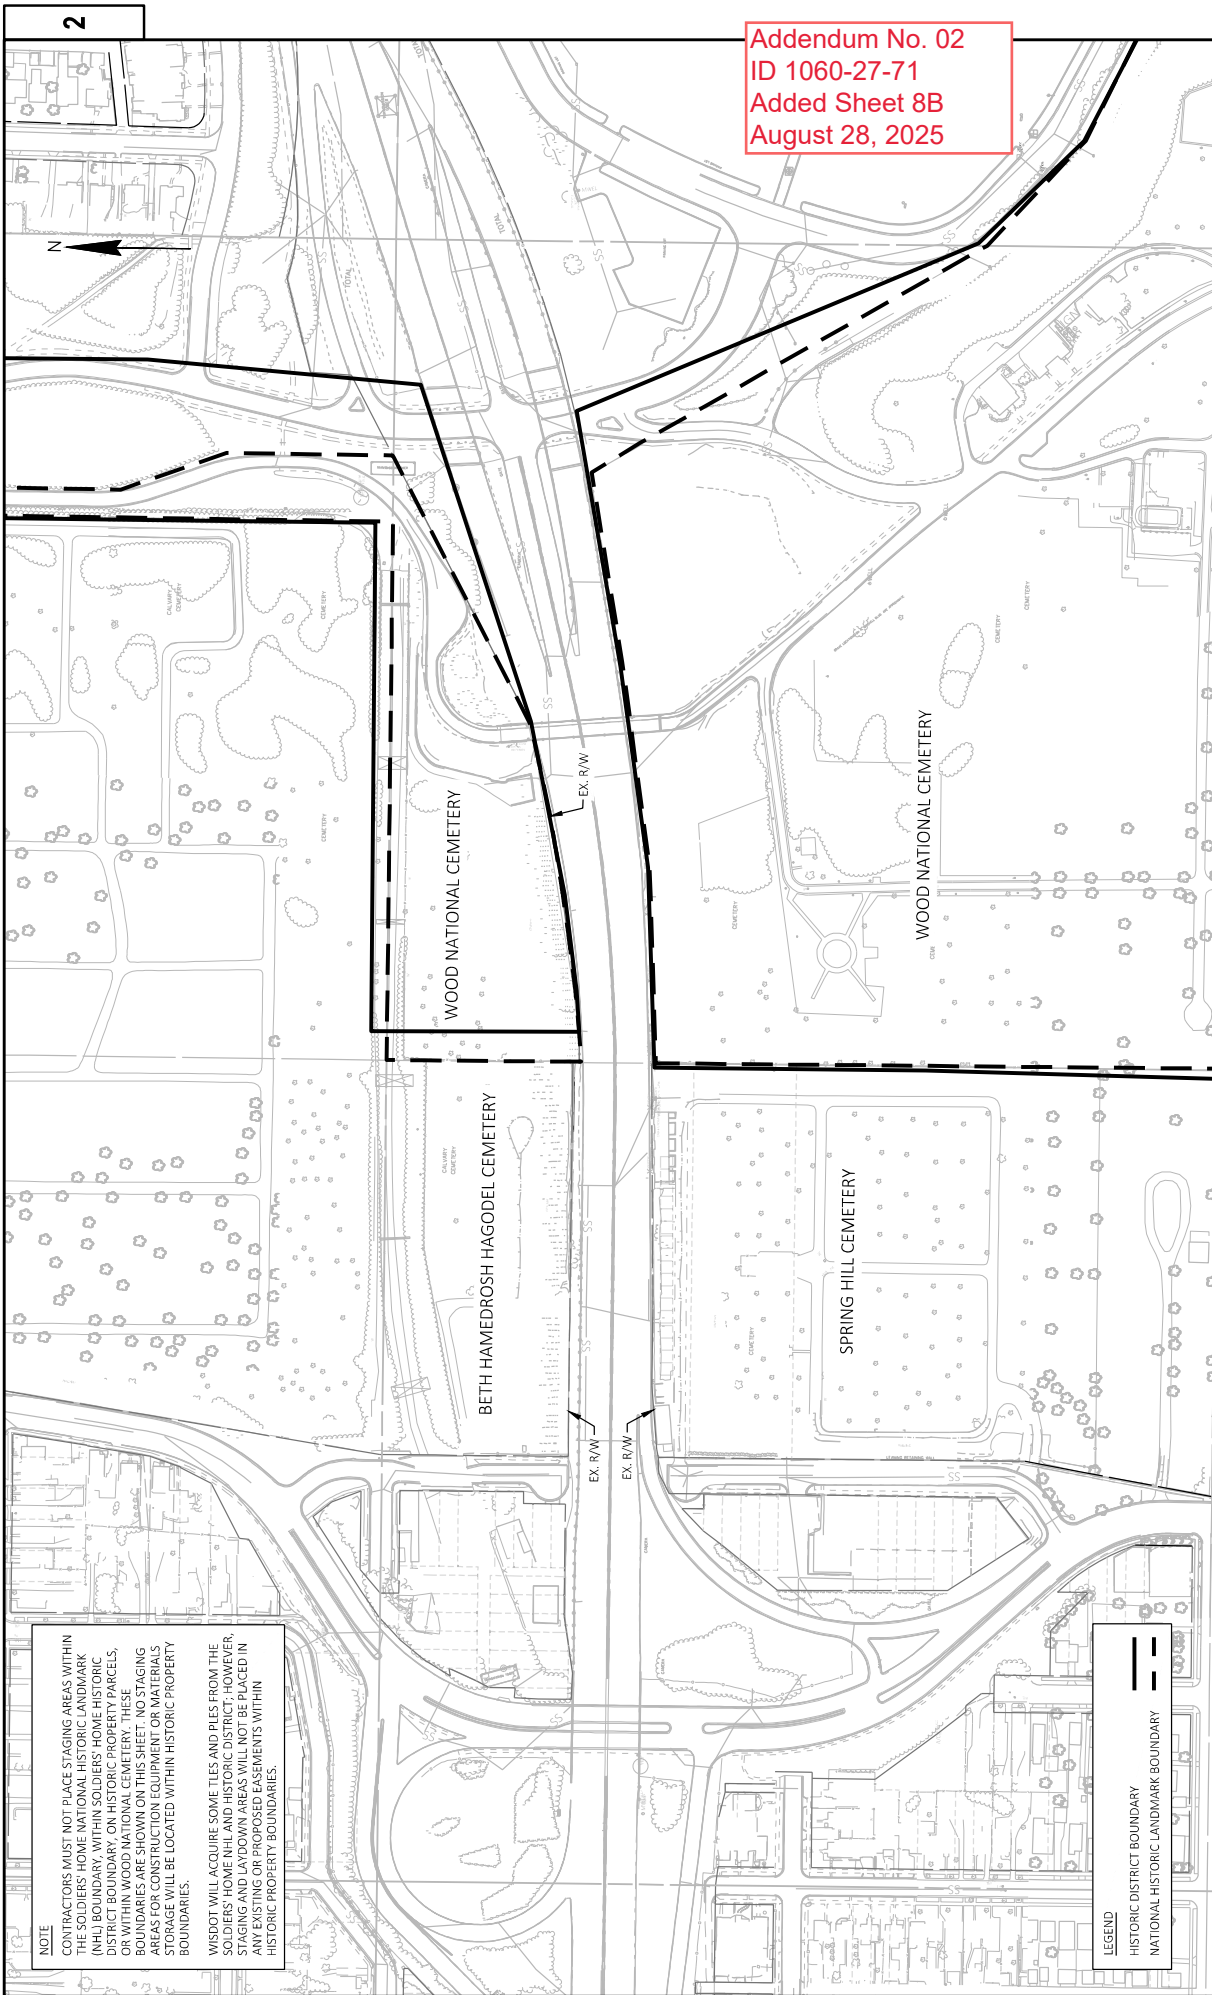

NOTE
CONTRACTORS MUST NOT PLACE STAGING AREAS WITHIN HISTORIC HOME NHL AND HISTORIC DISTRICT BOUNDARIES. THESE BOUNDARIES ARE SHOWN ON THIS SHEET. NO STAGING AREAS FOR CONSTRUCTION EQUIPMENT OR MATERIALS STORAGE WILL BE LOCATED WITHIN HISTORIC PROPERTY BOUNDARIES.

WISDOT WILL ACQUIRE SOME TILES AND PILES FROM THE SOLDIERS' HOME NHL AND HISTORIC DISTRICT; HOWEVER, STAGING AND LAYDOWN AREAS WILL NOT BE PLACED IN HISTORIC PROPERTY BOUNDARIES.

LEGEND
HISTORIC DISTRICT BOUNDARY
NATIONAL HISTORIC LANDMARK BOUNDARY

Addendum No. 02
ID 1060-27-71
Added Sheet 8B
August 28, 2025


LEGEND

(A) 6" TOPSOIL, SEEDING MIXTURE NO. 20, AND FERTILIZER TYPE B

(B) 6" TOPSOIL, SEEDING MIXTURE NO. 75, SEEDING NURSE CROP, AND FERTILIZER TYPE B

(C) 6" TOPSOIL, FERTILIZER TYPE B, AND SOD LAWN

NOTE
LOCATIONS OF EROSION MAT ARE SHOWN ON EROSION CONTROL PLANS



PROJECT NO: 1060-27-71	HWY: IH 94	COUNTY: MILWAUKEE	TYPICAL SECTIONS	SHEET 35
FILE NAME: C:\MSERVER\J10\CAAC\0005\WISDOT\106027701\PROJECT FILES\WEST SEGMENT\10602771\SHEETS\T02.TPS\ANDREAS\106027701.DWG				
LAYOUT NAME: 06		PLOT DATE: 8/27/2005 12:56 PM		PLOT BY: FERGUSON, JULIE
		PLOT SCALE: 1:15		WISDOT/CADD SHEET 4

PLAN DETAIL LEGEND

CG03	CURB RAMP TYPE 2	CP01	HPC PAVEMENT 12-INCH, DOWELED AND TINED
CG04	CURB RAMP TYPE 3	CP02	HPC PAVEMENT 9-INCH, DOWELED AND TINED
CG07	CURB RAMP TYPE 4B	CP03	HPC PAVEMENT 9-INCH, DOWELED
CG08	CURB RAMP TYPE 4B1	CP05	CONCRETE PAVEMENT 7-INCH
CG10	CURB RAMP TYPE 6	CP06	HPC PAVEMENT HES 9-INCH, DOWELED
CG12	CURB RAMP TYPE 7B	CM01	CONCRETE MEDIAN SLOPED NOSE TYPE 1
CG14	CONCRETE CURB PEDESTRIAN	CM02	CONCRETE MEDIAN SLOPED NOSE TYPE 2
CG16	CONCRETE CURB AND GUTTER 4-INCH SLOPED 60-INCH TYPE A	CM03	CONCRETE SIDEWALK 5-INCH
CG17	CONCRETE CURB AND GUTTER 19-INCH	CM05	CONCRETE STEPS
CG18	CONCRETE CURB AND GUTTER 31-INCH	CM07	MAINTENANCE OPENING
CG19	CONCRETE CURB AND GUTTER 55-INCH	CM08	COLORING CONCRETE CUSTOM
CG23	CONCRETE CURB AND GUTTER 22-INCH	PV01	CONCRETE PAVEMENT APPROACH SLAB
CG25	CONCRETE CURB AND GUTTER 6-INCH SLOPED 36-INCH TYPE D	PV04	TACTILE DIRECTIONAL INDICATORS
CG26	CONCRETE CURB AND GUTTER 30-INCH TYPE D	PV05	ASPHALTIC MATERIAL BINDER
		PV11	ASPHALTIC SURFACE 5-INCH
AP02	HMA PAVEMENT 4 HT 58-28 H, 2-INCH,	DR02	CONCRETE DRIVEWAY 7-INCH
	HMA PAVEMENT 3 HT 58-28 S, 2 3/4-INCH,	DR06	CONCRETE DRIVEWAY HES 7-INCH
AP04	HMA PAVEMENT 4 HT 58-28 H, 2-INCH,	DR10	ASPHALTIC SURFACE DRIVEWAYS AND FIELD ENTRANCES, 5-INCH
AP05	HMA PAVEMENT 3 HT 58-28 S, 2 1/2-INCH,		
	REMOVING ASPHALTIC SURFACE MILLING 2 1/2-INCH,		
	HMA PAVEMENT 4 HT 58-28 H, 2 1/2-INCH		
AG02	BASE AGGREGATE DENSE 1 1/4-INCH	RG01	MGS GUARDRAIL 3
AG03	UTILITY AGGREGATE PATH	RG02	MGS THRIE BEAM TRANSITION
AG04	BASE AGGREGATE OPEN-GRADED	RG03	MGS GUARDRAIL TERMINAL EAT
RG01	RAMP CLOSURE GATE 24-FT	RG04	MGS GUARDRAIL TERMINAL TYPE 2
RG04	RAMP CLOSURE GATE 30-FT	RG05	CRASH CUSHION PERMANENT LOW MAINTENANCE
RG06	RAMP CLOSURE GATE 37-FT		
	REVERSE SLOPE CURB AND GUTTER	SW01	SAWING ASPHALT
		SW02	SAWING CONCRETE
		LS01	SOD LAWN
		BS01	BUS STOP

Addendum No. 02
ID 1060-27-71
Revised Sheet 132
August 28, 2025

PROJECT NO: 1060-27-71

HWY: IH 94

COUNTY: MILWAUKEE

PLAN DETAILS

SHEET

132

E

FILE NAME: C:\USERS\VERGUTZ\DWG\CCDC\WISDOT\10602703\PROJECT FILES\WEST SEGMENT\1060271\SHEETS\02 TYPES\ANDDETAIL\10602707-021200-FD.DWG

PLOT DATE: 8/27/2025 1:02 PM

PLOT BY: FERGUSON, JULIE

PLOT NAME:

PLOT SCALE: 1 IN=40 FT

WISDOT-CDCS SHEET 12

2

- FOLLOWING IS A LIST OF THE FITTINGS SHOWN ON THIS CONSTRUCTION PLAN THAT WILL BE FURNISHED BY THE CONTRACTOR:

1 - B6-45
1 - M7D)
1 - SL6DP)



Addendum No. 02
ID 1060-27-71
Revised Sheet 400
August 28, 2025

SHEET NO. 4 OF 7 PLAN FILE NO. **2025111**

NO.	BY	REVISION	DATE
WILEY ROAD WATERMAIN PLAN			

**CALL DIGGERS HOTLINE
1-800-242-8511**
TOLL FREE TO OBTAIN LOCATION OF UNRECORDED
BEFORE YOU DIG. MISCONGEN STATUTE VIOLATION REQUIRES

A circular sign with a black border. Inside the circle, there is a black silhouette of a lit cigarette. A diagonal slash runs from the top-left to the bottom-right, crossing out the cigarette. This is a standard international symbol for 'No Smoking'.

HAWLEY ROAD WATERMAIN PLAN

TY: MILWAUKEE

COUNT	

IH 94

HWY:	
------	--

7-71

CT NO: 1060-2

PROJE

PLOT SCALE :

PLOT NAME: _____

PLOT BY: -

8/25/2025

PLOT DATE :

Downloaded from ascelibrary.org by University of California, San Diego on 06/01/15. Copyright ASCE, For All Rights Reserved, No part of this document may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage or retrieval system, without permission in writing from ASCE.

1

Downloaded from ascelibrary.org by University of California, San Diego on 06/01/15. Copyright ASCE, For All Rights Reserved, No part of this document may be reproduced without written permission from ASCE.

1


1881

ME. MURRAY OF LUNN 24

FILE NAME :

1

Addendum No. 02
ID 1060-27-71
Revised Sheet 614
August 28, 2025

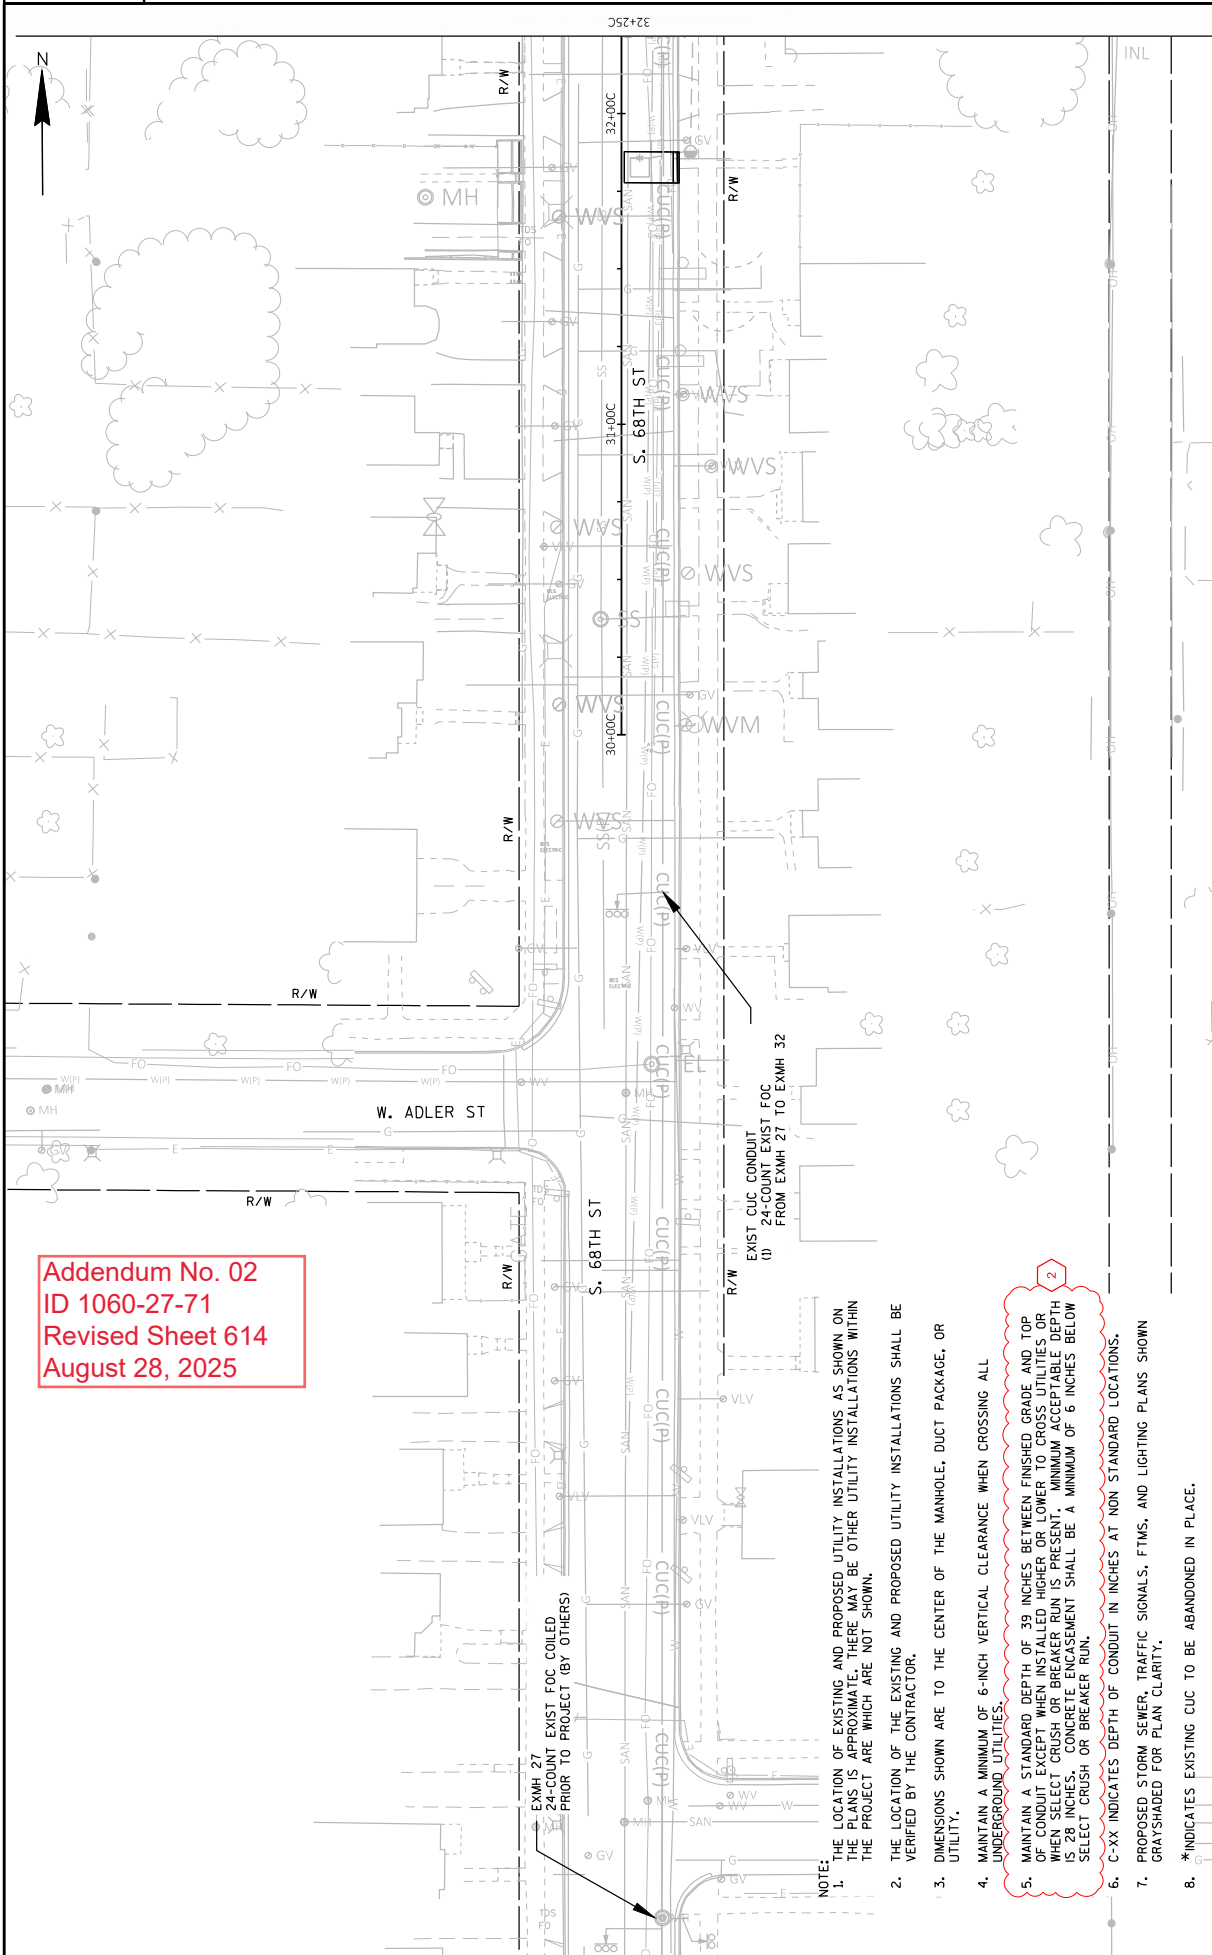

- NOTE:
1. THE LOCATION OF EXISTING AND PROPOSED UTILITY INSTALLATIONS AS SHOWN ON THE PLANS IS APPROXIMATE. THERE MAY BE OTHER UTILITY INSTALLATIONS WITHIN THE PROJECT AREAS WHICH ARE NOT SHOWN.
2. THE LOCATION OF THE EXISTING AND PROPOSED UTILITY INSTALLATIONS SHALL BE VERIFIED BY THE CONTRACTOR.
3. DIMENSIONS SHOWN ARE TO THE CENTER OF THE MANHOLE, DUCT PACKAGE, OR UTILITY.
4. MAINTAIN A MINIMUM OF 6-INCH VERTICAL CLEARANCE WHEN CROSSING ALL UNDERGROUND UTILITIES.
5. MAINTAIN A STANDARD DEPTH OF 36 INCHES BETWEEN FINISHED GRADE AND TOP OF CONDUIT EXCEPT WHEN INSTALLED UNDER OTHER TYPES OF CROSS UTILITIES. OR WHEN SELECT CRUSH OR BREAKER RUN IS PRESENT A MINIMUM ACCEPTABLE DEPTH IS 28 INCHES. CONCRETE ENCASMENT SHALL BE A MINIMUM OF 6 INCHES BELOW SELECT CRUSH OR BREAKER RUN.
6. C-XX INDICATES DEPTH OF CONDUIT IN INCHES AT NON STANDARD LOCATIONS.
7. PROPOSED STORM SEWER, TRAFFIC SIGNALS, FTMS, AND LIGHTING PLANS SHOWN GRAYSHADE FOR PLAN CLARITY.
8. *INDICATES EXISTING CUC TO BE ABANDONED IN PLACE.

PROJECT NO: 1060-27-71	COUNTY: MILWAUKEE	CITY UNDERGROUND CONDUIT PLAN 68TH ST-1	SHEET 614	E
FILE NAME: C:\USERS\JIMMAY\DWG\CADD\CS\WISDOT\10602771\PROJECT FILES\WEST SEGMENT\10602771\DESIGNED\EDLINE\CUC\WESTLEG_PROPOSED_CUC.DWG	HWY: IH 94	PLOT DATE: 8/25/2025 2:51 PM	PLOT BY: MATTHEW MAY	WISDOT/CADD 9/1/22
LAYOUT NAME: 68RUC1			PLOT SCALE: 1 IN=40 FT	




- NOTE: THE LOCATION OF EXISTING AND PROPOSED UTILITY INSTALLATIONS AS SHOWN ON THE PLANS IS APPROXIMATE. THERE MAY BE OTHER UTILITY INSTALLATIONS WITHIN THE PROJECT ARE WHICH ARE NOT SHOWN.
2. THE LOCATION OF THE EXISTING AND PROPOSED UTILITY INSTALLATIONS SHALL BE VERIFIED BY THE CONTRACTOR.
3. DIMENSIONS SHOWN ARE TO THE CENTER OF THE MANHOLE, DUCT PACKAGE, OR UTILITY.
4. MAINTAIN A MINIMUM OF 6-INCH VERTICAL CLEARANCE WHEN CROSSING ALL UNDERGROUND UTILITIES.
5. MAINTAIN A STANDARD DEPTH OF 39 INCHES BETWEEN FINISHED GRADE AND TOP OF CONDUIT EXCEPT WHEN INSTALLED HIGHER OR LOWER TO CROSS UTILITIES OR WHEN SELECT CRUSH OR BREAKER RUN IS PRESENT. MINIMUM ACCEPTABLE DEPTH FOR SELECT CRUSH OR BREAKER RUN SHALL BE A MINIMUM OF 6 INCHES BELOW SELECT CRUSH OR BREAKER RUN.
6. C-XX INDICATES DEPTH OF CONDUIT IN INCHES AT NON STANDARD LOCATIONS. 2
7. PROPOSED STORM SEWER, TRAFFIC SIGNALS, FTMS, AND LIGHTING PLANS SHOWN GRAYSHADED FOR PLAN CLARITY.
8. *INDICATES EXISTING CUC TO BE ABANDONED IN PLACE.

PROJECT NO:	1060-27-71	HWY:	HI 94	COUNTY:	MILWAUKEE
FILE NAME:	C:\USER\MANADIA\ACCORDS\WISDOT\1060-27-71\PROJECT FILES\WEST SEGMENT\U060271\USGIN\EDGE\LINE\CUC\WESTLEG_PROPOSED_CUC.DWG				
LAYOUT NAME:	-18THQUC-2				
				PLOT DATE:	8/25/2025 2:54 PM


Addendum No. 02
ID 1060-27-71
Revised Sheet 616
August 28, 2025

- NOTE: THE LOCATION OF EXISTING AND PROPOSED UTILITY INSTALLATIONS AS SHOWN ON THE PLANS IS APPROXIMATE. THERE MAY BE OTHER UTILITY INSTALLATIONS WITHIN THE PROJECT ARE WHICH ARE NOT SHOWN.
- THE LOCATION OF THE EXISTING AND PROPOSED UTILITY INSTALLATIONS SHALL BE VERIFIED BY THE CONTRACTOR.
 - DIMENSIONS SHOWN ARE TO THE CENTER OF THE MANHOLE, DUCT PACKAGE, OR UTILITY.
 - MAINTAIN A MINIMUM OF 6-INCH VERTICAL CLEARANCE WHEN CROSSING ALL UNDERGROUND UTILITIES.
 - MAINTAIN A STANDARD DEPTH OF 39 INCHES BETWEEN FINISHED GRADE AND TOP OF CONDUIT EXCEPT WHEN INSTALLED HIGHER OR LOWER TO CROSS UTILITIES OR WHEN SELECT CRUSH OR BREAKER CONCRETE PRESENTATION IS REQUIRED. ACCEPTABLE DEPTH IS 28 INCHES. CONCRETE PRESENTATION SHALL BE A MINIMUM OF 6 INCHES BELOW SELECT CRUSH OR BREAKER RUN.
 - C-XX INDICATES DEPTH OF CONDUIT IN INCHES AT NON STANDARD LOCATIONS.
 - PROPOSED STORM SEWER, TRAFFIC SIGNALS, FTMS, AND LIGHTING PLANS SHOWN GRAYSHADE FOR PLAN CLARITY.
 - *INDICATES EXISTING CUC TO BE ABANDONED IN PLACE.

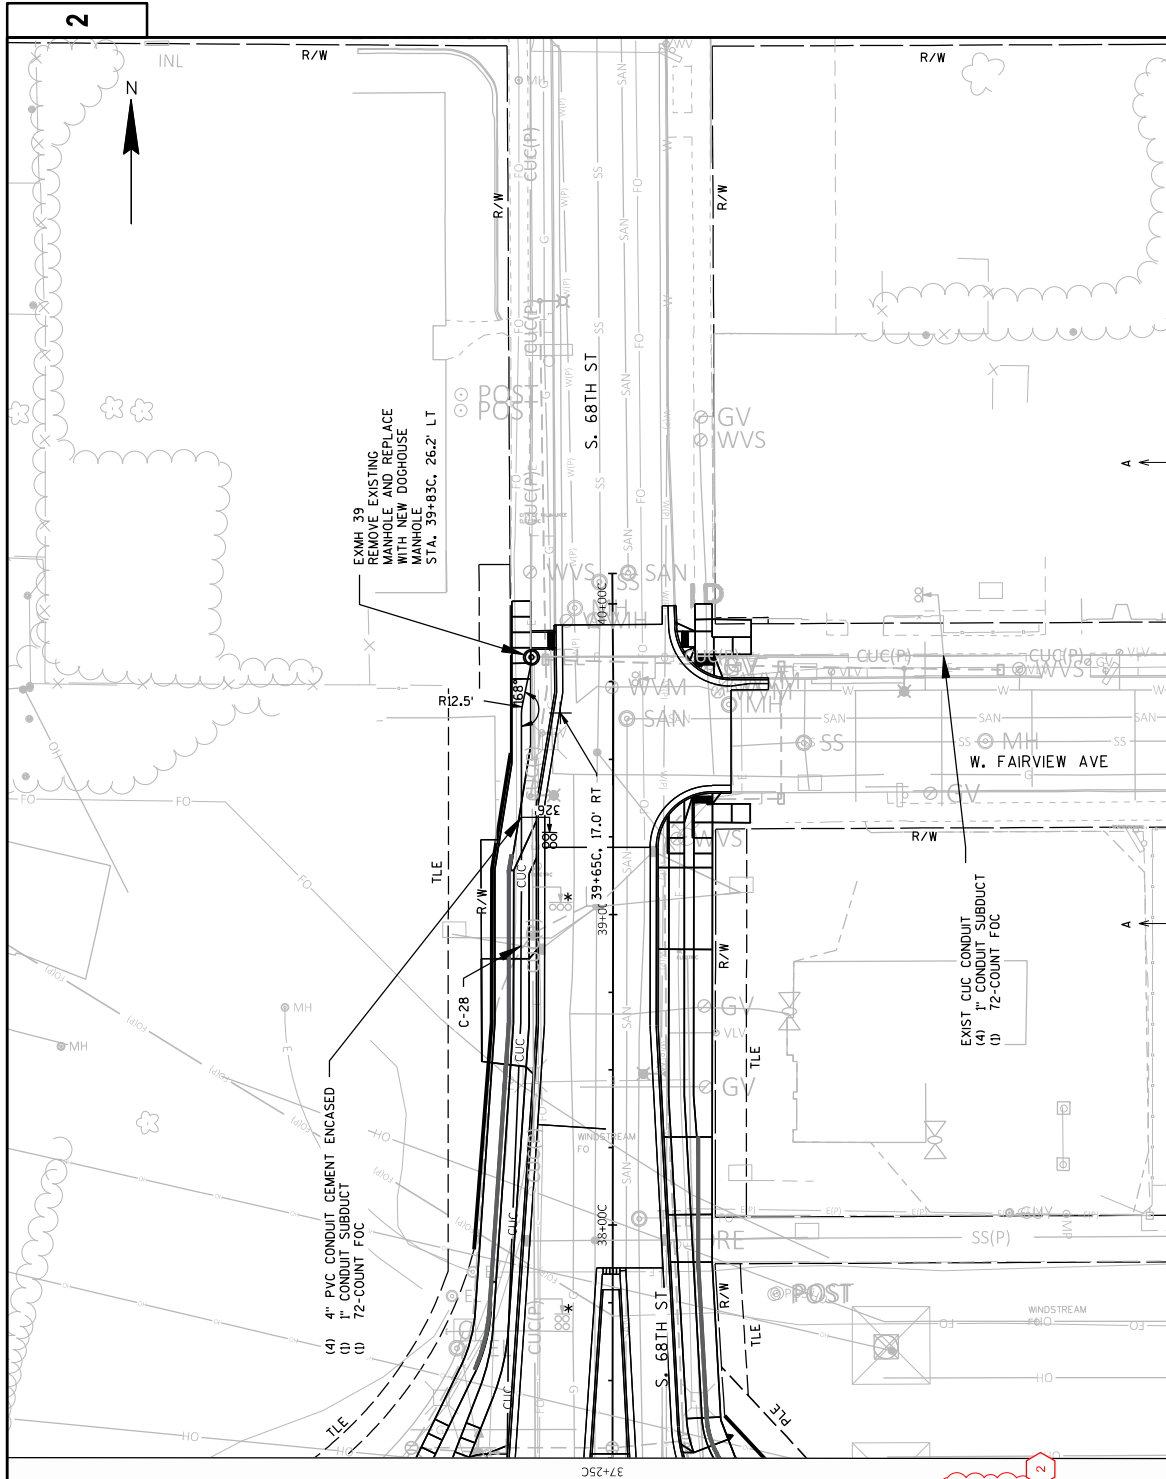




Addendum No. 02
ID 1060-27-71
Revised Sheet 617
August 28, 2025

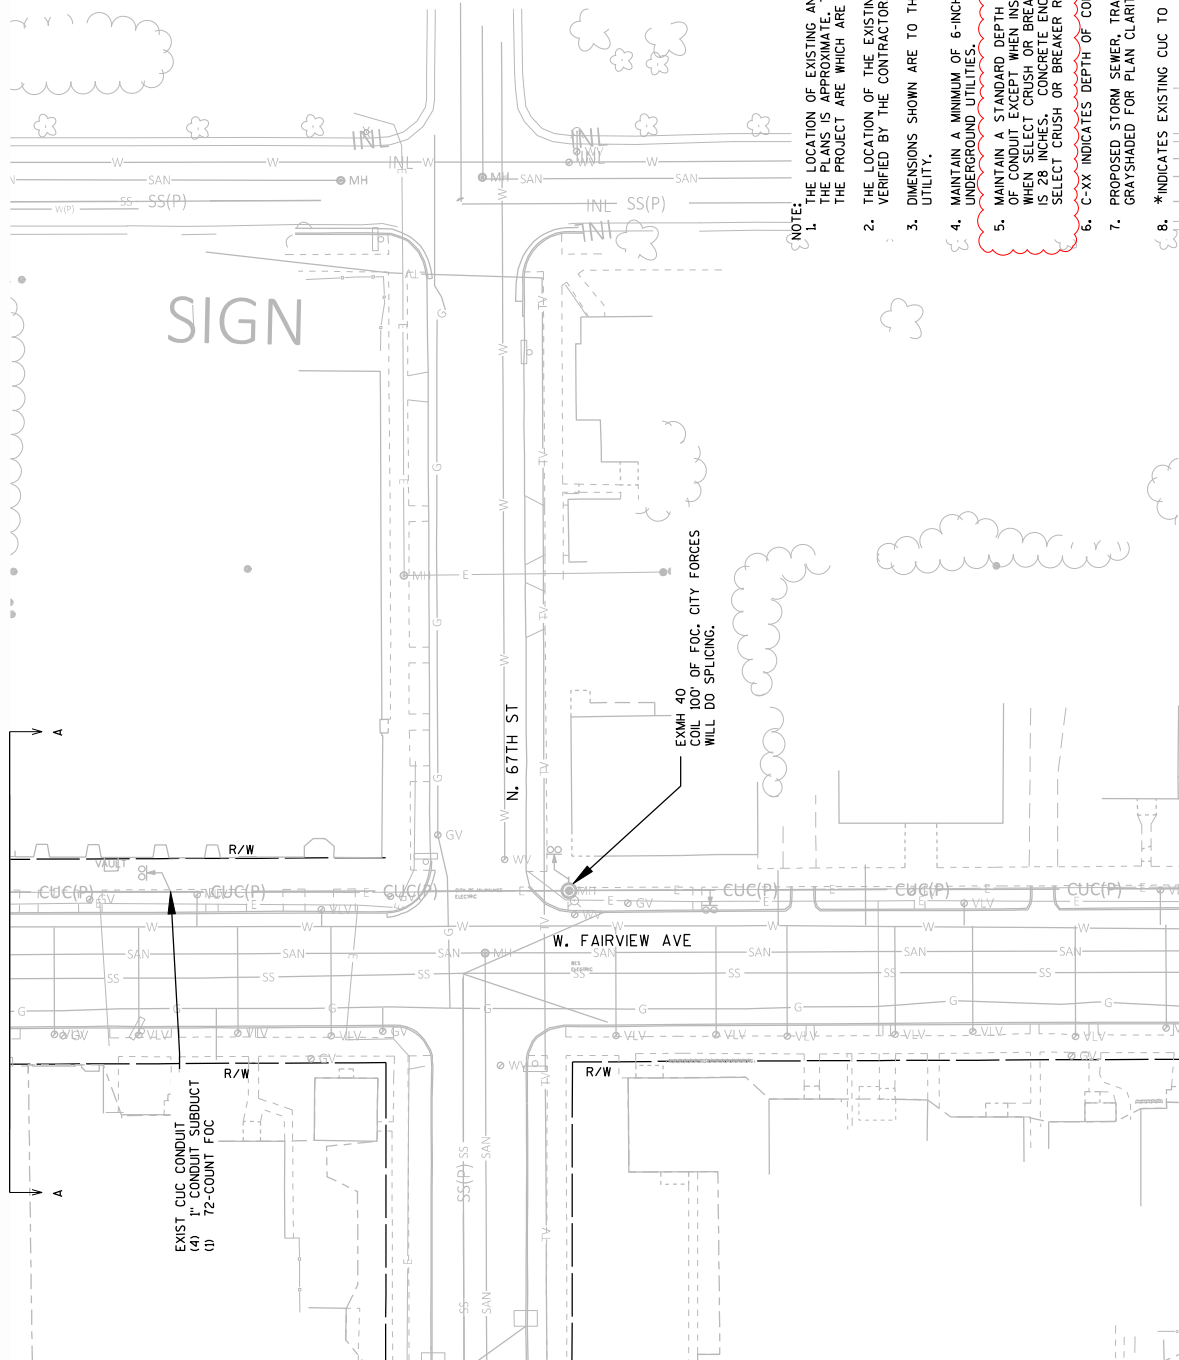

- NOTE:
1. THE LOCATION OF EXISTING AND PROPOSED UTILITY INSTALLATIONS AS SHOWN ON THE PLANS IS APPROXIMATE. THERE MAY BE OTHER UTILITY INSTALLATIONS WITHIN THE PROJECT ARE WHICH ARE NOT SHOWN.
 2. THE LOCATION OF THE EXISTING AND PROPOSED UTILITY INSTALLATIONS SHALL BE VERIFIED BY THE CONTRACTOR.
 3. DIMENSIONS SHOWN ARE TO THE CENTER OF THE MANHOLE, DUCT PACKAGE, OR UTILITY.
 4. MAINTAIN A MINIMUM OF 6-INCH VERTICAL CLEARANCE WHEN CROSSING ALL UNDERGROUND UTILITIES.
 5. MAINTAIN A STANDARD DEPTH OF 39 INCHES BETWEEN FINISHED GRADE AND TOP OF CONDUIT EXCEPT WHEN INSTALLED HIGHER OR LOWER TO CROSS UTILITIES OR WHEN SELECT CRUSH OR BREAKER RUN IS PRESENT. MINIMUM ACCEPTABLE DEPTH IS 28 INCHES. CONCRETE ENCASUREMENT SHALL BE A MINIMUM OF 6 INCHES BELOW SELECT CRUSH OR BREAKER RUN.
 6. C-XX INDICATES DEPTH OF CONDUIT IN INCHES AT NON STANDARD LOCATIONS.
 7. PROPOSED STORM SEWER, TRAFFIC SIGNALS, FTMS, AND LIGHTING PLANS SHOWN GRAYSHADE FOR PLAN CLARITY.
 8. *INDICATES EXISTING CUC TO BE ABANDONED IN PLACE.

PROJECT NO: 1060-27-71	COUNTY: MILWAUKEE	CITY UNDERGROUND CONDUIT PLAN 68TH ST-4	SHEET 617	E
FILE NAME: C:\USERS\WIMAY\ACAD\CADD\WISDOT\10602771\PROJECT FILES\WEST SEGMENT\10602771\05GNEDELINE\CUC\WESTLEG_PROPOSED_CUC.DWG	HWY: IH 94	8/25/2025 2:59 PM	1 IN=40 FT	WISDOT/CADD 9/1/22 42
LAYOUT NAME: 68TH-CUC-4		PLOT BY: MATTHEW MAY		

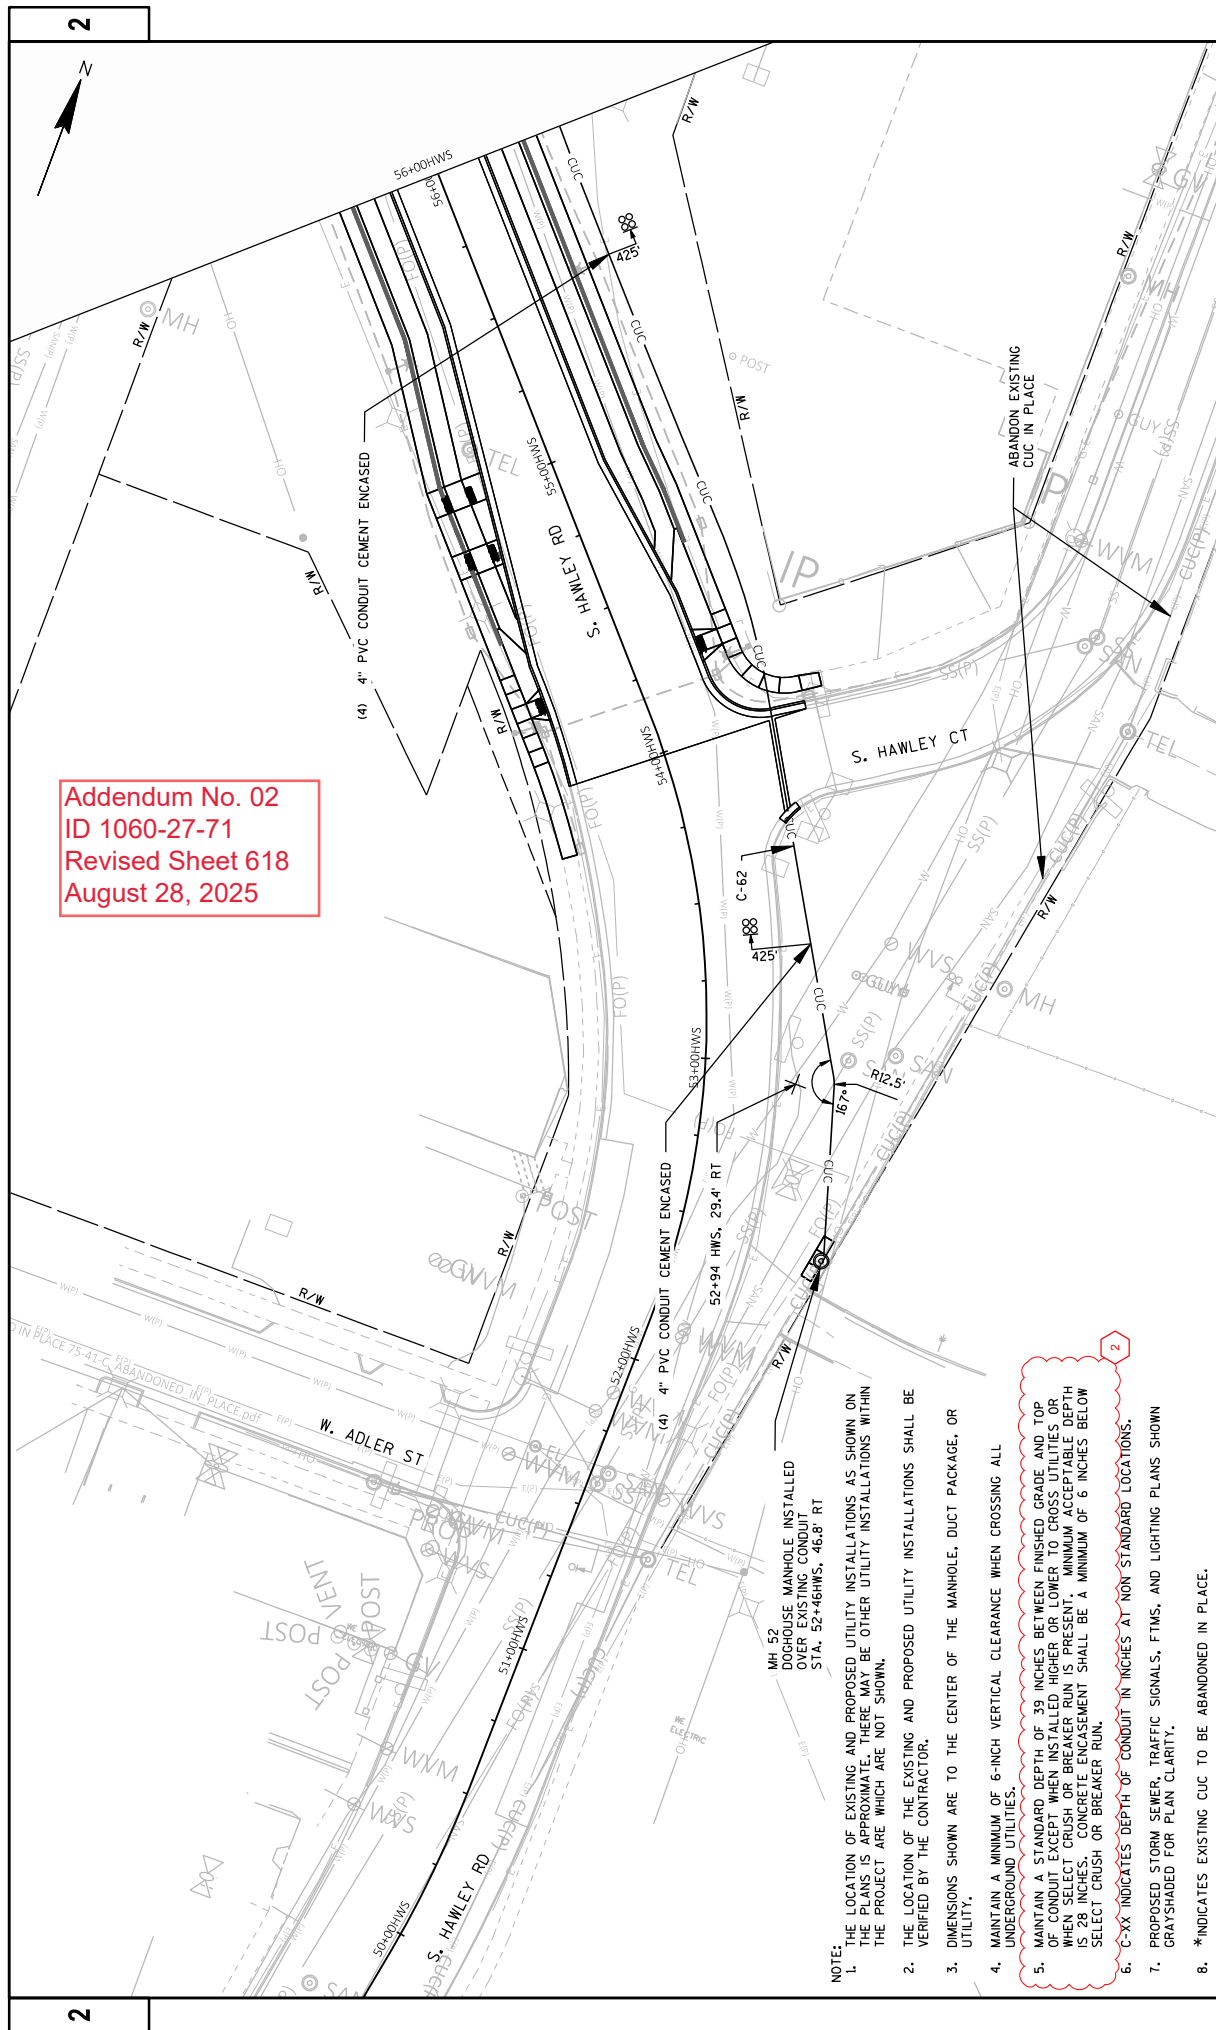


Addendum No. 02
ID 1060-27-71
Revised Sheet 618
August 28, 2025


- NOTE:
1. THE LOCATION OF EXISTING AND PROPOSED UTILITY INSTALLATIONS AS SHOWN ON THE PLANS IS APPROXIMATE. THERE MAY BE OTHER UTILITY INSTALLATIONS WITHIN THE PROJECT ARE WHICH ARE NOT SHOWN.
 2. THE LOCATION OF THE EXISTING AND PROPOSED UTILITY INSTALLATIONS SHALL BE VERIFIED BY THE CONTRACTOR.
 3. DIMENSIONS SHOWN ARE TO THE CENTER OF THE MANHOLE, DUCT PACKAGE, OR UTILITY.
 4. MAINTAIN A MINIMUM OF 6-INCH VERTICAL CLEARANCE WHEN CROSSING ALL UNDERGROUND UTILITIES.
 5. MAINTAIN A STANDARD DEPTH OF 39 INCHES BETWEEN FINISHED GRADE AND TOP OF CONDUIT EXCEPT WHEN INSTALLED HIGHER OR LOWER TO CROSS UTILITIES OR WHEN SELECT CRUSH OR BREAKER RUN IS PRESENT. MINIMUM ACCEPTABLE DEPTH IS 28 INCHES. CONCRETE ENCASEMENT SHALL BE A MINIMUM OF 6 INCHES BELOW SELECT CRUSH OR BREAKER RUN.
 6. C-XX INDICATES DEPTH OF CONDUIT IN INCHES AT NON-STANDARD LOCATIONS.
 7. PROPOSED STORM SEWER, TRAFFIC SIGNALS, FTMS, AND LIGHTING PLANS SHOWN GRAYSHADE FOR PLAN CLARITY.
 8. *INDICATES EXISTING CUC TO BE ABANDONED IN PLACE.

PROJECT NO: 1060-27-71	COUNTY: MILWAUKEE	CITY UNDERGROUND CONDUIT PLAN HAWLEY RD-1	SHEET 618	E
FILE NAME: C:\USERS\JIMMAY\DCAD\DCS\WISDOT\10602771\DSG\EDGELINE\CUC\WSTIEG_PROPOSED_CUC.DWG	HWY: IH 94	PLOT DATE: 8/25/2025 3:01 PM	PLOT BY: MATTHEW MAY	WISDOT/CAD05 SHEET 42
LAYOUT NAME: HawleyCUC-1			PLOT SCALE: 1 IN=40 FT	



FILE NAME:	C:\USER\NATHAN\CDODS\WORKBOOK\06027971.DWG	PLOT DATE:	8/25/2025 3:04 PM	PLOT BY:	MATTHEW MAY	PLOT SCALE:	1 IN=40 FT	SHEET	E
PROJECT NO:	1060-27-71	HWW:	IH 94	COUNTY:	MILWAUKEE	CITY UNDERGROUND CONDUIT PLAN HAWLEY RD-2			
FILE NAME:	C:\USER\NATHAN\CDODS\WORKBOOK\06027971.DWG	PLOT DATE:	8/25/2025 3:04 PM	PLOT BY:	MATTHEW MAY	PLOT SCALE:	1 IN=40 FT	SHEET	619

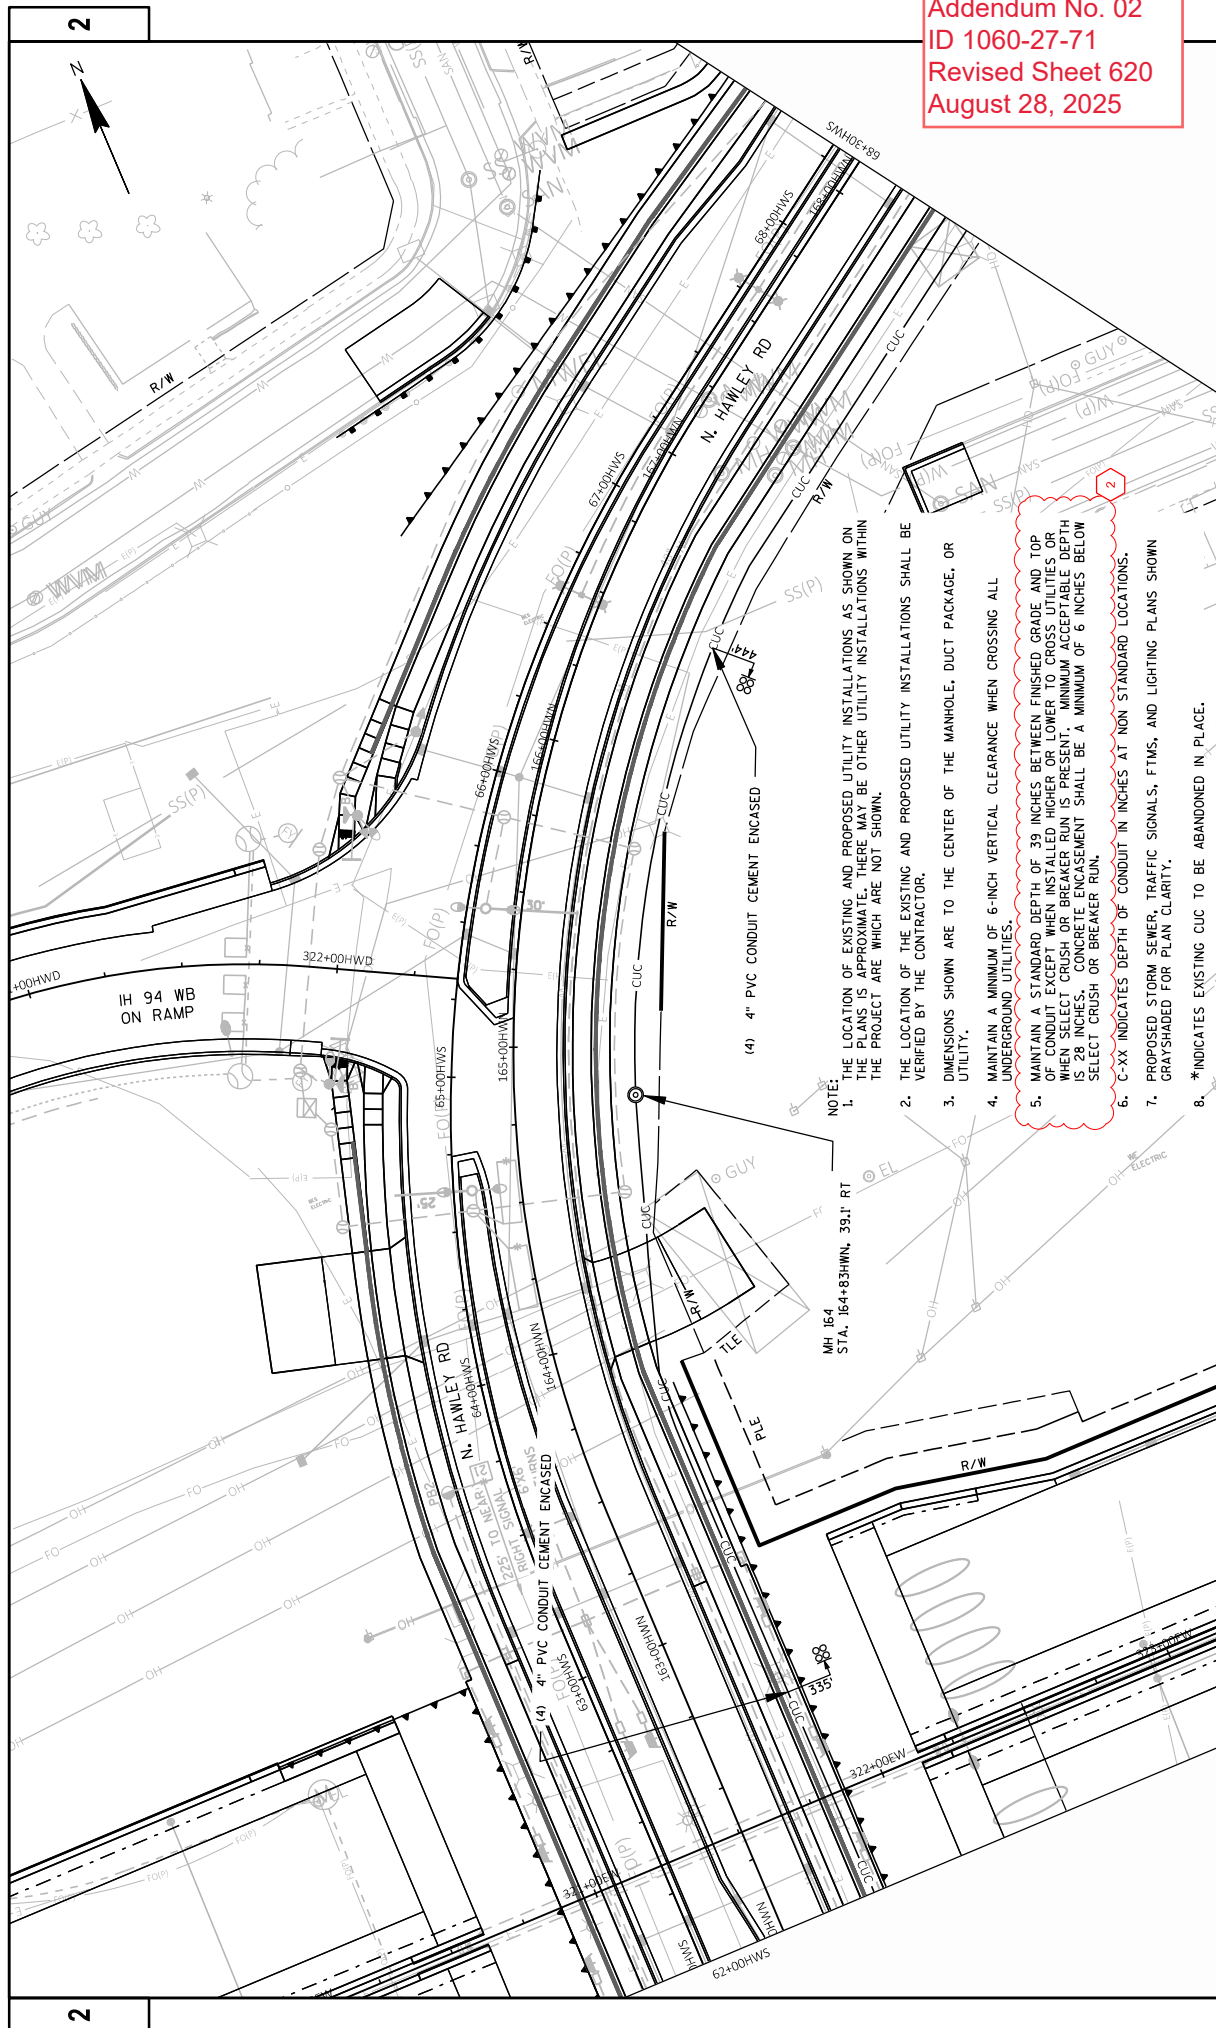

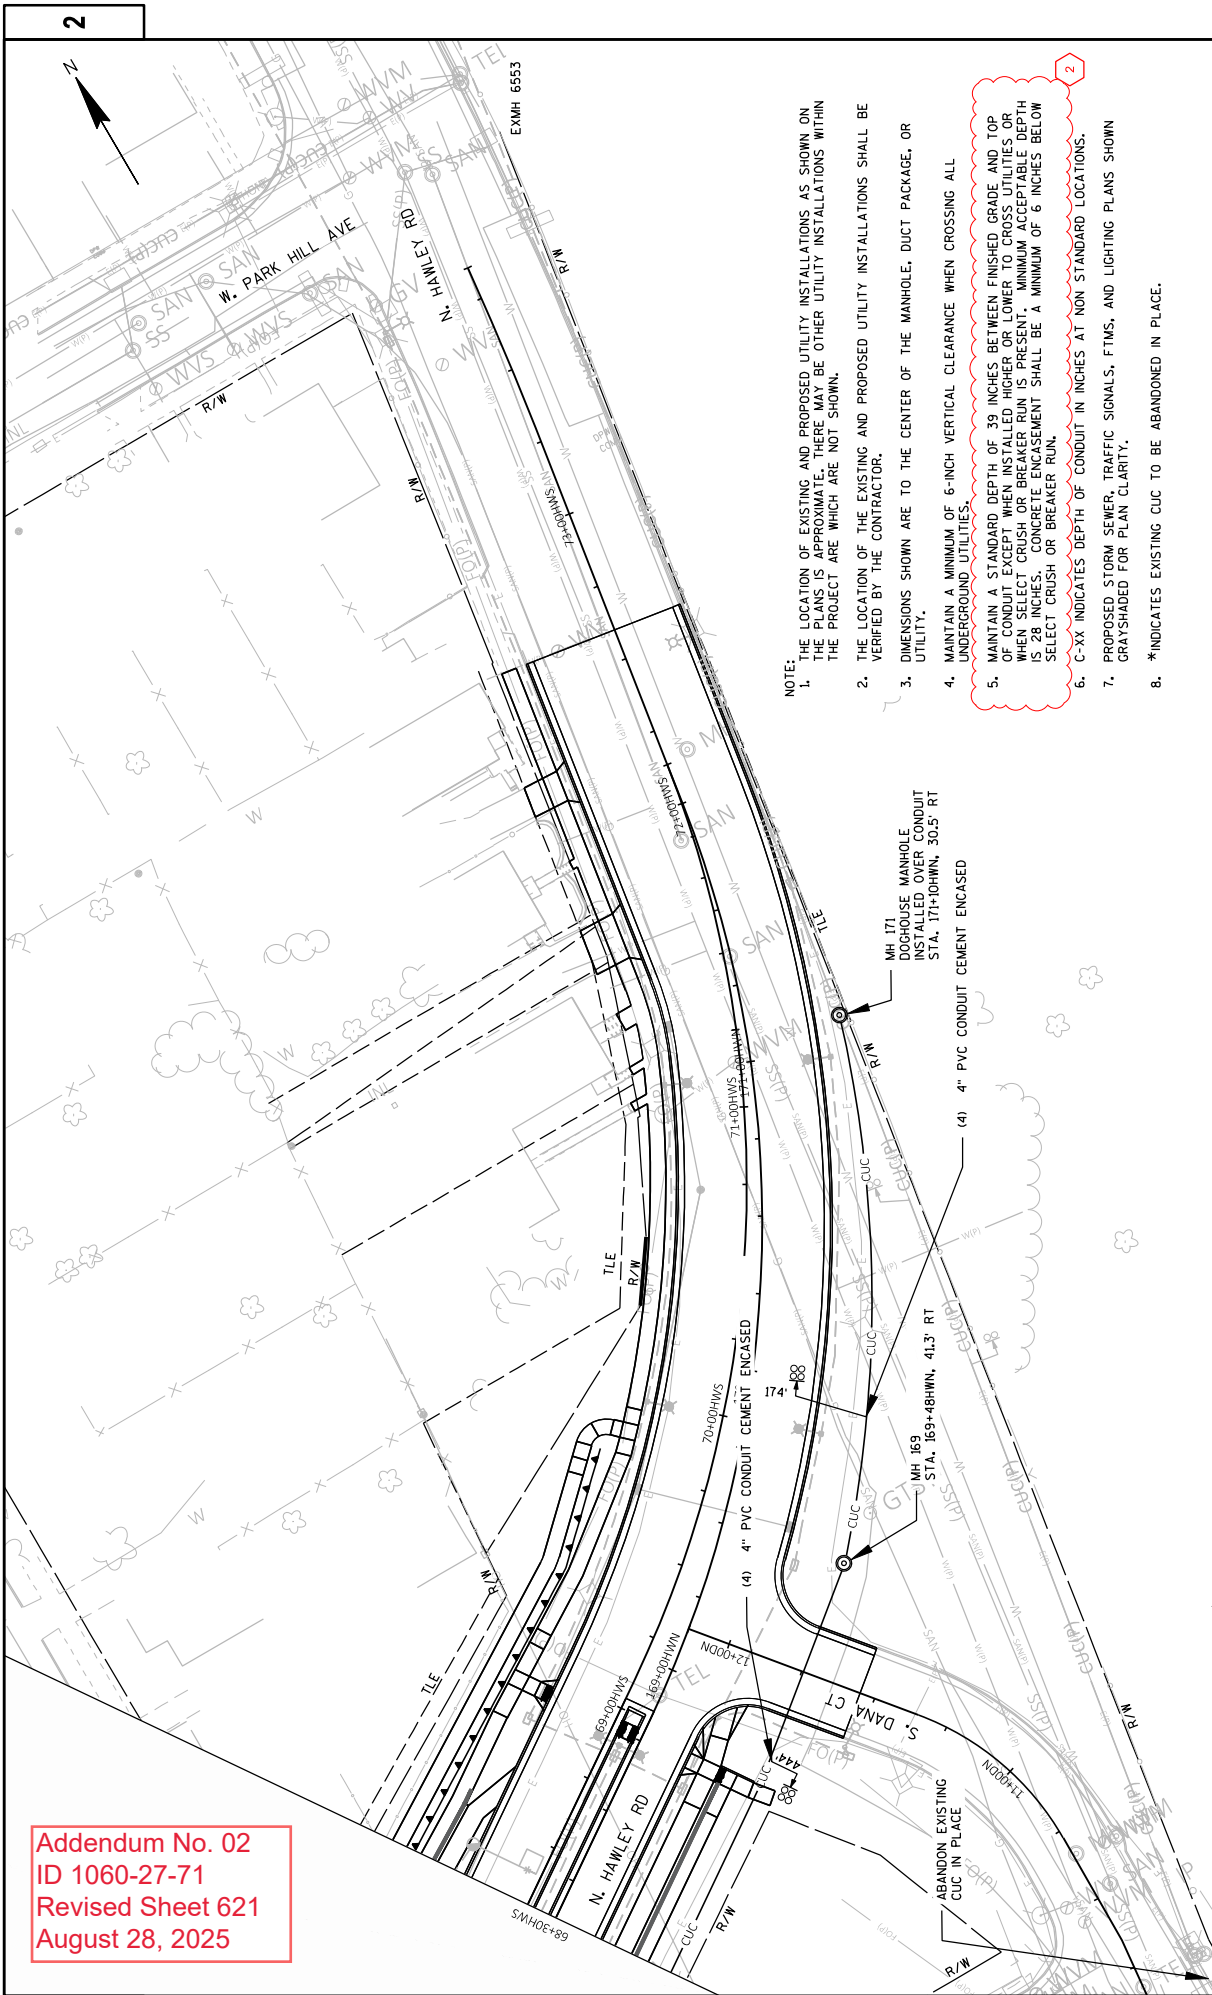

Addendum No. 02
ID 1060-27-71
Revised Sheet 621
August 28, 2025

- NOTE:
- THE LOCATION OF EXISTING AND PROPOSED UTILITY INSTALLATIONS AS SHOWN ON THE PLANS IS APPROXIMATE. THERE MAY BE OTHER UTILITY INSTALLATIONS WITHIN THE PROJECT AREAS WHICH ARE NOT SHOWN.
 - THE LOCATION OF THE EXISTING AND PROPOSED UTILITY INSTALLATIONS SHALL BE VERIFIED BY THE CONTRACTOR.
 - DIMENSIONS SHOWN ARE TO THE CENTER OF THE MANHOLE, DUCT PACKAGE, OR UTILITY.
 - MAINTAIN A MINIMUM OF 6-INCH VERTICAL CLEARANCE WHEN CROSSING ALL UNDERGROUND UTILITIES.
 - MAINTAIN A STANDARD DEPTH OF 36 INCHES BETWEEN FINISHED GRADE AND TOP OF CONDUIT EXCEPT WHEN INSTALLED HIGHER OR LOWER TO CROSS UTILITIES OR WHEN SELECT CRUSH OR BREAKER RUN IS PRESENT. MINIMUM ACCEPTABLE DEPTH IS 28 INCHES. CONCRETE ENCASEMENT SHALL BE A MINIMUM OF 6 INCHES BELOW SELECT CRUSH OR BREAKER RUN.
 - C-XX INDICATES DEPTH OF CONDUIT IN INCHES AT NON STANDARD LOCATIONS.
 - PROPOSED STORM SEWER, TRAFFIC SIGNALS, FTMS, AND LIGHTING PLANS SHOWN GRAYSHADED FOR PLAN CLARITY.
 - *INDICATES EXISTING CUC TO BE ABANDONED IN PLACE.

PROJECT NO: 1060-27-71	COUNTY: MILWAUKEE	CITY UNDERGROUND CONDUIT PLAN HAWLEY RD-4	SHEET 621	E
FILE NAME: C:\USERS\MJMACDONALD\PROJECT FILES\WEST SEGMENT\10602771\DSGN\EDGELINE\CUC\WESTLEG_PROPOSED_CUC.DWG	HWY: IH 94	8/25/2025 3:09 PM	1 IN=40 FT	WISDOT/CAD05 SHEET 42
LAYOUT NAME: HawleyCUC-4		8/25/2025 3:09 PM		

2



HWY: IH 94

COUNTY: MILWAUKEE

TRAFFIC CONTROL - STAGE 1B

SHEET 697

3	

FILE NAME : C:\USERS\ASCHMITT\DC\ACCDOS\WISDOT\10602703\PROJECT FILES\WEST SEGMENT\10602771\SHEETS\02_TPS\ANDDetail\10602707-026112-518.DWG
LAYOUT NAME - 01-5W-09


PLOT DATE: 8/25/2025 3:17 PM

LOT BY: AARON SCHMITT


PLOT SCALE: 1 IN=100 FT

WISDOT/CADDs SHEET 42


Addendum No. 02
ID 1060-27-71
Revised Sheet 712
August 28, 2025

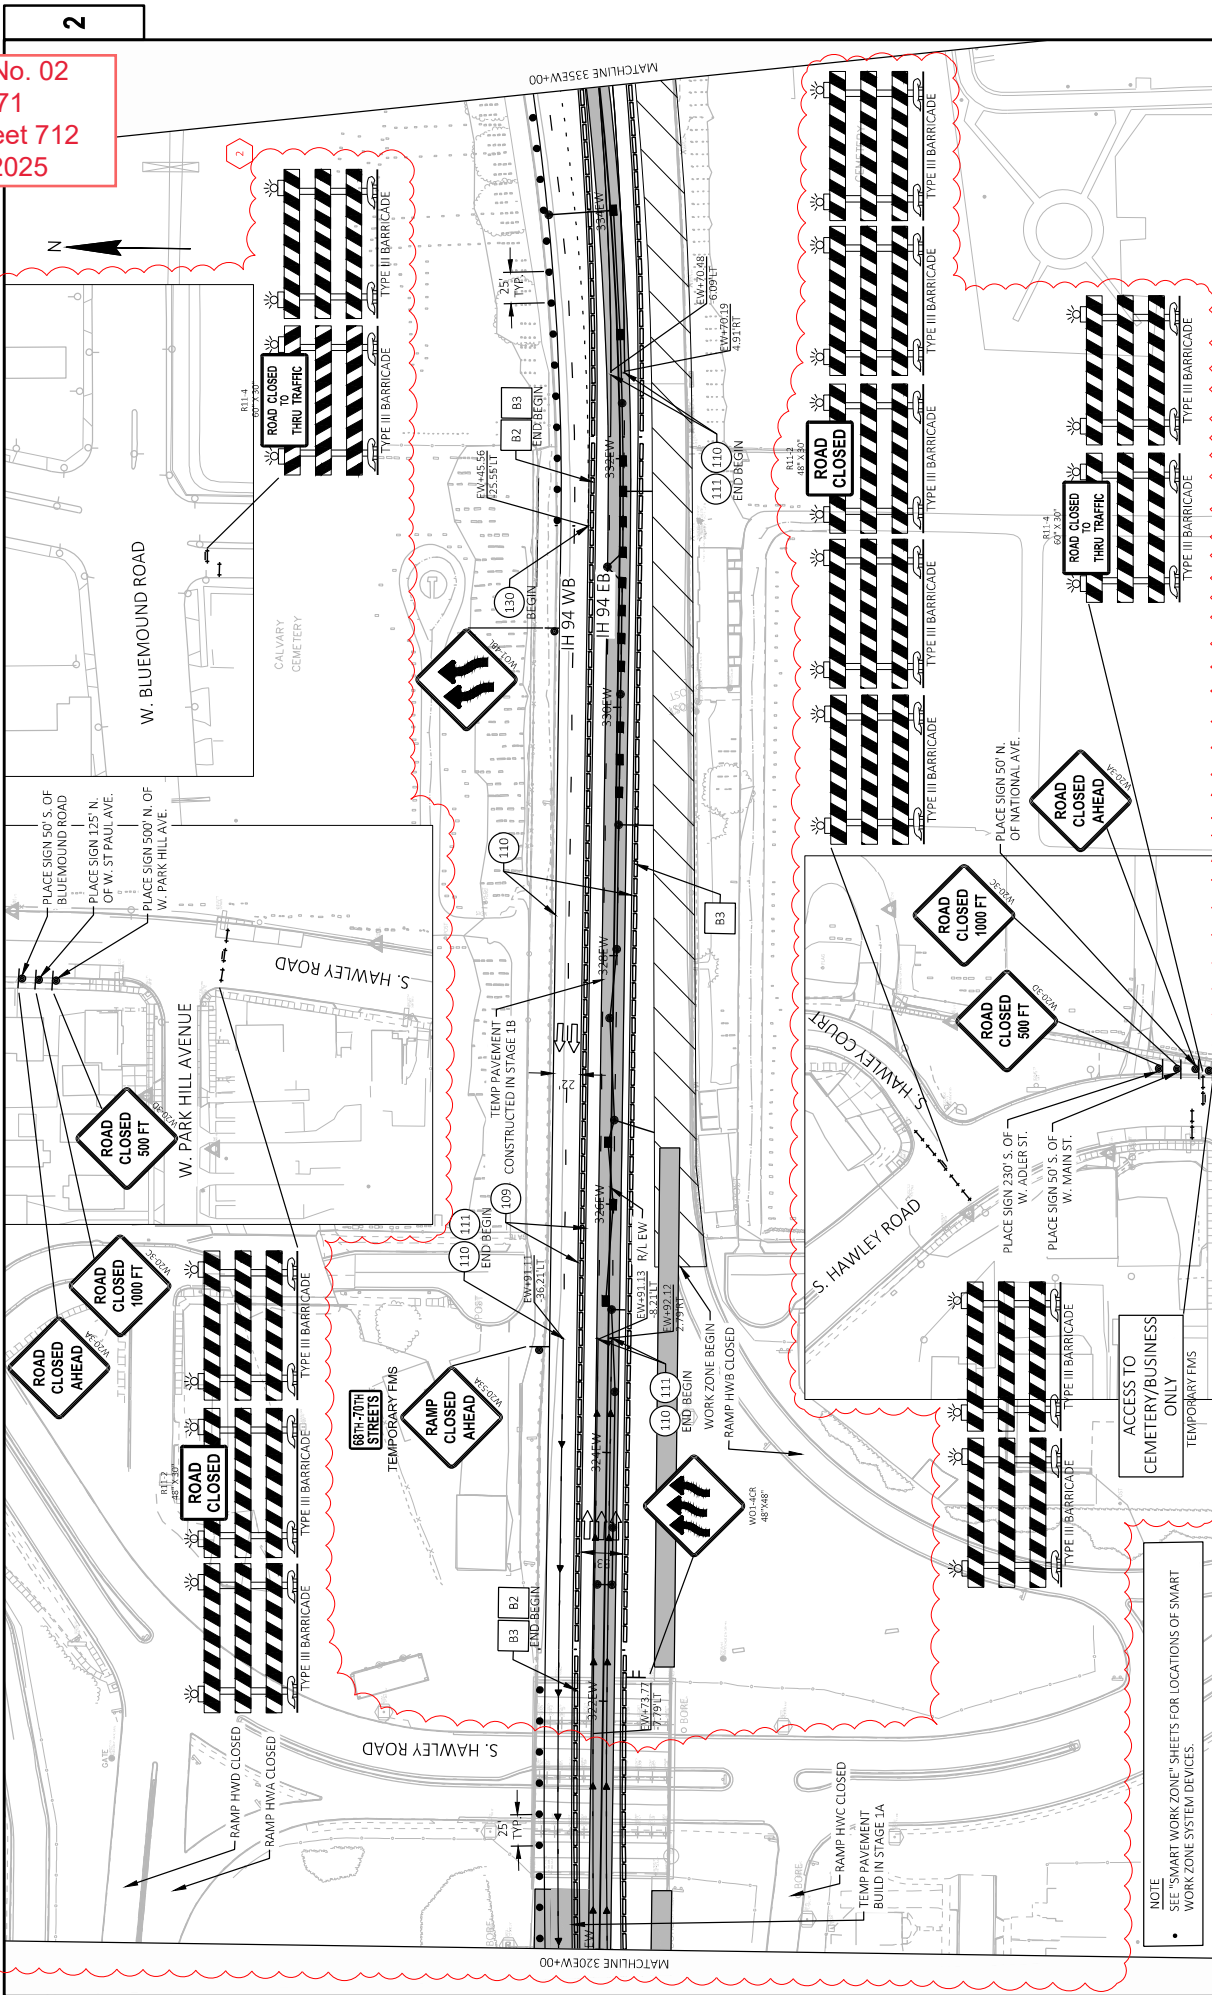

Addendum No. 02
ID 1060-27-71
Revised Sheet 727
August 28, 2025

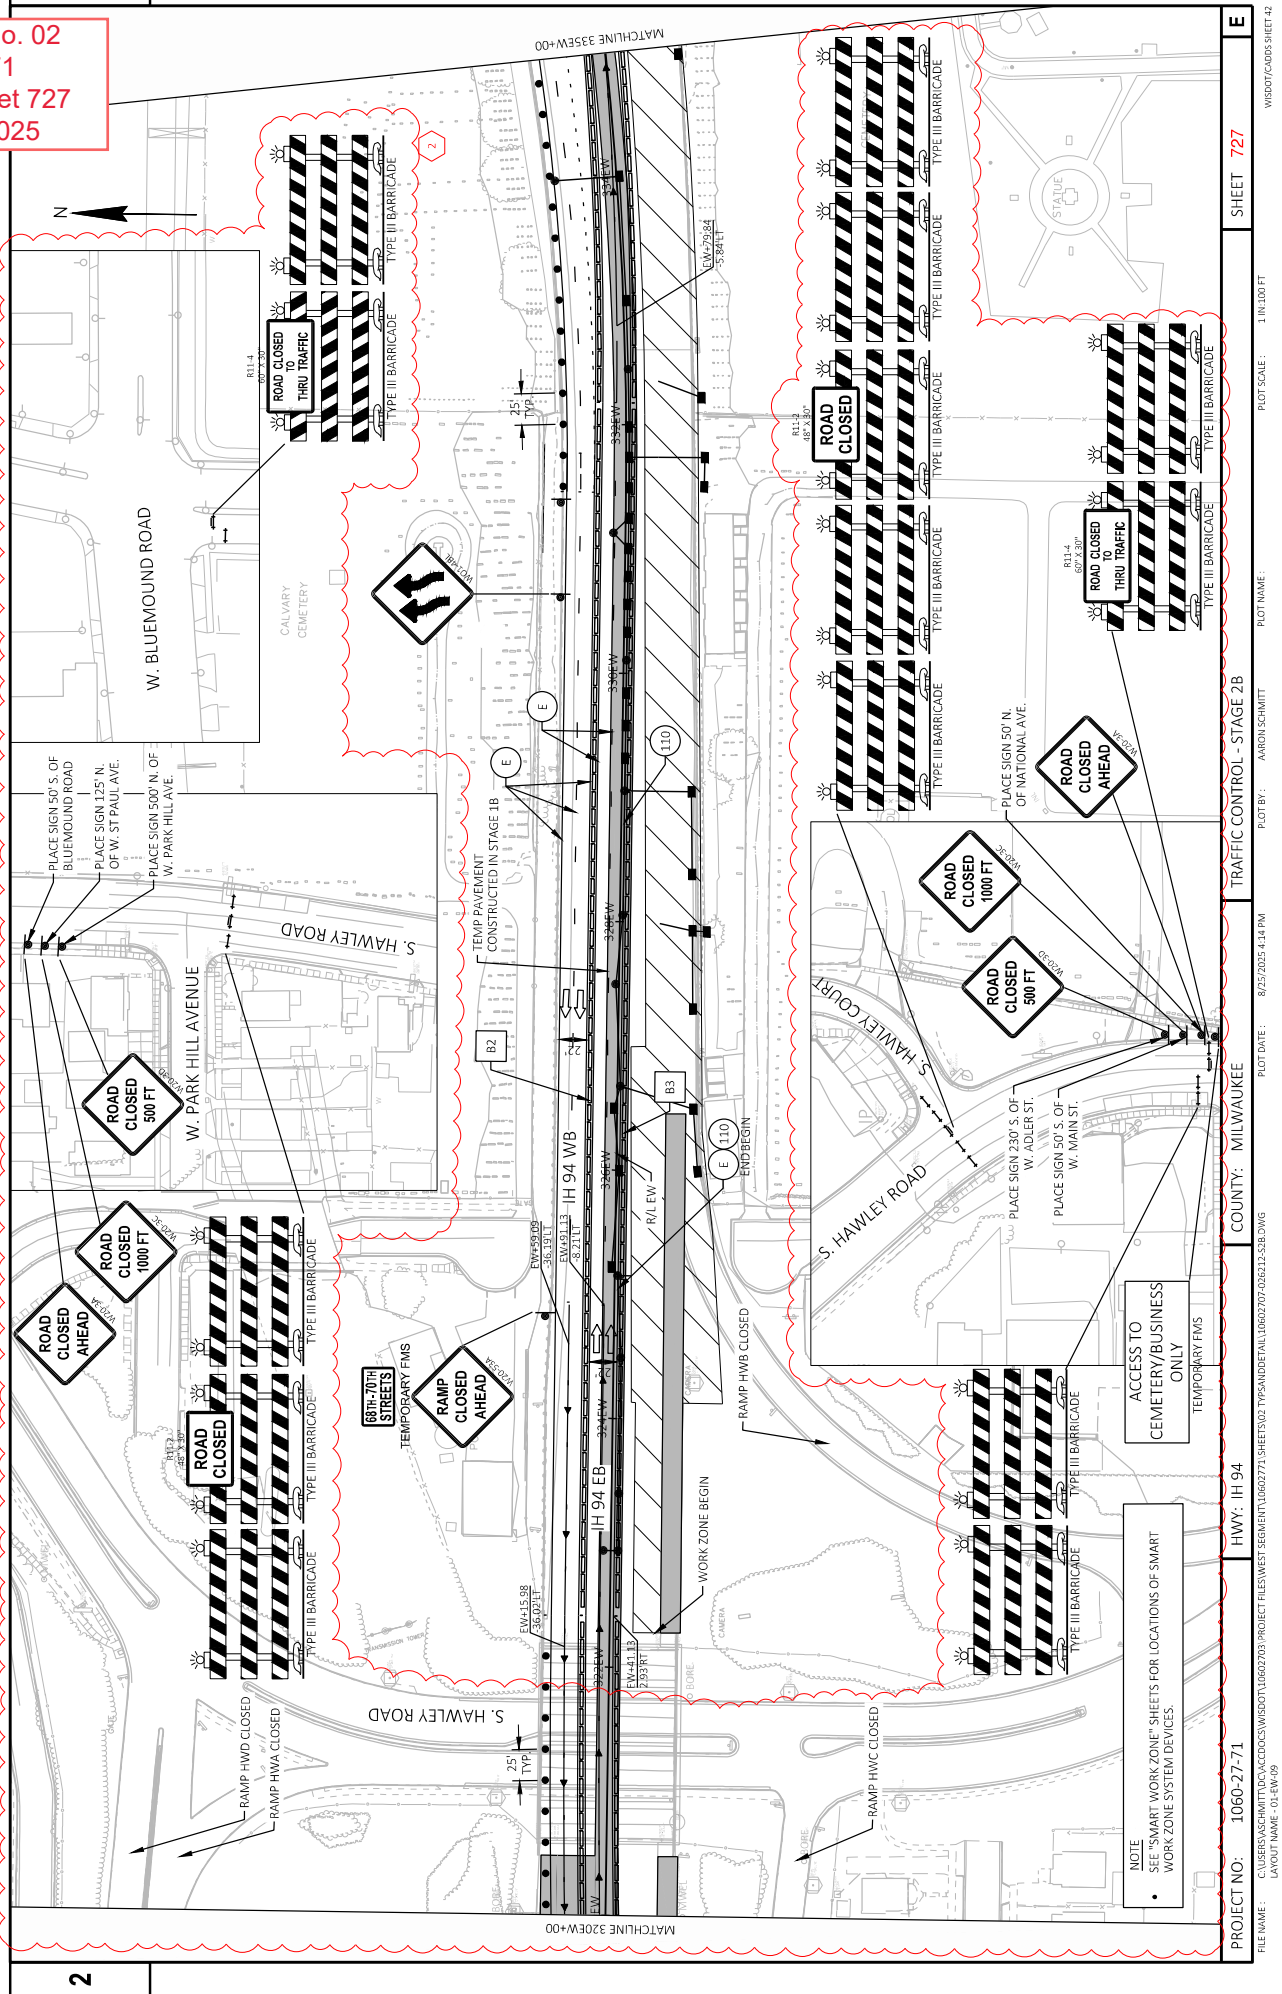

Addendum No. 02
ID 1060-27-71
Revised Sheet 742
August 28, 2025

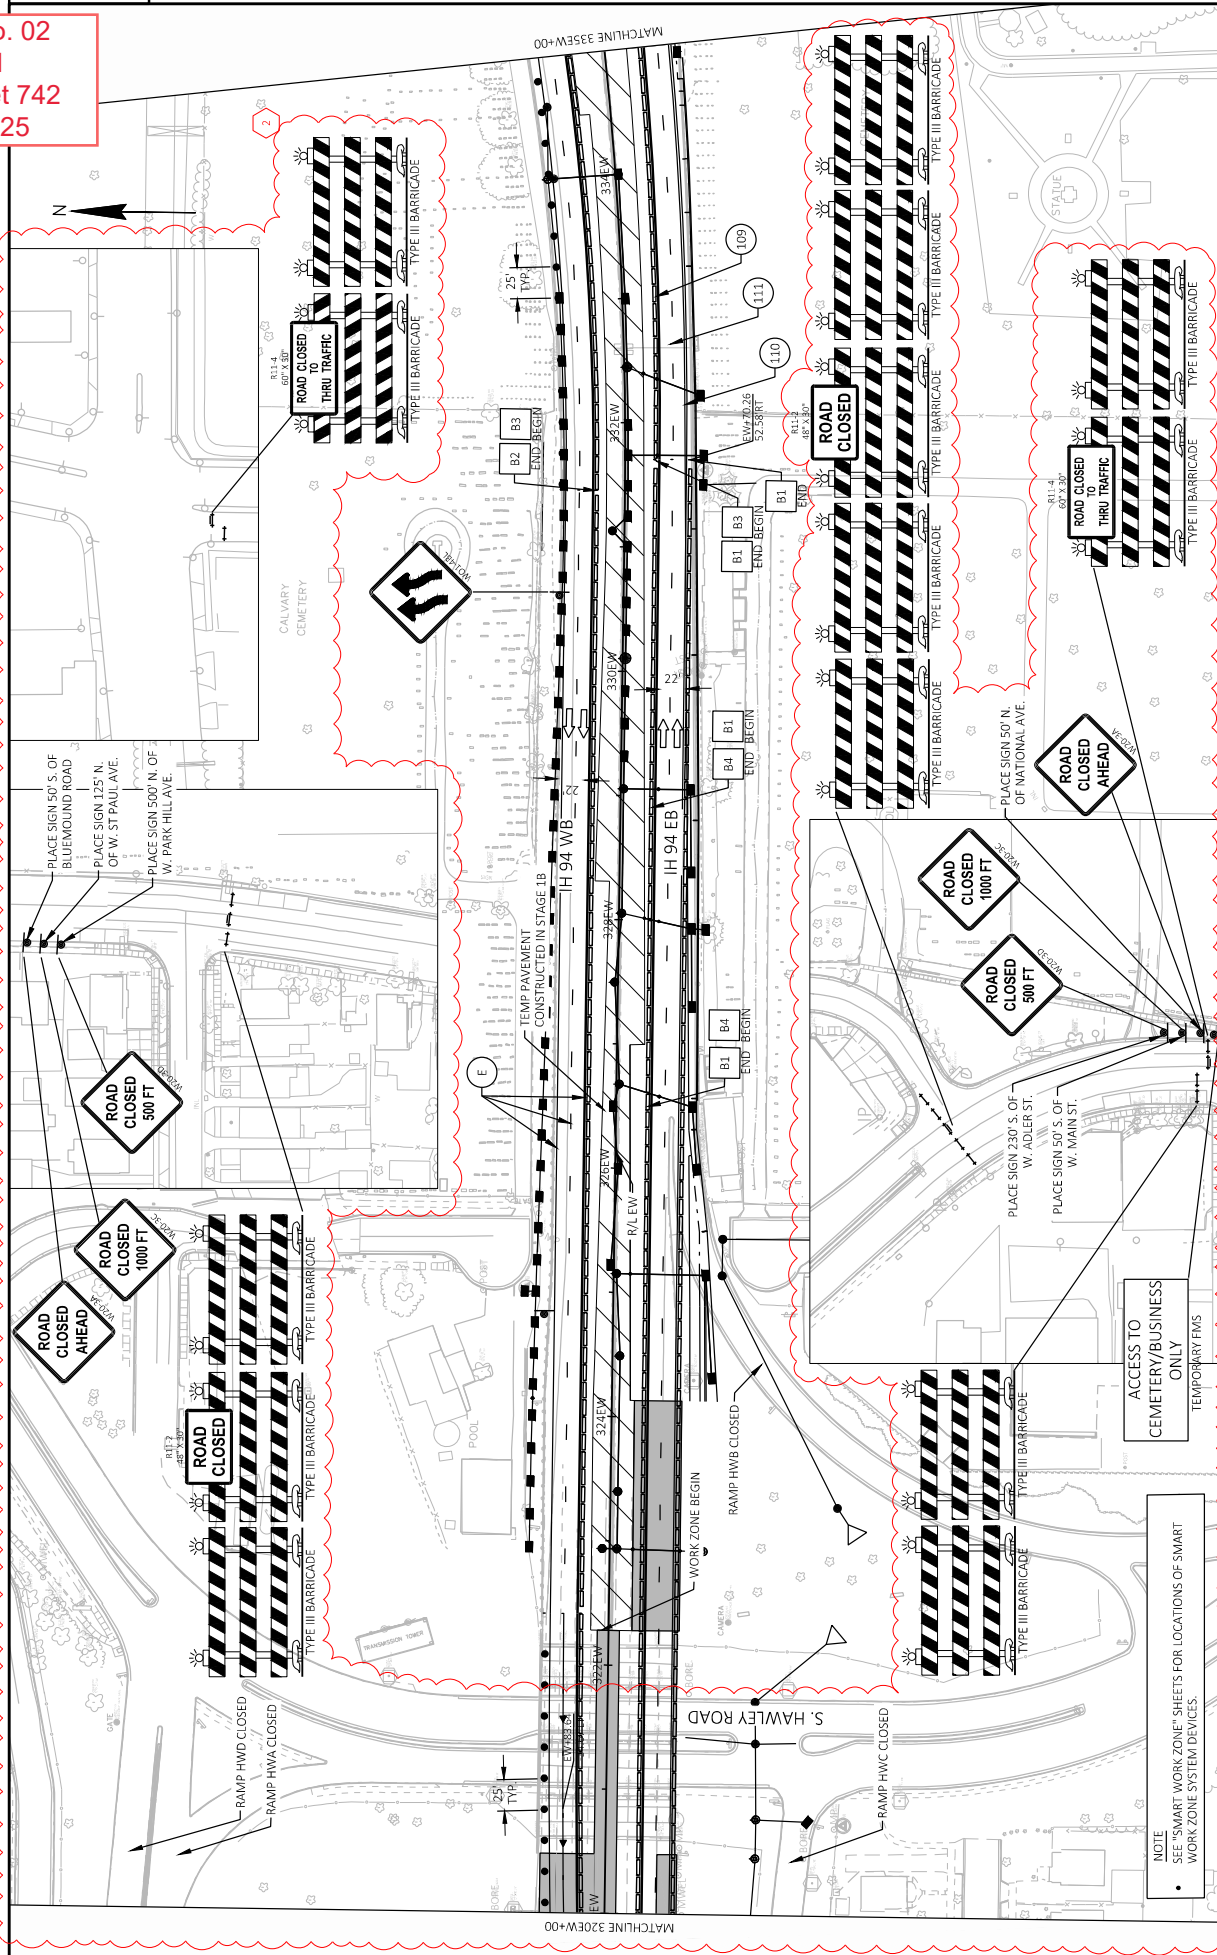

TACTILE DIRECTIONAL INDICATORS

SPV.0165.0400

ASPHALTIC PAVEMENT ITEMS

CATEGORY	STAGE	ROADWAY	STATION	TO	STATION	OFFSET	TACK	COAT	455.0605*	460.7423*	465.0105
										HMA PAVEMENT 3 HT 58-28 S	HMA SURFACE 4 HT 58-28 H 5-INCH**
										TON	TON
1000	1	RAMPS <u>RAMP EMD</u>	185FMD+44 - 185FMD+65 - 185FMD+65	-	191FMD+21 194FMD+41 191FMD+21	RT LT RT/LT	36 40 94			141 159 --	57 64 188
			STAGE 1 SUBTOTALS							300 309	309
1000	2	MAINLINE <u>IH 94 EB</u>	322EW+13 - 335EW+00 - 341EW+46 335EW+00 - 342EW+01 343EW+36 - 355EW+78	-	335EW+00 341EW+46 342EW+01 355EW+78	RT RT RT RT	12 39 174 79			51 170 764 345	19 62 278 126
1000	2	<u>IH 94 WB</u>	322EW+08 - 334EW+50 - 342EW+01	-	334EW+50 342EW+01	LT LT	11 153			46 672	17 245
			STAGE 2 SUBTOTALS							2,048	747
1000	3	MAINLINE <u>IH 94 WB</u>	334EW+50 - 342EW+02 334EW+50 - 342EW+01 343EW+61 - 350EW+46	-	342EW+02 342EW+01 350EW+46	LT LT LT	56 34 43			244 146 189	89 53 69
1000	3	LOCAL ROADS <u>W FAIRVIEW AVE</u>	66HWS+75 -	-	67HWS+25	LT	--			--	--
			STAGE 3 SUBTOTALS							579	211
		TOTALS								2,927	1,267

* ADDITIONAL QUANTITIES SHOWN ELSEWHERE

* ADDITIONAL QUANTITIES SHOWN ELSEWHERE
** FOR INFORMATION ONLY

A 631

TOTALS

A 631

ALL ITEMS CATEGORY 1000
UNLESS OTHERWISE NOTED

PROJECT NO: 1060-27-71

HWY: IH 94

MISCELLANEOUS QUANTITIES

SHEET:

W

ACC:\10602703\Project Files\West Segment\10602771\dsgn\qty\mq\Roadway

PLOT DATE : 8/27/2025 1:09:30 PM

PLOT NAME : 030203_MQ10

PLOT SCALE : 1:1

CITY OF MILWAUKEE - WATER

CATEGORY	ROADWAY	STATION	OFFSET TO	STATION	OFFSET	PERMANENT		ADJUSTING	ADJUSTING	INSTALLING	BLOWOFF	INSPECTION	REMOVING	STEEL				ABANDON				DUCTILE IRON			
						EXISTING 36-INCH WATER MAIN	CONNECTION TO EXISTING 48-INCH WATER MAIN							WATER VALVE	MANHOLE	HYDRANT-ALTERNATION	MANHOLE	MANHOLE	EACH	EACH	EACH	HYDRANT	CARRIER	IRON 36-INCH	DUCTILE IRON 36-INCH
7000	S. HAWLEY RD.	59HWS+71.82	37.61 LT	67HWS+13.73	5.81 LT	--	1	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--		
		0+38.24		2+40.83		2	--	--	--	--	1	--	25	--	200	--	120	--	10	--	--	--			
		60HWS+49.77	5.0 LT			--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--			
		60HWS+49.76	7.6 RT			--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--			
		66HWS+48.94	5.1 LT			--	--	--	--	--	1	--	--	--	--	--	--	--	--	--	--	--			
		67HWS+12.91	19.6 LT			--	--	--	--	--	--	1	--	--	--	--	--	--	--	--	--	--			
		67HWS+15.01	14.6 RT			--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--			
		70HWS+94.05	33.1 LT			--	--	--	--	1	--	--	--	--	--	--	--	--	--	--	--	--			
		S. HAWLEY CT.				--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--			
		32SEW+27.42	92.2 RT			--	--	--	--	1	--	--	--	--	--	--	--	--	--	--	--	--			
S. DANNA CT.					--	--	--	--	--	--	--	--	1	--	--	--	--	--	--	--	--				
	32SEW+12.19	66.6 LT	2		--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	2	18				
N. 68TH ST.					--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--			
	38C+51.45	17.4 RT			--	--	--	--	--	--	--	--	--	--	--	--	--	--	10	21	--	--			
	39C+25.1	23.6 RT			--	--	--	--	1	--	--	--	--	--	--	--	--	--	--	--	--	--			
UNDISTRIBUTED						--	--	26	8	3	--	--	--	--	--	--	--	--	--	--	--	--			
TOTALS						2	1	26	8	6	4	1	1	1	25	200	762	120	720	30	21	18			

Addendum No. 02
ID 1060-27-71
Revised Sheet 1030
August 28, 2025

* ADDITIONAL QUANTITIES FOUND ELSEWHERE

PROJECT NO. 1060-27-71

MISCELLANEOUS QUANTITIES

COUNTY: MII WAIKKEE

HWY. 1H 94

SHEET. 1030

PLOT NAME : 030235 mq lp1 PLOT SCALE : 1:1

PLOT DATE : 8/25/2025 10:37:00 AM

PLOT BY : KCHAI

1888

Addendum No. 02
ID 1060-27-71
Revised Sheet 1079
August 28, 2025

3

LIGHTING - PROPOSED LIGHTING LOCAL CONTINUED

- 654.0105 CONCRETE BASES TYPE 5*
- SPV.0090.1008 ELECTRICAL CABLE TYPE 3#12 UF WITH GROUND
- 657.0610 LUMINAIRE ARMS SINGLE MEMBER 4 1/2-INCH CLAMP 6-FT*
- SPV.0060.1017 LUMINAIRES UTILITY 2LED
- SPV.0060.1018 LUMINAIRES UTILITY 3LED
- 659.1215 LUMINAIRES UNDERDECK LED C
- SPV.0060.1005 POLES TYPE 30-AL-BD
- SPV.0060.1006 POLES TYPE 25-AL-BD
- 657.0255 TRANSFORMER BASES BREAKWAY 11 1/2-INCH BOLT CIRCLE*
- SPV.0060.1028 HYDRO EXCAVATION

CATEGORY	STAGE	SYSTEM	DESCRIPTION	STATION	OFFSET	654.0105 CONCRETE BASES TYPE 5	SPV.0090.1008 ELECTRICAL CABLE TYPE 3#12 UF WITH GROUND	657.0610 LUMINAIRE ARMS SINGLE MEMBER 4 1/2-INCH CLAMP 6-FT	SPV.0060.1017 LUMINAIRE UTILITY 2LED	SPV.0060.1018 LUMINAIRE UTILITY 3LED	659.1215 LUMINAIRES UNDERDECK LED C	SPV.0060.1005 POLES TYPE 30-AL-BD	SPV.0060.1006 POLES TYPE 25-AL-BD	657.0255 TRANSFORMER BASES BREAKWAY 11 1/2-INCH BOLT CIRCLE	SPV.0060.1028 HYDRO EXCAVATION	COMMENTS
1100	4		#136 169HWN+84 25' RT			1	117	1	1	1	1	1	1	1	1	1
			#135 70HWS+00 24' LT			1	117	1	1	1	1	1	1	1	1	1
			#142 170HWN+98 26' RT			1	117	1	1	1	1	1	1	1	1	1
			#147 71HWS+03 24' LT			1	117	1	1	1	1	1	1	1	1	1
			UNDISTRIBUTED			--	--	--	--	--	--	--	--	--	--	--
			SUBTOTAL			4	468	4	4	0	0	4	0	4	9	9
			TOTAL			43	6381	49	40	9	32	24	19	43	16	16

*ADDITIONAL QUANTITIES ELSEWHERE

2

SHEET 31 OF 40

E

PROJECT NO: 1060-27-71

HWY: IH 94

COUNTY: MILWAUKEE

MISCELLANEOUS QUANTITIES

SHEET: 1079

FILE NAME: V:\Projects\23270_IHNTL\54 ESW Final Design\07_Quantities\01_Prefinal\1060-27-71_Lighting M03.dwg PLOT NAME: 030201_m03.dwg PLOT SCALE: 1:1

Addendum No. 02
ID 1060-27-71
Revised Sheet 1142
August 28, 2025

CUC MANHOLES

SPV.0060.5203									
		204.0210*		SPV.0060.5200		SPV.0060.5201		SPV.0060.5204	
		REMOVING		MANHOLES		MANHOLES		DOGHOUSE	
		MANHOLES		4-FT DIAMETER		DOGHOUSE		CUC	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH		EACH		EACH	
		EACH		EACH					

Addendum No. 02
ID 1060-27-71
Revised Sheet 1151
August 28, 2025

TRAFFIC CONTROL ITEMS

CATEGORY	STAGE	DURATION DAY	ROADWAY	STATION	TO	STATION	OFFSET	LOCATION	EACH**	DAY	EACH**	DAY	TYPE A		TYPE C		EACH**	DAY	EACH**	DAY	EACH**	DAY	MARKERS		
													EACH**	DAY	EACH**	DAY									
1B	IH 94	80		259EW+00.84	-	265EW+16.93	10.00	RT	9	720	--	--	52	2080	4160	--	--	60	4800	1	80	0	4	320	
				276EW+46.10	-	312EW+27.35	29.89	LT	144	11,520	--	--	--	--	--	--	--	--	--	--	--	--	--	--	
				295EW+38.72	-	306EW+39.64	33.33	RT	42	3,360	--	--	--	--	27	2,192	--	--	--	--	1	80	--	--	--
				300EW+14.48	-	322EW+27.98	52.37	LT	91	7,280	--	--	--	--	--	--	--	--	--	--	--	--	--	--	
				308EW+27.43	-	308EW+27.99	64.29	RT	8	640	--	--	--	--	--	--	--	--	--	--	--	--	--	--	
				331EW+77.34	-	355EW+90.86	50.29	LT	98	7,840	--	--	--	--	--	--	--	--	--	--	--	--	--	--	
				349EW+86.63	-	356EW+31.15	143.99	LT	27	2,160	--	--	--	--	27	2,160	--	--	--	--	--	--	--	--	
				349EW+86.01	-	369EW+58.40	161.94	LT	89	7,120	--	--	--	--	28	2,208	--	--	--	--	1	80	--	--	
				HAWLEY ROAD NORTH		5	400	10	800	--	--	5	400	--	--	--	--	--							
				HAWLEY ROAD SOUTH		9	720	18	1440	--	--	5	400	--	--	--	--	--							
				GENERAL MITCHELL BOULEVARD		20	1600	5	400	10	800	--	7	560	--	--	--	--							
				STH 175 SB OFF - RAMP HW		26	2080	4	320	8	640	15	1235	4	320	--	--	--	--						
				STAGE 1B SUBTOTAL		44320	39320	7840	7795	6480	240	--	--	--	--	--	--	--							
		2																				2	320		

TRAFFIC CONTROL ITEMS

CATEGORY	STAGE	DURATION	ROADWAY	STATION	TO	STATION	OFFSET	LOCATION	EACH**	DAY	EACH**	DAY	TYPE A	TYPE C	EACH**	DAY	EACH**	DAY	MAINTENANCE	
2A	IH 94	142		259EW+00.84	-	265EW+16.93	10.00	RT	14	1,988	--	--	6816	--	76	10792	2	284	4	568
			269EW+74.54	-	281EW+39.23	31.04	LT	16	2,272	--	--	--	--	--	--	--	--	--	--	
			308EW+21.67	-	310EW+11.32	57.81	RT	8	1,136	--	--	--	--	--	--	--	--	--	--	
			315EW+20.68	-	322EW+41.10	35.66	LT	29	4,118	--	--	--	--	--	--	--	--	--	--	
			331EW+45.65	-	348EW+81.15	50.55	LT	69	9,798	--	--	--	--	--	--	--	--	--	--	
			338EW+95.12	-	349EW+88.99	51.75	LT	45	6,390	--	--	--	--	28	3976	--	--	--	--	
			348EW+81.15	-	351EW+13.34	123.48	LT	10	1,420	--	--	--	--	10	1420	--	--	--	--	
			349EW+84.63	-	355EW+31.15	143.99	LT	26	3,692	--	--	--	--	26	3692	--	--	--	--	
			349EW+86.01	-	369EW+58.40	161.94	LT	83	11,786	--	--	--	--	27	3834	--	--	--	--	
			349EW+87.79	-	355EW+90.86	128.79	LT	24	3,408	--	--	--	--	--	--	--	--	--	--	
HAWLEY ROAD NORTH																				
HAWLEY ROAD SOUTH																				
STH 17S SB OFF - RAMP RW																				
70TH ST LANE CLOSURE UNDISTRIBUTED																				
68TH ST LANE CLOSURE UNDISTRIBUTED																				
STAGE 2A SUBTOTAL																				
28	43			259EW+00.84	-	265EW+16.93	10.00	RT	14	602	--	--	--	--	81	3483	4	172	4	172
				269EW+74.54	-	281EW+39.23	31.04	LT	21	903	--	--	--	--	--	--	--	--	--	
				277EW+54.45	-	308EW+81.81	69.54	RT	124	5332	--	--	--	--	--	--	--	--	--	
				315EW+11.78	-	322EW+41.10	35.66	LT	39	1247	--	--	--	--	--	--	--	--	--	
				331EW+44.65	-	355EW+90.86	50.55	LT	98	4214	--	--	--	--	--	--	--	--	--	
				338EW+95.12	-	349EW+88.99	51.75	LT	45	3395	--	--	--	28	1204	--	--	--	--	
				348EW+84.63	-	355EW+31.15	143.99	LT	26	1118	--	--	--	26	1118	--	--	--	--	
				349EW+86.01	-	369EW+58.40	161.94	LT	83	3369	--	--	--	27	1161	--	--	--	--	
				356EW+81.25	-	369EW+33.55	94.06	LT	18	774	--	--	--	18	774	--	--	--	--	
HAWLEY ROAD NORTH																				
HAWLEY ROAD SOUTH																				
STH 17S SB OFF - RAMP RW																				
70TH ST LANE CLOSURE UNDISTRIBUTED																				
68TH ST LANE CLOSURE UNDISTRIBUTED																				
STAGE 2B SUBTOTAL																				
28	43								54,102	6356	12712	16,188	15,620	0	0	0	4	172	4	172
									28	1204	56	2408	81	3483	4	172	--	--	--	--
									--	--	--	--	--	--	--	--	--	--	--	--
									--	--	--	--	--	--	--	--	--	--	--	--
									25	1075	4	320	8	640	15	645	4	172	--	--
									16	688	4	320	8	640	4	172	10	430	--	--
									16	688	4	320	8	640	4	172	10	430	--	--
HAWLEY ROAD NORTH																				
HAWLEY ROAD SOUTH																				
STH 17S SB OFF - RAMP RW																				
70TH ST LANE CLOSURE UNDISTRIBUTED																				
68TH ST LANE CLOSURE UNDISTRIBUTED																				
STAGE 2B SUBTOTAL																				
28	43								22,145	2766	5332	5346	4945	0	0	0	4	172	4	172
									--	--	--	--	--	--	--	--	--	--	--	--
									--	--	--	--	--	--	--	--	--	--	--	--
									25	1075	4	320	8	640	15	645	4	172	--	--
									16	688	4	320	8	640	4	172	10	430	--	--
									16	688	4	320	8	640	4	172	10	430	--	--
HAWLEY ROAD NORTH																				
HAWLEY ROAD SOUTH																				
STH 17S SB OFF - RAMP RW																				
70TH ST LANE CLOSURE UNDISTRIBUTED																				
68TH ST LANE CLOSURE UNDISTRIBUTED																				
STAGE 2B SUBTOTAL																				
28	43								22,145	2766	5332	5346	4945	0	0	0	4	172	4	172
									--	--	--	--	--	--	--	--	--	--	--	--
									--	--	--	--	--	--	--	--	--	--	--	--
									25	1075	4	320	8	640	15	645	4	172	--	--
									16	688	4	320	8	640	4	172	10	430	--	--
									16	688	4	320	8	640	4	172	10	430	--	--
HAWLEY ROAD NORTH																				
HAWLEY ROAD SOUTH																				
STH 17S SB OFF - RAMP RW																				
70TH ST LANE CLOSURE UNDISTRIBUTED																				
68TH ST LANE CLOSURE UNDISTRIBUTED																				
STAGE 2B SUBTOTAL																				
28	43								22,145	2766	5332	5346	4945	0	0	0	4	172	4	172
									--	--	--	--	--	--	--	--	--	--	--	--
									--	--	--	--	--	--	--	--	--	--	--	--
									25	1075	4	320	8	640	15	645	4	172	--	--
									16	688	4	320	8	640	4	172	10	430	--	--
									16	688	4	320	8	640	4	172	10	430	--	--
HAWLEY ROAD NORTH																				
HAWLEY ROAD SOUTH																				
STH 17S SB OFF - RAMP RW																				
70TH ST LANE CLOSURE UNDISTRIBUTED																				
68TH ST LANE CLOSURE UNDISTRIBUTED																				
STAGE 2B SUBTOTAL																				
28	43								22,145	2766	5332	5346	4945	0	0	0	4	172	4	172
									--	--	--	--	--	--	--	--	--	--	--	--
									--	--	--	--	--	--	--	--	--	--	--	--
									25	1075	4	320	8	640	15	645	4	172	--	--
									16	688	4	320	8	640	4	172	10	430	--	--
									16	688	4	320	8	640	4	172	10	430	--	--
HAWLEY ROAD NORTH																				
HAWLEY ROAD SOUTH																				
STH 17S SB OFF - RAMP RW																				
70TH ST LANE CLOSURE UNDISTRIBUTED																				
68TH ST LANE CLOSURE UNDISTRIBUTED																				
STAGE 2B SUBTOTAL																				
28	43								22,145	2766	5332	5346	4945	0	0	0	4	172	4	172
									--	--	--	--	--	--	--	--	--	--	--	--
									--	--	--	--	--	--	--	--	--	--	--	--
									25	1075	4	320	8	640	15	645	4	172	--	--
									16	688	4	320	8	640	4	172	10	430	--	--
									16	688	4	320	8	640	4	172	10	430	--	--
HAWLEY ROAD NORTH																				
HAWLEY ROAD SOUTH																				
STH 17S SB OFF - RAMP RW																				
70TH ST LANE CLOSURE UNDISTRIBUTED																				
68TH ST LANE CLOSURE UNDISTRIBUTED																				
STAGE 2B SUBTOTAL																				
28	43								22,145	2766	5332	5346	4945	0	0	0	4	172	4	172
									--	--	--	--	--	--	--	--	--	--	--	--
									--	--	--	--	--	--	--	--	--	--	--	--
									25	1075	4	320	8	640	15	645	4	172	--	--
									16	688	4	320	8	640	4	172	10	430	--	--
									16	688	4	320	8	640	4	172	10	430	--	--
HAWLEY ROAD NORTH																				
HAWLEY ROAD SOUTH																				
STH 17S SB OFF - RAMP RW																				
70TH ST LANE CLOSURE UNDISTRIBUTED																				
68TH ST LANE CLOSURE UNDISTRIBUTED																				
STAGE 2B SUBTOTAL																				
28	43								22,145	2766	5332	5346	4945	0	0	0	4	172	4	172
									--	--	--	--	--	--	--	--	--	--	--	--
									--	--	--	--	--	--	--	--	--	--	--	--
									25	1075	4	320	8	640	15	645	4	172	--	--
									16	688	4	320	8	640	4	172	10	430	--	--
									16	688	4	320	8	640	4	172	10	430	--	--
HAWLEY ROAD NORTH																				
HAWLEY ROAD SOUTH																				
STH 17S SB OFF - RAMP RW																				
70TH ST LANE CLOSURE UNDISTRIBUTED																				
68TH ST LANE CLOSURE UNDISTRIBUTED																				
STAGE 2B SUBTOTAL																				
28	43								22,145	2766	5332	5346	4945	0	0	0	4	172	4	172
									--	--	--	--	--	--	--	--	--	--	--	--
									--	--	--	--	--	--	--	--	--	--	--	--
									25	1075	4	320	8	640	15	645	4	172	--	--
									16	688	4	320	8	640	4	172	10	430	--	--
									16	688	4	320	8	640	4	172	10	430	--	--
HAWLEY ROAD NORTH																				
HAWLEY ROAD SOUTH																				
STH 17S SB OFF - RAMP RW																				
70TH ST LANE CLOSURE UNDISTRIBUTED																				
68TH ST LANE CLOSURE UNDISTRIBUTED																				
STAGE 2B SUBTOTAL																				
28	43								22,145	2766	5332	5346	4945	0	0	0	4	172	4	172
									--	--	--	--	--	--	--	--	--	--	--	--
									--	--	--	--	--	--	--	--	--	--	--	--
									25	1075	4	320	8	640	15	645	4	172	--	--
									16	688	4	320	8	640	4	172	10	430	--	--
									16	688	4	320	8	640	4	172	10	430	--	--
HAWLEY ROAD NORTH																				
HAWLEY ROAD SOUTH																				
STH 17S SB OFF - RAMP RW																				
70TH ST LANE CLOSURE UNDISTRIBUTED																				
68TH ST LANE CLOSURE UNDISTRIBUTED																				
STAGE 2B SUBTOTAL																				
28	43								22,145	2766	5332	5346	4945	0	0	0	4	172	4	172
									--	--	--	--	--	--	--	--	--	--	--	--
									--	--	--	--	--	--	--	--	--	--	--	--
									25	1075	4	320	8	640	15	645	4	172	--	--
									16	688	4	320	8	640	4	172	10	430	--	--
									16	688	4	320	8	640	4	172	10	430	--	--
HAWLEY ROAD NORTH																				
HAWLEY ROAD SOUTH																				
STH 17S SB OFF - RAMP RW																				
70TH ST LANE CLOSURE UNDISTRIBUTED																				
68TH ST LANE CLOSURE UNDISTRIBUTED																				
STAGE 2B SUBTOTAL																				
28	43								22											

Addendum No. 02
ID 1060-27-71
Revised Sheet 1152
August 28, 2025

Addendum No. 02
ID 1060-27-71
Revised Sheet 1153
August 28, 2025

CATEGORY	STAGE	DURATION DAY	ROADWAY	STATION	TO	STATION	OFFSET	LOCATION	EACH**	DAY	TYPE A				TYPE C				MARKERS			
											EACH**	DAY	EACH**	DAY	EACH**	DAY	EACH**	DAY	EACH**	DAY	EACH**	DAY
2C	56	IH 94	259EW+00.94	-	205EW+16.93	10.00	RT	9	504	--	21	1176	42	2852	--	79	4424	4	224	--	4	224
			269EW+24.54	-	281EW+99.23	31.04	LT	23	1288	--	--	--	--	--	--	--	--	--	--	--	--	
			277EW+54.58	-	305EW+41.55	72.59	RT	113	6328	--	--	--	--	--	--	--	--	--	--	--	--	
			315EW+20.68	-	322EW+41.10	35.68	LT	29	3624	--	--	--	--	--	--	--	--	--	--	--	--	
			331EW+45.65	-	353EW+86.26	50.55	LT	90	5040	--	--	--	--	--	--	--	--	--	--	--	--	
			342EW+30.40	-	349EW+83.99	67.73	LT	32	1792	--	--	--	--	--	28	1568	--	--	--	--	--	
			349EW+84.63	-	356EW+81.15	143.99	LT	26	1456	--	--	--	--	--	76	1456	--	--	--	--		
			349EW+86.01	-	363EW+69.23	151.94	LT	88	4928	--	--	--	--	--	27	1512	--	--	--	--		
			HAWLEY ROAD NORTH																			
			349EW+86.01	-	363EW+69.23	151.94	LT	88	4928	--	--	--	--	--	5	280	--	--	--	--		
			HAWLEY ROAD SOUTH																			
			349EW+86.01	-	363EW+69.23	151.94	LT	88	4928	--	--	--	--	--	9	504	18	1008	--	5	280	--
			GENERAL MITCHELL BOULEVARD																			
			5TH+125 SB OFF - RAMP NW																			
			70TH ST LANE CLOSURE																			
UNCONTRIBUTED																						
68TH ST LANE CLOSURE																						
UNCONTRIBUTED																						
STAGE SUBTOTAL																						
26656																						
3320																						
6640																						
3824																						
7280																						
224																						

Addendum No. 02
ID 1060-27-71
Revised Sheet 1156
August 28, 2025

TRAFFIC CONTROL ITEMS

CATEGORY	STAGE	DURATION DAY	ROADWAY	STATION	TO	STATION	OFFSET	LOCATION	EACH**	DAY	EACH**	DAY	TYPE A	TYPE C	MARKERS								
	6	201	IH 94	234EW+56.63	-	258EW+64.36	85.00	RT	101	20301	2	402	4	804	47	9447	11	2211	1	201	--	--	--
				235EW+58.78	-	278EW+487.11	113.37	RT															
				227EW+22.24	-	257EW+15.77	112.00	RT	107	21507	3	603	6	1206	14	2814	16	3216	--	--	--	4	804
				84TH EB ON RAMP																			
				KEARNEY																			
				69TH																			
				68TH																			
				64TH																			
				HAWLEY/HMC																			
				STAGE 6 SUBTOTAL																			
	7	77	IH 94	263RW+19.56	-	272FW+02.18	84.00	RT	42	3234	8	616	16	1232	--	--	9	693	2	154	--	--	--
				276EW+42.28	-	319FW+82.71	30.90	LT	87	6699	--	--	--	--	--	--	6	462	--	--	--	--	--
				315FW+24.93	-	319FW+83.09	13.00	RT	19	1463	1	77	2	154	--	--	--	--	--	--	--	--	--
				338EW+83.87	-	347+84.33	45.00	LT	36	2772	--	--	--	--	--	--	--	--	--	--	--	--	--
				84TH EB ON RAMP																			
				KEARNEY																			
				70TH																			
				69TH																			
				68TH																			
				GENERAL MITCHELL BOULEVARD																			
STAGE 7 SUBTOTAL																							

PROJECT 1060-27-71 SUBTOTAL										409388	41252	85600	137421	81448	2078	1360	4122
UNAPPORTIONED										6084	6084	6084	6084	6084	6084	6084	6084
PROJECT 1060-27-71 TOTAL										476800	50890	98440	138035	93870	2390	2350	4940

2

*ADDITIONAL QUANTITIES FOUND ELSEWHERE
**FOR INFORMATION ONLY



Proposal Schedule of Items

Page 1 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0002	201.0105 Clearing	76.000 STA	_____.	_____.
0004	201.0120 Clearing	558.000 ID	_____.	_____.
0006	201.0205 Grubbing	76.000 STA	_____.	_____.
0008	201.0220 Grubbing	558.000 ID	_____.	_____.
0010	203.0220 Removing Structure (structure) 0081. B-40-81	1.000 EACH	_____.	_____.
0012	203.0220 Removing Structure (structure) 0083. B-40-83	1.000 EACH	_____.	_____.
0014	203.0220 Removing Structure (structure) 0085. B-40-85	1.000 EACH	_____.	_____.
0016	203.0220 Removing Structure (structure) 0087. B-40-87	1.000 EACH	_____.	_____.
0018	203.0220 Removing Structure (structure) 0110. N-40-81	1.000 EACH	_____.	_____.
0020	203.0220 Removing Structure (structure) 0111. N-40-80	1.000 EACH	_____.	_____.
0022	203.0220 Removing Structure (structure) 0801. R-40-0026	1.000 EACH	_____.	_____.
0024	203.0220 Removing Structure (structure) 0802. R-40-0088	1.000 EACH	_____.	_____.
0026	203.0220 Removing Structure (structure) 1034. B-40-87	1.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 2 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0028	203.0220 Removing Structure (structure) 1035. B-40-86	1.000 EACH	_____.	_____.
0030	203.0220 Removing Structure (structure) 1036. B-40-85	1.000 EACH	_____.	_____.
0032	203.0220 Removing Structure (structure) 1037. B-40-84	1.000 EACH	_____.	_____.
0034	203.0220 Removing Structure (structure) 1038. B-40-83	1.000 EACH	_____.	_____.
0036	203.0220 Removing Structure (structure) 1039. B-40-82	1.000 EACH	_____.	_____.
0038	203.0220 Removing Structure (structure) 1040. B-40-81	1.000 EACH	_____.	_____.
0040	203.0220 Removing Structure (structure) 1041. B-40-81	1.000 EACH	_____.	_____.
0042	203.0330 Debris Containment (structure) 0087. B-40-87	1.000 EACH	_____.	_____.
0044	203.0330 Debris Containment (structure) 1034. B-40-87	1.000 EACH	_____.	_____.
0046	203.0330 Debris Containment (structure) 1035. B-40-86	1.000 EACH	_____.	_____.
0048	204.0100 Removing Concrete Pavement	130,599.000 SY	_____.	_____.
0050	204.0120 Removing Asphaltic Surface Milling	51,442.000 SY	_____.	_____.
0052	204.0150 Removing Curb & Gutter	1,833.000 LF	_____.	_____.



Proposal Schedule of Items

Page 3 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0054	204.0155 Removing Concrete Sidewalk	5,564.000 SY	_____.	_____.
0056	204.0157 Removing Concrete Barrier	15,273.000 LF	_____.	_____.
0058	204.0165 Removing Guardrail	5,003.000 LF	_____.	_____.
0060	204.0170 Removing Fence	8,805.000 LF	_____.	_____.
0062	204.0195 Removing Concrete Bases	177.000 EACH	_____.	_____.
0064	204.0210 Removing Manholes	75.000 EACH	_____.	_____.
0066	204.0220 Removing Inlets	245.000 EACH	_____.	_____.
0068	204.0245 Removing Storm Sewer (size) 0001. 12-Inch	9,609.000 LF	_____.	_____.
0070	204.0245 Removing Storm Sewer (size) 0002. 15-Inch	2,021.000 LF	_____.	_____.
0072	204.0245 Removing Storm Sewer (size) 0003. 18-Inch	1,244.000 LF	_____.	_____.
0074	204.0245 Removing Storm Sewer (size) 0004. 21-Inch	701.000 LF	_____.	_____.
0076	204.0245 Removing Storm Sewer (size) 0005. 24-Inch	314.000 LF	_____.	_____.
0078	204.0245 Removing Storm Sewer (size) 0006. 36-Inch	806.000 LF	_____.	_____.
0080	204.0245 Removing Storm Sewer (size) 0007. 54-Inch	23.000 LF	_____.	_____.



Proposal Schedule of Items

Page 4 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0082	204.0246 Removing Ancillary Structure (structure) 4001. S-40-002	1.000 EACH	_____.	_____.
0084	204.0246 Removing Ancillary Structure (structure) 4002. S-40-443	1.000 EACH	_____.	_____.
0086	204.0246 Removing Ancillary Structure (structure) 4003. S-40-151	1.000 EACH	_____.	_____.
0088	204.0246 Removing Ancillary Structure (structure) 4004. S-40-444	1.000 EACH	_____.	_____.
0090	204.0246 Removing Ancillary Structure (structure) 4005. S-40-994	1.000 EACH	_____.	_____.
0092	204.0246 Removing Ancillary Structure (structure) 4006. S-40-313	1.000 EACH	_____.	_____.
0094	204.0250 Abandoning Manholes	1.000 EACH	_____.	_____.
0096	204.0280 Sealing Pipes	12.000 EACH	_____.	_____.
0098	204.0291.S Abandoning Sewer	71.820 CY	_____.	_____.
0100	204.9001.S Removing Advance Flasher Assemblies Type 1	6.000 EACH	_____.	_____.
0102	204.9060.S Removing (item description) 0001. Steps Railing	15.000 EACH	_____.	_____.
0104	204.9060.S Removing (item description) 0002. Sand Barrel Arrays	1.000 EACH	_____.	_____.
0106	204.9060.S Removing (item description) 1001. Distribution Center	2.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 5 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0108	204.9060.S Removing (item description) 1002. Lighting Units	118.000 EACH	_____.	_____.
0110	204.9060.S Removing (item description) 1003. Poles Wood 60-FT	10.000 EACH	_____.	_____.
0112	204.9060.S Removing (item description) 1004. Poles Wood 60-FT and Floodlights	54.000 EACH	_____.	_____.
0114	204.9060.S Removing (item description) 1005. Underdeck Lighting	35.000 EACH	_____.	_____.
0116	204.9060.S Removing (item description) 3001. Traffic Signals W. O'Connor St & 70th St	1.000 EACH	_____.	_____.
0118	204.9060.S Removing (item description) 3002. Traffic Signals W Kearney St & S 70th St	1.000 EACH	_____.	_____.
0120	204.9060.S Removing (item description) 3003. Traffic Signals W O'Connor St & S 68th St	1.000 EACH	_____.	_____.
0122	204.9060.S Removing (item description) 3004. Traffic Signals W Kearney St & S 68th St	1.000 EACH	_____.	_____.
0124	204.9060.S Removing (item description) 3005. Traffic Signals IH 94 Ramps & S Hawley Rd	1.000 EACH	_____.	_____.
0126	205.0100 Excavation Common	193,570.000 CY	_____.	_____.
0128	205.0508.S Excavation, Hauling, and Disposal of Potential Creosote Contaminated Soil 0001. Onsite Fill	1,468.000 TON	_____.	_____.
0130	205.0508.S Excavation, Hauling, and Disposal of Potential Creosote Contaminated Soil 0002. Daily Cover	2,438.000 TON	_____.	_____.



Proposal Schedule of Items

Page 6 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0132	205.0508.S Excavation, Hauling, and Disposal of Potential Creosote Contaminated Soil 0003. Direct Bury	987.000 TON	_____.	_____.
0134	206.1001 Excavation for Structures Bridges (structure) 1034. B-40-1034	1.000 EACH	_____.	_____.
0136	206.1001 Excavation for Structures Bridges (structure) 1035. B-40-1035	1.000 EACH	_____.	_____.
0138	206.1001 Excavation for Structures Bridges (structure) 1040. B-40-1040	1.000 EACH	_____.	_____.
0140	206.1001 Excavation for Structures Bridges (structure) 1041. B-40-1041	1.000 EACH	_____.	_____.
0142	206.3001 Excavation for Structures Retaining Walls (structure) 0735. R-40-735	1.000 EACH	_____.	_____.
0144	206.3001 Excavation for Structures Retaining Walls (structure) 0738. R-40-738	1.000 EACH	_____.	_____.
0146	206.3001 Excavation for Structures Retaining Walls (structure) 0743. R-40-743	1.000 EACH	_____.	_____.
0148	206.3001 Excavation for Structures Retaining Walls (structure) 0801. R-40-801	1.000 EACH	_____.	_____.
0150	209.0200.S Backfill Controlled Low Strength	500.000 CY	_____.	_____.
0152	210.1500 Backfill Structure Type A	11,164.000 TON	_____.	_____.
0154	213.0100 Finishing Roadway (project) 0001. 1060-27-71	1.000 EACH	_____.	_____.
0156	305.0120 Base Aggregate Dense 1 1/4-Inch	72,563.000 TON	_____.	_____.



Proposal Schedule of Items

Page 7 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0158	310.0110 Base Aggregate Open-Graded	2,229.000 TON	_____.	_____.
0160	312.0110 Select Crushed Material	158,676.000 TON	_____.	_____.
0162	312.0115 Select Crushed Material	305.000 CY	_____.	_____.
0164	390.0100 Removing Pavement for Base Patching	150.000 CY	_____.	_____.
0166	390.0405 Base Patching Concrete SHES	150.000 CY	_____.	_____.
0168	405.0200 Coloring Concrete Custom	528.000 CY	_____.	_____.
0170	415.0070 Concrete Pavement 7-Inch	535.000 SY	_____.	_____.
0172	415.0410 Concrete Pavement Approach Slab	2,408.000 SY	_____.	_____.
0174	415.4100 Concrete Pavement Joint Filling	27,506.000 SY	_____.	_____.
0176	416.0610 Drilled Tie Bars	736.000 EACH	_____.	_____.
0178	416.0620 Drilled Dowel Bars	573.000 EACH	_____.	_____.
0180	416.1715 Concrete Pavement Repair SHES	100.000 SY	_____.	_____.
0182	450.1100.S Asphaltic Mixture For Extreme Conditions	125.000 TON	_____.	_____.
0184	455.0605 Tack Coat	8,115.000 GAL	_____.	_____.
0186	460.2000 Incentive Density HMA Pavement	2,750.000 DOL	1.00000	2,750.00
0190	460.7223 HMA Pavement 3 HT 58-28 S	2,927.000 TON	_____.	_____.



Proposal Schedule of Items

Page 8 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0194	460.7424 HMA Pavement 4 HT 58-28 H	6,002.000 TON	_____.	_____.
0196	465.0105 Asphaltic Surface	19.000 TON	_____.	_____.
0198	465.0120 Asphaltic Surface Driveways and Field Entrances	29.000 TON	_____.	_____.
0200	465.0125 Asphaltic Surface Temporary	13,780.000 TON	_____.	_____.
0202	495.1000.S Cold Patch	100.000 TON	_____.	_____.
0204	501.1000.S Ice Hot Weather Concreting	142,460.000 LB	_____.	_____.
0206	502.0100 Concrete Masonry Bridges	1,839.000 CY	_____.	_____.
0208	502.0110.S Concrete Masonry Soldier Pile Footings	325.000 CY	_____.	_____.
0210	502.3200 Protective Surface Treatment	11,897.000 SY	_____.	_____.
0212	502.3210 Pigmented Surface Sealer	4,125.000 SY	_____.	_____.
0214	502.4205 Adhesive Anchors No. 5 Bar	64.000 EACH	_____.	_____.
0216	503.0137 Prestressed Girder Type I 36W-Inch	7,398.000 LF	_____.	_____.
0218	504.0500 Concrete Masonry Retaining Walls	5,502.000 CY	_____.	_____.
0220	505.0400 Bar Steel Reinforcement HS Structures	105,710.000 LB	_____.	_____.
0222	505.0600 Bar Steel Reinforcement HS Coated Structures	1,418,960.000 LB	_____.	_____.



Proposal Schedule of Items

Page 9 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0224	505.0800.S Bar Steel Reinforcement HS Stainless Structures	21,760.000 LB	_____.	_____.
0226	505.0905 Bar Couplers No. 5	42.000 EACH	_____.	_____.
0228	505.0908 Bar Couplers No. 8	180.000 EACH	_____.	_____.
0230	506.0605 Structural Steel HS	125,050.000 LB	_____.	_____.
0232	506.2605 Bearing Pads Elastomeric Non-Laminated	188.000 EACH	_____.	_____.
0234	506.3003 Welded Stud Shear Connectors 5/8x4-Inch	2,974.000 EACH	_____.	_____.
0236	506.3015 Welded Stud Shear Connectors 7/8x6-Inch	670.000 EACH	_____.	_____.
0238	506.4000 Steel Diaphragms (structure) 1034. B-40-1034	24.000 EACH	_____.	_____.
0240	506.4000 Steel Diaphragms (structure) 1035. B-40-1035	24.000 EACH	_____.	_____.
0242	506.4000 Steel Diaphragms (structure) 1036. B-40-1036	20.000 EACH	_____.	_____.
0244	506.4000 Steel Diaphragms (structure) 1037. B-40-1037	20.000 EACH	_____.	_____.
0246	506.4000 Steel Diaphragms (structure) 1038. B-40-1038	8.000 EACH	_____.	_____.
0248	506.4000 Steel Diaphragms (structure) 1039. B-40-1039	8.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 10 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0250	506.4000 Steel Diaphragms (structure) 1040. B-40-1040	12.000 EACH	_____.	_____.
0252	506.4000 Steel Diaphragms (structure) 1041. B-40-1041	12.000 EACH	_____.	_____.
0254	509.0310.S Sawing Pavement Deck Preparation Areas	314.000 LF	_____.	_____.
0256	509.0500 Cleaning Decks	557.000 SY	_____.	_____.
0258	511.1100 Temporary Shoring	11,213.000 SF	_____.	_____.
0260	511.1200 Temporary Shoring (structure) 0735. R-40-735	1,530.000 SF	_____.	_____.
0262	511.1200 Temporary Shoring (structure) 0741. R-40-741	816.000 SF	_____.	_____.
0264	511.1200 Temporary Shoring (structure) 0742. R-40-742	530.000 SF	_____.	_____.
0266	511.1200 Temporary Shoring (structure) 0743. R-40-743	250.000 SF	_____.	_____.
0268	511.1200 Temporary Shoring (structure) 0762. R-40-762	933.000 SF	_____.	_____.
0270	511.1200 Temporary Shoring (structure) 0801. R-40-801	575.000 SF	_____.	_____.
0272	511.1200 Temporary Shoring (structure) 1035. B-40-1035	2,800.000 SF	_____.	_____.
0274	511.1200 Temporary Shoring (structure) 1037. B-40-1037	1,100.000 SF	_____.	_____.



Proposal Schedule of Items

Page 11 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0276	511.1200 Temporary Shoring (structure) 1039. B-40-1039	3,250.000 SF	_____.	_____.
0278	511.1300 Temporary Shoring (location) 0500. 292+05 to 300+00	21,280.000 SF	_____.	_____.
0280	511.1300 Temporary Shoring (location) 0501. 317+50 to 320+00	900.000 SF	_____.	_____.
0282	511.1300 Temporary Shoring (location) 0502. 294+00 to 301+50	6,330.000 SF	_____.	_____.
0284	512.0500 Piling Steel Sheet Permanent Delivered	19,020.000 SF	_____.	_____.
0286	513.2001 Railing Pipe	836.000 LF	_____.	_____.
0288	516.0500 Rubberized Membrane Waterproofing	546.000 SY	_____.	_____.
0290	517.0601 Painting Epoxy System (structure) 0738. R-40-738	1.000 EACH	_____.	_____.
0292	517.0601 Painting Epoxy System (structure) 0801. R-40-801	1.000 EACH	_____.	_____.
0294	517.1010.S Concrete Staining (structure) 0734. R-40-734	11,415.000 SF	_____.	_____.
0296	517.1010.S Concrete Staining (structure) 0735. R-40-735	5,258.000 SF	_____.	_____.
0298	517.1010.S Concrete Staining (structure) 0736. R-40-736	21,280.000 SF	_____.	_____.
0300	517.1010.S Concrete Staining (structure) 0737. R-40-737	6,432.000 SF	_____.	_____.



Proposal Schedule of Items

Page 12 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0302	517.1010.S Concrete Staining (structure) 0739. R-40-739	10,862.000 SF	_____.	_____.
0304	517.1010.S Concrete Staining (structure) 0740. R-40-740	4,496.000 SF	_____.	_____.
0306	517.1010.S Concrete Staining (structure) 0744. R-40-744	2,557.000 SF	_____.	_____.
0308	517.1010.S Concrete Staining (structure) 1036. B-40-1036	149.000 SF	_____.	_____.
0310	517.1010.S Concrete Staining (structure) 1037. B-40-1037	284.000 SF	_____.	_____.
0312	517.1010.S Concrete Staining (structure) 1039. B-40-1039	282.000 SF	_____.	_____.
0314	522.1018 Apron Endwalls for Culvert Pipe Reinforced Concrete 18-Inch	1.000 EACH	_____.	_____.
0316	522.1042 Apron Endwalls for Culvert Pipe Reinforced Concrete 42-Inch	1.000 EACH	_____.	_____.
0318	531.1100 Concrete Masonry Ancillary Structures Type NS	84.200 CY	_____.	_____.
0320	531.1140 Steel Reinforcement HS Ancillary Structures Type NS	3,710.000 LB	_____.	_____.
0322	531.1160 Steel Reinforcement HS Coated Ancillary Structures Type NS	13,520.000 LB	_____.	_____.
0324	531.2024 Drilling Shaft 24-Inch	60.000 LF	_____.	_____.
0326	531.2030 Drilling Shaft 30-Inch	116.000 LF	_____.	_____.



Proposal Schedule of Items

Page 13 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0328	531.2036 Drilling Shaft 36-Inch	250.000 LF	_____.	_____.
0330	531.2042 Drilling Shaft 42-Inch	529.000 LF	_____.	_____.
0332	531.4050 Foundation Camera Pole 50-FT	2.000 EACH	_____.	_____.
0334	531.5140 Foundation Single-Shaft Type MC-IV (structure) 3115. S-40-3115	1.000 EACH	_____.	_____.
0336	531.5220 Foundation Single-Shaft Type MF-II (structure) 3111. S-40-3111	2.000 EACH	_____.	_____.
0338	531.5220 Foundation Single-Shaft Type MF-II (structure) 3114. S-40-3114	2.000 EACH	_____.	_____.
0340	531.5220 Foundation Single-Shaft Type MF-II (structure) 3120. S-40-3120	2.000 EACH	_____.	_____.
0342	531.5410 Foundation Single-Shaft Type TF-I (structure) 3112. S-40-3112	2.000 EACH	_____.	_____.
0344	531.6010 Foundation Two-Shaft Type FC-I (structure) 3118. S-40-3118	1.000 EACH	_____.	_____.
0346	531.6010 Foundation Two-Shaft Type FC-I (structure) 3176. S-40-3176	1.000 EACH	_____.	_____.
0348	531.6020 Foundation Two-Shaft Type FC-II (structure) 3117. S-40-3117	1.000 EACH	_____.	_____.
0350	531.6020 Foundation Two-Shaft Type FC-II (structure) 3121. S-40-3121	1.000 EACH	_____.	_____.
0352	531.6120 Foundation Two-Shaft Type FF-II (structure) 0467. S-40-467	1.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 14 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0354	531.6130 Foundation Two-Shaft Type FF-III (structure) 0466. S-40-466	2.000 EACH	_____.	_____.
0356	531.6130 Foundation Two-Shaft Type FF-III (structure) 0467. S-40-467	1.000 EACH	_____.	_____.
0358	531.6130 Foundation Two-Shaft Type FF-III (structure) 3113. S-40-3113	2.000 EACH	_____.	_____.
0360	531.6130 Foundation Two-Shaft Type FF-III (structure) 3116. S-40-3116	2.000 EACH	_____.	_____.
0362	531.6130 Foundation Two-Shaft Type FF-III (structure) 3122. S-40-3122	2.000 EACH	_____.	_____.
0364	531.6140 Foundation Two-Shaft Type FF-IV (structure) 0468. S-40-468	2.000 EACH	_____.	_____.
0366	532.5020 Butterfly 2-Chord NS (structure) 3123. S-40-3123	1.000 EACH	_____.	_____.
0368	532.5140 Monotube Cantilever Type IV (structure) 3115. S-40-3115	1.000 EACH	_____.	_____.
0370	532.5220 Monotube Full Span Type II (structure) 3111. S-40-3111	1.000 EACH	_____.	_____.
0372	532.5220 Monotube Full Span Type II (structure) 3114. S-40-3114	1.000 EACH	_____.	_____.
0374	532.5220 Monotube Full Span Type II (structure) 3120. S-40-3120	1.000 EACH	_____.	_____.
0376	532.5410 Truss Full Span 2-Chord Type I (structure) 3112. S-40-3112	1.000 EACH	_____.	_____.
0378	532.6010 Truss Cantilever 4-Chord Type I (structure) 3118. S-40-3118	1.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 15 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0380	532.6010 Truss Cantilever 4-Chord Type I (structure) 3119. S-40-3119	1.000 EACH	_____.	_____.
0382	532.6010 Truss Cantilever 4-Chord Type I (structure) 3176. S-40-3176	1.000 EACH	_____.	_____.
0384	532.6020 Truss Cantilever 4-Chord Type II (structure) 3117. S-40-3117	1.000 EACH	_____.	_____.
0386	532.6020 Truss Cantilever 4-Chord Type II (structure) 3121. S-40-3121	1.000 EACH	_____.	_____.
0388	532.6100 Truss Full Span 4-Chord Type NS (structure) 0466. S-40-466	1.000 EACH	_____.	_____.
0390	532.6100 Truss Full Span 4-Chord Type NS (structure) 3122. S-40-3122	1.000 EACH	_____.	_____.
0392	532.6120 Truss Full Span 4-Chord Type II (structure) 0467. S-40-467	1.000 EACH	_____.	_____.
0394	532.6130 Truss Full Span 4-Chord Type III (structure) 3113. S-40-3113	1.000 EACH	_____.	_____.
0396	532.6130 Truss Full Span 4-Chord Type III (structure) 3116. S-40-3116	1.000 EACH	_____.	_____.
0398	532.6140 Truss Full Span 4-Chord Type IV (structure) 0468. S-40-468	1.000 EACH	_____.	_____.
0400	541.0300.S Noise Barriers Double-Sided Sound Absorptive (structure) 0110. N-40-110	10,210.000 SF	_____.	_____.
0402	541.0300.S Noise Barriers Double-Sided Sound Absorptive (structure) 0111. N-40-111	10,930.000 SF	_____.	_____.
0404	541.0300.S Noise Barriers Double-Sided Sound Absorptive (structure) 0112. N-40-112	7,130.000 SF	_____.	_____.



Proposal Schedule of Items

Page 16 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0406	541.0300.S Noise Barriers Double-Sided Sound Absorptive (structure) 0113. N-40-113	3,970.000 SF	_____.	_____.
0408	541.0300.S Noise Barriers Double-Sided Sound Absorptive (structure) 0114. N-40-114	2,930.000 SF	_____.	_____.
0410	541.0300.S Noise Barriers Double-Sided Sound Absorptive (structure) 0115. N-40-115	7,120.000 SF	_____.	_____.
0412	541.0300.S Noise Barriers Double-Sided Sound Absorptive (structure) 0116. N-40-116	22,270.000 SF	_____.	_____.
0414	541.0300.S Noise Barriers Double-Sided Sound Absorptive (structure) 0117. N-40-117	26,730.000 SF	_____.	_____.
0416	541.0300.S Noise Barriers Double-Sided Sound Absorptive (structure) 0118. N-40-118	27,970.000 SF	_____.	_____.
0418	550.0500 Pile Points	333.000 EACH	_____.	_____.
0420	550.1120 Piling Steel HP 12-Inch X 53 Lb	9,135.000 LF	_____.	_____.
0422	550.1140 Piling Steel HP 14-Inch X 73 Lb	3,750.000 LF	_____.	_____.
0424	550.2128 Piling CIP Concrete 12 3/4 X 0.50-Inch	14,846.000 LF	_____.	_____.
0426	601.0319 Concrete Curb & Gutter 19-Inch	251.000 LF	_____.	_____.
0428	601.0322 Concrete Curb & Gutter 22-Inch	119.000 LF	_____.	_____.
0430	601.0331 Concrete Curb & Gutter 31-Inch	14,444.000 LF	_____.	_____.
0432	601.0411 Concrete Curb & Gutter 30-Inch Type D	644.000 LF	_____.	_____.



Proposal Schedule of Items

Page 17 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0434	601.0557 Concrete Curb & Gutter 6-Inch Sloped 36-Inch Type D	3,310.000 LF	_____.	_____.
0436	601.0600 Concrete Curb Pedestrian	435.000 LF	_____.	_____.
0438	602.0410 Concrete Sidewalk 5-Inch	101,391.000 SF	_____.	_____.
0440	602.0515 Curb Ramp Detectable Warning Field Natural Patina	827.000 SF	_____.	_____.
0442	602.0615 Curb Ramp Detectable Warning Field Radial Natural Patina	101.000 SF	_____.	_____.
0444	602.0815 Concrete Driveway 7-Inch	319.000 SY	_____.	_____.
0446	602.0865 Concrete Driveway HES 7-Inch	251.000 SY	_____.	_____.
0448	602.1500 Concrete Steps	115.000 SF	_____.	_____.
0450	603.1442 Concrete Barrier Type S42C	1,076.000 LF	_____.	_____.
0452	603.1456 Concrete Barrier Type S56C	1,254.000 LF	_____.	_____.
0454	603.3513 Concrete Barrier Transition Type S32 to S36	1.000 EACH	_____.	_____.
0456	603.3535 Concrete Barrier Transition Type S36 to S42	1.000 EACH	_____.	_____.
0458	603.3559 Concrete Barrier Transition Type S42 to S56	4.000 EACH	_____.	_____.
0460	603.8000 Concrete Barrier Temporary Precast Delivered	67,344.000 LF	_____.	_____.



Proposal Schedule of Items

Page 18 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0462	603.8125 Concrete Barrier Temporary Precast Installed	103,652.000 LF	_____.	_____.
0464	603.8500 Anchoring Concrete Barrier Temporary Precast	1,632.000 LF	_____.	_____.
0466	604.0400 Slope Paving Concrete	477.000 SY	_____.	_____.
0468	606.0100 Riprap Light	154.000 CY	_____.	_____.
0470	606.0300 Riprap Heavy	26.000 CY	_____.	_____.
0472	608.0312 Storm Sewer Pipe Reinforced Concrete Class III 12-Inch	1,602.000 LF	_____.	_____.
0474	608.0315 Storm Sewer Pipe Reinforced Concrete Class III 15-Inch	1,011.000 LF	_____.	_____.
0476	608.0318 Storm Sewer Pipe Reinforced Concrete Class III 18-Inch	6,896.000 LF	_____.	_____.
0478	608.0324 Storm Sewer Pipe Reinforced Concrete Class III 24-Inch	4,881.000 LF	_____.	_____.
0480	608.0330 Storm Sewer Pipe Reinforced Concrete Class III 30-Inch	529.000 LF	_____.	_____.
0482	608.0336 Storm Sewer Pipe Reinforced Concrete Class III 36-Inch	678.000 LF	_____.	_____.
0484	608.0342 Storm Sewer Pipe Reinforced Concrete Class III 42-Inch	475.000 LF	_____.	_____.
0486	608.0348 Storm Sewer Pipe Reinforced Concrete Class III 48-Inch	460.000 LF	_____.	_____.



Proposal Schedule of Items

Page 19 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0488	608.0354 Storm Sewer Pipe Reinforced Concrete Class III 54-Inch	790.000 LF	_____.	_____.
0490	608.0412 Storm Sewer Pipe Reinforced Concrete Class IV 12-Inch	39.000 LF	_____.	_____.
0492	608.0415 Storm Sewer Pipe Reinforced Concrete Class IV 15-Inch	791.000 LF	_____.	_____.
0494	608.0418 Storm Sewer Pipe Reinforced Concrete Class IV 18-Inch	1,774.000 LF	_____.	_____.
0496	608.0424 Storm Sewer Pipe Reinforced Concrete Class IV 24-Inch	804.000 LF	_____.	_____.
0498	608.0436 Storm Sewer Pipe Reinforced Concrete Class IV 36-Inch	92.000 LF	_____.	_____.
0500	608.0442 Storm Sewer Pipe Reinforced Concrete Class IV 42-Inch	74.000 LF	_____.	_____.
0502	608.0454 Storm Sewer Pipe Reinforced Concrete Class IV 54-Inch	104.000 LF	_____.	_____.
0504	608.0518 Storm Sewer Pipe Reinforced Concrete Class V 18-Inch	44.000 LF	_____.	_____.
0506	608.0524 Storm Sewer Pipe Reinforced Concrete Class V 24-Inch	89.000 LF	_____.	_____.
0508	608.2329 Storm Sewer Pipe Reinforced Concrete Horizontal Elliptical Class HE-III 29x45-Inch	396.000 LF	_____.	_____.
0510	608.2434 Storm Sewer Pipe Reinforced Concrete Horizontal Elliptical Class HE-IV 34x53-Inch	379.000 LF	_____.	_____.



Proposal Schedule of Items

Page 20 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0512	611.0420 Reconstructing Manholes	11.000 EACH	_____.	_____.
0514	611.0430 Reconstructing Inlets	31.000 EACH	_____.	_____.
0516	611.0530 Manhole Covers Type J	11.000 EACH	_____.	_____.
0518	611.0535 Manhole Covers Type J-Special	28.000 EACH	_____.	_____.
0520	611.0557 Manhole Covers Type Q-Communications	2.000 EACH	_____.	_____.
0522	611.0610 Inlet Covers Type BW	77.000 EACH	_____.	_____.
0524	611.0615 Inlet Covers Type F	3.000 EACH	_____.	_____.
0526	611.0627 Inlet Covers Type HM	4.000 EACH	_____.	_____.
0528	611.0642 Inlet Covers Type MS	14.000 EACH	_____.	_____.
0530	611.0655 Inlet Covers Type V-B	58.000 EACH	_____.	_____.
0532	611.0656 Inlet Covers Type VV-B	54.000 EACH	_____.	_____.
0534	611.0657 Inlet Covers Type W	25.000 EACH	_____.	_____.
0536	611.0666 Inlet Covers Type Z	2.000 EACH	_____.	_____.
0538	611.1003 Catch Basins 3-FT Diameter	9.000 EACH	_____.	_____.
0540	611.1004 Catch Basins 4-FT Diameter	78.000 EACH	_____.	_____.
0542	611.1005 Catch Basins 5-FT Diameter	5.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 21 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0544	611.2004 Manholes 4-FT Diameter	51.000 EACH	_____.	_____.
0546	611.2005 Manholes 5-FT Diameter	99.000 EACH	_____.	_____.
0548	611.2006 Manholes 6-FT Diameter	25.000 EACH	_____.	_____.
0550	611.2007 Manholes 7-FT Diameter	8.000 EACH	_____.	_____.
0552	611.2008 Manholes 8-FT Diameter	4.000 EACH	_____.	_____.
0554	611.2009 Manholes 9-FT Diameter	2.000 EACH	_____.	_____.
0556	611.2104 Manholes Communication 4-FT Diameter	2.000 EACH	_____.	_____.
0558	611.3003 Inlets 3-FT Diameter	4.000 EACH	_____.	_____.
0560	611.3004 Inlets 4-FT Diameter	119.000 EACH	_____.	_____.
0562	611.3225 Inlets 2x2.5-FT	23.000 EACH	_____.	_____.
0564	611.3253 Inlets 2.5x3-FT	3.000 EACH	_____.	_____.
0566	611.3901 Inlets Median 1 Grate	10.000 EACH	_____.	_____.
0568	611.3902 Inlets Median 2 Grate	2.000 EACH	_____.	_____.
0570	611.8110 Adjusting Manhole Covers	6.000 EACH	_____.	_____.
0572	611.8115 Adjusting Inlet Covers	45.000 EACH	_____.	_____.
0574	611.8120.S Cover Plates Temporary	77.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 22 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0576	611.9850.S Pipe Grates (size) 0001. 18-Inch	1.000 EACH	_____.	_____.
0578	612.0106 Pipe Underdrain 6-Inch	60.000 LF	_____.	_____.
0580	612.0206 Pipe Underdrain Unperforated 6-Inch	608.000 LF	_____.	_____.
0582	612.0406 Pipe Underdrain Wrapped 6-Inch	7,375.000 LF	_____.	_____.
0584	614.0805 Crash Cushions Permanent Low Maintenance	3.000 EACH	_____.	_____.
0586	614.0905 Crash Cushions Temporary	30.000 EACH	_____.	_____.
0588	614.2300 MGS Guardrail 3	2,591.000 LF	_____.	_____.
0590	614.2500 MGS Thrie Beam Transition	360.000 LF	_____.	_____.
0592	614.2610 MGS Guardrail Terminal EAT	3.000 EACH	_____.	_____.
0594	614.2620 MGS Guardrail Terminal Type 2	2.000 EACH	_____.	_____.
0596	616.0204 Fence Chain Link 4-FT	84.000 LF	_____.	_____.
0598	616.0206 Fence Chain Link 6-FT	2,896.000 LF	_____.	_____.
0600	616.0329 Gates Chain Link (width) 0001. 12-FT	2.000 EACH	_____.	_____.
0602	616.0329 Gates Chain Link (width) 0002. 30-FT	1.000 EACH	_____.	_____.
0604	616.0600.S Fence Temporary	535.000 LF	_____.	_____.
0606	616.0700.S Fence Safety	15,000.000 LF	_____.	_____.



Proposal Schedule of Items

Page 23 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0608	619.1000 Mobilization	1.000 EACH	_____.	_____.
0610	620.0300 Concrete Median Sloped Nose	523.000 SF	_____.	_____.
0612	623.0200 Dust Control Surface Treatment	188,200.000 SY	_____.	_____.
0614	624.0100 Water	831.000 MGAL	_____.	_____.
0616	625.0100 Topsoil	61,283.000 SY	_____.	_____.
0618	628.1104 Erosion Bales	100.000 EACH	_____.	_____.
0620	628.1504 Silt Fence	14,394.000 LF	_____.	_____.
0622	628.1520 Silt Fence Maintenance	8,636.000 LF	_____.	_____.
0624	628.1905 Mobilizations Erosion Control	15.000 EACH	_____.	_____.
0626	628.1910 Mobilizations Emergency Erosion Control	8.000 EACH	_____.	_____.
0628	628.2004 Erosion Mat Class I Type B	74,468.000 SY	_____.	_____.
0630	628.2008 Erosion Mat Urban Class I Type B	3,414.000 SY	_____.	_____.
0632	628.6510 Soil Stabilizer Type B	5.000 ACRE	_____.	_____.
0634	628.7005 Inlet Protection Type A	356.000 EACH	_____.	_____.
0636	628.7010 Inlet Protection Type B	389.000 EACH	_____.	_____.
0638	628.7015 Inlet Protection Type C	128.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 24 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0640	628.7020 Inlet Protection Type D	116.000 EACH	_____.	_____.
0642	628.7504 Temporary Ditch Checks	450.000 LF	_____.	_____.
0644	628.7555 Culvert Pipe Checks	17.000 EACH	_____.	_____.
0646	628.7560 Tracking Pads	3.000 EACH	_____.	_____.
0648	628.7570 Rock Bags	100.000 EACH	_____.	_____.
0650	629.0210 Fertilizer Type B	47.000 CWT	_____.	_____.
0652	630.0120 Seeding Mixture No. 20	2,154.000 LB	_____.	_____.
0654	630.0130 Seeding Mixture No. 30	113.000 LB	_____.	_____.
0656	630.0175 Seeding Mixture No. 75	42.000 LB	_____.	_____.
0658	630.0200 Seeding Temporary	305.000 LB	_____.	_____.
0660	630.0400 Seeding Nurse Crop	47.000 LB	_____.	_____.
0662	630.0500 Seed Water	1,489.000 MGAL	_____.	_____.
0664	631.0300 Sod Water	264.000 MGAL	_____.	_____.
0666	631.1000 Sod Lawn	9,761.000 SY	_____.	_____.
0668	633.1000 Delineators Barrier Wall	92.000 EACH	_____.	_____.
0670	634.0618 Posts Wood 4x6-Inch X 18-FT	60.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 25 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0672	634.0622 Posts Wood 4x6-Inch X 22-FT	39.000 EACH	_____.	_____.
0674	634.0808 Posts Tubular Steel 2x2-Inch X 8-FT	4.000 EACH	_____.	_____.
0676	634.0814 Posts Tubular Steel 2x2-Inch X 14-FT	35.000 EACH	_____.	_____.
0678	634.0885 Posts Tubular Steel 2x2-Inch X 8.5-FT	4.000 EACH	_____.	_____.
0680	635.0200 Sign Supports Structural Steel HS	4,552.000 LB	_____.	_____.
0682	637.1220 Signs Type I Reflective SH	2,934.000 SF	_____.	_____.
0684	637.1230 Signs Type I Reflective F	376.880 SF	_____.	_____.
0686	637.2210 Signs Type II Reflective H	2,366.320 SF	_____.	_____.
0688	637.2215 Signs Type II Reflective H Folding	135.940 SF	_____.	_____.
0690	637.2230 Signs Type II Reflective F	631.500 SF	_____.	_____.
0692	638.2101 Moving Signs Type I	3.000 EACH	_____.	_____.
0694	638.2102 Moving Signs Type II	21.000 EACH	_____.	_____.
0696	638.2601 Removing Signs Type I	21.000 EACH	_____.	_____.
0698	638.2602 Removing Signs Type II	288.000 EACH	_____.	_____.
0700	638.3000 Removing Small Sign Supports	181.000 EACH	_____.	_____.
0702	638.3100 Removing Structural Steel Sign Supports	24.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 26 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0704	643.0300 Traffic Control Drums	713,195.000 DAY	_____.	_____.
0706	643.0370.S Digital Speed Reduction System (DSRS)	2,000.000 DAY	_____.	_____.
0708	643.0420 Traffic Control Barricades Type III	50,890.000 DAY	_____.	_____.
0710	643.0705 Traffic Control Warning Lights Type A	98,440.000 DAY	_____.	_____.
0712	643.0715 Traffic Control Warning Lights Type C	158,035.000 DAY	_____.	_____.
0714	643.0810.S Connected Arrow Board	2,390.000 DAY	_____.	_____.
0716	643.0900 Traffic Control Signs	1,241,070.000 DAY	_____.	_____.
0718	643.0910 Traffic Control Covering Signs Type I	36.000 EACH	_____.	_____.
0720	643.0920 Traffic Control Covering Signs Type II	14.000 EACH	_____.	_____.
0722	643.1000 Traffic Control Signs Fixed Message	2,625.000 SF	_____.	_____.
0724	643.1050 Traffic Control Signs PCMS	2,350.000 DAY	_____.	_____.
0726	643.1051 Traffic Control Signs PCMS with TMC Communications	2,320.000 DAY	_____.	_____.
0728	643.1055.S Truck or Trailer Mounted Attenuator	100.000 DAY	_____.	_____.
0730	643.1220.S Connected Work Zone Start and End Location Markers	4,940.000 DAY	_____.	_____.
0732	643.3170 Temporary Marking Line Epoxy 6-Inch	506,058.000 LF	_____.	_____.



Proposal Schedule of Items

Page 27 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0734	643.3175 Temporary Marking Line Black Epoxy 6-Inch	44,858.000 LF	_____.	_____.
0736	643.3270 Temporary Marking Line Epoxy 10-Inch	3,857.000 LF	_____.	_____.
0738	643.3760 Temporary Marking Raised Pavement Marker Type I	1,101.000 EACH	_____.	_____.
0740	643.4100 Traffic Control Interim Lane Closure	500.000 EACH	_____.	_____.
0742	643.5000 Traffic Control	1.000 EACH	_____.	_____.
0744	644.1410 Temporary Pedestrian Surface Asphalt	1,000.000 SF	_____.	_____.
0746	644.1430 Temporary Pedestrian Surface Plate	100.000 SF	_____.	_____.
0748	644.1601 Temporary Pedestrian Curb Ramp	200.000 DAY	_____.	_____.
0750	644.1810 Temporary Pedestrian Barricade	500.000 LF	_____.	_____.
0752	644.1900.S Temporary Audible Message Devices	8,400.000 DAY	_____.	_____.
0754	645.0112 Geotextile Type DF Schedule B	1,009.000 SY	_____.	_____.
0756	645.0140 Geotextile Type SAS	1,154.000 SY	_____.	_____.
0758	645.0220 Geogrid Type SR	14,281.000 SY	_____.	_____.
0760	646.1020 Marking Line Epoxy 4-Inch	16,055.000 LF	_____.	_____.
0762	646.2020 Marking Line Epoxy 6-Inch	8,906.000 LF	_____.	_____.



Proposal Schedule of Items

Page 28 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0764	646.2025 Marking Line Grooved Black Epoxy 6-Inch	18,316.000 LF	_____.	_____.
0766	646.2040 Marking Line Grooved Wet Ref Epoxy 6-Inch	71,263.000 LF	_____.	_____.
0768	646.2050 Marking Line Grooved Permanent Tape 6-Inch	12,010.000 LF	_____.	_____.
0770	646.3020 Marking Line Epoxy 8-Inch	2,543.000 LF	_____.	_____.
0772	646.4020 Marking Line Epoxy 10-Inch	3,940.000 LF	_____.	_____.
0774	646.4025 Marking Line Grooved Black Epoxy 10-Inch	2,905.000 LF	_____.	_____.
0776	646.4040 Marking Line Grooved Wet Ref Epoxy 10-Inch	18,337.000 LF	_____.	_____.
0778	646.4050 Marking Line Grooved Permanent Tape 10-Inch	1,378.000 LF	_____.	_____.
0780	646.5020 Marking Arrow Epoxy	117.000 EACH	_____.	_____.
0782	646.5120 Marking Word Epoxy	15.000 EACH	_____.	_____.
0784	646.5220 Marking Symbol Epoxy	58.000 EACH	_____.	_____.
0786	646.6120 Marking Stop Line Epoxy 18-Inch	349.000 LF	_____.	_____.
0788	646.6220 Marking Yield Line Epoxy 18-Inch	20.000 EACH	_____.	_____.
0790	646.7120 Marking Diagonal Epoxy 12-Inch	6,356.000 LF	_____.	_____.



Proposal Schedule of Items

Page 29 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0792	646.7220 Marking Chevron Epoxy 24-Inch	1,863.000 LF	_____.	_____.
0794	646.7320 Marking Chevron Epoxy 12-Inch	170.000 LF	_____.	_____.
0796	646.7420 Marking Crosswalk Epoxy Transverse Line 6-Inch	1,000.000 LF	_____.	_____.
0798	646.8120 Marking Curb Epoxy	168.000 LF	_____.	_____.
0800	646.8220 Marking Island Nose Epoxy	5.000 EACH	_____.	_____.
0802	646.9000 Marking Removal Line 4-Inch	64,930.000 LF	_____.	_____.
0804	646.9050 Marking Removal Line Grooved Permanent Tape 4-Inch	17,293.000 LF	_____.	_____.
0806	652.0125 Conduit Rigid Metallic 2-Inch	377.000 LF	_____.	_____.
0808	652.0225 Conduit Rigid Nonmetallic Schedule 40 2-Inch	33,307.000 LF	_____.	_____.
0810	652.0230 Conduit Rigid Nonmetallic Schedule 40 2 1/2-Inch	742.000 LF	_____.	_____.
0812	652.0235 Conduit Rigid Nonmetallic Schedule 40 3-Inch	9,229.000 LF	_____.	_____.
0814	652.0605 Conduit Special 2-Inch	170.000 LF	_____.	_____.
0816	652.0615 Conduit Special 3-Inch	1,540.000 LF	_____.	_____.
0818	652.0700.S Install Conduit into Existing Item	8.000 EACH	_____.	_____.
0820	652.0800 Conduit Loop Detector	5,840.000 LF	_____.	_____.



Proposal Schedule of Items

Page 30 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0822	653.0135 Pull Boxes Steel 24x36-Inch	24.000 EACH	_____.	_____.
0824	653.0140 Pull Boxes Steel 24x42-Inch	138.000 EACH	_____.	_____.
0826	653.0905 Removing Pull Boxes	72.000 EACH	_____.	_____.
0828	654.0101 Concrete Bases Type 1	24.000 EACH	_____.	_____.
0830	654.0102 Concrete Bases Type 2	9.000 EACH	_____.	_____.
0832	654.0105 Concrete Bases Type 5	67.000 EACH	_____.	_____.
0834	654.0106 Concrete Bases Type 6	1.000 EACH	_____.	_____.
0836	654.0107 Concrete Bases Type 7	2.000 EACH	_____.	_____.
0838	654.0108 Concrete Bases Type 8	3.000 EACH	_____.	_____.
0840	654.0110 Concrete Bases Type 10	11.000 EACH	_____.	_____.
0842	654.0120 Concrete Bases Type 10-Special	5.000 EACH	_____.	_____.
0844	654.0217 Concrete Control Cabinet Bases Type 9 Special	6.000 EACH	_____.	_____.
0846	654.0230 Concrete Control Cabinet Bases Type L30	1.000 EACH	_____.	_____.
0848	654.1239 Concrete Control Cabinet Bases ITS	1.000 EACH	_____.	_____.
0850	655.0230 Cable Traffic Signal 5-14 AWG	3,716.000 LF	_____.	_____.



Proposal Schedule of Items

Page 31 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0852	655.0240 Cable Traffic Signal 7-14 AWG	3,290.000 LF	_____.	_____.
0854	655.0250 Cable Traffic Signal 9-14 AWG	385.000 LF	_____.	_____.
0856	655.0260 Cable Traffic Signal 12-14 AWG	5,217.000 LF	_____.	_____.
0858	655.0270 Cable Traffic Signal 15-14 AWG	1,004.000 LF	_____.	_____.
0860	655.0320 Cable Type UF 2-10 AWG Grounded	3,195.000 LF	_____.	_____.
0862	655.0510 Electrical Wire Traffic Signals 12 AWG	995.000 LF	_____.	_____.
0864	655.0515 Electrical Wire Traffic Signals 10 AWG	19,333.000 LF	_____.	_____.
0866	655.0610 Electrical Wire Lighting 12 AWG	16,569.000 LF	_____.	_____.
0868	655.0615 Electrical Wire Lighting 10 AWG	1,322.000 LF	_____.	_____.
0870	655.0625 Electrical Wire Lighting 6 AWG	46,300.000 LF	_____.	_____.
0872	655.0630 Electrical Wire Lighting 4 AWG	10,435.000 LF	_____.	_____.
0874	655.0635 Electrical Wire Lighting 2 AWG	2,620.000 LF	_____.	_____.
0876	655.0640 Electrical Wire Lighting 1 AWG	18.000 LF	_____.	_____.
0878	655.0700 Loop Detector Lead In Cable	20,661.000 LF	_____.	_____.
0880	655.0800 Loop Detector Wire	20,844.000 LF	_____.	_____.
0882	655.0900 Traffic Signal EVP Detector Cable	3,788.000 LF	_____.	_____.



Proposal Schedule of Items

Page 32 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0884	656.0201 Electrical Service Meter Breaker Pedestal (location) 2001. (MBDMS4000190)	1.000 EACH	_____.	_____.
0886	656.0201 Electrical Service Meter Breaker Pedestal (location) 2002. (MBDMS400132)	1.000 EACH	_____.	_____.
0888	656.0201 Electrical Service Meter Breaker Pedestal (location) 2003. (MBDMS400042)	1.000 EACH	_____.	_____.
0890	656.0201 Electrical Service Meter Breaker Pedestal (location) 3001. W O'Connor St & S 70th St	1.000 EACH	_____.	_____.
0892	656.0201 Electrical Service Meter Breaker Pedestal (location) 3002. W Kearney St & S 70th St	1.000 EACH	_____.	_____.
0894	656.0201 Electrical Service Meter Breaker Pedestal (location) 3003. W O'Connor Sr & S 68th St	1.000 EACH	_____.	_____.
0896	656.0201 Electrical Service Meter Breaker Pedestal (location) 3004. W Kearney St & S 68th St	1.000 EACH	_____.	_____.
0898	656.0201 Electrical Service Meter Breaker Pedestal (location) 3005. IH 94 WB On Ramp & N Hawley Rd	1.000 EACH	_____.	_____.
0900	656.0201 Electrical Service Meter Breaker Pedestal (location) 3006. IH 94 EB Off Ramp & S Hawley Rd	1.000 EACH	_____.	_____.
0902	656.0401 Electrical Service Main Lugs Only Meter Pedestal (location) 1001. HL-40-HY	1.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 33 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0904	656.0501 Electrical Service Breaker Disconnect Box (location) 2001. (DMS400019)	1.000 EACH	_____.	_____.
0906	656.0501 Electrical Service Breaker Disconnect Box (location) 2002. (DMS400132)	1.000 EACH	_____.	_____.
0908	656.0501 Electrical Service Breaker Disconnect Box (location) 2003. (RM40007)	1.000 EACH	_____.	_____.
0910	656.0501 Electrical Service Breaker Disconnect Box (location) 2004. (DMS400042)	1.000 EACH	_____.	_____.
0912	656.0501 Electrical Service Breaker Disconnect Box (location) 2005. (CCTV400010)	1.000 EACH	_____.	_____.
0914	657.0100 Pedestal Bases	22.000 EACH	_____.	_____.
0916	657.0210 Transformer Bases Breakaway 15-17 Inch Bolt Circle	32.000 EACH	_____.	_____.
0918	657.0255 Transformer Bases Breakaway 11 1/2-Inch Bolt Circle	80.000 EACH	_____.	_____.
0920	657.0310 Poles Type 3	9.000 EACH	_____.	_____.
0922	657.0322 Poles Type 5-Aluminum	15.000 EACH	_____.	_____.
0924	657.0327 Poles Type 6-Aluminum	1.000 EACH	_____.	_____.
0926	657.0375 Poles Type A	25.000 EACH	_____.	_____.
0928	657.0380 Poles Type E	3.000 EACH	_____.	_____.
0930	657.0381 Poles Type F	5.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 34 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0932	657.0405 Traffic Signal Standards Aluminum 3.5-FT	1.000 EACH	_____.	_____.
0934	657.0420 Traffic Signal Standards Aluminum 13-FT	11.000 EACH	_____.	_____.
0936	657.0425 Traffic Signal Standards Aluminum 15-FT	6.000 EACH	_____.	_____.
0938	657.0430 Traffic Signal Standards Aluminum 10-FT	4.000 EACH	_____.	_____.
0940	657.0609 Luminaire Arms Single Member 4-Inch Clamp 6-FT	9.000 EACH	_____.	_____.
0942	657.0610 Luminaire Arms Single Member 4 1/2-Inch Clamp 6-FT	68.000 EACH	_____.	_____.
0944	657.0620 Luminaire Arms Single Member 6-Inch Clamp 4-FT	50.000 EACH	_____.	_____.
0946	657.0625 Luminaire Arms Single Member 6-Inch Clamp 6-FT	3.000 EACH	_____.	_____.
0948	658.0171 Traffic Signal Face 1S 12-Inch	2.000 EACH	_____.	_____.
0950	658.0173 Traffic Signal Face 3S 12-Inch	51.000 EACH	_____.	_____.
0952	658.0174 Traffic Signal Face 4S 12-Inch	12.000 EACH	_____.	_____.
0954	658.0175 Traffic Signal Face 5S 12-Inch	6.000 EACH	_____.	_____.
0956	658.0416 Pedestrian Signal Face 16-Inch	28.000 EACH	_____.	_____.
0958	658.0500 Pedestrian Push Buttons	4.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 35 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0960	658.5070 Signal Mounting Hardware (location) 3001. W O'Connor St & S 70th St	1.000 EACH	_____.	_____.
0962	658.5070 Signal Mounting Hardware (location) 3002. W Kearney St & S 70th St	1.000 EACH	_____.	_____.
0964	658.5070 Signal Mounting Hardware (location) 3003. W O'Connor St & S 68th St	1.000 EACH	_____.	_____.
0966	658.5070 Signal Mounting Hardware (location) 3004. W Kearney St & S 68th St	1.000 EACH	_____.	_____.
0968	658.5070 Signal Mounting Hardware (location) 3005. IH 94 WB On Ramp & N Hawley Rd	1.000 EACH	_____.	_____.
0970	658.5070 Signal Mounting Hardware (location) 3006. IH 94 EB Off Ramp & S Hawley Rd	1.000 EACH	_____.	_____.
0972	658.5070 Signal Mounting Hardware (location) 3007. Wisconsin and Hawley Rd	1.000 EACH	_____.	_____.
0974	658.5070 Signal Mounting Hardware (location) 3008. W Bluemound and Hawley Rd	1.000 EACH	_____.	_____.
0976	659.0601 Underdeck Lighting (structure) 1001. Underdeck Lighting (B-40-1034)	1.000 EACH	_____.	_____.
0978	659.0601 Underdeck Lighting (structure) 1002. Underdeck Lighting (B-40-1035)	1.000 EACH	_____.	_____.
0980	659.0601 Underdeck Lighting (structure) 1003. Underdeck Lighting (B-40-1036)	1.000 EACH	_____.	_____.
0982	659.0601 Underdeck Lighting (structure) 1004. Underdeck Lighting (B-40-1037)	1.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 36 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0984	659.0601 Underdeck Lighting (structure) 1005. Underdeck Lighting (B-40-1038)	1.000 EACH	_____.	_____.
0986	659.0601 Underdeck Lighting (structure) 1006. Underdeck Lighting (B-40-1039)	1.000 EACH	_____.	_____.
0988	659.0601 Underdeck Lighting (structure) 1007. Underdeck Lighting (B-40-1040)	1.000 EACH	_____.	_____.
0990	659.0601 Underdeck Lighting (structure) 1008. Underdeck Lighting (B-40-1041)	1.000 EACH	_____.	_____.
0992	659.1125 Luminaires Utility LED C	44.000 EACH	_____.	_____.
0994	659.1130 Luminaires Utility LED D	63.000 EACH	_____.	_____.
0996	659.1215 Luminaires Underdeck LED C	32.000 EACH	_____.	_____.
0998	659.2230 Lighting Control Cabinets 240/480 30-Inch	1.000 EACH	_____.	_____.
1000	659.5000.S Lamp, Ballast, LED, Switch Disposal by Contractor	84.000 EACH	_____.	_____.
1002	661.0201 Temporary Traffic Signals for Intersections (location) 3001. W. Kearney St. & S. 70th St.	1.000 EACH	_____.	_____.
1004	662.1024.S Ramp Closure Gates 24-FT	1.000 EACH	_____.	_____.
1006	662.1030.S Ramp Closure Gates 30-FT	2.000 EACH	_____.	_____.
1008	662.1037.S Ramp Closure Gates 37-FT	1.000 EACH	_____.	_____.
1010	670.0101 Field System Integrator	1.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 37 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
1012	670.0201 ITS Documentation	1.000 EACH	_____.	_____.
1014	671.0142 Conduit HDPE 4-Duct 2-Inch	3,155.000 LF	_____.	_____.
1016	671.0222 Conduit HDPE Directional Bore 2-Duct 2-Inch	215.000 LF	_____.	_____.
1018	671.0242 Conduit HDPE Directional Bore 4-Duct 2-Inch	1,585.000 LF	_____.	_____.
1020	673.0105 Communication Vault Type 1	8.000 EACH	_____.	_____.
1022	673.0200 Tracer Wire Marker Posts	5.000 EACH	_____.	_____.
1024	673.1200.S Install ITS Field Cabinet	1.000 EACH	_____.	_____.
1026	673.1225.S Install Pole Mounted Cabinet	1.000 EACH	_____.	_____.
1028	674.0300 Remove Cable	10,390.000 LF	_____.	_____.
1030	675.0100 Install Controller Ramp Meter Processor Assembly	1.000 EACH	_____.	_____.
1032	675.0300 Install Mounted Controller Microwave Detector Assembly	4.000 EACH	_____.	_____.
1034	677.0150 Install Camera Pole 50-FT	2.000 EACH	_____.	_____.
1036	677.0200 Install Camera Assembly	2.000 EACH	_____.	_____.
1038	677.9051.S Removing 50-FT Camera Pole	2.000 EACH	_____.	_____.
1040	677.9200.S Removing CCTV Camera	2.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 38 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
1042	678.0006 Install Fiber Optic Cable Outdoor Plant 6-CT	5,175.000 LF	_____.	_____.
1044	678.0024 Install Fiber Optic Cable Outdoor Plant 24-CT	763.000 LF	_____.	_____.
1046	678.0072 Install Fiber Optic Cable Outdoor Plant 72-CT	6,864.000 LF	_____.	_____.
1048	678.0100.S Install Overhead Freeway DMS Full Matrix	3.000 EACH	_____.	_____.
1050	678.0300 Fiber Optic Splice	172.000 EACH	_____.	_____.
1052	678.0400 Fiber Optic Termination	54.000 EACH	_____.	_____.
1054	678.0501 Communication System Testing	1.000 EACH	_____.	_____.
1056	678.0600 Install Ethernet Switches	11.000 EACH	_____.	_____.
1058	678.0800 Install Cellular Modems	3.000 EACH	_____.	_____.
1060	690.0150 Sawing Asphalt	1,081.000 LF	_____.	_____.
1062	690.0250 Sawing Concrete	29,492.000 LF	_____.	_____.
1064	715.0502 Incentive Strength Concrete Structures	61,494.000 DOL	1.00000	61,494.00
1066	715.0715 Incentive Flexural Strength Concrete Pavement	36,623.000 DOL	1.00000	36,623.00
1068	740.0440 Incentive IRI Ride	16,600.000 DOL	1.00000	16,600.00



Proposal Schedule of Items

Page 39 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
1070	ASP.1T0A On-the-Job Training Apprentice at \$5.00/HR	36,000.000 HRS	5.00000	180,000.00
1072	ASP.1T0G On-the-Job Training Graduate at \$5.00/HR	72,000.000 HRS	5.00000	360,000.00
1074	SPV.0035 Special 0001. Roadway Embankment	42,676.000 CY	_____.	_____.
1076	SPV.0035 Special 4000. HPC Masonry Structures	3,847.000 CY	_____.	_____.
1078	SPV.0045 Special 0504. Truck Entering Warning System	2,000.000 DAY	_____.	_____.
1080	SPV.0045 Special 0505. Flashing Beacon Sign (SWZ)	18,170.000 DAY	_____.	_____.
1082	SPV.0045 Special 0506. PCMS with Cellular Communications (SWZ)	30,309.000 DAY	_____.	_____.
1084	SPV.0045 Special 0507. Portable Traffic Sensor (SWZ)	25,899.000 DAY	_____.	_____.
1086	SPV.0060 Special 0001. Baseline CPM Project Schedule	1.000 EACH	_____.	_____.
1088	SPV.0060 Special 0002. Monthly CPM Project Schedule Updates	37.000 EACH	_____.	_____.
1090	SPV.0060 Special 0101. Concrete Barrier Transition Type G1	1.000 EACH	_____.	_____.
1092	SPV.0060 Special 0102. Concrete Barrier Transition Type G2	1.000 EACH	_____.	_____.
1094	SPV.0060 Special 0106. Concrete Barrier Transition Type S42 to S56 Special	32.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 40 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
1096	SPV.0060 Special 0107. Concrete Barrier Transition Type S32C Reverse Footing to S56C Reverse Foot	1.000 EACH	_____.	_____.
1098	SPV.0060 Special 0110. Concrete Barrier Transition Type M1	1.000 EACH	_____.	_____.
1100	SPV.0060 Special 0111. Concrete Barrier Transition Type M2	1.000 EACH	_____.	_____.
1102	SPV.0060 Special 0112. Concrete Barrier Type S42 End Anchor	4.000 EACH	_____.	_____.
1104	SPV.0060 Special 0113. Concrete Barrier Type S56 End Anchor	5.000 EACH	_____.	_____.
1106	SPV.0060 Special 0114. Concrete Barrier Type S42 Special End Anchor	12.000 EACH	_____.	_____.
1108	SPV.0060 Special 0115. Concrete Barrier Type S56 Special End Anchor	10.000 EACH	_____.	_____.
1110	SPV.0060 Special 0116. Concrete Barrier Type S56 Special 34-Inch End Anchor	8.000 EACH	_____.	_____.
1112	SPV.0060 Special 0117. Concrete Barrier Type S32 Special End Anchor	1.000 EACH	_____.	_____.
1116	SPV.0060 Special 0123. Salvage Ramp Gate	2.000 EACH	_____.	_____.
1118	SPV.0060 Special 0124. Salvage Wrong Way Driver Detection Equipment	5.000 EACH	_____.	_____.
1120	SPV.0060 Special 0125. Section Corner Monuments Special	2.000 EACH	_____.	_____.
1122	SPV.0060 Special 0126. Survey Project 1060-27-71	1.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 41 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
1124	SPV.0060 Special 0140. Drilled High Performance Dowel Bars	140.000 EACH	_____.	_____.
1126	SPV.0060 Special 0151. Round Aluminum Sign Post System in Soft Surface 10-Foot	33.000 EACH	_____.	_____.
1128	SPV.0060 Special 0152. Round Aluminum Sign Post System in Soft Surface 11-Foot	4.000 EACH	_____.	_____.
1130	SPV.0060 Special 0153. Round Aluminum Sign Post System in Soft Surface 12-Foot	1.000 EACH	_____.	_____.
1132	SPV.0060 Special 0159. Round Aluminum Sign Post in Concrete Surface 10-Foot	14.000 EACH	_____.	_____.
1134	SPV.0060 Special 0170. Exposing Existing Infrastructure Paved Area	15.000 EACH	_____.	_____.
1136	SPV.0060 Special 0171. Exposing Existing Infrastructure Unpaved Area	15.000 EACH	_____.	_____.
1138	SPV.0060 Special 0177. Fire Hydrant Sign Mounting	62.000 EACH	_____.	_____.
1140	SPV.0060 Special 0180. Tree Trimming	5.000 EACH	_____.	_____.
1142	SPV.0060 Special 0554. Emergency Response to Traffic Involving Concrete Barrier Temporary	20.000 EACH	_____.	_____.
1144	SPV.0060 Special 0555. Emergency Response to Traffic Involving Crash Cushion Temporary	20.000 EACH	_____.	_____.
1146	SPV.0060 Special 0556. Emergency Response to Pavement Repair	20.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 42 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
1148	SPV.0060 Special 0557. Fixed Message Sign Portable Support	39.000 EACH	_____.	_____.
1150	SPV.0060 Special 0564. Traffic Control Close-Open Freeway to Freeway System Ramp	500.000 EACH	_____.	_____.
1152	SPV.0060 Special 0565. Traffic Control Close-Open Crash Cushion	1,000.000 EACH	_____.	_____.
1154	SPV.0060 Special 0566. Traffic Control Full Freeway Closure	400.000 EACH	_____.	_____.
1156	SPV.0060 Special 0571. Traffic Control Local Road Lane Closure	300.000 EACH	_____.	_____.
1158	SPV.0060 Special 0572. Thrie Beam Connection to Concrete Barrier Temporary Precast	5.000 EACH	_____.	_____.
1160	SPV.0060 Special 0573. Moving FBS (SWZ)	160.000 EACH	_____.	_____.
1162	SPV.0060 Special 0574. Moving PCMS (SWZ)	278.000 EACH	_____.	_____.
1164	SPV.0060 Special 0575. Moving PTS (SWZ)	232.000 EACH	_____.	_____.
1166	SPV.0060 Special 0576. Mobilizations Emergency Traffic Control	60.000 EACH	_____.	_____.
1168	SPV.0060 Special 0600. Emergency Response to Incident Involving Utility	3.000 EACH	_____.	_____.
1170	SPV.0060 Special 1001. Poles Wood 60-FT	12.000 EACH	_____.	_____.
1172	SPV.0060 Special 1002. Wood Pole Lighting 60-FT	54.000 EACH	_____.	_____.
1174	SPV.0060 Special 1003. Concrete Bases Type B	25.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 43 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
1176	SPV.0060 Special 1004. Luminaires Utility Floodlight	54.000 EACH	_____.	_____.
1178	SPV.0060 Special 1005. Poles Type 30-AL-BD	24.000 EACH	_____.	_____.
1180	SPV.0060 Special 1006. Poles Type 25-AL-BD	19.000 EACH	_____.	_____.
1182	SPV.0060 Special 1013. Inline 5A Fast Acting Fuse with Holder	24.000 EACH	_____.	_____.
1184	SPV.0060 Special 1017. Luminaire Utility 2LED	40.000 EACH	_____.	_____.
1186	SPV.0060 Special 1018. Luminaire Utility 3LED	9.000 EACH	_____.	_____.
1188	SPV.0060 Special 1020. Pull Boxes 17x30x24-Inch	86.000 EACH	_____.	_____.
1190	SPV.0060 Special 1025. Lighting Units Relocated	4.000 EACH	_____.	_____.
1192	SPV.0060 Special 1026. Luminaire Arms Single Member 4-Inch Clamp 4-FT	10.000 EACH	_____.	_____.
1194	SPV.0060 Special 1027. Poles Type 5-Aluminum 20-FT	3.000 EACH	_____.	_____.
1196	SPV.0060 Special 1028. Hydro Excavation	16.000 EACH	_____.	_____.
1198	SPV.0060 Special 1031. Maintenance of Lighting Systems	1.000 EACH	_____.	_____.
1200	SPV.0060 Special 1041. Lighting System Integrator 1060-27-71	1.000 EACH	_____.	_____.
1202	SPV.0060 Special 1051. Lighting System Survey 1060-27-71	1.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 44 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
1204	SPV.0060 Special 2000. Removing Electrical Service Meter Breaker Pedestal	3.000 EACH	_____.	_____.
1206	SPV.0060 Special 2001. Removing Controller Cabinet	5.000 EACH	_____.	_____.
1208	SPV.0060 Special 2002. Removing Controller Cabinet Base	5.000 EACH	_____.	_____.
1210	SPV.0060 Special 2003. Removing Microwave Detector	8.000 EACH	_____.	_____.
1212	SPV.0060 Special 2004. Removing Ramp Control Signal Assembly Sidemount	5.000 EACH	_____.	_____.
1214	SPV.0060 Special 2005. Removing Ramp Control Signal Assembly Overhead	2.000 EACH	_____.	_____.
1216	SPV.0060 Special 2006. Removing Overhead Freeway DMS	2.000 EACH	_____.	_____.
1218	SPV.0060 Special 2007. Removing Pole	4.000 EACH	_____.	_____.
1220	SPV.0060 Special 2008. Salvaging Pole Mounted Cabinet	2.000 EACH	_____.	_____.
1222	SPV.0060 Special 2009. Temporary Vehicle Detector Assembly	1.000 EACH	_____.	_____.
1224	SPV.0060 Special 2010. Relocating Temporary Vehicle Detector Assembly	5.000 EACH	_____.	_____.
1226	SPV.0060 Special 2011. Removing Temporary Vehicle Detector Assembly	1.000 EACH	_____.	_____.
1228	SPV.0060 Special 2012. Temporary Traffic Camera Assembly	2.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 45 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
1230	SPV.0060 Special 2013. Relocating Temporary Traffic Camera Assembly	10.000 EACH	_____.	_____.
1232	SPV.0060 Special 2014. Removing Temporary Traffic Camera Assembly	2.000 EACH	_____.	_____.
1234	SPV.0060 Special 2050. Enter Existing Splice Enclosure	1.000 EACH	_____.	_____.
1236	SPV.0060 Special 2051. Loop Detector Protection	6.000 EACH	_____.	_____.
1238	SPV.0060 Special 2052. Refocus Vehicle Detector Assembly	63.000 EACH	_____.	_____.
1240	SPV.0060 Special 2053. Signal Assembly Advance Flasher Type 1	5.000 EACH	_____.	_____.
1242	SPV.0060 Special 2054. Signal Assembly Ramp Control Overhead	3.000 EACH	_____.	_____.
1244	SPV.0060 Special 2055. Ground Rod	4.000 EACH	_____.	_____.
1246	SPV.0060 Special 2056. Install Structure Mounted Cabinet	3.000 EACH	_____.	_____.
1248	SPV.0060 Special 3002. Install Poles Type 10	11.000 EACH	_____.	_____.
1250	SPV.0060 Special 3003. Install Poles Type 9-Special	3.000 EACH	_____.	_____.
1252	SPV.0060 Special 3004. Install Poles Type 10-Special	2.000 EACH	_____.	_____.
1254	SPV.0060 Special 3007. Install Monotube Arms 15-FT	1.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 46 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
1256	SPV.0060 Special 3008. Install Monotube Arms 20-FT	1.000 EACH	_____.	_____.
1258	SPV.0060 Special 3009. Install Monotube Arms 25-FT	4.000 EACH	_____.	_____.
1260	SPV.0060 Special 3010. Install Monotube Arms 30-FT	5.000 EACH	_____.	_____.
1262	SPV.0060 Special 3011. Install Monotube Arms 35-FT-Special	2.000 EACH	_____.	_____.
1264	SPV.0060 Special 3013. Install Monotube Arms 45-FT-Special	3.000 EACH	_____.	_____.
1266	SPV.0060 Special 3017. Install Luminaire Arms Steel 15-FT	17.000 EACH	_____.	_____.
1268	SPV.0060 Special 3029. Trnspt Traffic Signal & Inter Lighting Materials w O'Connor St & S 70th St	1.000 EACH	_____.	_____.
1270	SPV.0060 Special 3030. Trnspt Traffic Signal & Inter Lighting Materials w Kearney St & S 70th St	1.000 EACH	_____.	_____.
1272	SPV.0060 Special 3031. Trnspt Traffic Signal & Inter Lighting Materials O'Connor St & S 68th St	1.000 EACH	_____.	_____.
1274	SPV.0060 Special 3032. Trnspt Traffic Signal & Inter Lighting Materials W Kearney St & S 68th St	1.000 EACH	_____.	_____.
1276	SPV.0060 Special 3033. Trnspt Signal & Inter Lighting Materials IH 94 WB On Ramp & N Hawley RD	1.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 47 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
1278	SPV.0060 Special 3034. Trnspt Signal & Inter Lighting Materials IH 94 EB Off Ramp & S Hawley RD.	1.000 EACH	_____.	_____.
1280	SPV.0060 Special 3043. Backplates With Reflective Border 3 Section 12-Inch	12.000 EACH	_____.	_____.
1282	SPV.0060 Special 3046. Trnspt & Install State Furn Traffic Signal Cabinet W O'Connor St & S 70th	1.000 EACH	_____.	_____.
1284	SPV.0060 Special 3047. Trnspt & Install State Furn Traffic Signal Cabinet W Kearney St & S 70th	1.000 EACH	_____.	_____.
1286	SPV.0060 Special 3048. Trnspt & Install State Furn Traffic Signal Cabinet W O'Connor St & S 68th	1.000 EACH	_____.	_____.
1288	SPV.0060 Special 3049. Trnspt & Install State Furn Traffic Signal Cabinet W Kearney St & S 68th	1.000 EACH	_____.	_____.
1290	SPV.0060 Special 3050. Trnspt & Install State Furn Traffic Signal Cabinet IH 94 WB On Ramp & N Ha	1.000 EACH	_____.	_____.
1292	SPV.0060 Special 3051. Trnspt & Install State Furn Traffic Signal Cabinet IH 94 EB Off Ramp & S H	1.000 EACH	_____.	_____.
1294	SPV.0060 Special 3052. Trnspt & Install State Furn APS Push Button System W O'Connor St & S 70th	1.000 EACH	_____.	_____.
1296	SPV.0060 Special 3053. Trnspt & Install State Furn APS Push Button System W Kearney St & S 70th	1.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 48 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
1298	SPV.0060 Special 3054. Trnspt & Install State Furn APS Push Button System W O'Connor St & S 68th	1.000 EACH	_____.	_____.
1300	SPV.0060 Special 3055. Trnspt & Install State Furn APS Push Button System W Kearney St & S 68th	1.000 EACH	_____.	_____.
1302	SPV.0060 Special 3056. Trnspt & Install State Furn APS Push Button Sys IH94 WB On Ramp & N Hawley	1.000 EACH	_____.	_____.
1304	SPV.0060 Special 3057. Trnspt & Install State Furn APS Push Button Sys IH94 EB Off Ramp & S Hawley	1.000 EACH	_____.	_____.
1306	SPV.0060 Special 3058. Trnspt & Instl State Furn EVP Heads with Confirm Lights W O'Connor & 70th	1.000 EACH	_____.	_____.
1308	SPV.0060 Special 3059. Trnspt & Install State Furn EVP Heads With Confirm Lights W Kearney & 70th	1.000 EACH	_____.	_____.
1310	SPV.0060 Special 3060. Trnspt & Instl State Furn EVP Heads with Confirm Lights W O'Connor & 68th	1.000 EACH	_____.	_____.
1312	SPV.0060 Special 3061. Trnspt & Install State Furn EVP Heads with Confirm Lights W Kearney & 68th	1.000 EACH	_____.	_____.
1314	SPV.0060 Special 3062. Trnspt & Install State Furn EVP Heads with Confirmation Lights IH 94 WB On	1.000 EACH	_____.	_____.
1316	SPV.0060 Special 3063. Trnspt & Install State Furn EVP Heads with Confirmation Lights IH 94 EB Of	1.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 49 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
1318	SPV.0060 Special 3064. Temporary EVP System W Kearney St & S 70th St	1.000 EACH	_____.	_____.
1320	SPV.0060 Special 3065. Remove Traffic Signal Equipment	3.000 EACH	_____.	_____.
1322	SPV.0060 Special 3066. Relocate Pedestrian Push Button (APS)	3.000 EACH	_____.	_____.
1324	SPV.0060 Special 3067. Relocate Pedestrian Head	3.000 EACH	_____.	_____.
1326	SPV.0060 Special 3068. Temporary Overhead Cable w Wisconsin Ave & N Hawley Rd	1.000 EACH	_____.	_____.
1328	SPV.0060 Special 3069. Trnsprt and Install S-F FO Cable Pigtail 8-CT W O'Connor St & S 68th St	1.000 EACH	_____.	_____.
1330	SPV.0060 Special 3070. Trnsprt and Install S-F FO Cable Pigtail 8-CT W Kearney St & S 68th St	1.000 EACH	_____.	_____.
1332	SPV.0060 Special 3071. Trnsprt and Install S-F FO Cable Pigtail 8-CT IH 94 WB On Ramp & N Hawley	1.000 EACH	_____.	_____.
1334	SPV.0060 Special 3072. Trnsprt and Install S-F FO Cable Pigtail 8-CT IH 94 EB Off Ramp & S Hawley	1.000 EACH	_____.	_____.
1336	SPV.0060 Special 4083. Temporary Bridge Widening B-40-83	1.000 EACH	_____.	_____.
1338	SPV.0060 Special 4085. Temporary Bridge Widening B-40-85	1.000 EACH	_____.	_____.
1340	SPV.0060 Special 4087. Temporary Bridge Widening B-40-87	1.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 50 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
1342	SPV.0060 Special 4200. Anchor Assemblies Noise Barrier Structures	386.000 EACH	_____.	_____.
1344	SPV.0060 Special 4383. Temporary Pier Support B-40-83	2.000 EACH	_____.	_____.
1346	SPV.0060 Special 4385. Temporary Pier Support B-40-85	6.000 EACH	_____.	_____.
1348	SPV.0060 Special 4400. Cored Holes 4-Inch	8.000 EACH	_____.	_____.
1350	SPV.0060 Special 5001. Permanent Connection to Existing 36-Inch Water Main	2.000 EACH	_____.	_____.
1352	SPV.0060 Special 5002. Permanent Connection to Existing 48-Inch Water Main	1.000 EACH	_____.	_____.
1354	SPV.0060 Special 5003. Adjusting Water Valve Boxes	26.000 EACH	_____.	_____.
1356	SPV.0060 Special 5004. Adjusting Water Manhole	8.000 EACH	_____.	_____.
1358	SPV.0060 Special 5005. Installing Hydrant-Alteration	6.000 EACH	_____.	_____.
1360	SPV.0060 Special 5006. Blowoff Manhole	4.000 EACH	_____.	_____.
1362	SPV.0060 Special 5007. Inspection Manhole	1.000 EACH	_____.	_____.
1364	SPV.0060 Special 5008. Removing Hydrant/Minor	1.000 EACH	_____.	_____.
1366	SPV.0060 Special 5009. Installing Hydrant	1.000 EACH	_____.	_____.
1368	SPV.0060 Special 5100. Adjusting Sanitary Manhole	12.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 51 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
1370	SPV.0060 Special 5101. Internal Sanitary Manhole Seals	12.000 EACH	_____.	_____.
1372	SPV.0060 Special 5200. Manholes Type TES 4-FT Diameter	7.000 EACH	_____.	_____.
1374	SPV.0060 Special 5201. Manholes Type TES Doghouse 4-FT Diameter	2.000 EACH	_____.	_____.
1376	SPV.0060 Special 5203. Manholes Type TES Doghouse 4-FT Diameter Installed Over Conduit	2.000 EACH	_____.	_____.
1378	SPV.0060 Special 5204. Removing CUC Manhole	2.000 EACH	_____.	_____.
1380	SPV.0060 Special 8000. Hawley Road Pond Outlet Storm Sewer Structure	1.000 EACH	_____.	_____.
1382	SPV.0060 Special 8001. Temporary Storm Sewer Plug	37.000 EACH	_____.	_____.
1384	SPV.0060 Special 8002. Detention Pond Anti-Seep Collar	1.000 EACH	_____.	_____.
1386	SPV.0060 Special 8003. Reconnect Storm Sewer	127.000 EACH	_____.	_____.
1388	SPV.0060 Special 8004. Fastening Sewer Access Covers	25.000 EACH	_____.	_____.
1390	SPV.0060 Special 8005. Sealing Storm Structure	5.000 EACH	_____.	_____.
1392	SPV.0060 Special 8006. Control of Water Storm Sewer	1.000 EACH	_____.	_____.
1394	SPV.0060 Special 8007. Cover Plates Left in Place	20.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 52 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
1396	SPV.0060 Special 8008. Inlet Covers Type Beehive A	3.000 EACH	_____.	_____.
1398	SPV.0060 Special 8009. Manhole Covers Type 58-A	32.000 EACH	_____.	_____.
1400	SPV.0060 Special 8010. Inlet Covers Type MS 57	87.000 EACH	_____.	_____.
1402	SPV.0060 Special 8012. Inlet Cover Type 55	6.000 EACH	_____.	_____.
1404	SPV.0075 Special 0200. Pavement Cleanup Project 1060-27-71	2,000.000 HRS	_____.	_____.
1406	SPV.0075 Special 4010. Obstructions Foundation Drilling	40.000 HRS	_____.	_____.
1408	SPV.0075 Special 4020. Obstructions Piling Steel Sheet Permanent Installed	17.000 HRS	_____.	_____.
1410	SPV.0090 Special 0250. Concrete Curb & Gutter 55-Inch	188.000 LF	_____.	_____.
1412	SPV.0090 Special 0251. Concrete Curb & Gutter 4-Inch Sloped 60-Inch Type A	1,038.000 LF	_____.	_____.
1414	SPV.0090 Special 0252. Concrete Barrier Type S56 Special 34-Inch	503.000 LF	_____.	_____.
1416	SPV.0090 Special 0253. Concrete Barrier Type S56 Special Light Pole Base	24.000 LF	_____.	_____.
1418	SPV.0090 Special 0254. Concrete Barrier Type S56 Special Vertical Back	657.000 LF	_____.	_____.
1420	SPV.0090 Special 0255. Concrete Barrier Type S42 Special	8,360.000 LF	_____.	_____.



Proposal Schedule of Items

Page 53 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
1422	SPV.0090 Special 0256. Concrete Barrier Type S56 Special	3,384.000 LF	_____.	_____.
1424	SPV.0090 Special 0257. Concrete Barrier Type S42C Special	1,378.000 LF	_____.	_____.
1426	SPV.0090 Special 0258. Concrete Barrier Type S56C Special	1,350.000 LF	_____.	_____.
1428	SPV.0090 Special 0259. Concrete Barrier Type S32 Special	90.000 LF	_____.	_____.
1430	SPV.0090 Special 0261. Pipe Underdrain 6-Inch Special	27,179.000 LF	_____.	_____.
1432	SPV.0090 Special 0265. Concrete Barrier Type S32C Reverse Footing	557.000 LF	_____.	_____.
1434	SPV.0090 Special 0266. Concrete Barrier Type S56C Reverse Footing	579.000 LF	_____.	_____.
1436	SPV.0090 Special 0270. Marking Stop Line Epoxy 24-Inch	410.000 LF	_____.	_____.
1438	SPV.0090 Special 0271. Marking Crosswalk Epoxy Transverse Line 12-Inch	862.000 LF	_____.	_____.
1440	SPV.0090 Special 0272. Marking Crosswalk Epoxy Block Style 12-Inch	3,006.000 LF	_____.	_____.
1442	SPV.0090 Special 0702. Concrete Barrier Temporary Precast Left in Place	1,071.000 LF	_____.	_____.
1444	SPV.0090 Special 0703. Fence Temporary 6-FT	2,000.000 LF	_____.	_____.
1446	SPV.0090 Special 0704. Glare Screens Temporary	4,418.000 LF	_____.	_____.



Proposal Schedule of Items

Page 54 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
1448	SPV.0090 Special 0705. Glare Screen Temporary Left in Place	1,952.000 LF	_____.	_____.
1450	SPV.0090 Special 0711. Removing Concrete Barrier Precast	512.000 LF	_____.	_____.
1452	SPV.0090 Special 1001. Cable Aerial Aluminum 6 AWG Triplex	23,805.000 LF	_____.	_____.
1454	SPV.0090 Special 1002. Cable Aerial Aluminum 4 AWG Triplex	1,365.000 LF	_____.	_____.
1456	SPV.0090 Special 1004. Conduit 3-Inch HDPE Schedule 40	1,170.000 LF	_____.	_____.
1458	SPV.0090 Special 1008. Electrical Cable Type 3#12 UF with Ground	6,381.000 LF	_____.	_____.
1460	SPV.0090 Special 1009. Electrical Cable Type 4#8/1#1 XLP	2,880.000 LF	_____.	_____.
1462	SPV.0090 Special 1010. Electrical Cable Type 4#6/1#8 XLP	60.000 LF	_____.	_____.
1464	SPV.0090 Special 1011. Electrical Cable Type 4#4/1#8 XLP	37,320.000 LF	_____.	_____.
1466	SPV.0090 Special 2000. Outdoor Rated Network Cable	5,360.000 LF	_____.	_____.
1468	SPV.0090 Special 4000. Removing Existing Timber Piling	1,205.000 LF	_____.	_____.
1470	SPV.0090 Special 4020. Foundation Drilling 36-Inch Diameter	1,240.000 LF	_____.	_____.
1472	SPV.0090 Special 5001. Steel Casing W/ Ductile Iron 36-Inch Carrier	25.000 LF	_____.	_____.



Proposal Schedule of Items

Page 55 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
1474	SPV.0090 Special 5002. Ductile Iron Water Main 36-Inch	200.000 LF	_____.	_____.
1476	SPV.0090 Special 5003. Ductile Iron Water Main 48-Inch	762.000 LF	_____.	_____.
1478	SPV.0090 Special 5004. Abandon Existing 36-Inch Water Main	120.000 LF	_____.	_____.
1480	SPV.0090 Special 5005. Abandon Existing 48-Inch Water Main	720.000 LF	_____.	_____.
1482	SPV.0090 Special 5006. Removing Water Main	30.000 LF	_____.	_____.
1484	SPV.0090 Special 5007. Ductile Iron Water Main 12-Inch	21.000 LF	_____.	_____.
1486	SPV.0090 Special 5008. Ductile Iron Hydrant Branch 6-Inch	23.000 LF	_____.	_____.
1488	SPV.0090 Special 5120. Sewer Exams by CCTV Post Construction	7,037.000 LF	_____.	_____.
1490	SPV.0090 Special 5201. 4-Duct Conduit Cement Encased 4-Inch Conduit	2,576.000 LF	_____.	_____.
1492	SPV.0090 Special 5210. Conduit Subduct 1-Inch	1,207.000 LF	_____.	_____.
1494	SPV.0090 Special 5211. Furnish Municipal Fiber Optic Cable 72 Count	1,387.000 LF	_____.	_____.
1496	SPV.0090 Special 8000. Drain Slotted Vane Temporary	1,437.000 LF	_____.	_____.
1498	SPV.0090 Special 8001. Pipe Underdrain Exploration	500.000 LF	_____.	_____.



Proposal Schedule of Items

Page 56 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
1500	SPV.0090 Special 8002. Drain Slotted Vane Permanent	1,787.000 LF	_____.	_____.
1502	SPV.0110 Special 4000. Timber Lagging	15.000 MBM	_____.	_____.
1504	SPV.0135 Special 0301. Vibration Monitoring	40.000 MON	_____.	_____.
1506	SPV.0165 Special 0400. Tactile Directional Indicators	4,631.000 SF	_____.	_____.
1508	SPV.0165 Special 0401. High Friction Traffic Marking Green Bike Lane Panel	2,222.000 SF	_____.	_____.
1510	SPV.0165 Special 4000. Longitudinal Grooving Bridge Deck	82,584.000 SF	_____.	_____.
1512	SPV.0165 Special 4100. Geocomposite Drain Board	4,970.000 SF	_____.	_____.
1514	SPV.0165 Special 4500. Piling Steel Sheet Permanent Installed R-40-801	19,020.000 SF	_____.	_____.
1516	SPV.0165 Special 4600. Screening Fence Structure Mounted	6,280.000 SF	_____.	_____.
1518	SPV.0165 Special 4610. Screening Fence Ground Mounted	10,150.000 SF	_____.	_____.
1520	SPV.0165 Special 4700. Temporary Wall Wire Faced Mechanically Stabilized Earth	10,283.000 SF	_____.	_____.
1522	SPV.0165 Special 4734. Wall Concrete Panel Mechanically Stabilized Earth R-40-734	10,700.000 SF	_____.	_____.
1524	SPV.0165 Special 4735. Wall Concrete Panel Mechanically Stabilized Earth R-40-735	11,600.000 SF	_____.	_____.



Proposal Schedule of Items

Page 57 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
1526	SPV.0165 Special 4736. Wall Concrete Panel Mechanically Stabilized Earth R-40-736	18,526.000 SF	_____.	_____.
1528	SPV.0165 Special 4737. Wall Concrete Panel Mechanically Stabilized Earth R-40-737	15,087.000 SF	_____.	_____.
1530	SPV.0165 Special 4739. Wall Concrete Panel Mechanically Stabilized Earth R-40-739	10,135.000 SF	_____.	_____.
1532	SPV.0165 Special 4740. Wall Concrete Panel Mechanically Stabilized Earth R-40-740	5,987.000 SF	_____.	_____.
1534	SPV.0165 Special 4741. Wall Concrete Panel Mechanically Stabilized Earth R-40-741	7,720.000 SF	_____.	_____.
1536	SPV.0165 Special 4742. Wall Concrete Panel Mechanically Stabilized Earth R-40-742	3,620.000 SF	_____.	_____.
1538	SPV.0165 Special 4744. Wall Concrete Panel Mechanically Stabilized Earth R-40-744	1,486.000 SF	_____.	_____.
1540	SPV.0165 Special 4762. Wall Concrete Panel Mechanically Stabilized Earth R-40-762	2,830.000 SF	_____.	_____.
1542	SPV.0180 Special 0420. Asphaltic Material Binder	1,091.000 SY	_____.	_____.
1544	SPV.0180 Special 0421. HPC Pavement 9-Inch	35,541.000 SY	_____.	_____.
1546	SPV.0180 Special 0422. HPC Pavement HES 9-Inch	758.000 SY	_____.	_____.
1548	SPV.0180 Special 0423. HPC Pavement 12-Inch	82,658.000 SY	_____.	_____.
1550	SPV.0195 Special 0443. HMA Longitudinal Joint Repair	100.000 TON	_____.	_____.



Proposal Schedule of Items

Page 58 of 58

Proposal ID: 20250909006 Project(s): 1060-27-71

Federal ID(s): WISC 2025596

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
1552	SPV.0195 Special 0444. HMA Transverse Joint Repair	100.000 TON	_____.	_____.
1554	204.0115 Removing Asphaltic Surface Butt Joints	300.000 SY	_____.	_____.
1556	450.4000 HMA Cold Weather Paving	13,780.000 TON	_____.	_____.
1558	SPV.0060 Special 0955. Install State Furnished Sign	4.000 EACH	_____.	_____.
1560	SPV.0090 Special 0274. Marking Epoxy 6-Inch Black Non Grooved	1,637.000 LF	_____.	_____.
1562	SPV.0090 Special 0275. Marking Epoxy 10-Inch Black Non Grooved	426.000 LF	_____.	_____.
Section: 0001			Total:	_____.
			Total Bid:	_____.