



Wisconsin Department of Transportation

September 4, 2025

Division of Transportation Systems Development

Bureau of Project Development
4822 Madison Yards Way, 4th Floor South
Madison, WI 53705

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

Proposal #22: 1590-12-75, WISC 2025608
Rhineland – Monico
STH 47 to STH 17 North
USH 8
Oneida County

Letting of September 9, 2025

This is Addendum No. 01, which provides for the following:

Schedule of Items:

Revised Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Proposal Quantity Change (-)	Proposal Total After Addendum
633.1100	Delineators Temporary	Each	3,424	-3,359	65

Added Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Quantity Added	Proposal Total After Addendum
465.0110	Asphaltic Surface Patching	Ton	0	120	120

Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
22	Typical Section (Revised pavement layer to 4 MT 58-34 H)
214	Miscellaneous Quantities (Added asphaltic surface patching item)
228	Miscellaneous Quantities (Revised delineators temporary quantity)

Schedule of Items

Attached, dated September 4, 2025, are the revised Schedule of Items Pages 7, 14, and 15.

Plan Sheets

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:

Revised: 22, 214, and 228.


The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman


Proposal Development Specialist
Proposal Management Section

END OF ADDENDUM

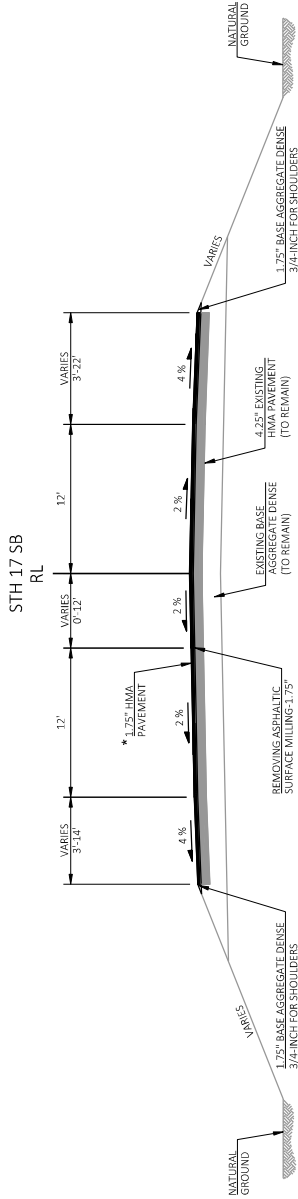

FINISHED TYPICAL SECTION FOR STH 17 SOUTH
STA 10+00.00NB - STA 13+26.00NB

PAVEMENT LAYERS	
* 1 3/4" HMA PAVEMENT	4 MT 55-34 H
** 7" HMA PAVEMENT	1 3/4" (4 MT 55-34 H) UPPER LAYER 2 1/4" (3 MT 55-28 S) LOWER LAYER 3" (3 MT 55-28 S) LOWER LAYER

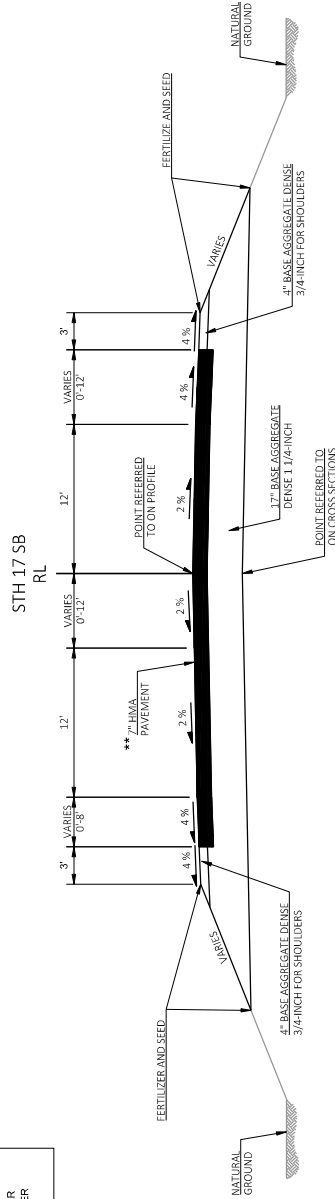

FINISHED TYPICAL SECTION FOR STH 17 SOUTH
STA 13+26.00NB - STA 14+29.00NB

Addendum No. 01
ID 1590-12-75
Revised Sheet 22
September 4, 2025

HMA PAVEMENT										
CATEGORY	STATION	TO	STATION	LOCATION	WEATHER PAVING	450.4000 HMA COLD	455.0605 TACK COAT	460.6223 HMA PAVEMENT 3 MT 58-28 S	460.6244 HMA PAVEMENT 4 MT 58-34 S	460.6444 HMA PAVEMENT 4 MT 58-34 H
					TON		GAL	TON	TON	TON
REMARKS										
STAGE 1										
0010	99+41	-	154+45	USH 8 EB	-	-	2,597	5,185	1,884	-
0010	169+20	-	223+00	USH 8 EB	-	-	2,513	5,018	1,822	-
				STAGE 1 SUBTOTALS	0		5,110	10,203	3,706	0
STAGE 2										
0010	83+81	-	89+70	USH 8 EB, LT	-	-	176	386	-	127
0010	83+81	-	89+70	USH 8 EB, RT	-	-	180	396	-	130
0010	88+46	-	99+41	USH 8 EB	-	-	975	2,135	-	704
0010	154+45	-	160+90	USH 8 EB	-	-	357	784	-	260
0010	161+76	-	169+20	USH 8 EB	-	-	572	1,246	-	412
				STAGE 2 SUBTOTALS	0		2,260	4,947	0	1,633
STAGE 3										
0010	89+70	-	92+86	USH 8 EB	86	86	120	260	-	86
0010	160+93	-	161+75	USH 8 EB	255	255	355	770	-	256
0010	223+00	-	242+00	USH 8 EB	565	565	1,375	1,280	994	-
0010	10+00	-	13+26	STH 17 SOUTH NB	49	49	135	-	-	195
				STAGE 3 SUBTOTALS	955	955	1,985	2,310	994	537
				TOTAL 0010	955		9,355	17,460	4,700	2,170
STAGE 1										
0020	700+95	-	726+70	LINCOLN ST	363	363	882	-	1,450	-
0020	806+50	-	811+17	LINCOLN ST	88	88	213	-	350	-
				STAGE 1 SUBTOTALS	451	451	1,095	0	1,800	0
				TOTAL 0020	451		1,095	0	1,800	0
				PROJECT TOTALS	1,406		10,450	17,460	6,500	2,170

Addendum No. 01
ID 1590-12-75
Revised Sheet 214
September 4, 2025

ASPHALTIC SURFACE PATCHING		
465.0110 ASPHALTIC SURFACE PATCHING		
CATEGORY	LOCATION	TON
0010	PROJECT	120
	TOTAL 0010	120

TRAFFIC CONTROL SUMMARY

3

3

CATEGORY	LOCATION	APPROX. SERVICE DAYS	633.1100 DELINEATORS TEMPORARY	643.0300		643.0420		643.0705		643.0715		643.0900		643.3760		REMARKS
				NO. IN	SERVICE	DAY	NO. IN	TRAFFIC CONTROL BARRICADES TYPE III	NO. IN	TRAFFIC CONTROL WARNING LIGHTS TYPE A	NO. IN	TRAFFIC CONTROL SIGNS	DAY	TEMPORARY MARKING RAISED PAVEMENT MARKER TYPE I	EACH	
STAGE 1	USH 8 & STH 17 SOUTH INTERSECTION	14	-	98	1,372	23	322	29	406	13	182	24	336	-	-	SHOULDER CLOSURE
	USH 8 & STH 17 SOUTH INTERSECTION	14	-	-	-	-	-	-	-	-	-	4	56	-	-	TRAFFIC CONTROL, ADVANCE WARNING SIGNS
	USH 8 & STH 17 SOUTH INTERSECTION	14	-	-	-	-	-	-	-	-	-	5	70	-	-	TRAFFIC CONTROL, ADVANCE WARNING SIGNS
	BOYCE DR	14	-	-	-	9	126	12	168	-	-	7	98	-	-	BARRICADES AND SIGNS FOR VARIOUS CLOSURES
	USH 8 & CTH G INTERSECTION	14	-	52	728	18	252	21	294	-	-	5	70	-	-	SHOULDER CLOSURE
	USH 8 & CTH G INTERSECTION	14	-	-	-	-	-	-	-	-	-	10	140	-	-	TRAFFIC CONTROL, ADVANCE WARNING SIGNS
STAGE 1 SUBTOTALS			0	-	2,100	-	700	-	868	-	182	-	770	-	0	
STAGE 2	USH 8 & STH 17 SOUTH INTERSECTION	75	22	28	2,100	4	300	8	600	12	900	28	2,100	21	-	TRAFFIC CONTROL, TEMPORARY BYPASS ROADWAY
	USH 8 & STH 17 SOUTH INTERSECTION	85	-	-	-	-	-	-	-	-	-	4	340	-	-	TRAFFIC CONTROL, ADVANCE WARNING SIGNS
	USH 8 & STH 17 SOUTH INTERSECTION	85	-	-	-	-	-	-	-	-	-	5	425	-	-	TRAFFIC CONTROL, ADVANCE WARNING SIGNS
	USH 8	85	-	-	-	3	255	4	340	-	-	1	85	-	-	BARRICADES AND SIGNS FOR VARIOUS CLOSURES
	STH 17	85	-	-	-	3	255	4	340	-	-	1	85	-	-	BARRICADES AND SIGNS FOR VARIOUS CLOSURES
	BOYCE DR	85	-	-	-	9	765	12	1,020	-	-	7	595	-	-	BARRICADES AND SIGNS FOR VARIOUS CLOSURES
STAGE 3	USH 8 & CTH G INTERSECTION	85	-	73	6,205	25	2,125	32	2,720	10	850	14	1,190	-	-	TRAFFIC CONTROL, ONE LANE ROAD WITH TEMPORARY SIGNALS
	USH 8 & CTH G INTERSECTION	85	-	-	-	-	-	-	-	-	-	10	850	-	-	TRAFFIC CONTROL, ADVANCE WARNING SIGNS
	USH 8 - STAGE 2A/2B	10	22	47	470	4	40	3	30	24	240	28	280	-	-	TRAFFIC CONTROL, ONE LANE ROAD WITH TEMPORARY SIGNALS
	STAGE 2 SUBTOTALS		44	-	8,775	-	3,740	-	5,050	-	1,990	-	5,950	-	21	
STAGE 3	USH 8 & STH 17 SOUTH INTERSECTION	74	21	70	5,180	13	962	18	1,332	21	1,554	24	1,776	-	-	TRAFFIC CONTROL, TEMPORARY BYPASS ROADWAY
	USH 8 & STH 17 SOUTH INTERSECTION	74	-	-	-	-	-	-	-	-	-	4	296	-	-	TRAFFIC CONTROL, ADVANCE WARNING SIGNS
	USH 8 & STH 17 SOUTH INTERSECTION	74	-	-	-	-	-	-	-	-	-	5	370	-	-	TRAFFIC CONTROL, ADVANCE WARNING SIGNS
	USH 8	74	-	-	-	3	222	4	296	-	-	1	74	-	-	BARRICADES AND SIGNS FOR VARIOUS CLOSURES
	STH 17	74	-	-	-	3	222	4	296	-	-	1	74	-	-	BARRICADES AND SIGNS FOR VARIOUS CLOSURES
	BOYCE DR	74	-	-	-	9	666	12	888	-	-	7	518	-	-	BARRICADES AND SIGNS FOR VARIOUS CLOSURES
STAGE 1	USH 8 & CTH G INTERSECTION	74	-	51	3,774	14	1,036	20	1,480	10	740	15	1,110	-	-	TRAFFIC CONTROL, ONE LANE ROAD WITH TEMPORARY SIGNALS
	USH 8 & CTH G INTERSECTION	74	-	-	-	-	-	-	-	-	-	10	740	-	-	TRAFFIC CONTROL, ADVANCE WARNING SIGNS
	USH 8 & STH 17 NORTH INTERSECTION	3	-	-	-	-	-	-	-	-	-	6	18	-	-	FLAGGING OPERATION
	STAGE 3 SUBTOTALS		21	-	8,954	-	3,108	-	4,292	-	2,294	-	4,976	-	0	
TOTAL 0010			65	-	19,829	-	7,548	-	10,210	-	4,456	-	11,696	-	21	
STAGE 1	LINCOLN ST (RESURFACING)	19	-	-	-	-	-	-	-	-	-	24	456	-	-	FLAGGING OPERATION
	LINCOLN ST (RESURFACING)	19	-	-	-	-	-	-	-	-	-	33	627	-	-	TRAFFIC CONTROL, ADVANCE WARNING SIGNS
	STAGE 1 SUBTOTALS		0	-	0	-	0	-	0	-	0	-	1,083	-	0	
	TOTAL 0020		0	-	0	-	0	-	0	-	0	-	1,083	-	0	
PROJECT TOTALS			65	-	19,829	-	7,548	-	10,210	-	4,456	-	12,779	-	21	

*ADDITIONAL QUANTITIES SHOWN ELSEWHERE



Proposal Schedule of Items

Page 7 of 15

Proposal ID: 20250909022 Project(s): 1590-12-75

Federal ID(s): WISC 2025608

SECTION: 0001

Roadway Construction

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0178	628.7010 Inlet Protection Type B	2.000 EACH	_____.	_____.
0180	628.7015 Inlet Protection Type C	24.000 EACH	_____.	_____.
0182	628.7020 Inlet Protection Type D	8.000 EACH	_____.	_____.
0184	628.7504 Temporary Ditch Checks	340.000 LF	_____.	_____.
0186	628.7555 Culvert Pipe Checks	15.000 EACH	_____.	_____.
0188	628.7570 Rock Bags	120.000 EACH	_____.	_____.
0190	629.0210 Fertilizer Type B	36.000 CWT	_____.	_____.
0192	630.0140 Seeding Mixture No. 40	2,290.000 LB	_____.	_____.
0194	630.0200 Seeding Temporary	110.000 LB	_____.	_____.
0196	630.0500 Seed Water	1,000.000 MGAL	_____.	_____.
0198	632.0101 Trees (species, root, size) 01. Cole's Select Serviceberry, B&B, 5'	6.000 EACH	_____.	_____.
0200	632.9101 Landscape Planting Surveillance and Care Cycles	20.000 EACH	_____.	_____.
0202	633.1100 Delineators Temporary	65.000 EACH	_____.	_____.
0204	634.0612 Posts Wood 4x6-Inch X 12-FT	2.000 EACH	_____.	_____.
0206	634.0614 Posts Wood 4x6-Inch X 14-FT	75.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 14 of 15

Proposal ID: 20250909022 Project(s): 1590-12-75

Federal ID(s): WISC 2025608

SECTION: 0001

Roadway Construction

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0384	SPV.0060 Special 03. Perennials Catmint 'Walkers Low', SP4, CG	225.000 EACH	_____.	_____.
0386	SPV.0060 Special 04. Perennials Prairie Dropseed, SP4, CG	873.000 EACH	_____.	_____.
0388	SPV.0060 Special 05. Inlets 5-FT Diameter	2.000 EACH	_____.	_____.
0390	SPV.0060 Special 06. Salvage Traffic Signals USH 8 & STH 17	1.000 EACH	_____.	_____.
0392	SPV.0060 Special 07. Salvage Traffic Signals USH 8 & CTH G	1.000 EACH	_____.	_____.
0394	SPV.0060 Special 08. Traffic Signal Modifications Courtney St & Pelham St	1.000 EACH	_____.	_____.
0396	SPV.0090 Special 01. Concrete Curb & Gutter 4-Inch Sloped 36-Inch Type A Full Depth	611.000 LF	_____.	_____.
0398	SPV.0090 Special 02. Installing and Maintaining Climbing Turtle Exclusion Fence	2,160.000 LF	_____.	_____.
0400	SPV.0165 Special 01. Stone Mulch Epoxied	4,016.000 SF	_____.	_____.
0402	SPV.0165 Special 02. Weed Barrier	11,825.000 SF	_____.	_____.
0404	SPV.0180 Special 01. Protective Thermoplastic Coating at Snowmobile Crossing	384.000 SY	_____.	_____.
0406	SPV.0180 Special 02. Removing Distressed Asphaltic Surface Milling	500.000 SY	_____.	_____.
0408	SPV.0195 Special 01. Stone Mulch	164.000 TON	_____.	_____.
0410	465.0110 Asphaltic Surface Patching	120.000 TON	_____.	_____.



Proposal Schedule of Items

Page 15 of 15

Proposal ID: 20250909022 Project(s): 1590-12-75

Federal ID(s): WISC 2025608

Section: 0001

Total: _____.

Total Bid: _____.