



Wisconsin Department of Transportation

October 2, 2025

Division of Transportation Systems Development

Bureau of Project Development
4822 Madison Yards Way, 4th Floor South
Madison, WI 53705

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

Proposal #16: 1570-00-78, WISC 2026012
St Croix Falls – Turtle Lake
STH 35 N to STH 46 S
USH 8
Polk County

Letting of October 14, 2025

This is Addendum No. 01, which provides for the following:

Special Provisions:

Added Special Provisions	
Article No.	Description
26	Removing Asphaltic Longitudinal Notched Wedge Joint Milling, Item 204.0126.S

Schedule of Items:

Added Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Quantity Added	Proposal Total After Addendum
204.0126.S	Removing Asphaltic Longitudinal Notched Wedge Joint Milling	LF	0	49,440	49,440

Deleted Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Proposal Quantity Change (-)	Proposal Total After Addendum
460.0110.S	HMA Percent Within Limits (PWL) Test Strip Density	Each	1	-1	0

Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
4	Updated station ranges
5	Updated HMA Mix types on both Typical
27	Added 204.0126.S table and removed item 460.0110.S from the table
28	Added a line to the table for the Sloughing Areas

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman

Proposal Development Specialist
Proposal Management Section

ADDENDUM NO. 01

1570-00-78

October 2, 2025

Special Provisions

26. Removing Asphaltic Longitudinal Notched Wedge Joint Milling, Item 204.0126.S.

A Description

This special provision describes the milling and removing of the upper layer HMA longitudinal notched wedge joint, including sweeping and cleaning of the affected area prior to paving the adjacent lane. Follow drop-off and hazard protection in standard spec 104.6.1.2.3.

B (Vacant)

C Construction

Prior to paving the adjacent upper layer HMA lane, mill longitudinal notched wedge joint to a true line with a face perpendicular to the surface of the existing asphaltic surface pavement as the plans show or the engineer directs. Provide a uniform milled surface that is reasonably plane, free of excessively large scarification marks, and has the grade and transverse slope the plans show, or the engineer directs. Do not damage the remaining pavement.

Use a self-propelled milling machine with depth, grade, and slope controls. Shroud the drum to prevent discharging loosened material onto the adjacent work areas or live traffic lanes. Provide an engineer-approved dust control system.

Thoroughly clean the milled surface and completely remove all millings from the project site. Unless using a continuous removal and pick-up operation, do not windrow or store material on the roadway. Clear the roadway of all material and equipment during non-working hours. The contractor becomes the owner of the removed asphaltic pavement and is responsible for the disposal as specified in standard spec 204.3.1.3.

D Measurement

The department will measure Removing Asphaltic Longitudinal Notched Wedge Joint Milling by the linear foot unit for all wedge joints, acceptably removed.

E Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBER	DESCRIPTION	UNIT
204.0126.S	Removing Asphaltic Longitudinal Notched Wedge Joint Milling	LF

Payment is full compensation for milling, removing, sweeping, cleaning, and disposing of materials.

stp-204-045 (20191121)

Schedule of Items

Attached, dated October 2, 2025, are the revised Schedule of Items Pages 1 – 8.

Plan Sheets

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:

Revised: 4, 5, 27, and 28.

END OF ADDENDUM


LT STA RANGE
533+99-543+55
546+00-595+02

LT STA RANGE (MAY NOT HAVE C&G,
ANY EXISTING PAVED SHOULDER OVER 5')


260+95-266+45
260+95-264+15
260+95-264+15
333+88-343+43
382+90-395+68
462+10-464+60
473+99-481+50
543+55-546+00
683+87-688+05
738+02-740+80

LT STA RANGE
294+15-300+23
347+70-354+44
369+75-382+90
496+69-500+07
700+94-715+69
740+80-743+08

LT STA RANGE
266+45-290+57
325+07-327+62
327+62-332+69
343+10-354+73
395+68-429+00
432+75-462+10
464+60-473+99
484+50-496+69
500+07-533+99
595+02-683+87
688+05-700+94
715+69-738+02

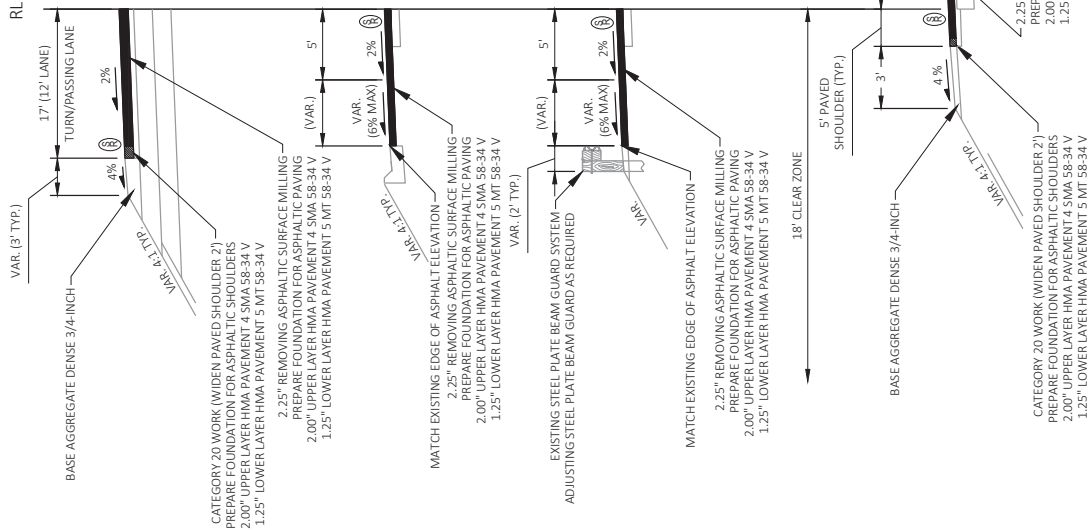

Addendum No. 01
ID 1570-00-78
Revised Sheet 4
October 2, 2025

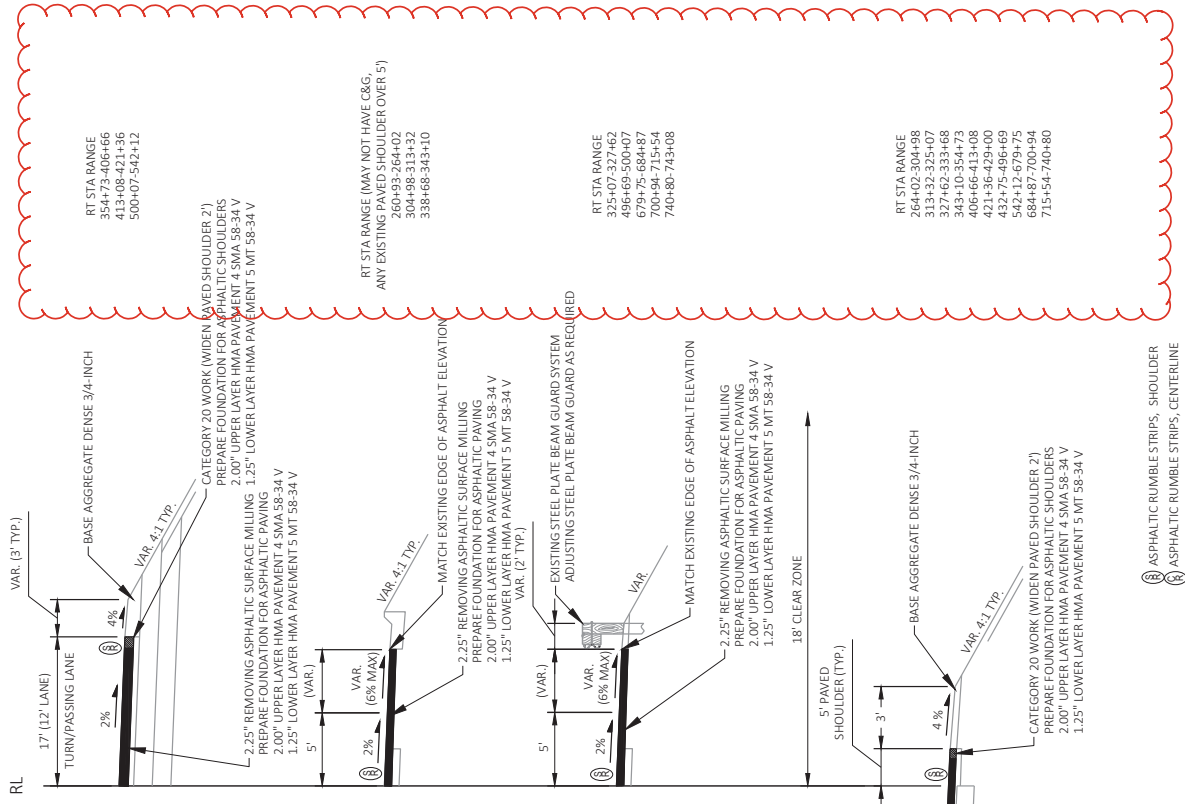

TYPICAL FINISHED SECTION

ASPHALTIC RUMBLE STRIPS, SHOULDER
ASPHALTIC RUMBLE STRIPS, CENTERLINE

PROJECT NO: 1570-00-78

HWY: USH 8


COUNTY: POLK

TYPICAL SECTIONS


SHEET 4

FILE NAME: C:\VMS\DOT\DESIGN\15700008\SHSHE\PLAN02B01.TS BC CG AND TURN LANE DWG
LAYOUT NAME: TS-4
PLOT DATE: 9/18/2025 1:20 PM
PLOT BY: BECKUM, MATTHEW R
PLOT NAME: 1 IN 10 FT
PLOT SCALE: 1 IN 10 FT
WMS07/CADDS SHEET 42

Addendum No. 01
ID 1570-00-78
Revised Sheet 5
October 2, 2025

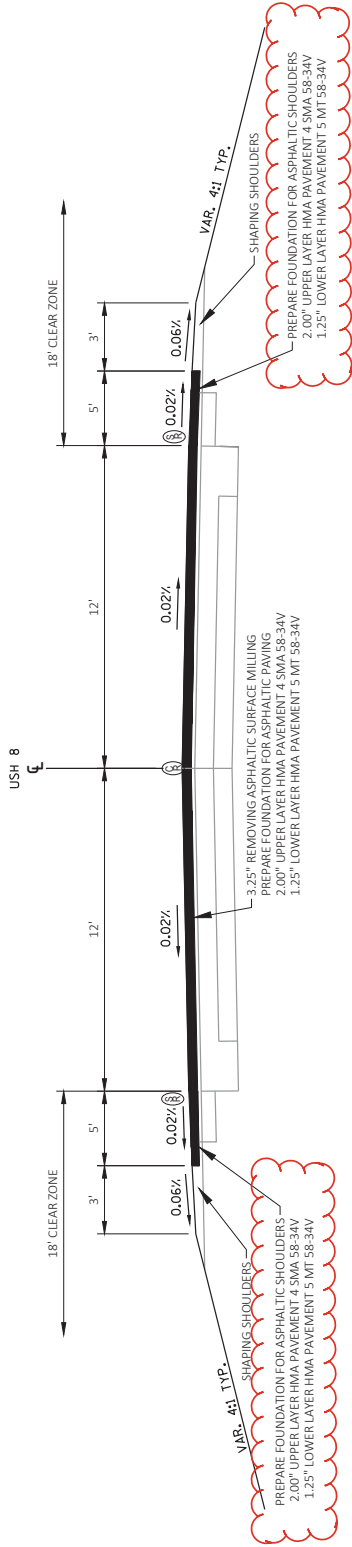

USH 8 PROPOSED TYPICAL SECTION
STA 744+88 - 757+76

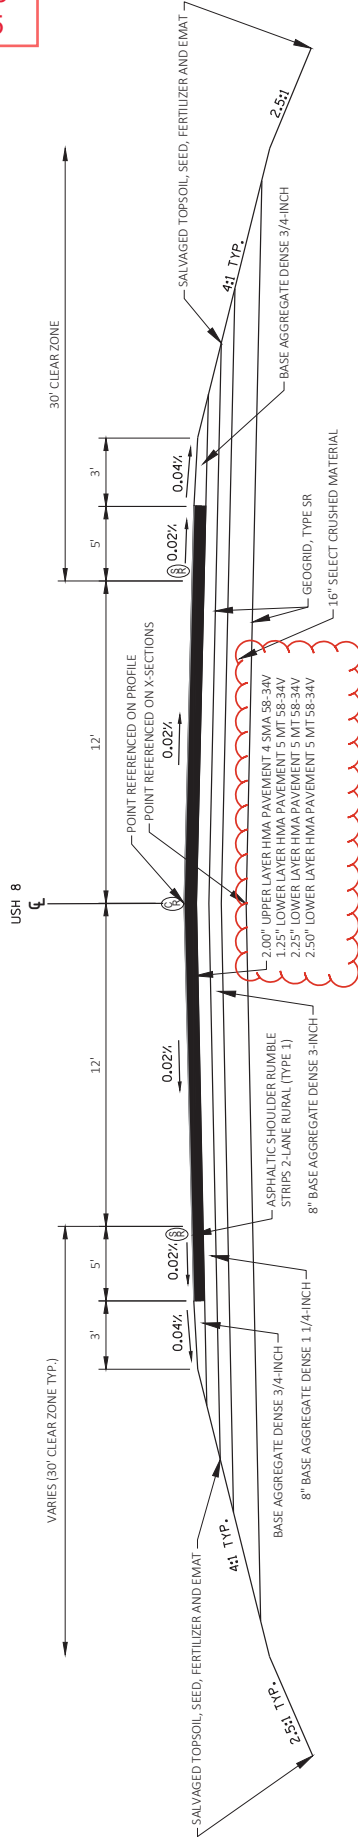

USH 8 PROPOSED TYPICAL SECTION
STA 429+00 - 432+75
STA 481+50 - 484+50 (LEFT)

- ⑧ ASPHALTIC RUMBLE STRIPS, SHOULDER
- ⑧ ASPHALTIC RUMBLE STRIPS, CENTERLINE

THE FOLLOWING ACCEPTANCE CRITERIA ARE APPLICABLE FOR THIS PROJECT:

LOCATION	STATION	MIXTURE USE	UNDERLYING SURFACE	BID ITEM	TON	THICKNESS	QUALITY MANAGEMENT PROGRAM TO BE USED FOR:	
							MIXTURE ACCEPTANCE	DENSITY ACCEPTANCE
DRIVING LANES & PASSING LANE	260+93 - 757+76	UPPER LAYER	5 MT 58-34 V	4 SMA 58-34 V	18,707	2.25"	INCENTIVE AIR VOIDS HMA PAVEMENT 460.2010	INCENTIVE DENSITY HMA PAVEMENT 460.2000
DRIVING LANES & PASSING LANE	260+93 - 757+76	LOWER LAYER	MILLED EXISTING HMA SURFACE	5 MT 58-34 V	10,393	1.25"	INCENTIVE AIR VOIDS HMA PAVEMENT 460.2010	ORDINARY COMPACTION (SS 450.3.2.6.2)
SHOULDER, MEDIAN, AND TURN LANES	260+93 - 757+76	UPPER LAYER	5 MT 58-34 V	4 SMA 58-34 V	7,761	2.25"	INCENTIVE AIR VOIDS HMA PAVEMENT 460.2010	DEPARTMENT ACCEPTANCE (SS 460.3.3.2) *NOT ELIGIBLE FOR INCENTIVE)
SHOULDER, MEDIAN, AND TURN LANES	260+93 - 757+76	LOWER LAYER	MILLED EXISTING HMA SURFACE/ BASE AGGREGATE	5 MT 58-34 V	6,902	VARIES	INCENTIVE AIR VOIDS HMA PAVEMENT 460.2010	ORDINARY COMPACTION (SS 450.3.2.6.2)
SLOUGHING AREAS	429+00-432+75 481+50-484+50 (LEFT)	LOWER LAYERS	BASE AGGREGATE/5 MT 58-34 V	5 MT 58-34 V	678	VARIES	QMP (SS 460.2.8)	ORDINARY COMPACTION (SS 450.3.2.6.2)
HMA PAVING FOUNDATION	VARIOUS	LEVELING AND WEDGING	VARIES	ASPHALTIC SURFACE	400	VARIES	QMP (SS 460.2.8)	ORDINARY COMPACTION (SS 450.3.2.6.2)
PAVED DRIVEWAYS	VARIOUS	SINGLE LAYER	MILLED EXISTING HMA SURFACE	ASPHALTIC SURFACE DRIVEWAYS AND FIELD ENTRANCES	120	VARIES	QMP AS PER STANDARD SPECIFICATIONS 465	ORDINARY COMPACTION (SS 450.3.2.6.2)
PATCHING FOR REMOVALS	VARIOUS	REMOVALS	BASE AGGREGATE	ASPHALTIC SURFACE	43	VARIES	QMP AS PER STANDARD SPECIFICATIONS 465	ORDINARY COMPACTION (SS 450.3.2.6.2)

Addendum No. 01
ID 1570-00-78
Revised Sheet 28
October 2, 2025



Proposal Schedule of Items

Page 1 of 8

Proposal ID: 20251014016 Project(s): 1570-00-78

Federal ID(s): WISC 2026012

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0002	201.0105 Clearing	2.000 STA	_____.	_____.
0004	201.0205 Grubbing	2.000 STA	_____.	_____.
0006	203.0100 Removing Small Pipe Culverts	1.000 EACH	_____.	_____.
0008	204.0100 Removing Concrete Pavement	1,417.000 SY	_____.	_____.
0010	204.0115 Removing Asphaltic Surface Butt Joints	2,287.000 SY	_____.	_____.
0012	204.0120 Removing Asphaltic Surface Milling	207,731.000 SY	_____.	_____.
0014	204.0150 Removing Curb & Gutter	697.000 LF	_____.	_____.
0016	204.0165 Removing Guardrail	180.000 LF	_____.	_____.
0018	204.9060.S Removing (item description) 01. Culvert Endwalls	9.000 EACH	_____.	_____.
0020	205.0100 Excavation Common	2,985.000 CY	_____.	_____.
0022	211.0101 Prepare Foundation for Asphaltic Paving (project) 01. 1570-00-78	1.000 EACH	_____.	_____.
0024	211.0400 Prepare Foundation for Asphaltic Shoulders	760.000 STA	_____.	_____.
0026	213.0100 Finishing Roadway (project) 01. 1570-00-78	1.000 EACH	_____.	_____.
0028	305.0110 Base Aggregate Dense 3/4-Inch	1,969.000 TON	_____.	_____.
0030	305.0120 Base Aggregate Dense 1 1/4-Inch	1,570.000 TON	_____.	_____.



Proposal Schedule of Items

Page 2 of 8

Proposal ID: 20251014016 Project(s): 1570-00-78

Federal ID(s): WISC 2026012

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0032	305.0130 Base Aggregate Dense 3-Inch	720.000 TON	_____.	_____.
0034	305.0500 Shaping Shoulders	996.000 STA	_____.	_____.
0036	310.0110 Base Aggregate Open-Graded	200.000 TON	_____.	_____.
0038	312.0110 Select Crushed Material	1,655.000 TON	_____.	_____.
0040	455.0605 Tack Coat	26,540.000 GAL	_____.	_____.
0042	460.0105.S HMA Percent Within Limits (PWL) Test Strip Volumetrics	1.000 EACH	_____.	_____.
0046	460.0115.S HMA Pavement Test Strip Volumetrics	1.000 EACH	_____.	_____.
0048	460.0120.S HMA Pavement Test Strip Density	1.000 EACH	_____.	_____.
0050	460.2000 Incentive Density HMA Pavement	14,970.000 DOL	1.00000	14,970.00
0052	460.2005 Incentive Density PWL HMA Pavement	10,410.000 DOL	1.00000	10,410.00
0054	460.2007 Incentive Density HMA Pavement Longitudinal Joints	49,460.000 DOL	1.00000	49,460.00
0056	460.2010 Incentive Air Voids HMA Pavement	14,620.000 DOL	1.00000	14,620.00
0058	460.6645 HMA Pavement 5 MT 58-34 V	17,295.000 TON	_____.	_____.
0060	460.8644 HMA Pavement 4 SMA 58-34 V	26,468.000 TON	_____.	_____.
0062	460.9000.S Material Transfer Vehicle	1.000 EACH	_____.	_____.



Proposal Schedule of Items

Page 3 of 8

Proposal ID: 20251014016 Project(s): 1570-00-78

Federal ID(s): WISC 2026012

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0064	465.0105 Asphaltic Surface	443.000 TON	_____.	_____.
0066	465.0120 Asphaltic Surface Driveways and Field Entrances	195.000 TON	_____.	_____.
0068	465.0125 Asphaltic Surface Temporary	240.000 TON	_____.	_____.
0070	465.0310 Asphaltic Curb	350.000 LF	_____.	_____.
0072	465.0315 Asphaltic Flumes	100.000 SY	_____.	_____.
0074	465.0520 Asphaltic Rumble Strips, Shoulder	92,556.000 LF	_____.	_____.
0076	465.0560 Asphaltic Rumble Strips, Centerline	41,303.000 LF	_____.	_____.
0078	520.1024 Apron Endwalls for Culvert Pipe 24-Inch	3.000 EACH	_____.	_____.
0080	520.8000 Concrete Collars for Pipe	4.000 EACH	_____.	_____.
0082	520.8700 Cleaning Culvert Pipes	12.000 EACH	_____.	_____.
0084	522.0124 Culvert Pipe Reinforced Concrete Class III 24-Inch	74.000 LF	_____.	_____.
0086	522.0130 Culvert Pipe Reinforced Concrete Class III 30-Inch	16.000 LF	_____.	_____.
0088	522.1024 Apron Endwalls for Culvert Pipe Reinforced Concrete 24-Inch	7.000 EACH	_____.	_____.
0090	522.1030 Apron Endwalls for Culvert Pipe Reinforced Concrete 30-Inch	2.000 EACH	_____.	_____.
0092	524.0130 Culvert Pipe Salvaged 30-Inch	16.000 LF	_____.	_____.



Proposal Schedule of Items

Page 4 of 8

Proposal ID: 20251014016 Project(s): 1570-00-78

Federal ID(s): WISC 2026012

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0094	601.0557 Concrete Curb & Gutter 6-Inch Sloped 36-Inch Type D	697.000 LF	_____.	_____.
0096	603.8000 Concrete Barrier Temporary Precast Delivered	1,375.000 LF	_____.	_____.
0098	603.8125 Concrete Barrier Temporary Precast Installed	2,150.000 LF	_____.	_____.
0100	603.8500 Anchoring Concrete Barrier Temporary Precast	800.000 LF	_____.	_____.
0102	606.0300 Riprap Heavy	25.000 CY	_____.	_____.
0104	612.0106 Pipe Underdrain 6-Inch	300.000 LF	_____.	_____.
0106	612.0206 Pipe Underdrain Unperforated 6-Inch	15.000 LF	_____.	_____.
0108	612.0806 Apron Endwalls for Underdrain Reinforced Concrete 6-Inch	1.000 EACH	_____.	_____.
0110	614.0400 Adjusting Steel Plate Beam Guard	425.000 LF	_____.	_____.
0112	618.0100 Maintenance and Repair of Haul Roads (project) 01. 1570-00-78	1.000 EACH	_____.	_____.
0114	619.1000 Mobilization	1.000 EACH	_____.	_____.
0116	624.0100 Water	24.000 MGAL	_____.	_____.
0118	625.0500 Salvaged Topsoil	3,880.000 SY	_____.	_____.
0120	628.1504 Silt Fence	1,400.000 LF	_____.	_____.



Proposal Schedule of Items

Page 5 of 8

Proposal ID: 20251014016 Project(s): 1570-00-78

Federal ID(s): WISC 2026012

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0122	628.1520 Silt Fence Maintenance	1,400.000 LF	_____.	_____.
0124	628.1905 Mobilizations Erosion Control	4.000 EACH	_____.	_____.
0126	628.1910 Mobilizations Emergency Erosion Control	2.000 EACH	_____.	_____.
0128	628.2004 Erosion Mat Class I Type B	934.000 SY	_____.	_____.
0130	628.2008 Erosion Mat Urban Class I Type B	3,512.000 SY	_____.	_____.
0132	628.7504 Temporary Ditch Checks	40.000 LF	_____.	_____.
0134	628.7555 Culvert Pipe Checks	25.000 EACH	_____.	_____.
0136	629.0210 Fertilizer Type B	5.000 CWT	_____.	_____.
0138	630.0110 Seeding Mixture No. 10	94.000 LB	_____.	_____.
0140	630.0500 Seed Water	323.000 MGAL	_____.	_____.
0142	633.5200 Markers Culvert End	57.000 EACH	_____.	_____.
0144	634.0616 Posts Wood 4x6-Inch X 16-FT	2.000 EACH	_____.	_____.
0146	637.2230 Signs Type II Reflective F	18.000 SF	_____.	_____.
0148	642.5001 Field Office Type B	1.000 EACH	_____.	_____.
0150	643.0300 Traffic Control Drums	6,700.000 DAY	_____.	_____.
0152	643.0420 Traffic Control Barricades Type III	288.000 DAY	_____.	_____.



Proposal Schedule of Items

Page 6 of 8

Proposal ID: 20251014016 Project(s): 1570-00-78

Federal ID(s): WISC 2026012

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0154	643.0705 Traffic Control Warning Lights Type A	500.000 DAY	_____.	_____.
0156	643.0715 Traffic Control Warning Lights Type C	820.000 DAY	_____.	_____.
0158	643.0810.S Connected Arrow Board	50.000 DAY	_____.	_____.
0160	643.0900 Traffic Control Signs	6,340.000 DAY	_____.	_____.
0162	643.3165 Temporary Marking Line Paint 6-Inch	231,587.000 LF	_____.	_____.
0164	643.3805 Temporary Marking Stop Line Paint 18-Inch	60.000 LF	_____.	_____.
0166	643.5000 Traffic Control	1.000 EACH	_____.	_____.
0168	645.0112 Geotextile Type DF Schedule B	360.000 SY	_____.	_____.
0170	645.0120 Geotextile Type HR	50.000 SY	_____.	_____.
0172	645.0135 Geotextile Type SR	3,690.000 SY	_____.	_____.
0174	646.2040 Marking Line Grooved Wet Ref Epoxy 6-Inch	176,906.000 LF	_____.	_____.
0176	646.4040 Marking Line Grooved Wet Ref Epoxy 10-Inch	3,205.000 LF	_____.	_____.
0178	646.5020 Marking Arrow Epoxy	17.000 EACH	_____.	_____.
0180	646.5120 Marking Word Epoxy	6.000 EACH	_____.	_____.
0182	646.6120 Marking Stop Line Epoxy 18-Inch	92.000 LF	_____.	_____.



Proposal Schedule of Items

Page 7 of 8

Proposal ID: 20251014016 Project(s): 1570-00-78

Federal ID(s): WISC 2026012

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0184	646.7120 Marking Diagonal Epoxy 12-Inch	1,172.000 LF	_____.	_____.
0186	646.8020 Marking Corrugated Median Epoxy	967.000 SF	_____.	_____.
0188	646.8120 Marking Curb Epoxy	110.000 LF	_____.	_____.
0190	646.8220 Marking Island Nose Epoxy	4.000 EACH	_____.	_____.
0192	646.9000 Marking Removal Line 4-Inch	5,100.000 LF	_____.	_____.
0194	646.9200 Marking Removal Line Wide	120.000 LF	_____.	_____.
0196	650.4500 Construction Staking Subgrade	675.000 LF	_____.	_____.
0198	650.5000 Construction Staking Base	2,025.000 LF	_____.	_____.
0200	650.5500 Construction Staking Curb Gutter and Curb & Gutter	697.000 LF	_____.	_____.
0202	650.6000 Construction Staking Pipe Culverts	1.000 EACH	_____.	_____.
0204	650.8000 Construction Staking Resurfacing Reference	49,670.000 LF	_____.	_____.
0206	650.9911 Construction Staking Supplemental Control (project) 01. 1570-00-78	1.000 EACH	_____.	_____.
0208	650.9920 Construction Staking Slope Stakes	675.000 LF	_____.	_____.
0210	661.0101 Temporary Traffic Signals for Bridges (structure) 01. Roadway Sloughing	2.000 EACH	_____.	_____.
0212	690.0150 Sawing Asphalt	1,035.000 LF	_____.	_____.



Proposal Schedule of Items

Page 8 of 8

Proposal ID: 20251014016 Project(s): 1570-00-78

Federal ID(s): WISC 2026012

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0214	690.0250 Sawing Concrete	495.000 LF	_____.	_____.
0216	740.0440 Incentive IRI Ride	42,240.000 DOL	1.00000	42,240.00
0218	ASP.1T0A On-the-Job Training Apprentice at \$5.00/HR	2,400.000 HRS	5.00000	12,000.00
0220	ASP.1T0G On-the-Job Training Graduate at \$5.00/HR	2,000.000 HRS	5.00000	10,000.00
0222	SPV.0060 Special 01. Ditch Cleaning	1.000 EACH	_____.	_____.
0224	SPV.0060 Special 02. Abandon Cattle Pass	1.000 EACH	_____.	_____.
0226	SPV.0090 Special 01. UV GRP CIPP 24-Inch	602.000 LF	_____.	_____.
0228	204.0126.S Removing Asphaltic Longitudinal Notched Wedge Joint Milling	49,440.000 LF	_____.	_____.
Section: 0001			Total:	_____.
			Total Bid:	_____.

