



Wisconsin Department of Transportation

December 4, 2025

Division of Transportation Systems Development

Bureau of Project Development
4822 Madison Yards Way, 4th Floor South
Madison, WI 53705

Telephone: (608) 266-1631

Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

Proposal #07: 5290-02-71, WISC 2026102
Mazomanie – Sun Prairie
Division Street to River Road
STH 19
Dane County

Letting of December 9, 2025

This is Addendum No. 02, which provides for the following:

Schedule of Items:

Revised Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Proposal Quantity Change (-)	Proposal Total After Addendum
490.0100.S	Resin Binder High Friction Surface Treatment	SY	9,797	-2,557	7,240

Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
22	Updated the construction detail for the Resin Binder High Friction Surface to show 6-inch pavement marking widths instead of 4-inch.
256	Updated the asphalt pavement miscellaneous quantity table to reflect the correct quantity for Resin Binder High Friction Surface Treatment.

Schedule of Items

Attached, dated December 4, 2025, are the revised Schedule of Items Page 2.

Plan Sheets

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:

Revised: 22 and 256.

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,


Mike Coleman

Proposal Development Specialist
Proposal Management Section

END OF ADDENDUM

GENERAL NOTES

- ONLY APPLY ON THE MAINLINE.
- PROVIDE 30-DAY CURE TIME ON NEW HMA PAVEMENT PRIOR TO PLACING HFST.
- PLACE WHEN AMBIENT AIR OR PAVEMENT SURFACE TEMPERATURE IS ABOVE 50°F.
- REMOVE PAVEMENT MARKING PRIOR TO PLACING HFST. WATERBORNE PAINT MAY REMAIN IN PLACE.
- WITHIN 3 TO 7 DAYS AFTER OPENING TO TRAFFIC, THE CONTRACTOR SHALL VACUUM SWEEP THE PAVEMENT TO REMOVE LOOSENED AGGREGATE.

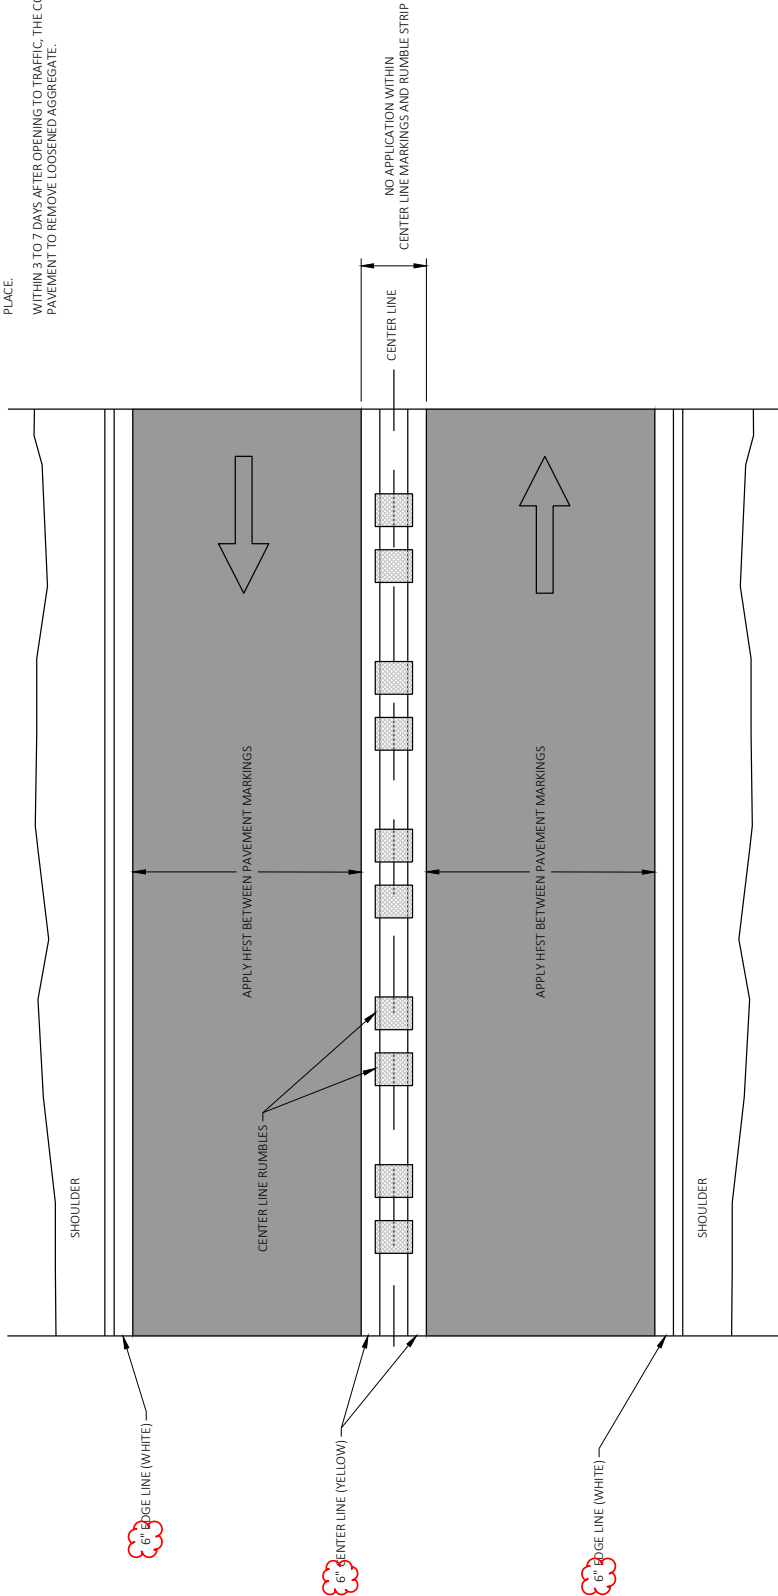

RESIN BINDER HIGH FRICTION SURFACE TREATMENT (HFST)

Addendum No. 02
ID 5290-02-71
Revised Sheet 22
December 4, 2025

PROJECT NO: 5290-02-71	HWY: STH 19	COUNTY: DANE	CONSTRUCTION DETAILS	SHEET 22	E
FILE NAME: \\WSMPLS1\PROJECTS\PROJECTS\1000\13997\DE SIGM\CAD_BIM\52900201\SHEETSPAN\021001-CD.DWG	PLOT DATE: 12/4/2025 10:31 AM	PLOT BY: MORGAN JOHNSON	PLOT NAME: 1 IN 10 FT	PLOT SCALE: 1 IN 10 FT	WBS007/CAD05 SHEET 42

Addendum No. 02
ID 5290-02-71
Revised Sheet 256
December 4, 2025

GRUBBING										REMOVALS									
CATEGORY		STATION	LOCATION	SY	201.0210 GRUBBING		203.0100 REMOVING SMALL PIPE CULVERTS		204.0110 REMOVING ASPHALTIC SURFACE	204.0115 REMOVING ASPHALTIC SURFACE BUTT JOINTS	204.0120 REMOVING ASPHALTIC SURFACE MILLING	204.0150* REMOVING CURB & GUTTER	204.0155 REMOVING CONCRETE SIDEWALK	204.0210 REMOVING MANHOLES	204.0220* REMOVING INLETS	204.0245 REMOVING DISTRESSED PAVEMENT MILLING	204.0255 REMOVING STORM SEWER 12-INCH		
0010	104+62	-	145+07	2	121	104+62 - 145+07	2	121	470	306	1871	265	--	--	1	253	--		
0010	145+07	-	184+56	2	--	145+07 - 184+56	2	--	38	23261	--	--	--	--	1	--	--		
0010	221+11	-	319+87	6	--	221+11 - 319+87	6	--	78	39049	--	--	--	--	--	--	6262		
CATEGORY 0010 TOTAL					10	121	586	62616	1871	265	0	2	253	6262					
0050	154+81	-	180+66	--	--	154+81 - 180+66	--	--	0	--	--	--	--	--	--	--	--		
0050	30+50 'H'	-	35+82 'H'	--	--	30+50 'H' - 35+82 'H'	--	--	29	--	1286	--	--	1	4	52	--		
0050	38+45 'H'	-	39+15 'H'	1	--	38+45 'H' - 39+15 'H'	1	--	36	--	--	--	--	--	--	--	0		
CATEGORY 0050 TOTAL					1	0	65	0	1286	0	1	4	52	0					
ITEM TOTALS					11	121	651	62616	3157	265	1	6	305	6262					
* ADDITIONAL QUANTITY INCLUDED IN STRUCTURE PLAN																			
BASE AGGREGATE DENSE																			
CATEGORY		STATION	TO	STATION	305.0110 3/4-INCH	305.0120* 1 1/4-INCH	305.0500 SHAPING SHOULDERS	312.0110 SELECT CRUSHED MATERIAL	624.0100 WATER	REMARKS									
0010	104+62	-	145+07	2	121	21815	63	24174	339	INCLUDES QUANTITY FOR RELIEF TRENCHES									
0010	145+07	-	184+56	2	89	--	63	--	1	3 MAINTENANCE CROSSOVER RESTORATION									
0010	182+76	-	184+08	11	186	--	--	--	3	3 MAINTENANCE CROSSOVER RESTORATION									
0010	221+11	-	319+87	652	1486	198	--	24174	375	DIVISION WB LEFT TURN LANE									
CATEGORY 0010 TOTAL					1527	23486	261	--	--	DIVISION WB LEFT TURN LANE									
0030	128+50	-	133+43	--	--	156	--	--	--	INCLUDES QUANTITY FOR RELIEF TRENCHES									
0050	154+81	-	180+66	271	4287	--	--	2275	68	INCLUDES QUANTITY FOR RELIEF TRENCHES									
0050	30+50 'H'	-	35+82 'H'	12	--	3716	--	--	56	3 MAINTENANCE CROSSOVER RESTORATION									
0050	38+45 'H'	-	39+15 'H'	283	10763	0	--	2275	165	3 MAINTENANCE CROSSOVER RESTORATION									
CATEGORY 0050 TOTAL					283	10763	0	2275	165	3 MAINTENANCE CROSSOVER RESTORATION									
ITEM TOTALS					1810	34405	261	26449	540	3 MAINTENANCE CROSSOVER RESTORATION									
* QUANTITIES SHOWN ELSEWHERE IN PLAN.																			
ASPHALTIC PAVEMENT																			
CATEGORY		STATION	TO	STATION	455.0605 TACK COAT	460.6224 HMA PAVEMENT 4 MT 38-28 S	465.0105 ASPHALTIC SURFACE	490.0100 S RESIN BINDER HIGH FRICTION SURFACE TREATMENT	REMARKS										
0010	104+62	-	145+07	3594	6108	2515	14	--	--	INCLUDES DRIVEWAY AND SHARED USE PATH RESTORATION									
0010	23+07 'S'	-	23+61 'S'	16	--	--	35	--	--	2" MILL AND OVERLAY FOR DETECTOR LOOP INSTALLATION									
0010	145+07	-	184+56	2792	2280	--	--	--	--	2" MILL AND OVERLAY FOR DETECTOR LOOP INSTALLATION									
0010	182+76	-	184+08	--	--	--	74	--	--	MAINTENANCE CROSSOVER RESTORATION									
0010	221+11	-	319+87	4686	3827	3827	741	7240	--	FOR DISTRESSED PAVEMENT AREAS. ADDITIONAL 2" OVERLAY									
CATEGORY 0010 TOTAL					11088	12293	864	7240	--	FOR DISTRESSED PAVEMENT AREAS. ADDITIONAL 2" OVERLAY									
0030	128+50	-	133+43	--	22	53	--	--	--	DIVISION WB LEFT TURN LANE									
CATEGORY 0030 TOTAL					22	53	--	--	--	DIVISION WB LEFT TURN LANE									
0050	154+81	-	180+66	457	776	320	32	--	--	3 MAINTENANCE CROSSOVER RESTORATION									
0050	30+50 'H'	-	35+82 'H'	482	820	338	--	--	--	3 MAINTENANCE CROSSOVER RESTORATION									
0050	38+45 'H'	-	39+15 'H'	609	1035	427	--	--	--	3 MAINTENANCE CROSSOVER RESTORATION									
CATEGORY 0050 TOTAL					1548	2631	1085	32	--	3 MAINTENANCE CROSSOVER RESTORATION									
ITEM TOTALS																			
25862																			

PROJECT NO: 5290-02-71

FILE NAME : H:\PROJECTS\13000\13997\DESIGN\CAD_BIM\52900201\SHEETS\PLAN\030201-MQ.DWG
LAYOUT NAME - 01

COUNTY: DANE

PLOT DATE: 12/4/2025 11:38 AM

MISCELLANEOUS QUANTITIES

PLOT NAME :

 $\bar{I} = 1$

E

WISDOT/CADDS SHEET 42



Proposal Schedule of Items

Page 2 of 17

Proposal ID: 20251209007 Project(s): 5290-02-71

Federal ID(s): WISC 2026102

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0032	305.0120 Base Aggregate Dense 1 1/4-Inch	37,020.000 TON	_____.	_____.
0034	305.0500 Shaping Shoulders	261.000 STA	_____.	_____.
0036	312.0110 Select Crushed Material	26,449.000 TON	_____.	_____.
0038	455.0605 Tack Coat	12,636.000 GAL	_____.	_____.
0040	460.0105.S HMA Percent Within Limits (PWL) Test Strip Volumetrics	3.000 EACH	_____.	_____.
0042	460.0110.S HMA Percent Within Limits (PWL) Test Strip Density	3.000 EACH	_____.	_____.
0044	460.2000 Incentive Density HMA Pavement	15,540.000 DOL	1.00000	15,540.00
0046	460.6224 HMA Pavement 4 MT 58-28 S	14,946.000 TON	_____.	_____.
0048	460.6424 HMA Pavement 4 MT 58-28 H	9,760.000 TON	_____.	_____.
0050	465.0105 Asphaltic Surface	896.000 TON	_____.	_____.
0052	465.0125 Asphaltic Surface Temporary	882.000 TON	_____.	_____.
0054	465.0315 Asphaltic Flumes	36.000 SY	_____.	_____.
0056	465.0520 Asphaltic Rumble Strips, Shoulder	25,862.000 LF	_____.	_____.
0058	465.0560 Asphaltic Rumble Strips, Centerline	10,406.000 LF	_____.	_____.
0060	490.0100.S Resin Binder High Friction Surface Treatment	7,240.000 SY	_____.	_____.

