Wisconsin Department of Transportation

Division of Transportation Systems Development
Bureau of Project Development
4822 Madison Yards Way, 4th Floor South
Madison, WI 53705

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

October 5, 2026

NOTICE TO ALL CONTRACTORS:

Proposal #31: 8820-00-70
Frederic – McKinley
STH 35 to Bass Lake Lane
STH 48
Polk County

Letting of October 13, 2026

This is Addendum No. 01, which provides for the following:

Special Provisions:

Revised Special Provisions	
Article No.	Description
3	Prosecution and Progress
16	Notice to Contractor – Electronic Load Tickets

Schedule of Items:

Revised Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Proposal Quantity Change (-)	Proposal Total After Addendum
465.0105	Asphaltic Surface	Ton	1,660	39	1,699
SPV.0055.02	Incentive Air Voids HMA Pavement	Dol	33,750	-35	33,715

Added Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Quantity Added	Proposal Total After Addendum
460.6245	HMA Pavement 5 MT 58-34 S	Ton	0	33,715	33,715

Deleted Bid Item Quantities					
Bid Item	Item Description	Unit	Proposal Total Prior to Addendum	Proposal Quantity Change (-)	Proposal Total After Addendum
460.6645	HMA Pavement 5 MT 58-34 V	Ton	33,750	-33,750	0

Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
7, 8, 9	Revised typical sections to change the HMA Pavement type throughout the project and changed the lower layer for the guardrail widening areas to Asphaltic Surface.
85, 86	Revised HMA Pavement and Asphaltic Surface quantities. Revised HMA Acceptance Table.

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman

Proposal Development Specialist
Proposal Management Section

ADDENDUM NO. 01

8820-00-70

October 5, 2026

Special Provisions

3. Prosecution and Progress.

Replace the last paragraph under section titled **Paving Operations** *with the following:*

A CIR surface is prohibited during the time periods specified in this section and in the Holidays and Special Events article, except a CIR surface will be allowed during the Lucky Days special event.

16. Notice to Contractor – Electronic Load Tickets.

Replace the bullet point for the HMA pavement type with the following:

- HMA Pavement 5 MT 58-34 S


Schedule of Items
Attached, dated October 5, 2026, are the revised Schedule of Items Pages 1 – 11.

Plan Sheets
The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:
Revised: 7, 8, 9, 85, and 86.

END OF ADDENDUM

2

STA 106+83 - STA 119+36

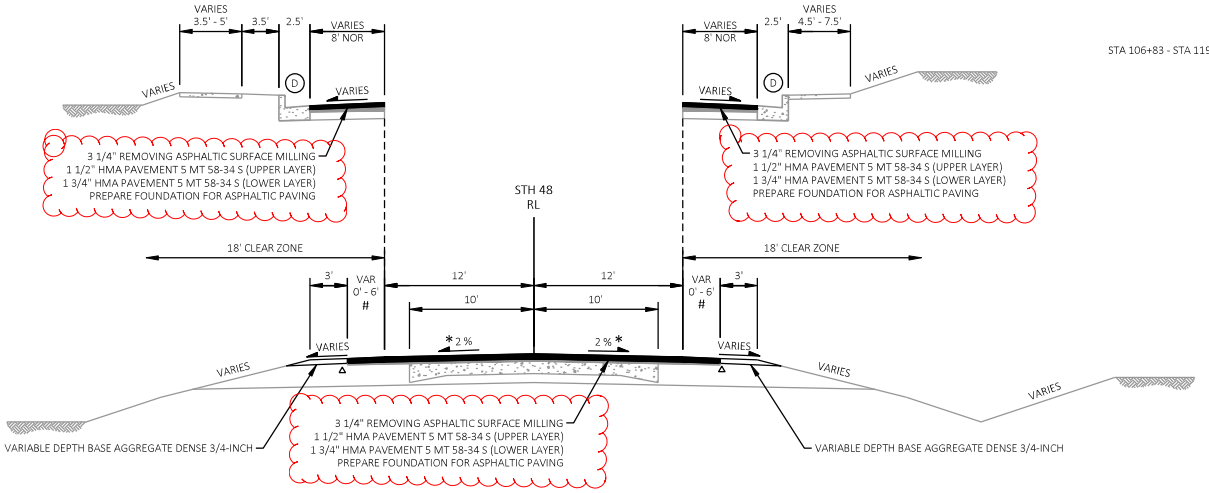

STA 106+83 - STA 119+02

FINISHED TYPICAL SECTION

STA 95+77 - STA 126+30

NOTES

* CROSS SLOPE VARIES DUE TO SUPERELEVATION, SEE SECTION 5 SHEETS FOR FOR CURVE INFORMATION

EXISTING CONCRETE PAVEMENT IS LOCATED FROM STA 95+77 - STA 111+32 AND MAY BE PRESENT FROM STA 111+32 - STA 116+50, ADJUST MILLING DEPTH IN THIS LOCATION AS TO NOT MILL ANY EXISTING CONCRETE PAVEMENT

\# FROM STA 102+72 - STA 105+60 RT, PAVED SHOULDER WIDTH IS 14'
FROM STA 105+83 - STA 106+82 LT, PAVED SHOULDER WIDTH IS 16'

△ PAVEMENT SAFETY EDGE REQUIRED FOR PAVED SHOULDERS 3' OR LESS, SEE SDD "SAFETY EDGE"


(D) SEE CURB RAMP DETAILS FOR SIDEWALK AND CURB & GUTTER REPLACEMENTS INCLUDED WITH PROJECT

MILLING DEPTH REFERENCED AT ROADWAY CENTERLINE

Addendum No. 01
ID 8820-00-70
Revised Sheet 7
October 5, 2026

PROJECT NO: 8820-00-70	HWY: STH 48	COUNTY: POLK	TYPICAL SECTIONS	SHEET 7	E

2

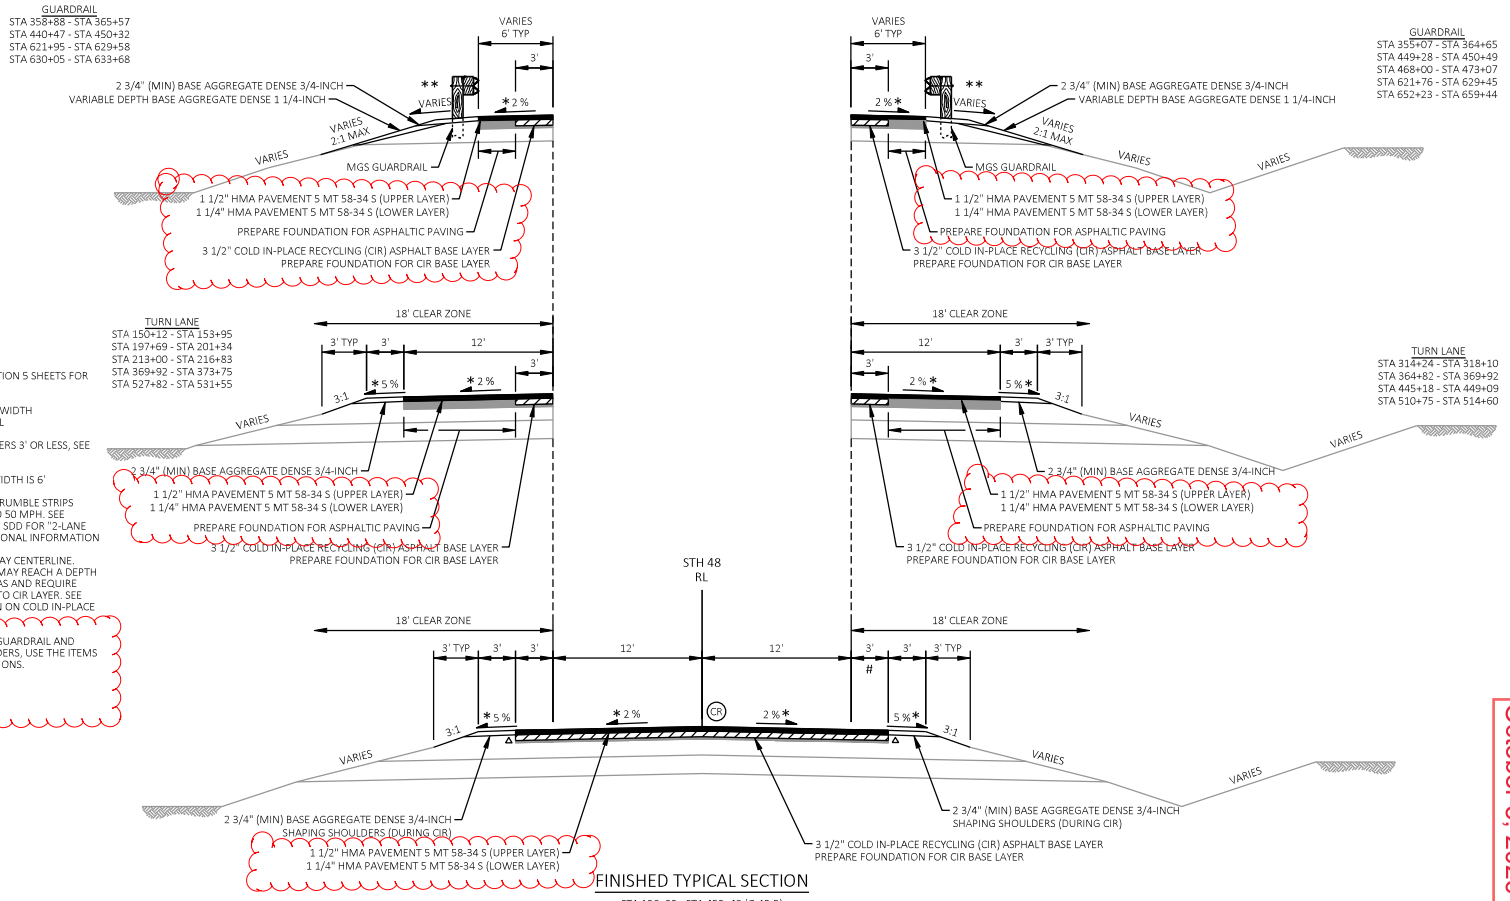

FINISHED TYPICAL SECTION

STA 126+30 - STA 450+40 (C-48-5)
STA 459+00 - STA 652+50
STA 682+50 - STA 685+63

NOTES

* CROSS SLOPE VARIES DUE TO SUPERELEVATION, SEE SECTION 5 SHEETS FOR FOR CURVE INFORMATION

** SEE CONSTRUCTION DETAILS FOR PROPOSED SHOULDER WIDTH REQUIREMENTS AND LOCATION AND TYPE OF GUARDRAIL

△ PAVEMENT SAFETY EDGE REQUIRED FOR PAVED SHOULDERS 3' OR LESS, SEE SDD "SAFETY EDGE"

FROM STA 125+28 - STA 128+25 RT, PAVED SHOULDER WIDTH IS 6'

(CR) ASPHALTIC RUMBLE STRIPS, CENTERLINE. . ONLY INSTALL RUMBLE STRIPS WHERE THE SPEED LIMIT IS GREATER THAN OR EQUAL TO 50 MPH. SEE MISCELLANEOUS QUANTITIES FOR FINAL LOCATIONS. SEE SDD FOR "2-LANE RURAL CENTERLINE RUMBLE STRIP, MILLING" FOR ADDITIONAL INFORMATION

COLD IN-PLACE RECYCLE DEPTH REFERENCED AT ROADWAY CENTERLINE. BASED ON GPR AND CORING DATA, THE CIR OPERATION MAY REACH A DEPTH BELOW THE EXISTING ASPHALTIC SURFACE IN SOME AREAS AND REQUIRE EXISTING AGGREGATE COURSE TO BE INCORPORATED INTO CIR LAYER. SEE CONSTRUCTION DETAILS FOR ADDITIONAL INFORMATION ON COLD IN-PLACE RECYCLING LIMITS.


WHERE THE PROPOSED SHOULDER PAVING TO FACE OF GUARDRAIL AND WITHIN TAPERS IS WIDER THAN EXISTING PAVED SHOULDERS, USE THE ITEMS BELOW TO COMPLETE THE WORK. SEE TABLE FOR LOCATIONS.

1 1/2" HMA PAVEMENT 5 MT 58-34 S (UPPER LAYER)
1 1/4" HMA PAVEMENT 5 MT 58-34 S (LOWER LAYER)
1 1/4" ASPHALTIC SURFACE (LOWER LAYER)
PREPARE FOUNDATION FOR ASPHALTIC SHOULDERS

STATION	TO	STATION	OFFSET
355+77	-	358+08	RT
359+57	-	360+42	LT
363+04	-	663+96	RT
363+55	-	364+88	LT
441+16	-	442+10	LT
451+11	-	452+78	LT
468+69	-	470+10	RT
471+63	-	472+37	RT
622+45	-	623+30	RT
622+65	-	623+32	LT
627+85	-	628+76	RT
632+06	-	632+98	LT

Addendum No. 01
ID 8820-00-70
Revised Sheet 8
October 5, 2026

PROJECT NO: 8820-00-70	HWY: STH 48	COUNTY: POLK	TYPICAL SECTIONS	SHEET 8	E

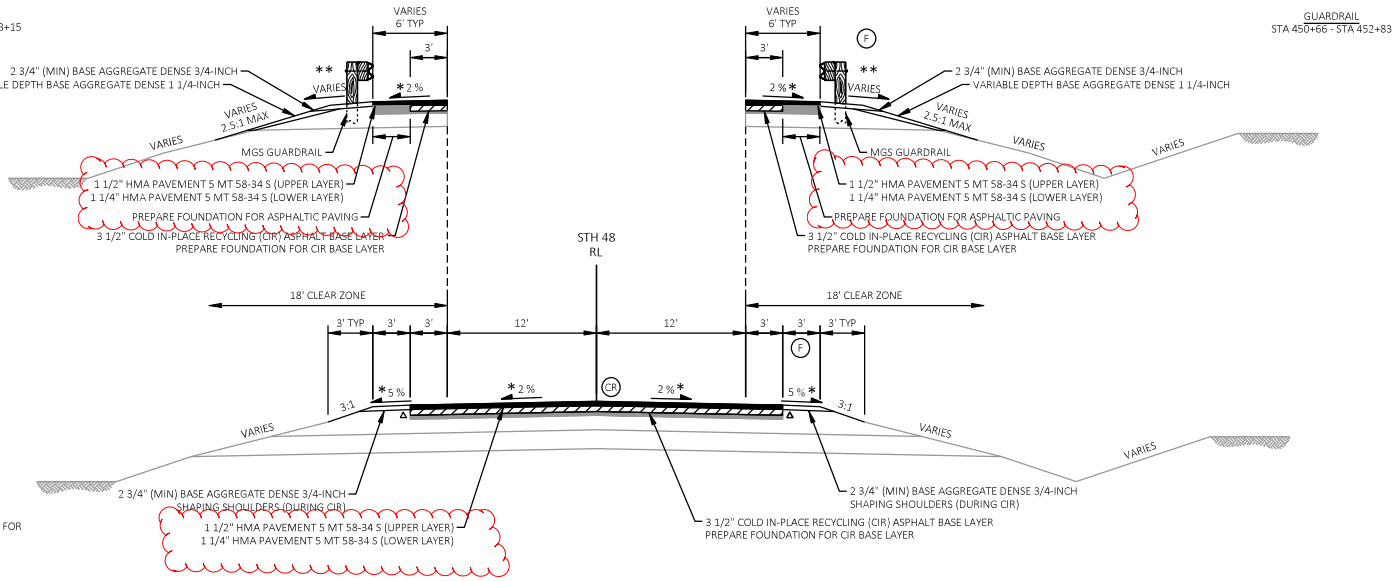

FINISHED TYPICAL SECTION

STA 450+59 (C-48-5) - STA 459+00
STA 652+50 - STA 682+50

NOTES

* CROSS SLOPE VARIES DUE TO SUPERELEVATION, SEE SECTION 5 SHEETS FOR FOR CURVE INFORMATION

** SEE CONSTRUCTION DETAILS FOR PROPOSED SHOULDER WIDTH REQUIREMENTS AND LOCATION AND TYPE OF GUARDRAIL

△ PAVEMENT SAFETY EDGE REQUIRED FOR PAVED SHOULDERS 3' OR LESS, SEE SDD "SAFETY EDGE"

(CR) ASPHALTIC RUMBLE STRIPS, CENTERLINE. ONLY INSTALL RUMBLE STRIPS WHERE THE SPEED LIMIT IS GREATER THAN OR EQUAL TO 50 MPH. SEE MISCELLANEOUS QUANTITIES FOR FINAL LOCATIONS. SEE SDD FOR "2-LANE RURAL CENTERLINE RUMBLE STRIP, MILLING" FOR ADDITIONAL INFORMATION

(F) FROM STA 452+00 - STA 454+15, RT THERE IS A FIRE DEPARTMENT FILL SITE BEHIND THE END TREATMENT OF THE GUARDRAIL, ADDITIONAL PAVED WIDTH VARIES FROM 0' - 29'. OVERLAY FILL SITE WITH 2 3/4" HMA PAVEMENT, MATCH MAINLINE LAYERS. (SEE CONSTRUCTION DETAILS FOR LAYOUT)

COLD IN-PLACE RECYCLE DEPTH REFERENCED AT ROADWAY CENTERLINE. BASED ON GPR AND CORING DATA, THE CIR OPERATION MAY REACH A DEPTH BELOW THE EXISTING ASPHALTIC SURFACE IN SOME AREAS AND REQUIRE EXISTING AGGREGATE COURSE TO BE INCORPORATED INTO CIR LAYER. SEE CONSTRUCTION DETAILS FOR ADDITIONAL INFORMATION ON COLD IN-PLACE RECYCLING LIMITS.

WHERE THE PROPOSED SHOULDER PAVING TO FACE OF GUARDRAIL AND WITHIN TAPERS IS WIDER THAN EXISTING PAVED SHOULDERS, USE THE ITEMS BELOW TO COMPLETE THE WORK. SEE TABLE FOR LOCATIONS.
- 1 1/2" HMA PAVEMENT 5 MT 58-34 S (UPPER LAYER)
- 1 1/4" HMA PAVEMENT 5 MT 58-34 S (LOWER LAYER)
- 1 1/4" ASPHALTIC SURFACE (LOWER LAYER)
- PREPARE FOUNDATION FOR ASPHALTIC SHOULDERS

STATION	TO	STATION	OFFSET
652+83	-	654+14	RT
658+23	-	659+14	RT

Addendum No. 01
ID 8820-00-70
Revised Sheet 9
October 5, 2026

PROJECT NO: 8820-00-70	HWY: STH 48	COUNTY: POLK	TYPICAL SECTIONS	SHEET 9	E

FILE NAME : P:\55XX\5508.DP.22.STH35-48.PLK\CADDS\88200070\SHEETS\020301-TS.DWG
LAYOUT NAME - 05
PLOT DATE : 10/1/2026 10:22 AM
PLOT BY : PARKER TISCHAUSER
PLOT NAME :
PLOT SCALE : 1 IN:10 FT
WISDOT/CADDS SHEET 42

ASPHALTIC ITEMS

CATEGORY	STATION	TO	STATION	OFFSET	327.1000.S COLD IN-PLACE RECYCLING (CIR) ASPHALT BASE LAYER SY	211.0800.S BASE REPAIR FOR CIR LAYER CY	450.4000 HMA COLD WEATHER PAVING TON	455.0605 TACK COAT GAL	455.0770.S ASPHALT STABILIZING AGENT TON	460.6245 HMA PAVEMENT 5 MT 58-34 S TON	460.0105.S HMA PERCENT WITHIN LIMITS (PWL) TEST STRIP VOLUMETRICS EACH	465.0105 ASPHALTIC SURFACE TON	465.0110* ASPHALTIC SURFACE PATCHING TON	465.0315 ASPHALTIC FLUMES SY	465.0560 ASPHALTIC RUMBLE STRIPS, CENTERLINE LF	COMMENTS
0010																
	95+77	-	126+30	LT&RT	--	--	--	1,615	--	2,450	--	--	--	--	--	MAINLINE & INTERSECTION PAVING
	95+77	-	126+30	UNDISTRIBUTED	--	--	--	--	--	--	--	100	100	--	--	MILL AND OVERLAY SEGMENT
	126+30	-	450+40	LT&RT	108,033	--	--	13,849	484	17,763	--	--	--	--	26,750	MAINLINE & INTERSECTION PAVING
	126+30	-	685+63	UNDISTRIBUTED	--	500	--	--	--	--	--	300	200	--	--	CIR SEGMENT
	137+24	-	138+28	LT&RT	--	--	--	21	--	--	--	97	--	--	--	CULVERT REPLACEMENT
	172+31	-	173+36	LT&RT	--	--	--	21	--	--	--	98	--	--	--	CULVERT REPLACEMENT
	183+31	-	184+37	LT&RT	--	--	--	21	--	--	--	97	--	--	--	CULVERT REPLACEMENT
	192+91	-	193+95	LT&RT	--	--	--	21	--	--	--	98	--	--	--	CULVERT REPLACEMENT
	202+73	-	204+13	LT&RT	--	--	--	23	--	--	--	133	--	--	--	CULVERT REPLACEMENT
	213+90	-	215+04	LT&RT	--	--	--	25	--	--	--	140	--	--	--	CULVERT REPLACEMENT
	250+85	-	250+99	LT&RT	--	--	--	--	--	--	--	--	4	--	--	JOINT TIES FOR CONCRETE PIPE
	355+77	-	364+88	LT&RT	--	--	--	55	--	71	--	12	--	--	--	GUARDRAIL PAVING
	368+18	-	368+28	LT	--	--	--	--	--	--	--	--	2	--	--	JOINT TIES FOR CONCRETE PIPE
	441+16	-	450+50	LT&RT	--	--	--	173	--	222	--	7	--	--	--	GUARDRAIL & INTERSECTION PAVING
	450+51	-	454+15	LT&RT	--	--	--	60	--	78	--	4	--	--	--	GUARDRAIL PAVING
	450+59	-	685+63	LT&RT	78,347	--	--	9,956	351	12,777	--	--	--	--	19,515	MAINLINE & INTERSECTION PAVING
	468+69	-	472+37	RT	--	--	--	15	--	20	--	5	--	--	--	GUARDRAIL PAVING
	493+39	-	494+46	LT&RT	--	--	--	18	--	--	--	99	--	--	--	CULVERT REPLACEMENT
	527+25	-	528+52	LT	--	--	--	--	--	--	--	--	--	18	--	CTH O
	576+99	-	578+05	LT&RT	--	--	--	17	--	--	--	98	--	--	--	CULVERT REPLACEMENT
	600+70	-	601+76	LT&RT	--	--	--	18	--	--	--	99	--	--	--	CULVERT REPLACEMENT
	605+14	-	606+19	LT&RT	--	--	--	18	--	--	--	98	--	--	--	CULVERT REPLACEMENT
	622+45	-	632+98	LT&RT	--	--	--	71	--	91	--	7	--	--	--	GUARDRAIL PAVING
	638+89	-	639+96	LT&RT	--	--	--	18	--	--	--	100	--	--	--	CULVERT REPLACEMENT
	651+77	-	652+83	LT&RT	--	--	--	19	--	--	--	104	--	--	--	CULVERT REPLACEMENT
	652+83	-	659+14	RT	--	--	--	26	--	34	--	5	--	--	--	GUARDRAIL PAVING
						--										
	PROJECT				--	--	800	--	--	--	1	--	--	--	--	
CATEGORY 0010 TOTALS					186,380	500	800	26,060	835	33,505	1	1,699	306	18	46,265	
0020																
	107+68	-	111+45	LT	--	--	--	31	--	46	--	--	--	--	--	PARKING LANE (6' WIDE)
	108+53	-	111+31	RT	--	--	--	23	--	34	--	--	--	--	--	PARKING LANE (6' WIDE)
	112+05	-	115+06	RT	--	--	--	24	--	37	--	--	--	--	--	PARKING LANE (6' WIDE)
	112+11	-	115+01	LT	--	--	--	23	--	35	--	--	--	--	--	PARKING LANE (6' WIDE)
	115+77	-	118+05	LT	--	--	--	18	--	28	--	--	--	--	--	PARKING LANE (6' WIDE)
	115+77	-	118+35	RT	--	--	--	21	--	31	--	--	--	--	--	PARKING LANE (6' WIDE)
CATEGORY 0020 TOTALS					--	--	--	140	--	210	--	--	--	--	--	
TOTALS					186,380	500	800	26,200	835	33,715	1	1,699	306	18	46,265	

NOTES:
UNDISTRIBUTED ASPHALTIC SURFACE USED FOR WEDGING, LEVELING AND SPOT LANE FAILURES AFTER MILLING/CIR
UNDISTRIBUTED ASPHALTIC SURFACE PATCHING USED FOR MISCELLANEOUS REPAIRS DESIGNATED BY THE ENGINEER
*ADDITIONAL QUANTITIES SHOWN ELSEWHERE

PREPARE FOUNDATION ITEMS

CATEGORY	STATION	TO	STATION	OFFSET	211.0400 PREPARE FOUNDATION FOR ASPHALTIC SHOULDERS STA	COMMENTS
0010						
	355+77	-	364+88	LT&RT	9	GUARDRAIL PAVING
	441+16	-	450+50	LT&RT	4	GUARDRAIL & INTERSECTION PAVING
	450+51	-	454+15	LT&RT	2	GUARDRAIL PAVING
	468+69	-	472+37	RT	5	GUARDRAIL PAVING
	622+45	-	632+98	LT&RT	7	GUARDRAIL PAVING
	652+83	-	659+14	RT	5	GUARDRAIL PAVING
	PROJECT				--	
TOTALS					32	

DRIVEWAY ITEMS

CATEGORY	STATION	TO	STATION	OFFSET	602.0810 CONCRETE DRIVEWAY 6-INCH SY	465.0120 ASPHALTIC SURFACE DRIVEWAYS AND FIELD ENTRANCES TON	690.0150* SAWING ASPHALT LF	690.0250* SAWING CONCRETE LF
0010								
	111+92	-	112+38	RT	--	3	30	--
	127+88	-	128+27	RT	--	7	12	--
	156+06	-	156+46	LT	--	8	18	--
	209+55	-	209+86	LT	--	7	11	--
	261+09	-	261+58	RT	60	2	--	18
	340+32	-	340+65	RT	--	7	13	--
	629+58	-	630+05	LT	--	6	--	--
TOTALS					60	40	84	18

*ADDITIONAL QUANTITIES SHOWN ELSEWHERE

Addendum No. 01
ID 8820-00-70
Revised Sheet 85
October 5, 2026

PROJECT NO: 8820-00-70	HWY: STH 48	COUNTY: POLK	MISCELLANEOUS QUANTITIES	SHEET 85	E

ASPHALTIC MATERIAL/HMA ACCEPTANCE TABLE

LOCATION	STA TO STA	MIXTURE USE	UNDERLYING SURFACE	BID ITEM	TONS	THICKNESS	QUALITY MANAGEMENT PROGRAM TO BE USED FOR: MIXTURE ACCEPTANCE	QUALITY MANAGEMENT PROGRAM TO BE USED FOR: DENSITY ACCEPTANCE
12 FOOT DRIVING LANE	95+77 - 126+30	LOWER LAYER	MILLED EXISTING HMA SURFACE	HMA PAVEMENT 5 MT 58-34 S	798	1.75"	INCENTIVE AIR VOIDS HMA PAVEMENT SPV.0055.02	INCENTIVE DENSITY PWL HMA PAVEMENT SPV.0055.01
12 FOOT DRIVING LANE	95+77 - 126+30	UPPER LAYER	HMA PAVEMENT 5 MT 58-34 S	HMA PAVEMENT 5 MT 58-34 S	684	1.5"	INCENTIVE AIR VOIDS HMA PAVEMENT SPV.0055.02	INCENTIVE DENSITY PWL HMA PAVEMENT SPV.0055.01
SHOULDERS & PARKING LANES	95+77 - 126+30	LOWER LAYER	MILLED EXISTING HMA SURFACE	HMA PAVEMENT 5 MT 58-34 S	634	1.75"	INCENTIVE AIR VOIDS HMA PAVEMENT SPV.0055.02	DEPARTMENT ACCEPTANCE (SS 460.3.3.2); NOT ELIGIBLE FOR INCENTIVE
SHOULDERS & PARKING LANES	95+77 - 126+30	UPPER LAYER	HMA PAVEMENT 5 MT 58-34 S	HMA PAVEMENT 5 MT 58-34 S	544	1.5"	INCENTIVE AIR VOIDS HMA PAVEMENT SPV.0055.02	DEPARTMENT ACCEPTANCE (SS 460.3.3.2); NOT ELIGIBLE FOR INCENTIVE
12 FOOT DRIVING LANE	126+30 - 685+63	LOWER LAYER	CIR	HMA PAVEMENT 5 MT 58-34 S	10,437	1.25"	INCENTIVE AIR VOIDS HMA PAVEMENT SPV.0055.02	INCENTIVE DENSITY PWL HMA PAVEMENT SPV.0055.01
12 FOOT DRIVING LANE	126+30 - 685+63	UPPER LAYER	HMA PAVEMENT 5 MT 58-34 S	HMA PAVEMENT 5 MT 58-34 S	12,525	1.5"	INCENTIVE AIR VOIDS HMA PAVEMENT SPV.0055.02	INCENTIVE DENSITY PWL HMA PAVEMENT SPV.0055.01
SHOULDERS, SIDEROADS, GUARDRAIL WIDENING, AND TURN LANES	126+30 - 685+63	LOWER LAYER	CIR OR EXISTNG ASPHALT SURFACE	HMA PAVEMENT 5 MT 58-34 S	4,399	1.25"	INCENTIVE AIR VOIDS HMA PAVEMENT SPV.0055.02	DEPARTMENT ACCEPTANCE (SS 460.3.3.2); NOT ELIGIBLE FOR INCENTIVE
SHOULDERS, SIDEROADS, GUARDRAIL WIDENING, AND TURN LANES	126+30 - 685+63	UPPER LAYER	HMA PAVEMENT 5 MT 58-34 S	HMA PAVEMENT 5 MT 58-34 S	3,694	1.5"	INCENTIVE AIR VOIDS HMA PAVEMENT SPV.0055.02	DEPARTMENT ACCEPTANCE (SS 460.3.3.2); NOT ELIGIBLE FOR INCENTIVE
GUARDRAIL WIDENING	126+30 - 685+63	LOWER LAYER	BASE AGGREGATE	ASPHALTIC SURFACE	39	1.25"	SS 465	ORDINARY COMPACTION (SS 450.3.2.6.2)
VARIOUS	VARIOUS	CULVERT PATCHES, WEDGING, LEVELING, AND SPOT LANE FAILURES	BASE AGGREGATE	ASPHALTIC SURFACE	1,660	5"	SS 465	ORDINARY COMPACTION (SS 450.3.2.6.2)
VARIOUS	VARIOUS	DRIVEWAYS	BASE AGGREGATE	ASPHALTIC SURFACE DRIVEWAYS AND FIELD ENTRANCES	40	3"	SS 465	ORDINARY COMPACTION (SS 450.3.2.6.2)

Addendum No. 01
ID 8820-00-70
Revised Sheet 86
October 5, 2026

Proposal ID: 20261013031 **Project(s):** 8820-00-70

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: **Alt Mbr ID:**

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0002	201.0105 Clearing	25.000 STA	_____.____	_____.____
0004	201.0205 Grubbing	25.000 STA	_____.____	_____.____
0006	203.0100 Removing Small Pipe Culverts	13.000 EACH	_____.____	_____.____
0008	204.0100 Removing Concrete Pavement	65.000 SY	_____.____	_____.____
0010	204.0109.S Removing Concrete Surface Partial Depth	860.000 SF	_____.____	_____.____
0012	204.0110 Removing Asphaltic Surface	695.000 SY	_____.____	_____.____
0014	204.0115 Removing Asphaltic Surface Butt Joints	1,240.000 SY	_____.____	_____.____
0016	204.0120 Removing Asphaltic Surface Milling	17,200.000 SY	_____.____	_____.____
0018	204.0150 Removing Curb & Gutter	1,030.000 LF	_____.____	_____.____
0020	204.0155 Removing Concrete Sidewalk	255.000 SY	_____.____	_____.____
0022	204.0165 Removing Guardrail	4,300.000 LF	_____.____	_____.____
0024	204.0180 Removing Delineators and Markers	96.000 EACH	_____.____	_____.____
0026	204.0195 Removing Concrete Bases	1.000 EACH	_____.____	_____.____
0028	204.0265 Abandoning Wells	1.000 EACH	_____.____	_____.____
0030	205.0100 Excavation Common	9,059.000 CY	_____.____	_____.____
0032	208.0100 Borrow	4,200.000 CY	_____.____	_____.____

Proposal ID: 20261013031 **Project(s):** 8820-00-70

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: **Alt Mbr ID:**

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0034	208.1500.S Temporary Lane Shift During Culvert Work	26.000 EACH	_____.____	_____.____
0036	209.0300.S Backfill Coarse Aggregate (size) 01. No. 2	15.000 CY	_____.____	_____.____
0038	211.0101 Prepare Foundation for Asphaltic Paving (project) 01. 8820-00-70	1.000 EACH	_____.____	_____.____
0040	211.0400 Prepare Foundation for Asphaltic Shoulders	32.000 STA	_____.____	_____.____
0042	211.0700.S Prepare Foundation for CIR Base Layer (project) 01. 8820-00-70	1.000 EACH	_____.____	_____.____
0044	211.0800.S Base Repair for CIR Layer	500.000 CY	_____.____	_____.____
0046	213.0100 Finishing Roadway (project) 01. 8820-00-70	1.000 EACH	_____.____	_____.____
0048	305.0110 Base Aggregate Dense 3/4-Inch	8,750.000 TON	_____.____	_____.____
0050	305.0120 Base Aggregate Dense 1 1/4-Inch	5,600.000 TON	_____.____	_____.____
0052	305.0500 Shaping Shoulders	1,010.000 STA	_____.____	_____.____
0054	327.1000.S CIR Asphaltic Base Layer	186,380.000 SY	_____.____	_____.____
0056	405.0200 Coloring Concrete Custom	4.000 CY	_____.____	_____.____
0058	450.4000 HMA Cold Weather Paving	800.000 TON	_____.____	_____.____
0060	455.0605 Tack Coat	26,200.000 GAL	_____.____	_____.____

Proposal ID: 20261013031 **Project(s):** 8820-00-70

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: **Alt Mbr ID:**

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0062	455.0770.S Asphalt Stabilizing Agent	835.000 TON	_____.____	_____.____
0064	460.0105.S HMA Percent Within Limits (PWL) Test Strip Volumetrics	1.000 EACH	_____.____	_____.____
0068	460.9000.S Material Transfer Vehicle	1.000 EACH	_____.____	_____.____
0070	465.0105 Asphaltic Surface	1,699.000 TON	_____.____	_____.____
0072	465.0110 Asphaltic Surface Patching	435.000 TON	_____.____	_____.____
0074	465.0120 Asphaltic Surface Driveways and Field Entrances	40.000 TON	_____.____	_____.____
0076	465.0315 Asphaltic Flumes	18.000 SY	_____.____	_____.____
0078	465.0560 Asphaltic Rumble Strips, Centerline	46,265.000 LF	_____.____	_____.____
0080	513.2001 Railing Pipe	3.000 LF	_____.____	_____.____
0082	520.1030 Apron Endwalls for Culvert Pipe 30-Inch	10.000 EACH	_____.____	_____.____
0084	520.1036 Apron Endwalls for Culvert Pipe 36-Inch	2.000 EACH	_____.____	_____.____
0086	520.2048 Culvert Pipe Temporary 48-Inch	96.000 LF	_____.____	_____.____
0088	520.3430 Culvert Pipe Class III-A Non-metal 30-Inch	290.000 LF	_____.____	_____.____
0090	520.3436 Culvert Pipe Class III-A Non-metal 36-Inch	66.000 LF	_____.____	_____.____
0092	520.3630 Culvert Pipe Class III-B Non-metal 30-Inch	120.000 LF	_____.____	_____.____

Proposal ID: 20261013031 **Project(s):** 8820-00-70

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: **Alt Mbr ID:**

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0094	520.8700 Cleaning Culvert Pipes	19.000 EACH	_____.____	_____.____
0096	522.0424 Culvert Pipe Reinforced Concrete Class IV 24-Inch	54.000 LF	_____.____	_____.____
0098	522.0430 Culvert Pipe Reinforced Concrete Class IV 30-Inch	178.000 LF	_____.____	_____.____
0100	522.1024 Apron Endwalls for Culvert Pipe Reinforced Concrete 24-Inch	2.000 EACH	_____.____	_____.____
0102	522.1030 Apron Endwalls for Culvert Pipe Reinforced Concrete 30-Inch	6.000 EACH	_____.____	_____.____
0104	522.2368 Culvert Pipe Reinforced Concrete Horizontal Elliptical Class HE-III 68x106-Inch	84.000 LF	_____.____	_____.____
0106	522.2429 Culvert Pipe Reinforced Concrete Horizontal Elliptical Class HE-IV 29x45-Inch	50.000 LF	_____.____	_____.____
0108	522.2629 Apron Endwalls for Culvert Pipe Reinforced Concrete Horizontal Elliptical 29x45-Inch	2.000 EACH	_____.____	_____.____
0110	522.2668 Apron Endwalls for Culvert Pipe Reinforced Concrete Horizontal Elliptical 68x106-Inch	2.000 EACH	_____.____	_____.____
0112	601.0411 Concrete Curb & Gutter 30-Inch Type D	560.000 LF	_____.____	_____.____
0114	601.0557 Concrete Curb & Gutter 6-Inch Sloped 36-Inch Type D	410.000 LF	_____.____	_____.____
0116	601.0600 Concrete Curb Pedestrian	75.000 LF	_____.____	_____.____

Proposal ID: 20261013031 **Project(s):** 8820-00-70

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: **Alt Mbr ID:**

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0118	602.0410 Concrete Sidewalk 5-Inch	2,935.000 SF	_____.____	_____.____
0120	602.0505 Curb Ramp Detectable Warning Field Yellow	200.000 SF	_____.____	_____.____
0122	602.0605 Curb Ramp Detectable Warning Field Radial Yellow	90.000 SF	_____.____	_____.____
0124	602.0810 Concrete Driveway 6-Inch	60.000 SY	_____.____	_____.____
0126	602.1500 Concrete Steps	24.000 SF	_____.____	_____.____
0128	602.3010 Concrete Surface Drains	1.000 CY	_____.____	_____.____
0130	606.0200 Riprap Medium	645.000 CY	_____.____	_____.____
0132	611.8120.S Cover Plates Temporary	5.000 EACH	_____.____	_____.____
0134	612.0902.S Insulation Board Polystyrene (inch) 01. 4-Inch	8.000 SY	_____.____	_____.____
0136	614.0396 Guardrail Mow Strip Asphalt	1,120.000 SY	_____.____	_____.____
0138	614.2300 MGS Guardrail 3	1,538.000 LF	_____.____	_____.____
0140	614.2330 MGS Guardrail 3 K	2,125.000 LF	_____.____	_____.____
0142	614.2350 MGS Guardrail Short Radius	100.000 LF	_____.____	_____.____
0144	614.2500 MGS Thrie Beam Transition	154.000 LF	_____.____	_____.____
0146	614.2610 MGS Guardrail Terminal EAT	18.000 EACH	_____.____	_____.____

Proposal ID: 20261013031 **Project(s):** 8820-00-70

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: **Alt Mbr ID:**

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0148	618.0100 Maintenance and Repair of Haul Roads (project) 01. 8820-00-70	1.000 EACH	_____.____	_____.____
0150	619.1000 Mobilization	1.000 EACH	_____.____	_____.____
0152	624.0100 Water	80.000 MGAL	_____.____	_____.____
0154	625.0100 Topsoil	24,810.000 SY	_____.____	_____.____
0156	628.1104 Erosion Bales	630.000 EACH	_____.____	_____.____
0158	628.1504 Silt Fence	12,500.000 LF	_____.____	_____.____
0160	628.1520 Silt Fence Maintenance	12,500.000 LF	_____.____	_____.____
0162	628.1530.S Silt Fence Heavy Duty	1,700.000 LF	_____.____	_____.____
0164	628.1535.S Silt Fence Heavy Duty Maintenance	1,700.000 LF	_____.____	_____.____
0166	628.1905 Mobilizations Erosion Control	8.000 EACH	_____.____	_____.____
0168	628.1910 Mobilizations Emergency Erosion Control	4.000 EACH	_____.____	_____.____
0170	628.2004 Erosion Mat Class I Type B	22,080.000 SY	_____.____	_____.____
0172	628.2006 Erosion Mat Urban Class I Type A	220.000 SY	_____.____	_____.____
0174	628.2027 Erosion Mat Class II Type C	1,810.000 SY	_____.____	_____.____
0176	628.2033 Erosion Mat Class III Type B	700.000 SY	_____.____	_____.____
0178	628.5505 Polyethylene Sheeting	400.000 SY	_____.____	_____.____

Proposal ID: 20261013031 **Project(s):** 8820-00-70

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: **Alt Mbr ID:**

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0180	628.7504 Temporary Ditch Checks	1,200.000 LF	_____.____	_____.____
0182	628.7555 Culvert Pipe Checks	130.000 EACH	_____.____	_____.____
0184	629.0210 Fertilizer Type B	12.000 CWT	_____.____	_____.____
0186	630.0130 Seeding Mixture No. 30	450.000 LB	_____.____	_____.____
0188	630.0140 Seeding Mixture No. 40	4.000 LB	_____.____	_____.____
0190	630.0160 Seeding Mixture No. 60	20.000 LB	_____.____	_____.____
0192	630.0500 Seed Water	560.000 MGAL	_____.____	_____.____
0194	633.5200 Markers Culvert End	96.000 EACH	_____.____	_____.____
0196	634.0616 Posts Wood 4x6-Inch x 16-FT	3.000 EACH	_____.____	_____.____
0198	637.2230 Signs Type II Reflective F	33.000 SF	_____.____	_____.____
0200	638.2102 Moving Signs Type II	30.000 EACH	_____.____	_____.____
0202	642.5001 Field Office Type B	1.000 EACH	_____.____	_____.____
0204	643.0300 Traffic Control Drums	3,825.000 DAY	_____.____	_____.____
0206	643.0420 Traffic Control Barricades Type III	40.000 DAY	_____.____	_____.____
0208	643.0705 Traffic Control Warning Lights Type A	80.000 DAY	_____.____	_____.____
0210	643.0715 Traffic Control Warning Lights Type C	80.000 DAY	_____.____	_____.____

Proposal ID: 20261013031 **Project(s):** 8820-00-70

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: **Alt Mbr ID:**

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0212	643.0900 Traffic Control Signs	13,900.000 DAY	_____.____	_____.____
0214	643.1000 Traffic Control Signs Fixed Message	64.000 SF	_____.____	_____.____
0216	643.3165 Temporary Marking Line Paint 6-Inch	263,100.000 LF	_____.____	_____.____
0218	643.3180 Temporary Marking Line Removable Tape 6-Inch	2,075.000 LF	_____.____	_____.____
0220	643.3960 Temporary Marking Removable Mask Out Tape 6-Inch	1,170.000 LF	_____.____	_____.____
0222	643.5000 Traffic Control	1.000 EACH	_____.____	_____.____
0224	644.1440 Temporary Pedestrian Surface Matting	165.000 SF	_____.____	_____.____
0226	644.1601 Temporary Pedestrian Curb Ramp	120.000 DAY	_____.____	_____.____
0228	644.1605 Temporary Pedestrian Detectable Warning Field	184.000 SF	_____.____	_____.____
0230	644.1810 Temporary Pedestrian Barricade	1,180.000 LF	_____.____	_____.____
0232	645.0120 Geotextile Type HR	1,790.000 SY	_____.____	_____.____
0234	646.2040 Marking Line Grooved Wet Ref Epoxy 6-Inch	178,000.000 LF	_____.____	_____.____
0236	646.4040 Marking Line Grooved Wet Ref Epoxy 10-Inch	2,130.000 LF	_____.____	_____.____
0238	646.6120 Marking Stop Line Epoxy 18-Inch	350.000 LF	_____.____	_____.____
0240	646.6466 Cold Weather Marking Epoxy 6-Inch	17,800.000 LF	_____.____	_____.____

Proposal ID: 20261013031 **Project(s):** 8820-00-70

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: **Alt Mbr ID:**

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0242	646.6470 Cold Weather Marking Epoxy 10-Inch	210.000 LF	_____.____	_____.____
0244	646.7120 Marking Diagonal Epoxy 12-Inch	40.000 LF	_____.____	_____.____
0246	646.7420 Marking Crosswalk Epoxy Transverse Line 6-Inch	740.000 LF	_____.____	_____.____
0248	646.7520 Marking Crosswalk Epoxy Block Style 24-Inch	90.000 LF	_____.____	_____.____
0250	646.8320 Marking Parking Stall Epoxy	130.000 LF	_____.____	_____.____
0252	650.4500 Construction Staking Subgrade	6,233.000 LF	_____.____	_____.____
0254	650.5000 Construction Staking Base	6,233.000 LF	_____.____	_____.____
0256	650.5500 Construction Staking Curb Gutter and Curb & Gutter	965.000 LF	_____.____	_____.____
0258	650.6000 Construction Staking Pipe Culverts	12.000 EACH	_____.____	_____.____
0260	650.8000 Construction Staking Resurfacing Reference	58,967.000 LF	_____.____	_____.____
0262	650.9000 Construction Staking Curb Ramps	20.000 EACH	_____.____	_____.____
0264	650.9500 Construction Staking Sidewalk (project) 01. 8820-00-70	1.000 EACH	_____.____	_____.____
0266	650.9911 Construction Staking Supplemental Control (project) 01. 8820-00-70	1.000 EACH	_____.____	_____.____
0268	650.9920 Construction Staking Slope Stakes	6,233.000 LF	_____.____	_____.____

Proposal ID: 20261013031 **Project(s):** 8820-00-70

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: **Alt Mbr ID:**

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0270	652.0225 Conduit Rigid Nonmetallic Schedule 40 2-Inch	16.000 LF	_____.____	_____.____
0272	652.0700.S Install Conduit into Existing Item	1.000 EACH	_____.____	_____.____
0274	654.0105 Concrete Bases Type 5	1.000 EACH	_____.____	_____.____
0276	680.0100 Public Land Survey Monument Verify and Reset	15.000 EACH	_____.____	_____.____
0278	690.0150 Sawing Asphalt	6,939.000 LF	_____.____	_____.____
0280	690.0250 Sawing Concrete	228.000 LF	_____.____	_____.____
0282	740.0440 Incentive IRI Ride	45,000.000 DOL	1.00000	45,000.00
0284	SPV.0055 Special 01. Incentive Density PWL HMA Pavement	24,440.000 DOL	1.00000	24,440.00
0286	SPV.0055 Special 02. Incentive Air Voids HMA Pavement	33,715.000 DOL	1.00000	33,715.00
0288	SPV.0055 Special 03. Incentive Density HMA Pavement Longitudinal Joints	23,590.000 DOL	1.00000	23,590.00
0290	SPV.0060 Special 01. Inlet Covers Type H-D	3.000 EACH	_____.____	_____.____
0292	SPV.0060 Special 02. Adjusting Water Valve Boxes	23.000 EACH	_____.____	_____.____
0294	SPV.0060 Special 03. Adjusting Sanitary Manhole Covers	7.000 EACH	_____.____	_____.____
0296	SPV.0060 Special 04. Joint Ties for Concrete Pipe	36.000 EACH	_____.____	_____.____

Proposal ID: 20261013031 **Project(s):** 8820-00-70

Federal ID(s): N/A

SECTION: 0001 Contract Items

Alt Set ID: **Alt Mbr ID:**

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0298	SPV.0060 Special 05. Remove and Reinstall Street Light Assembly	1.000 EACH	_____.____	_____.____
0300	SPV.0090 Special 01. Ditch Cleaning	90.000 LF	_____.____	_____.____
0302	SPV.0195 Special 01. Infill Riprap	575.000 TON	_____.____	_____.____
0304	460.6245 HMA Pavement 5 MT 58-34 S	33,715.000 TON	_____.____	_____.____
	Section: 0001		**Total:**	_____.____

Total Bid: _____.____