



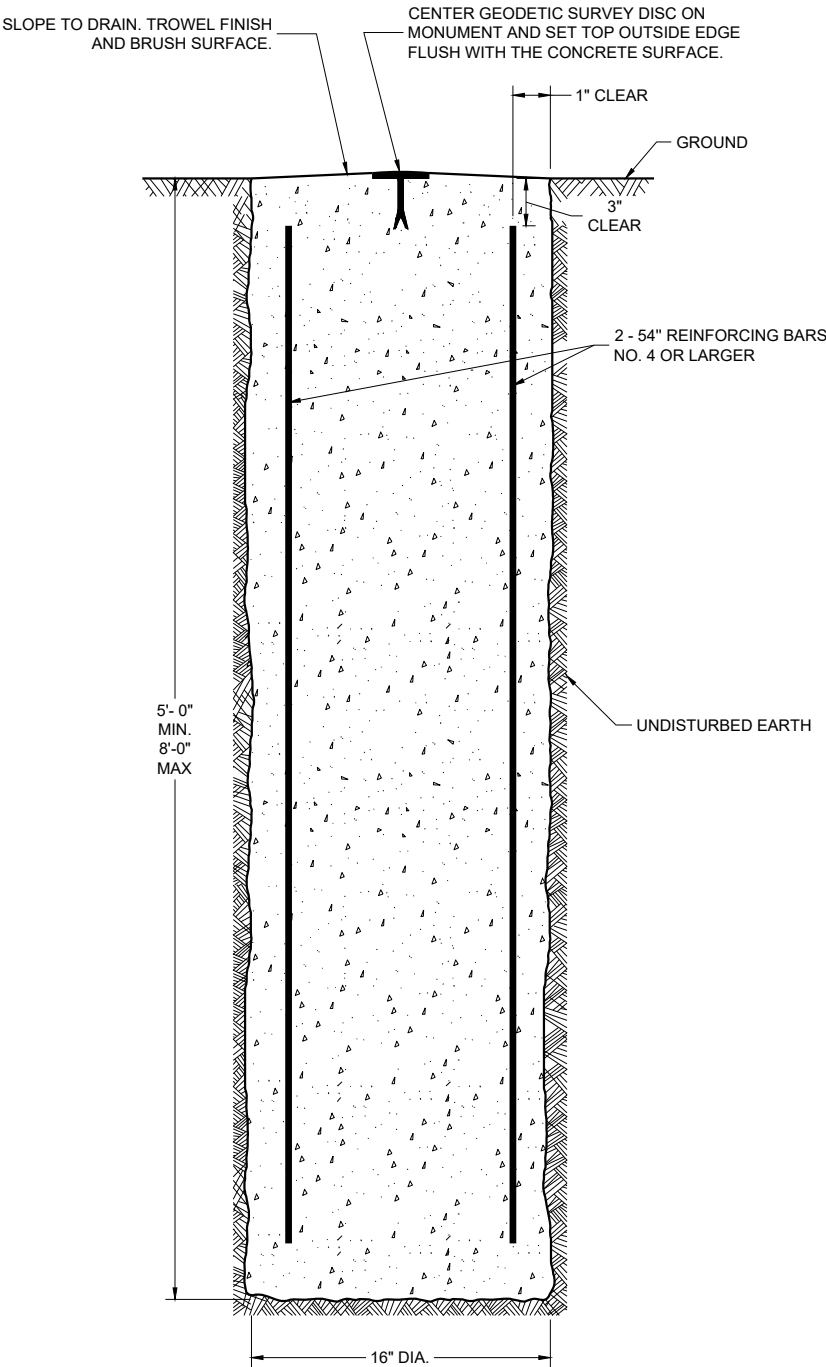

**CAST-IN-PLACE
CONCRETE MONUMENT**

CIRCULAR FORM DEPTH
SHALL BE NO MORE THAN
6" BELOW GRADE ON THE
LOWER SIDE OF BASE.

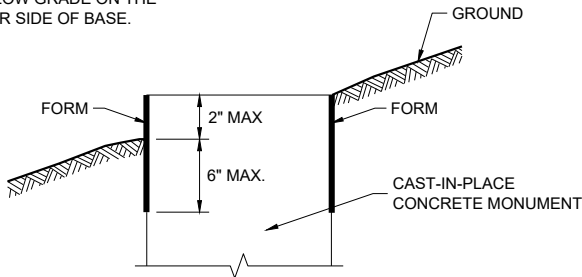

FORMING DETAIL

GENERAL NOTES

DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND THE APPLICABLE SPECIAL PROVISIONS.

SURVEY MONUMENT SHALL BE EXCAVATED BY USE OF A CIRCULAR AUGER.

IF A SURVEY MONUMENT REQUIRES A DEEP FORM BECAUSE OF LOOSE DIRT OR FILL, THE FORM SHALL BE REMOVED BEFORE BACKFILLING AROUND THE BASE. BACKFILL SHALL BE TAMPED TIGHT AGAINST THE BARE CONCRETE BASE IN LAYERS OF 1 FOOT OR LESS.



GEODETIC SURVEY DISC
FURNISHED BY WISDOT

**GEODETIC SURVEY
MONUMENT**

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
June 2025 /S/ DAVID J. LAYTON
DATE CHIEF SURVEY AND MAPPING ENGINEER

FHWA

*Geodetic Survey Monuments***References:**

[CMM 785](#)
[FDM 9-5-1](#)
[FDM 9-25-5](#)

Bid items associated with this drawing:

<u>ITEM NUMBER</u>	<u>DESCRIPTION</u>	<u>UNIT</u>
682.0200	Geodetic Survey Monument.....	EACH

Standardized Special Provisions associated with this drawing:

<u>STSP NUMBER</u>	<u>TITLE</u>
NONE	

Other SDDs associated with this drawing:

NONE

Design Notes:

NONE

Contact Person:

Jacob Rockweiler (608) 243-5992