



# YIELD SIGN INSTALLATIONS AT CROSSBUCK LOCATIONS


36" X 36" X 36" YIELD SIGN

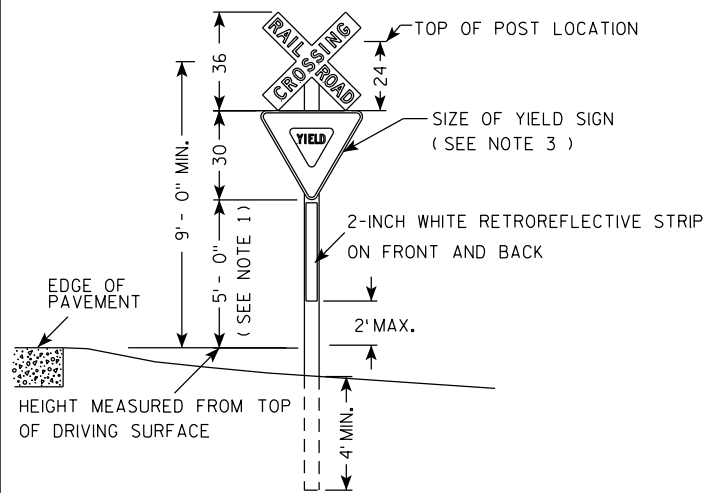


36" X 36" X 36" YIELD SIGN

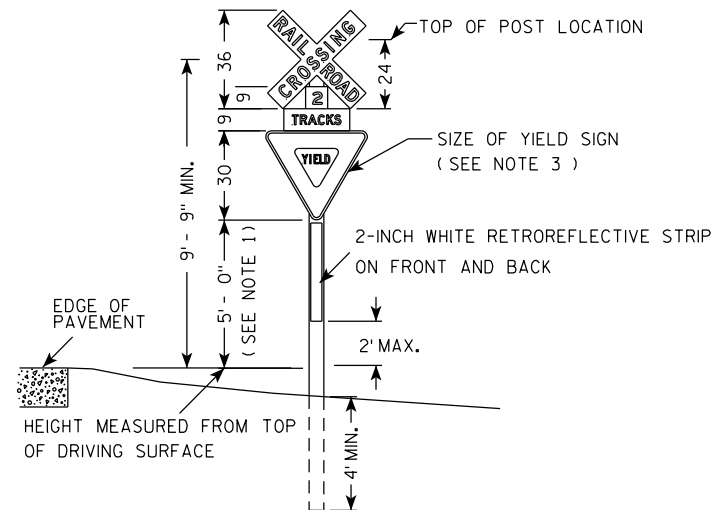


36" X 36" X 36" YIELD SIGN

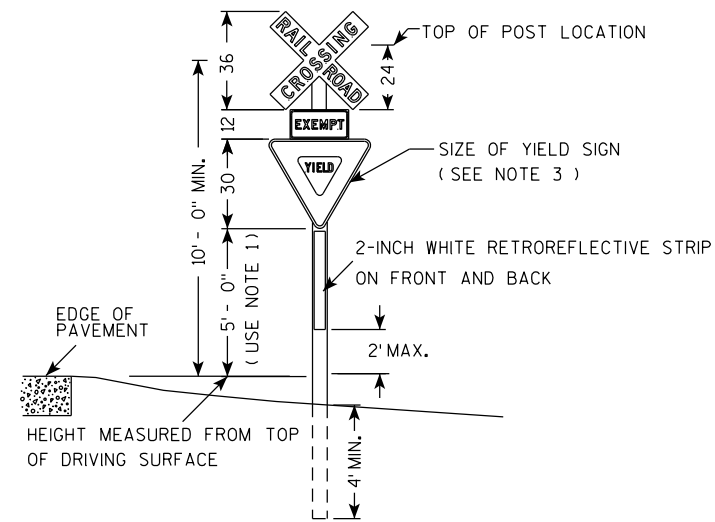


36" X 36" X 36" YIELD SIGN

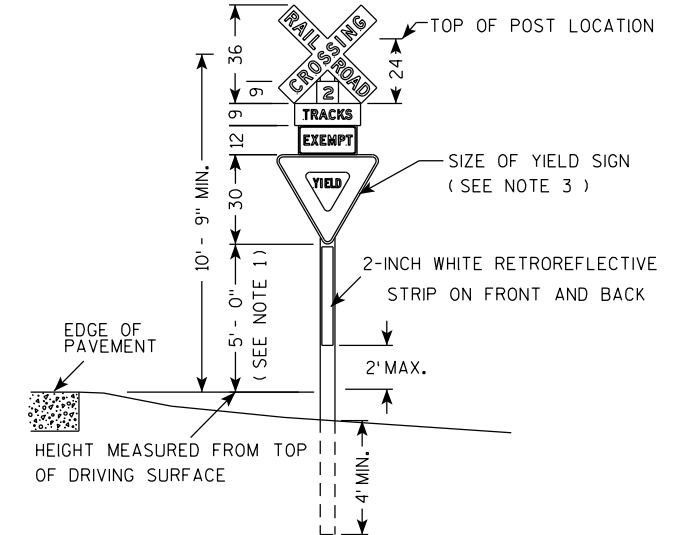


30" X 30" X 30" YIELD SIGN

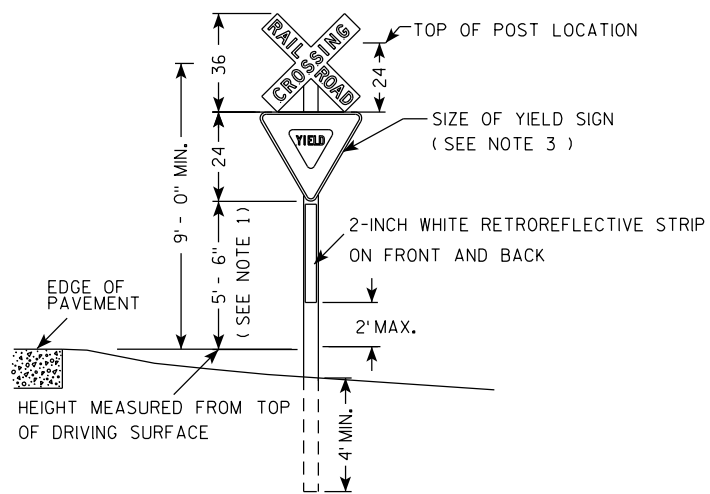


30" X 30" X 30" YIELD SIGN

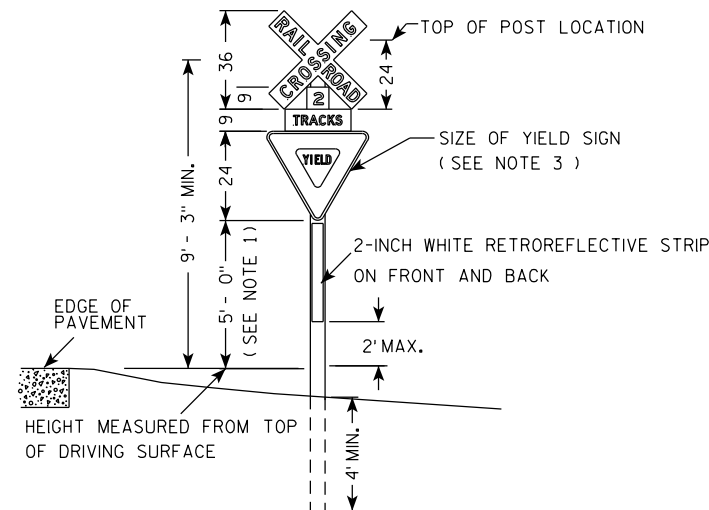

30" X 30" X 30" YIELD SIGN

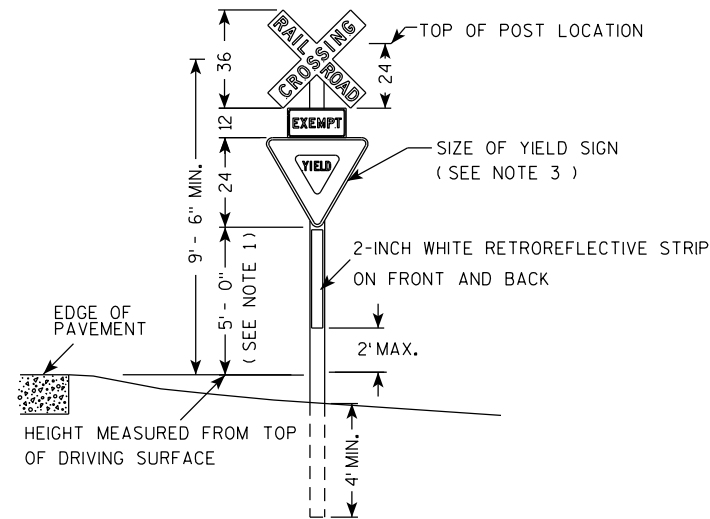

30" X 30" X 30" YIELD SIGN

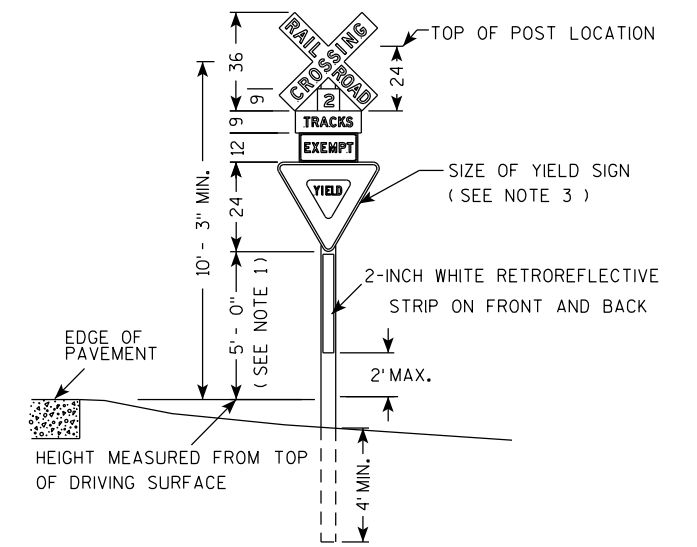

NOTES: 1.) 5'-0" MIN. MOUNTING HEIGHT FOR NEW INSTALLATIONS, EXCEPT AS NOTED  
7'-0" MIN. MOUNTING HEIGHT IN AREAS WITH PEDESTRIAN OR PARKING CONFLICTS  
2.) YIELD SIGNS SHALL HAVE A MINIMUM OF HIGH INTENSITY REFLECTIVE SHEETING (EITHER ENCAPSULATED BEAD OR PRISMATIC.)

3.) THE 36" X 36" X 36" YIELD SIGN IS THE STANDARD SIZE USED FOR MOST LOCATIONS. HOWEVER A 30" X 30" X 30" YIELD SIGN CAN BE USED ON ROADWAYS THAT HAVE A SPEED LIMIT OF 30 MPH OR LESS, AND ARE NOT STATE HIGHWAYS OR CONNECTING STATE HIGHWAYS AND HAVE NO MORE THAN ONE LANE OF TRAFFIC IN EACH DIRECTION.

TYPICAL INSTALL  
OF YIELD SIGN AT RR

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*  
for State Traffic Engineer

DATE 5/10/22 PLATE NO. A4-17.3