



SDD 08E14 Tracking Pad

GENERAL NOTES

DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND THE APPLICABLE SPECIAL PROVISIONS.

TRACKING PAD SHALL BE INSPECTED DAILY. DEFICIENT AREAS SHALL BE REPAIRED OR REPLACED IMMEDIATELY.


TRACKING PAD TO BE REMOVED AFTER CONSTRUCTION IS COMPLETED.

TRACKING PAD SHALL BE THE FULL WIDTH OF THE EGRESS POINT.


SURFACE WATER MUST BE PREVENTED FROM PASSING THROUGH THE TRACKING PAD. FLOWS SHALL BE DIVERTED AWAY, AROUND OR CONVEYED UNDER THE TRACKING PAD.

CULVERT PIPE OR OTHER BMP USED TO DIVERT WATER AWAY, AROUND OR UNDER THE TRACKING PAD SHALL BE DESIGNED TO CONVEY THE 2 YEAR - 24 HOUR EVENT.

THE COST OF ADDITIONAL BMP TO DIVERT WATER ARE INCIDENTAL TO THE TRACKING PAD BID ITEM.

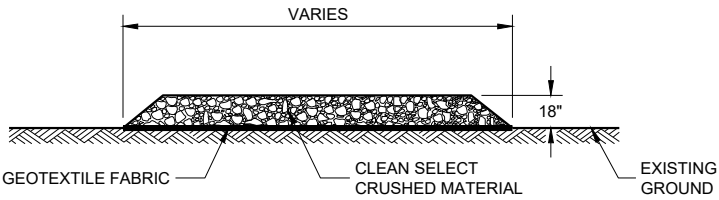

SECTION A - A

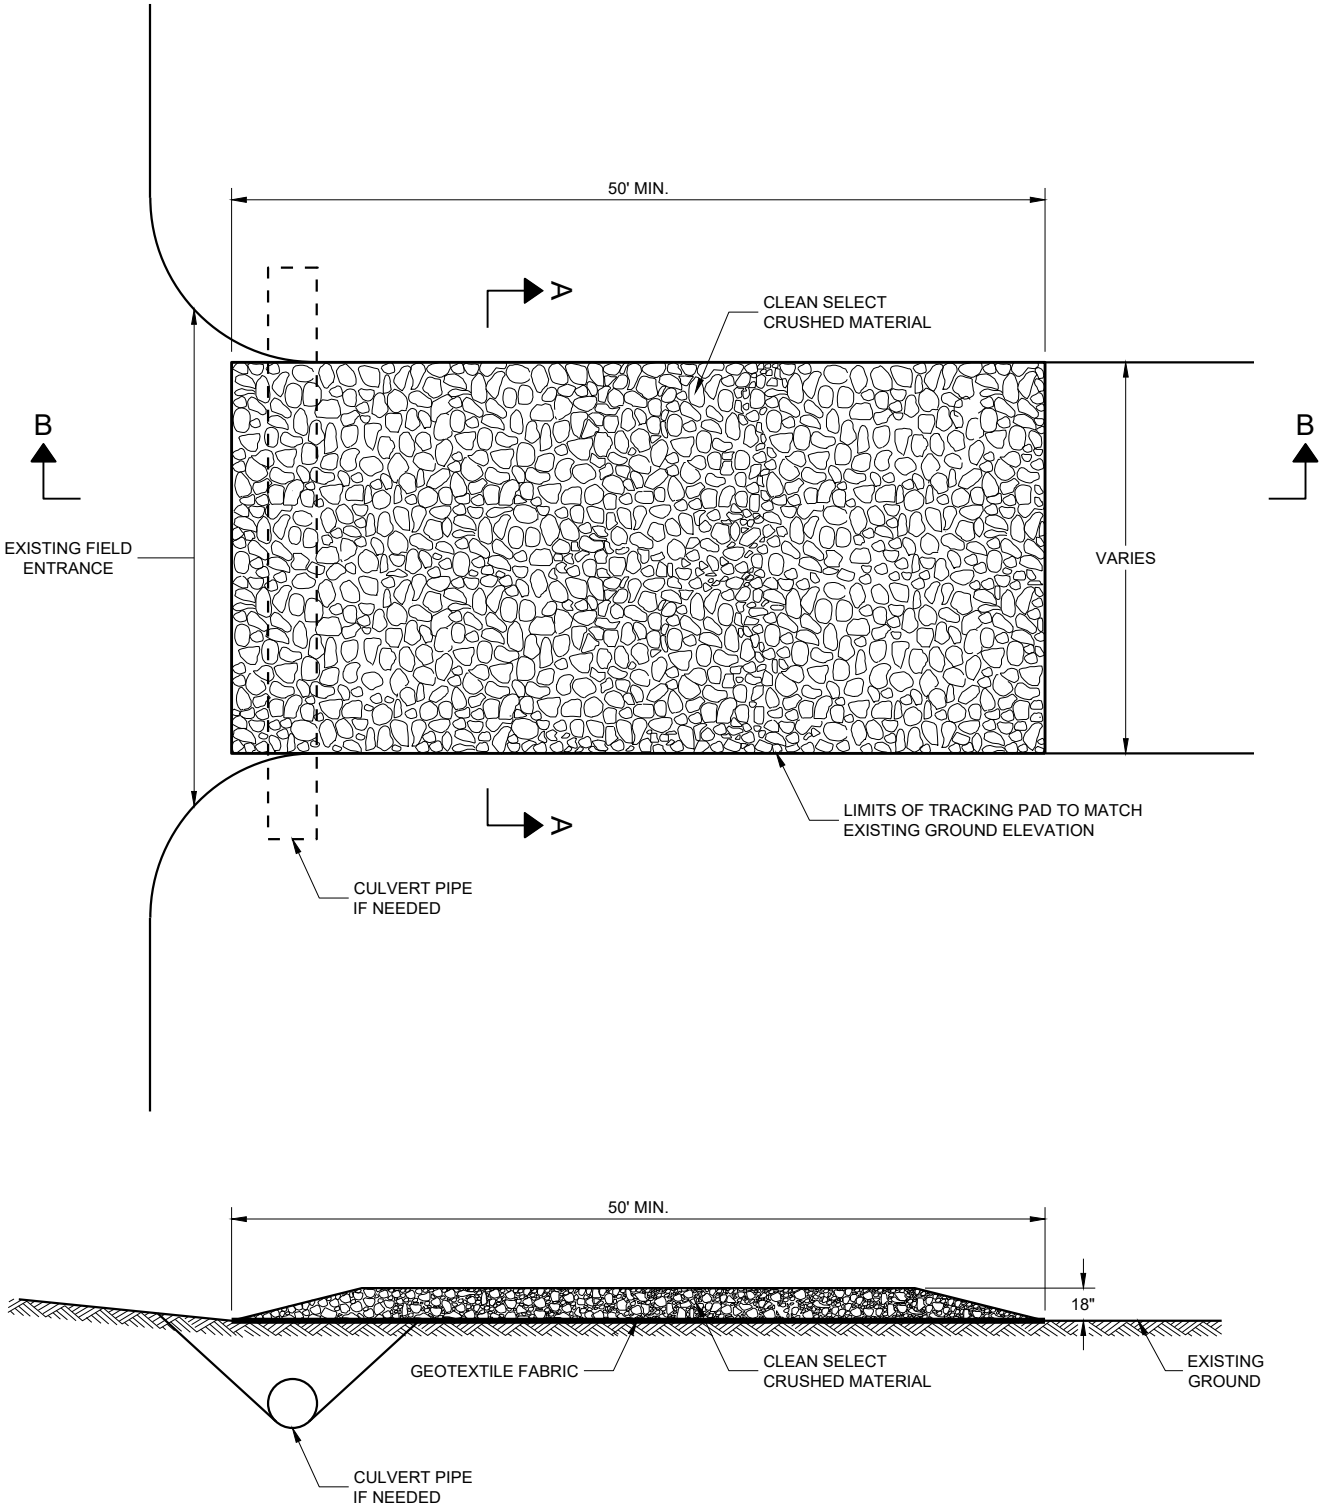

SECTION B - B

TRACKING PAD

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED

3/24/2011

DATE

/S/ Jerry H. Zogg

ROADWAY STANDARDS DEVELOPMENT
ENGINEER

FHWA

*Tracking Pad***References:**[FDM 10-10-42](#)**Bid items associated with this drawing:**

Bid items for tracking pad are encoded as follows:

<u>ITEM NUMBER</u>	<u>DESCRIPTION</u>	<u>UNIT</u>
628.7560	Tracking Pads.....	EACH

Standardized Special Provisions associated with this drawing:

<u>STSP NUMBER</u>	<u>TITLE</u>
NONE	

Other SDDs associated with this drawing:

NONE

Design Notes:

1. Tracking pads are to be used at egress points from the project, borrow and/or waste site locations, where construction vehicles enter live traffic.
2. One tracking pad per selected site.
3. Practices used to divert flow away from, under, or around tracking pads are incidental to the bid item.

Contact Person:

Jeremy Ashauer (920) 412-6381