


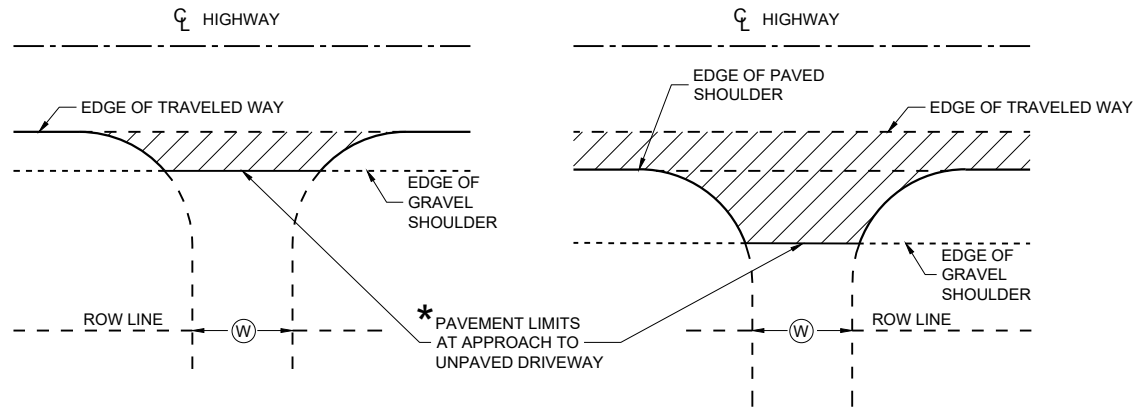


\* WHERE DRIVEWAY IS PAVED, APPROACH PAVEMENT SHOULD BE EXTENDED TO MATCH DRIVEWAY PAVEMENT.

**PLAN VIEW**  
(UNPAVED SHOULDER ON HIGHWAY)


**PLAN VIEW**  
(PAVED SHOULDER ON HIGHWAY)

**RURAL DRIVEWAY INTERSECTION DETAIL  
(NO CURB AND GUTTER OR SIDEWALK)**

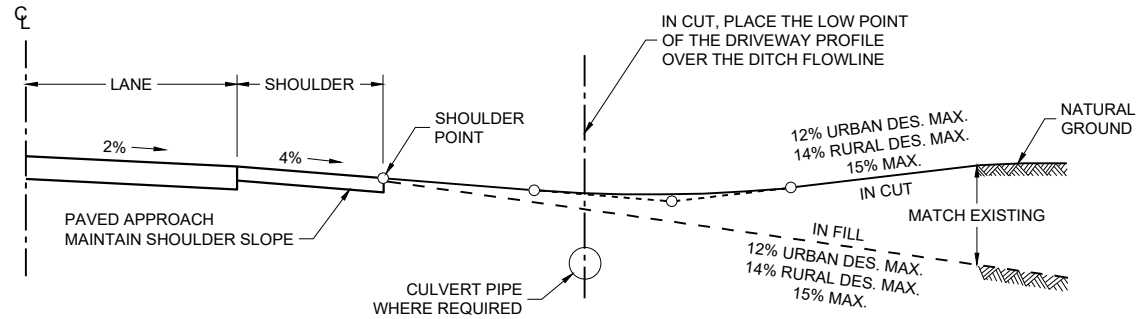

**TYPICAL DRIVEWAY PROFILES**


Ⓢ : DRIVEWAY WIDTHS (MEASURED AT ROW LINE)  
 ~ COMMERCIAL & INDUSTRIAL 16' MIN. - 35' MAX.  
 ~ RESIDENTIAL & AGRICULTURAL 16' MIN. - 24' MAX. (NONCOMMERCIAL)

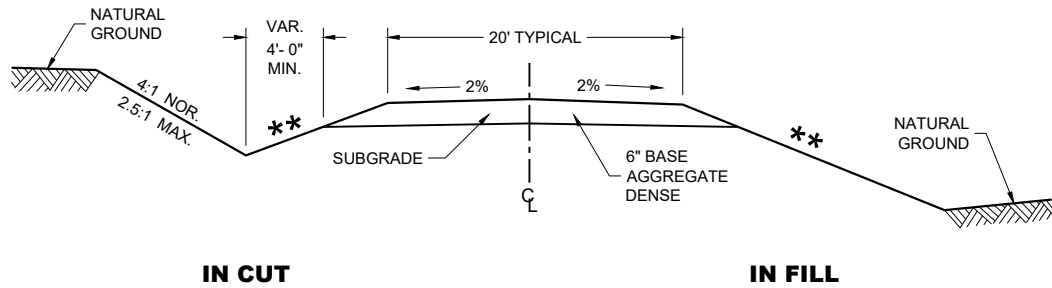

**TYPICAL CROSS SECTION FOR  
PRIVATE DRIVE OR FIELD ENTRANCE  
AGGREGATE SURFACE**

**\*\***  
SLOPE CAN VARY WITH SPEED. SEE 11-45-30.6.2

| POSTED SPEED<br>MPH | MAX. SLOPE |
|---------------------|------------|
| <35                 | 4:1        |
| ≥ 35 TO < 60        | 6:1        |
| ≥60                 | 10:1       |

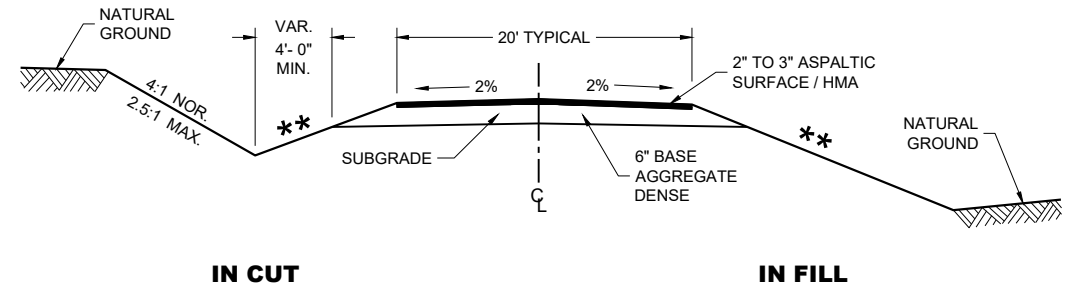

**TYPICAL CROSS SECTION FOR  
PRIVATE DRIVE OR FIELD ENTRANCE  
ASPALTIC SURFACE**

**DRIVEWAYS WITHOUT  
CURB AND GUTTER**

STATE OF WISCONSIN  
DEPARTMENT OF TRANSPORTATION

APPROVED  
 November 2025 /S/ Rodney Taylor  
 DATE ROADWAY STANDARDS DEVELOPMENT UNIT SUPERVISOR  
 FHWA

*Driveways without Curb & Gutter***References:**

Guide for the Geometric Design of Driveways, NCHRP Report 659, Transportation Research Board  
[FDM 11-25-48](#) Driveways

**Bid items associated with this drawing:**

| <u>ITEM NUMBER</u> | <u>DESCRIPTION</u>                                    | <u>UNIT</u> |
|--------------------|-------------------------------------------------------|-------------|
| 305.0120           | Base Aggregate Dense 1 1/4-inch .....                 | Ton         |
| 465.0120           | Asphaltic Surface Driveways and Field Entrances ..... | Ton         |

**Standardized Special Provisions associated with this drawing:**

| <u>STSP NUMBER</u> | <u>TITLE</u> |
|--------------------|--------------|
| NONE               |              |

**Other SDDs associated with this drawing:**

[SDD 9A15](#) Driveways without Curb & Gutter Resurfacing Projects Rural

**Design Notes:**

Consult with Region Access Management Staff prior to matching existing width if less than 16' or greater than 35'.

Label driveway widths and locations on the Plan and Profile Sheets.

Label elevations, offsets and percent grades on Cross Sections.

**Contact Person:**

John Jenkins (608-267-6975)