THE CONTRACTOR IS RESPONSIBLE FOR MAKING THEIR OWN DETERMINATION AS TO THE TYPE AND LOCATION OF UNDERGROUND UTILITIES AS MAY BE NECESSARY TO AVOID DAMAGE THERETO.

BASES (SHAFT) SHALL BE EXCAVATED BY THE USE OF A CIRCULAR AUGER. IF BASE REQUIRES A DEEP FORM BECAUSE OF LOOSE SOIL, THE FORM SHALL BE REMOVED BEFORE BACKFILLING. A STEEL CASING OR CORRUGATED METAL PIPE IS ALLOWED TO REMAIN. BACKFILL SHALL BE TAMPED TIGHT AGAINST THE BASE IN LAYERS OF ONE FOOT OR LESS.

TOP SURFACE OF THE CONCRETE BASE SHALL BE TROWEL FINISHED AND LEVEL.

ANY DAMAGE TO THE CONCRETE BASE AND ANCHOR RODS DURING CONSTRUCTION OPERATIONS SHALL BE REPAIRED AT THE ENGINEER'S DIRECTION, AT THE EXPENSE OF THE CONTRACTOR.

THE REINFORCEMENT AND ANCHOR RODS SHALL BE ADEQUATELY SUPPORTED IN THE PROPER POSITIONS SO NO MOVEMENT OCCURS DURING CONCRETE PLACEMENT.

ORIENT ANCHOR RODS IN FOOTING AND PROVIDE ANCHOR RODS STICK OUT ABOVE TOP OF CONCRETE FOOTING BASE PER THIS SHEET.

ANCHOR RODS SHALL BE INSTALLED WITH MISALIGNMENTS OF LESS THAN 1:40 FROM VERTICAL.

BAR STEEL REINFORCEMENT SHALL BE COATED WITH POWDERED EPOXY RESIN IN ACCORDANCE WITH SECTION 505 OF THE STANDARD SPECIFICATIONS (LATEST EDITION).

BENDING DIMENSIONS FOR REINFORCING BARS ARE OUT TO OUT.

WELDING OF ANCHOR RODS TO THE CAGE IS UNACCEPTABLE. TEMPLATES SHALL BE USED.

USE 3" CLEAR FOR ALL REINFORCEMENT UNLESS NOTED OTHERWISE

FORM ALL EXPOSED CONCRETE CORNERS WITH 1" CHAMFER ALL AROUND. TOP OF THE CONCRETE BASE SHALL BE TROWEL FINISHED AND LEVEL.

CONDUIT SIZES AND LOCATIONS SHALL BE SHOWN ON THE PLANS

MINIMUM BENDING RADIUS OF CONDUIT IS EQUAL TO 6 TIMES THE DIAMETER.

CONDUIT HEIGHT ABOVE CONCRETE BASES SHALL BE $4\frac{1}{2}$ " INCHES. ALL METALLIC CONDUIT ENDS SHALL BE REAMED AND THREADED. NON-METALLIC CONDUIT SHALL HAVE BELL ENDS INSTALLED. ALL CONDUIT SHALL SLOPE TO PULL BOX.

ALL CONDUIT ENDS AT THE TOP OF CONCRETE BASES SHALL BE CAPPED IF METALLIC OR PLUGGED IF NON-METALLIC IMMEDIATELY AFTER PLACEMENT AND BEFORE CONCRETE IS POURED. CONDUITS IN WHICH WIRE OR CABLE IS NOT INSTALLED SHALL REMAIN CAPPED OR PLUGGED.

BELL ENDS SHALL BE INSTALLED ON ALL PVC CONDUIT EXPOSED AT THE TOP OF CONCRETE BASES BEFORE INSTALLATION OF CABLE OR WIRE.


WHEN REQUIRED TO CONNECT NON-METALLIC CONDUIT TO METALLIC CONDUIT, ONLY ADAPTER FITTINGS, U.L. LISTED FOR ELECTRICAL USE, SHALL BE USED.

A NO. 4 AWG STRANDED COPPER EQUIPMENT GROUNDING CONDUCTOR SHALL BE EXOTHERMICALLY WELDED TO THE EQUIPMENT GROUNDING ELECTRODE (GROUND ROD).

THE EQUIPMENT GROUNDING CONDUCTOR SHALL BE FURNISHED AND INSTALLED TO ENTER THE BASE THROUGH A 1 INCH CONDUIT INSTALLED FOR GROUNDING PURPOSES, LEAVING A 4 FOOT COIL OF WIRE ABOVE THE CONCRETE BASE. THE EQUIPMENT GROUNDING CONDUCTOR SHALL BE NEATLY COILED AND THE COILS TIED TOGETHER.

THE FINAL OR TERMINATING CONCRETE BASE IN A CONDUIT RUN SHALL HAVE A 6" EXIT STUB INSTALLED FOR FUTURE CABLING USE. THE EXIT STUB SHALL BE SIZED AS USED THROUGHOUT THE CONDUIT RUN AS SHOWN A THE ENTRANCE OF THE BASE.

1 THE MINIMUM DEPTH OF CONDUIT EXITING THE CONCRETE BASE AND INSTALLED BELOW THE TRAVELED WAY SHALL BE 24 INCHES. THE MINIMUM DEPTH OF CONDUIT EXITING THE CONCRETE BASE THAT IS NOT INSTALLED BELOW THE TRAVELED WAY SHALL BE 18 INCHES. THE MAXIMUM DEPTH OF ALL CONDUIT SHALL BE 36 INCHES (GREATER THAN 36 INCHES IF INSTALLED IN BREAKER RUN) EXCEPT WITH WRITTEN APPROVAL OF THE ENGINEER.

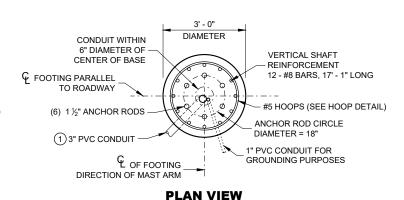

#5 HOOPS

9" MAX

SPACING

SHAFT

LENGTH

PLACE

#5 HOOPS

VERTICAL SHAFT

REINFORCEMENT


12 - #8 BARS

#5 HOOPS

ELEVATION VIEW

(CONDUITS NOT SHOWN ON

THIS VIEW FOR CLARITY)



NO MORE THAN 4" BELOW
GRADE ON THE LOWER
SIDE OF BASE

FORM

4" MAX

FORM

FORM

FORM

FORM

FORM

FORM

FORM

FORM

FORM

FORMING SHALL BE

REMOVED AFTER

CONCRETE


CONCRETE

CONCRETE

TROWEL FINISH AND LEVEL

FORMING DETAIL


FORM DEPTH SHALL BE

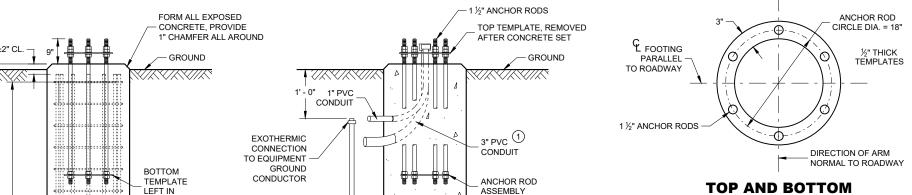

SIDE VIEW
(HOOPS AND VERTICAL SHAFT REINFORCEMENT

NOT SHOWN ON THIS VIEW FOR CLARITY)

TEMPLATE

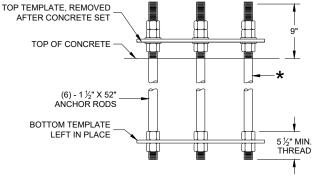

ANCHOR ROD ASSEMBLY DETAILS

★ THREAD TOP 10" OF ANCHOR ROD FOR 3 NUTS AND 2 WASHERS AND BOTTOM 5 ½" FOR 2 NUTS PER ANCHOR ROD. HOT DIP GALVANIZE THE ENTIRE LENGTH OF THE ANCHOR ROD (ASTM A123) AND HOT DIP NUTS AND WASHERS (ASTM A153. USE ZINC COATED NUTS MANUFACTURED WITH SUFFICIENT ALLOWANCE TO ALLOW NUTS TO RUN FREELY ON THE THREADS.

CONCRETE BASE, TYPE 10 SPECIAL (FOR TYPE 9 SPECIAL AND TYPE 10 SPECIAL POLES)

%" DIA. X 8' - 0" (MIN) COPPER CLAD

EQUIPMENT

GROUNDING

CONDUCTOR

CONCRETE = 4.6 CUBIC YARD H.S. REINFORCEMENT = 779 LBS

FOR USE WHEN GROUND ELEVATION AT BASE EQUALS OR IS GREATER THAN HIGH POINT OF ROADWAY ELEVATION.

CONCRETE BASE TYPE 10 SPECIAL

0

IJ

0

Ò

STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION

 APPROVED
 /S/ Alex Crabtree

 August 2020
 /S/ Alex Crabtree

 DATE
 WIND LOADED STRUCTURES

 PROGRAM LEADER

Standard Detail Drawing 9C15

August 2020

Concrete Base Type 10 Special

References:

FDM Procedures

Bid items associated with this drawing:

<u>ITEM</u> <u>NUMBER</u>	<u>DESCRIPTION</u>	<u>UNIT</u>
652.0200 - 0399	Conduit Rigid Non-Metallic (schedule) (size)	LF
654.0120	Concrete Bases Type 10-Special	EACH

Standardized Special Provisions associated with this drawing:

STSP NUMBER TITLE

NONE

Other SDDs associated with this drawing:

SDD 9B2 Conduit

Design Notes:

Examine the soil conditions at the site before using this standard detail drawing in the contract documents. Do not use this standard detail drawing if the site soils exhibit a phi-angle less than 20 degrees (granular soils), or a cohesion value of less than 350 psf (cohesive soils.) The designer is to provide a site-specific footing design (complete base details) in the contract plans when this standard detail drawing cannot be used.

The concrete base shall be extended further above ground when the ground elevation at the base is lower than the high point of roadway elevation.

Contact Person:

Ahmet Demirbilek (414) 220-6801 / Alexander Crabtree (608) 266-3686