


SDD 09F07 Loop Detector Installed in New Concrete Base With New Asphaltic Overlay, Round CSCP Pullbox

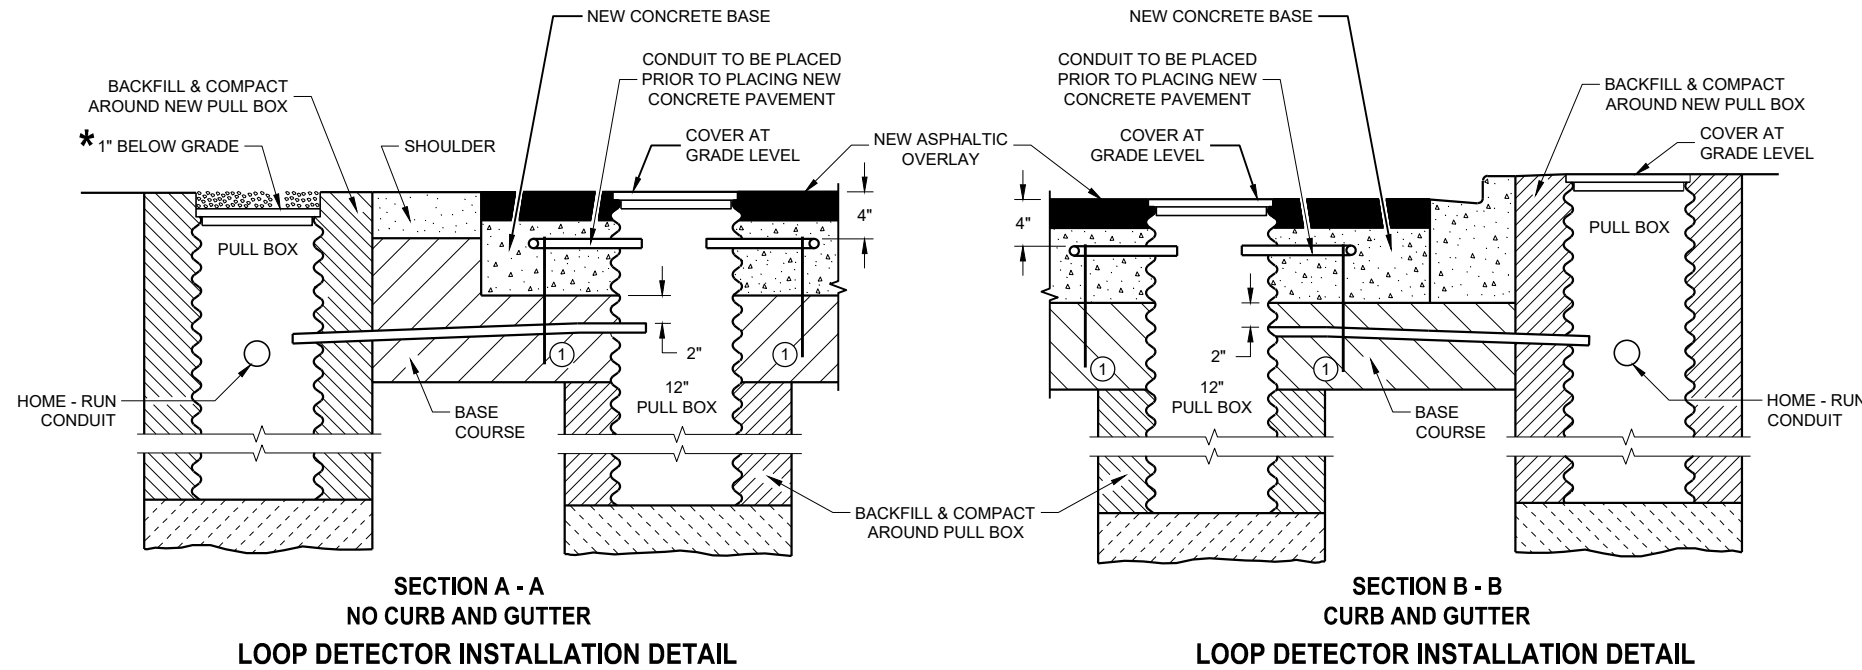

* RECESS PULL BOX SO THAT THE COVER IS 3" BELOW GRADE IN SHOULDER AREAS OF CRUSHED AGGREGATE. BACKFILL OVER COVER WITH THE CRUSHED AGGREGATE TO BRING THE AREA TO GRADE LEVEL.

GENERAL NOTES

DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE CONTRACT.

PITCH LEAD OUT CONDUIT TO DRAIN TO ROADSIDE PULL BOX.

LOOP SIZE, LOCATION, NUMBER OF TURNS OF WIRE AND ASSOCIATED SIGNAL PHASE SHALL BE AS SHOWN ON THE PLANS.

SPLICES SHALL BE INSTALLED BY USING CAST IN PLACE SPLICE KITS LISTED ON THE DEPARTMENTS APPROVED PRODUCTS LIST OR AN ENGINEER APPROVED EQUAL. NON-INSULATED BUTT SPLICES TO FIT #12 AWG STRANDED WIRE SHALL BE USED. SPLICES SHALL BE SOLDERED AND INSULATED FROM EACH OTHER AS PER INSTRUCTIONS INCLUDED IN THE SPLICE KIT.

MEASURE GROUND RESISTANCE USING A MEGGER. REPLACE LOOP WIRE NOT ATTAINING A READING OF INFINITY TO GROUND.

AFTER SPLICING THE LOOP WIRE TO THE LOOP LEAD-IN CABLE, THE CONTRACTOR SHALL MEASURE INDUCTANCE, GROUND RESISTANCE AND WIRE RESISTANCE AT THE CABINET END OF THE LEAD-IN CABLE AND FURNISH A COPY OF THE READING TO THE PROJECT ENGINEER FOR EVALUATION.

VERIFY THICKNESS OF NEW ASPHALTIC OVERLAY BEFORE INSTALLING PULL BOX AND RELATED CONDUIT.

CONDUIT SHALL BE FULLY ENCASED IN NEW CONCRETE BASE (2" MINIMUM COVERAGE.)

LOOP DETECTOR LEADS SHALL BE IDENTIFIED WITH THEIR ASSOCIATED LOOP BY USE OF WATERPROOF TAGS AT BOTH ENDS OF THE CABLE. A LISTING OF THE CABLE IDENTIFICATION PER INDIVIDUAL LOOP LEAD-IN SHALL BE PLACED IN THE CABINET.

ANY PVC LEADOUT CONDUIT CONTAINING MORE THAN ONE TWISTED PAIR OF LOOP LEAD WIRE SHALL BE 2".

THE #12 AWG LOOP WIRE FROM THE LOOP TO THE ROADSIDE PULL BOX, SHALL BE HAND TWISTED AT LEAST 3 TWISTS PER FOOT BEFORE INSTALLATION.

SPLICES OF LOOP WIRE TO LEAD-IN CABLE SHALL BE MADE ONLY IN PULL BOXES AT THE SIDE OF THE ROAD.




THE #12 AWG LOOP WIRE SHALL BE INSTALLED FROM THE ROADSIDE PULL BOX, INTO THE PULL BOX IN THE PAVEMENT, THROUGH THE LOOP CONDUIT, BACK TO THE ROADSIDE PULL BOX, AND BE INSTALLED IN ONE NON-SPLICED CONTINUOUS LENGTH.

PROTECTION OF THE PULL BOX IN THE BASE COURSE, AND THE RELATED CONDUITS SHALL BE REQUIRED AFTER INSTALLATION AND BEFORE NEW CONCRETE PAVEMENT IS POURED.

PROTECTION OF THE PULL BOX SHALL BE REQUIRED AFTER THE NEW CONCRETE BASE IS POURED AND BEFORE THE NEW ASPHALTIC OVERLAY IS REPLACED.

12" PULL BOXES IN PAVEMENT SHALL BE CORRUGATED STEEL ONLY.

① HOLD DOWN PINS TO HOLD CONDUIT DURING POUR.

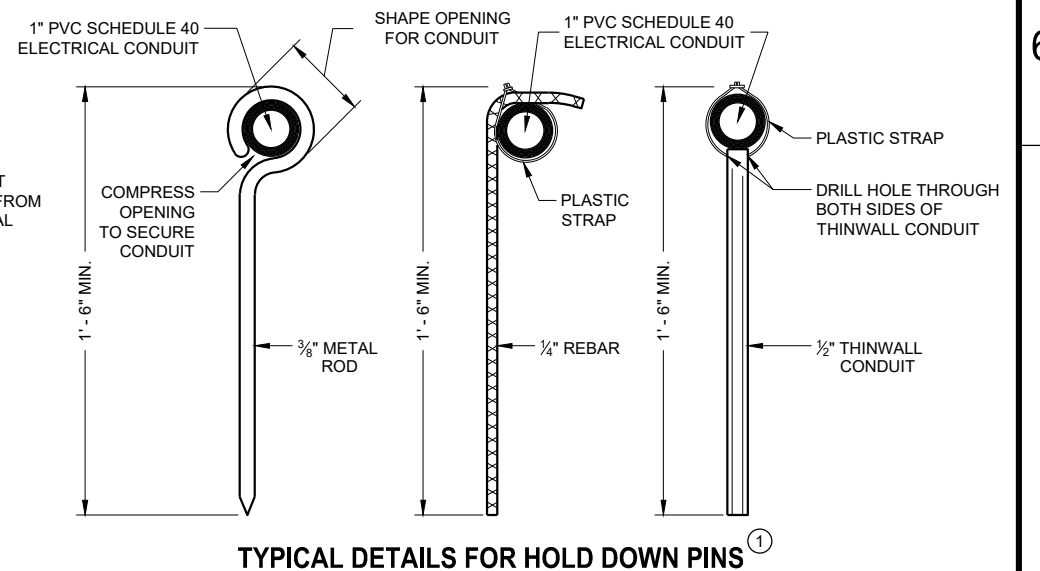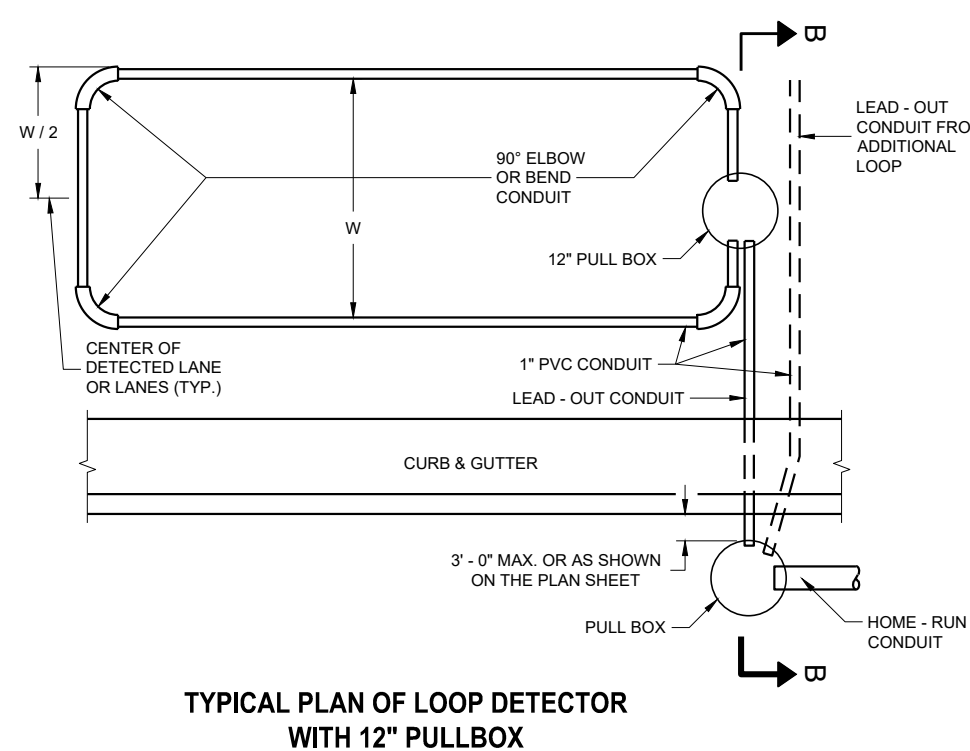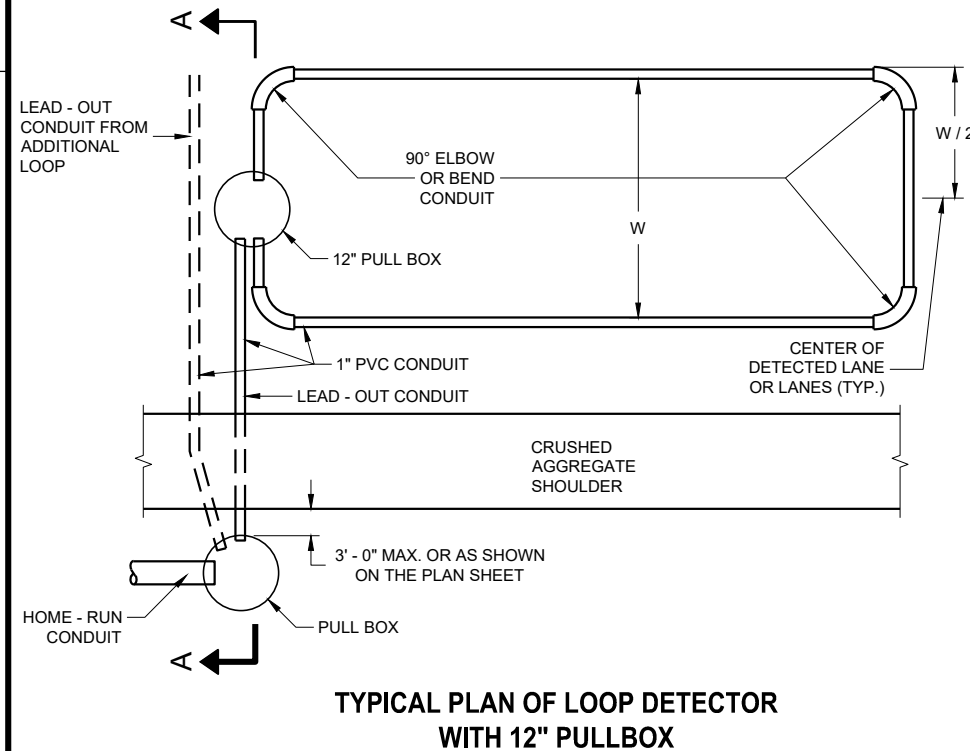

**LOOP DETECTOR INSTALLED
IN NEW CONCRETE BASE WITH
NEW ASPHALTIC OVERLAY
ROUND CSCP PULLBOX**

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
November 2018 DATE /S/ Ahmet Demirelek
ROADWAY STANDARDS DEVELOPMENT
ENGINEER
FHWA

*Loop Detector Installed in New Concrete Base with new Asphaltic Overlay Round CSCP
Pullbox*

References:

[FDM15-5 Attachment 30.5](#) and [30.6](#) for conventional symbols

[Standard Spec. 655](#) Electrical Wiring

[Standard Spec. 675](#) Controllers and Detectors

Bid items associated with this drawing:

<u>ITEM NUMBER</u>	<u>DESCRIPTION</u>	<u>UNIT</u>
652.0800	Conduit Loop Detector	LF
653.0100 - 0150	Pull Boxes Steel (inch)	EACH
653.0151 - 0179	Pull Boxes Non-Conductive (inch)	EACH
655.0700	Loop Detector Lead In Cable.....	LF
655.0800	Loop Detector Wire	LF

Standardized Special Provisions associated with this drawing:

<u>STSP NUMBER</u>	<u>TITLE</u>
NONE	

Other SDDs associated with this drawing:

SDD 9B2	Conduit
SDD 9B4	Pull Box
SDD 9B16	Pull Box Non-Conductive

Design Notes:

NONE

Contact Person:

Ahmet Demirbilek (414) 220-6801
(414) 322-9606 (Mobile)