

Public Involvement WIS 110

US 10 to WIS 96

Waupaca County

Monday, September 13, 2021 to Friday, October 1, 2021


*More information is available for review on the project website: <https://wisconsindot.gov/Pages/projects/by-region/nc/wis110/default.aspx>
Deaf, hard-of-hearing, deaf-blind, and speech-disabled persons should contact the Wisconsin Relay Service by dialing 711.*

Purpose of Public Involvement

- Our objective is to obtain your input on the following:
 - Identify needs
 - Proposed improvements
 - Proposed roadway reconfiguration



Project Location

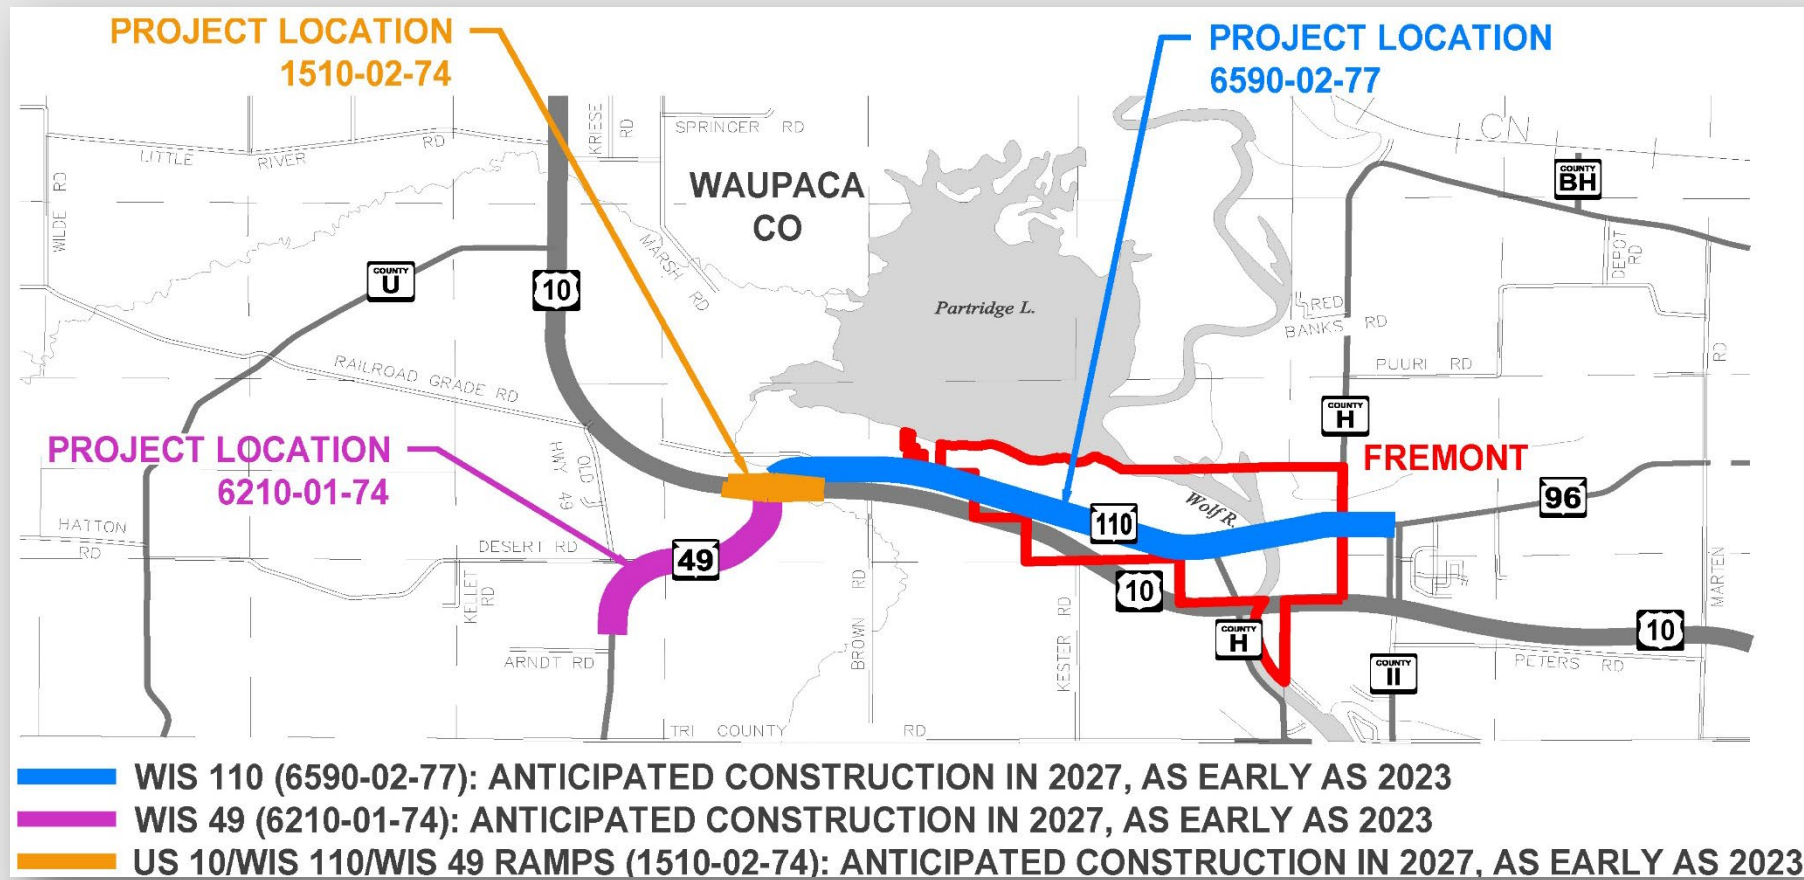

Project Purpose

- Preserve the roadway asset and minimize the overall life cycle cost of the corridor



Project Need

- Prevent poor riding surfaces and further deterioration on WIS 110
- Curb ramps do not meet Americans with Disabilities Act (ADA) standards
- Non-compliant guardrail will be upgraded to meet the most recent safety standards



Project Information

- Proposed improvements to 3.1 miles of WIS 110 include the following:
 - Remove the existing pavement surface and replacing it with a new surface of hot mix asphalt (HMA) pavement
 - Remove and replace non-compliant guardrail
 - Upgrade curb ramps to meet ADA standards
 - Install new centerline and shoulder rumble strips in rural areas




Project Information

- Lane reconfiguration between Tustin Road (CTH H) and WIS 96
 - Addition of two way left turn lane
 - Dedicated turn lanes at major intersections
 - Simplifies navigation of the corridor
 - Promotes reduced travel speeds and turning spaces for vehicles



Lane Reconfiguration

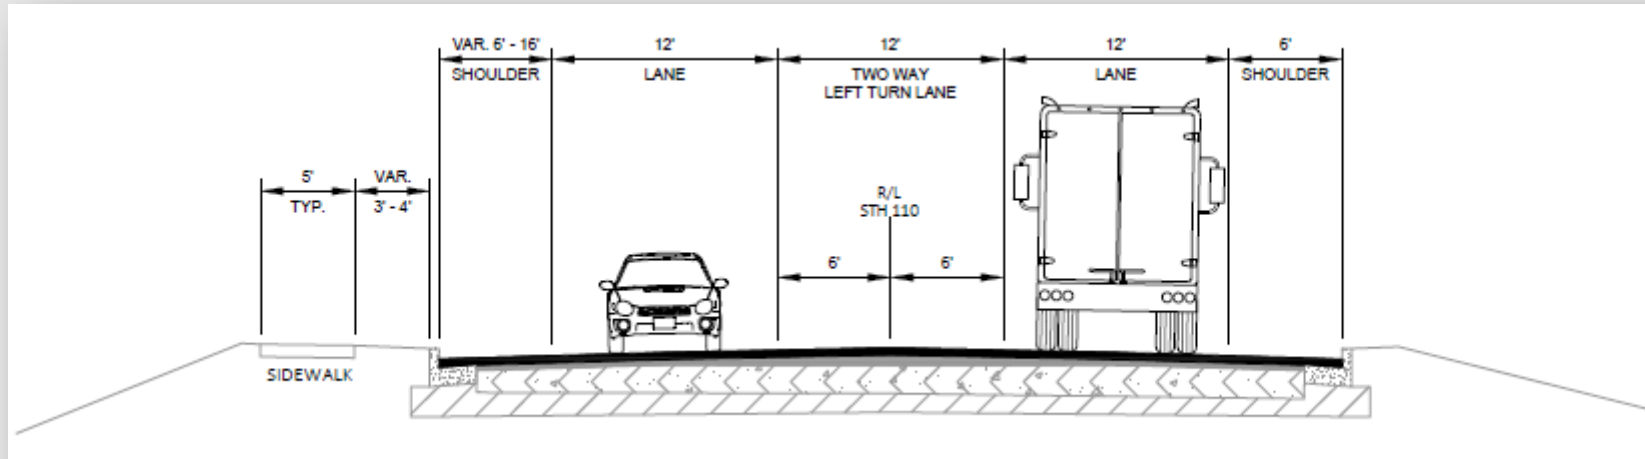

Finished typical section through lane reconfiguration areas

See "Project Overview Map" for more information.



Proposed Traffic Impacts

- Motorists can expect to encounter the following conditions:
 - Through the two-lane segment, WIS 110 will remain open to traffic under flagging operations
 - Through the three-lane and four-lane segments, single lanes will be closed for construction while at least one lane in each direction remains open
 - Traffic may be reduced to one lane on side roads when construction operations are occurring within the intersection



Proposed Traffic Impacts

- Temporary sidewalks and curb ramps will be provided while curb ramps are under construction
- Access to business and residential driveways will be maintained during construction
- Local and emergency access will be maintained to all businesses and residences throughout construction



Real Estate

- No real estate acquisition is required.



Project Update/Next Steps

- Preliminary design and plans: Fall 2021
- Final plans: Summer 2022
- Send project mailings to property owners & businesses impacted by the WIS 49 & US 10 projects: Fall 2021
- Construction on WIS 110 is currently scheduled to begin in 2027 but could occur as early as 2023
- Construction on WIS 49 & USH 10 ramps is currently scheduled to begin in 2027, but could occur as early as 2023



Public Input & Comments

- Provide input by October 1, 2021
 - Complete and mail comment form found in handout
 - Via online survey on project website
<https://wisconsindot.gov/Pages/projects/by-region/nc/wis110/default.aspx>
 - Via email or phone
Kyle Treml, P.E.
Wisconsin Department of Transportation
944 Vanderparren Way
Green Bay, WI 54304-5344
(920) 360-7029
Kyle.Treml@dot.wi.gov

Deaf, hard-of-hearing, deaf-blind, and speech-disabled persons should contact the Wisconsin Relay Service by dialing 711.

