

Wisconsin Department of Transportation

November 24, 2015

Division of Transportation Systems Development

Bureau of Project Development
4802 Sheboygan Avenue, Rm 601
P O Box 7916
Madison, WI 53707-7916

NOTICE TO ALL CONTRACTORS:

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

Proposal #15: 4984-08-71, WISC 2015 643
C Appleton, Lawe St
Power Canal Bridge
Local Street
Outagamie County

Letting of December 8, 2015

This is Addendum No. 01, which provides for the following:

Schedule of Items

Added Bid Item Quantities					
Bid Item	Item Description	Unit	Old Quantity	Revised Quantity	Proposal Total
642.5001	Field Office Type B	Each	0	1	1

Plan Sheets

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
6	Construction Details – Watermain Hanger Assembly (changed National Pipe Hanger Corporation, Figure 260 to Anvil International, Figure 171)

Schedule of Items

Attached, dated November 24, 2015, are the revised Schedule of Items Page 10.

Plan Sheets

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:
Revised: 6

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman

Proposal Development Specialist
Proposal Management Section

END OF ADDENDUM

GENERAL NOTES

PIPE HANGERS SHALL BE PLACED TWO (2) HANGERS PER PIPE WITH ONE (1) HANGER PLACED AT EACH END AND ONE HANGER PLACED AT THE MIDPOINT OF THE PIPE SPACING NOT TO EXCEED 10 FT.

FINAL HANGER LAYOUT AND PIPE LENGTHS TO BE DETERMINED BY CONTRACTOR AND SHALL BE SHOWN ON SHOP DRAWINGS.

HANGERS SHALL BE ADJUSTABLE TWO-ROD ROLLER HANGER FIGURE 171. PIPE SIZE IS AS MANUFACTURED BY ANVI INTERNATIONAL OR APPROVED EQUAL.

USE 307 SHIELD SIZE NO. 19 AS MANUFACTURED BY NATIONAL PIPE HANGER CORPORATION OR APPROVED EQUAL.

HANGERS SHALL BE 1 INCH DIA CONTINUOUS THREADED RODS FIGURE 755 MANUFACTURED BY NATIONAL PIPE HANGER CORPORATION OR APPROVED EQUAL. PROVIDE FOUR (4) HEAVY HEX NUTS PER SUPPORT.

ALL PIPE HANGERS, RODS, BOLTS, NUTS AND WASHERS SHALL BE GALVANIZED FINISH.

* DIMENSION BASED ON ROLLER CHOSEN


ADJUSTABLE TWO-ROD ROLLER HANGER FIGURE 171. PIPE SIZE IS AS MANUFACTURED BY ANVI INTERNATIONAL OR APPROVED EQUAL.

USE 307 SHIELD SIZE NO. 19 AS MANUFACTURED BY NATIONAL PIPE HANGER CORPORATION OR APPROVED EQUAL.

HANGERS SHALL BE 1 INCH DIA CONTINUOUS THREADED RODS FIGURE 755 MANUFACTURED BY NATIONAL PIPE HANGER CORPORATION OR APPROVED EQUAL. PROVIDE FOUR (4) HEAVY HEX NUTS PER SUPPORT.

ALL PIPE HANGERS, RODS, BOLTS, NUTS AND WASHERS SHALL BE GALVANIZED FINISH.

* DIMENSION BASED ON ROLLER CHOSEN

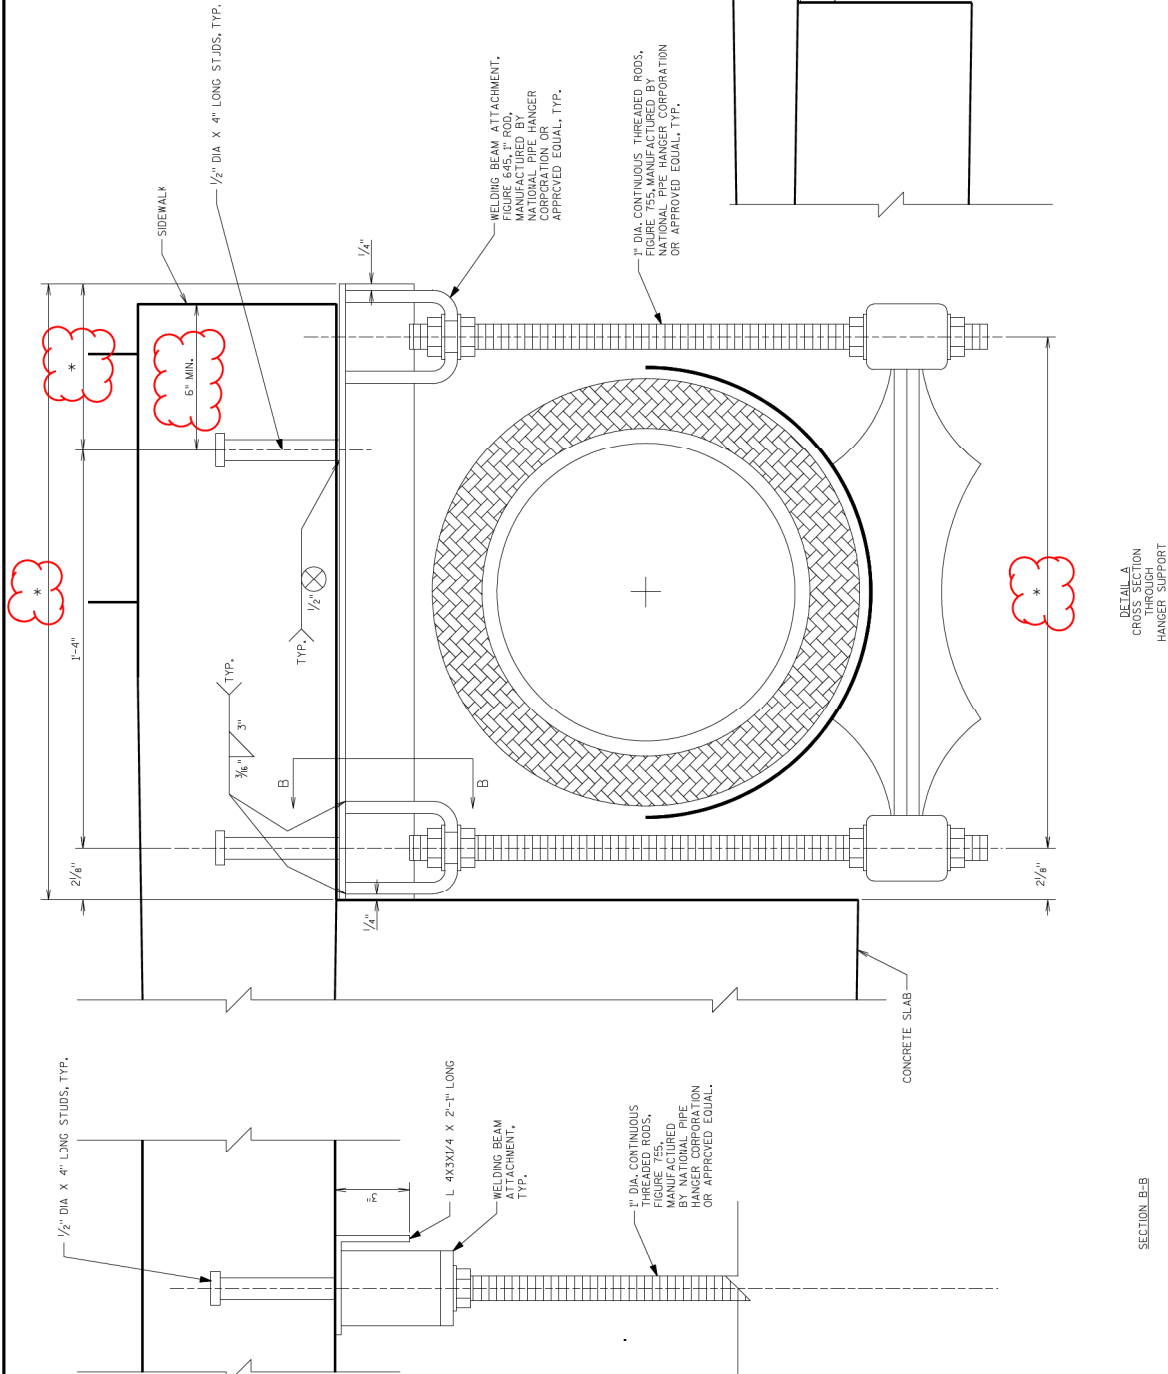

Addendum No. 01
 ID 4984-08-71
 Revised Sheet 6
 November 24, 2015

SCHEDULE OF ITEMS

REVISED:

CONTRACT:
20151208015PROJECT(S):
4984-08-71FEDERAL ID(S):
WISC 2015643

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
0960	SPV.0090 Special 04. Steel Casing Pipe, 24-Inch	80.000 LF	.		.	
0970	SPV.0090 Special 05. Railing Steel Pedestrian Type C3 Special	25.000 LF	.		.	
0980	SPV.0090 Special 06. Storm Sewer Pipe PVC 10-Inch	49.000 LF	.		.	
0990	SPV.0105 Special 01. Concrete Pavement Joint Layout	LUMP	LUMP		.	
1000	SPV.0165 Special 02. Reinforced Concrete Sidewalk 5-Inch	293.000 SF	.		.	
1010	SPV.0180 Special 01. Concrete Joint Sealing	306.000 SY	.		.	
1020	SPV.0195 Special 01. Excavation, Hauling, and Disposal of Contaminated Historic Fill	1,024.000 TON	.		.	
1030	642.5001 Field Office Type B	1.000 EACH	.		.	
	SECTION 0001 TOTAL				.	
	TOTAL BID				.	