



Wisconsin Department of Transportation

December 9, 2016

Division of Transportation Systems Development

Bureau of Project Development
4802 Sheboygan Avenue, Rm 601
P O Box 7916
Madison, WI 53707-7916

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

Proposal #33: 6290-05-75, WISC 2016 493
Stevens Point - Waupaca
Country Club Drive to Badger Avenue
USH 10
Portage County

Letting of December 13, 2016

This is Addendum No. 01, which provides for the following:

Special Provisions

Added Special Provisions	
Article No.	Description
42	Debris Containment B-49-24, Item 203.0225.S.01

Schedule of Items

Added Bid Item Quantities					
Bid Item	Item Description	Unit	Old Quantity	Revised Quantity	Proposal Total
203.0225.S.01	Debris Containment B-49-24	LS	0	1	1

Plan Sheets

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
224	Structure Plan (Revised Total Estimated Quantities Table)

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman

Proposal Development Specialist
Proposal Management Section

ADDENDUM NO. 01

6290-05-75

December 9, 2016

Special Provisions

42. Debris Containment B-49-24, Item 203.0225.S.01.

A Description

This special provision describes providing a containment system to prevent debris from structure removal, reconstruction, or other construction operations from falling onto facilities located under the structure. Using this containment system does not relieve the contractor of requirements under standard spec 107.17 and standard spec 107.19 or requirements under a US Army Corps of Engineers Section 404 Permit.

B (Vacant)

C Construction

Prior to starting work, submit a debris containment plan to the engineer for review. Incorporate engineer-requested modifications. Do not start work over IH 39 until the engineer approves the debris containment plan.

Maintain adequate protection throughout construction for people and property within the potential fall zone. Ensure that a containment system capable of protecting underlying facilities from falling construction debris is in place before beginning deck repair, parapet removal, or other operations that may generate debris.

D Measurement

The department will measure Debris Containment B-49-24 as a single lump sum unit of work for each structure acceptably completed.

E Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBER	DESCRIPTION	UNIT
203.0225.S.01	Debris Containment B-49-24	LS

Payment is full compensation for furnishing, installing, maintaining, and removing a debris containment system.

Schedule of Items

Attached, dated December 9, 2016, are the revised Schedule of Items Pages. All pages of the Schedule of Items are being replaced.


Plan Sheets

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:

Revised: 224


END OF ADDENDUM

Addendum No. 01
ID 6290-05-75
Revised Sheet 224
December 9, 2016

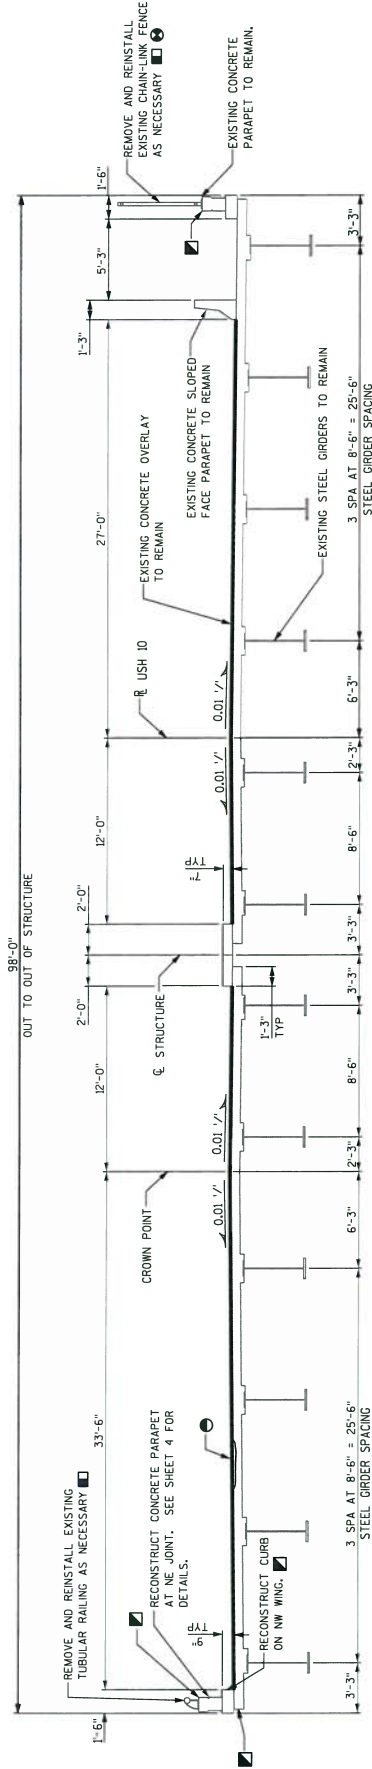

CROSS SECTION THRU BRIDGE

(LOOKING EAST)




PROTECTIVE SURFACE TREATMENT RESEAL LIMITS

TOTAL ESTIMATED QUANTITIES

BID ITEM NO.	BID ITEMS	UNIT	W ABUT	PIER 1	E ABUT	SUPER	TOTALS
203.0225 S	ABRASIVE SURFACE TREATMENT OF ASPHALT CONCRETE SURFACES	LS	---	---	---	10	10
203.0225 S	RESEALING OF ASPHALT CONCRETE SURFACES	LS	---	---	---	2	2
505.0600	BAR STEEL REINFORCEMENT FOR COATED STRUCTURES	LB	---	---	---	2	2
505.0904	BAR COUPLERS NO. 4	EA	---	---	---	2	2
509.0301	PREPARATION DECK TYPE 1	SY	---	---	---	15	15
509.0302	PREPARATION DECKS TYPE 2	SY	---	---	---	6	6
509.1500	CONCRETE SURFACE REPAIR	SF	15	---	24	107	146
616.0700 S	FENCE SAFETY	LF	---	---	---	238	238
SPV.0085.02	CONCRETE OVERLAY DECK PATCHING NON-CEMENTITIOUS	LB	---	---	---	6280	6280
SPV.0090.04	RECONSTRUCT CONCRETE PARAPET	LF	---	---	---	1.5	1.5
SPV.0105.01	REMOVE AND REINSTALL RAILING	LS	---	---	---	---	---
SPV.0180.02	REMOVING CONCRETE MASONRY OVERLAY	SY	---	---	---	25	25
SPV.0180.03	PIGMENTED PROTECTIVE SURFACE TREATMENT RESEAL	SY	79	---	76	495	650

William C. Decker SDR
12/07/16



ADDED BID ITEM 203.0225 S	MAB
REVISION	BY
STATE OF WISCONSIN	
DEPARTMENT OF TRANSPORTATION	
STRUCTURE B-49-24	
DRAWN BY	MAB
CHECKED BY	JKD
PLANS	CAR
SHEET 2 OF 4	
TYPICAL SECTION & QUANTITIES	
224	



Proposal Schedule of Items

Proposal ID: 20161213033

Project(s): 6290-05-75

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0010	203.0210.S Abatement of Asbestos Containing Material (structure) 01. B-49-24	LS	LUMP SUM	_____.
0020	204.0100 Removing Pavement	112.000 SY	_____.	_____.
0030	204.0110 Removing Asphaltic Surface	188.000 SY	_____.	_____.
0040	204.0150 Removing Curb & Gutter	897.000 LF	_____.	_____.
0050	204.0155 Removing Concrete Sidewalk	118.000 SY	_____.	_____.
0060	204.0165 Removing Guardrail	100.000 LF	_____.	_____.
0070	213.0100 Finishing Roadway (project) 01. 6290-05-75	1.000 EACH	_____.	_____.
0080	305.0110 Base Aggregate Dense 3/4-Inch	70.000 TON	_____.	_____.
0090	416.0160 Concrete Driveway 6-Inch	24.000 SY	_____.	_____.
0100	416.0610 Drilled Tie Bars	912.000 EACH	_____.	_____.
0110	416.0620 Drilled Dowel Bars	1,454.000 EACH	_____.	_____.
0120	416.1710 Concrete Pavement Repair	281.000 SY	_____.	_____.
0130	416.1720 Concrete Pavement Replacement	290.000 SY	_____.	_____.
0140	465.0105 Asphaltic Surface	1.000 TON	_____.	_____.
0150	465.0120 Asphaltic Surface Driveways and Field Entrances	43.000 TON	_____.	_____.
0160	502.3215.S Protective Surface Treatment Reseal	2,375.000 SY	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20161213033

Project(s): 6290-05-75

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0170	505.0600 Bar Steel Reinforcement HS Coated Structures	10.000 LB	_____.	_____.
0180	505.0904 Bar Couplers No. 4	2.000 EACH	_____.	_____.
0190	505.0905 Bar Couplers No. 5	2.000 EACH	_____.	_____.
0200	509.0301 Preparation Decks Type 1	15.000 SY	_____.	_____.
0210	509.0302 Preparation Decks Type 2	6.000 SY	_____.	_____.
0220	509.1500 Concrete Surface Repair	146.000 SF	_____.	_____.
0230	602.0505 Curb Ramp Detectable Warning Field Yellow	128.000 SF	_____.	_____.
0240	602.2400 Concrete Safety Islands	954.000 SF	_____.	_____.
0250	614.0010 Barrier System Grading Shaping Finishing	2.000 EACH	_____.	_____.
0260	614.0370 Steel Plate Beam Guard Energy Absorbing Terminal	2.000 EACH	_____.	_____.
0270	614.0400 Adjusting Steel Plate Beam Guard	104.000 LF	_____.	_____.
0280	616.0700.S Fence Safety	238.000 LF	_____.	_____.
0290	618.0100 Maintenance And Repair of Haul Roads (project) 01. 6290-05-75	1.000 EACH	_____.	_____.
0300	619.1000 Mobilization	1.000 EACH	_____.	_____.
0310	624.0100 Water	5.000 MGAL	_____.	_____.
0320	625.0100 Topsoil	918.000 SY	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20161213033

Project(s): 6290-05-75

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0330	628.1905 Mobilizations Erosion Control	8.000 EACH	_____	_____
0340	628.1910 Mobilizations Emergency Erosion Control	3.000 EACH	_____	_____
0350	628.2004 Erosion Mat Class I Type B	518.000 SY	_____	_____
0360	628.7005 Inlet Protection Type A	3.000 EACH	_____	_____
0370	628.7015 Inlet Protection Type C	120.000 EACH	_____	_____
0380	628.7555 Culvert Pipe Checks	3.000 EACH	_____	_____
0390	629.0210 Fertilizer Type B	1.000 CWT	_____	_____
0400	630.0130 Seeding Mixture No. 30	10.000 LB	_____	_____
0410	631.0300 Sod Water	9.200 MGAL	_____	_____
0420	631.1000 Sod Lawn	400.000 SY	_____	_____
0430	634.0612 Posts Wood 4x6-Inch X 12-FT	7.000 EACH	_____	_____
0440	634.0614 Posts Wood 4x6-Inch X 14-FT	33.000 EACH	_____	_____
0450	634.0616 Posts Wood 4x6-Inch X 16-FT	84.000 EACH	_____	_____
0460	634.0618 Posts Wood 4x6-Inch X 18-FT	2.000 EACH	_____	_____
0470	637.2210 Signs Type II Reflective H	1,190.020 SF	_____	_____
0480	637.2215 Signs Type II Reflective H Folding	179.040 SF	_____	_____
0490	637.2230 Signs Type II Reflective F	113.000 SF	_____	_____



Proposal Schedule of Items

Proposal ID: 20161213033

Project(s): 6290-05-75

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0500	638.2602 Removing Signs Type II	158.000 EACH	_____.	_____.
0510	638.3000 Removing Small Sign Supports	126.000 EACH	_____.	_____.
0520	642.5201 Field Office Type C	1.000 EACH	_____.	_____.
0530	643.0100 Traffic Control (project) 01. 6290-05-75	1.000 EACH	_____.	_____.
0540	643.0300 Traffic Control Drums	24,210.000 DAY	_____.	_____.
0550	643.0420 Traffic Control Barricades Type III	1,539.000 DAY	_____.	_____.
0560	643.0705 Traffic Control Warning Lights Type A	3,060.000 DAY	_____.	_____.
0570	643.0715 Traffic Control Warning Lights Type C	2,457.000 DAY	_____.	_____.
0580	643.0800 Traffic Control Arrow Boards	63.000 DAY	_____.	_____.
0590	643.0900 Traffic Control Signs	2,394.000 DAY	_____.	_____.
0600	643.0910 Traffic Control Covering Signs Type I	18.000 EACH	_____.	_____.
0610	643.0920 Traffic Control Covering Signs Type II	92.000 EACH	_____.	_____.
0620	643.1000 Traffic Control Signs Fixed Message	108.000 SF	_____.	_____.
0630	643.1050 Traffic Control Signs PCMS	441.000 DAY	_____.	_____.
0640	643.2000 Traffic Control Detour (project) 01. 6290-05-75	1.000 EACH	_____.	_____.
0650	643.3000 Traffic Control Detour Signs	3,572.000 DAY	_____.	_____.
0660	644.1420.S Temporary Pedestrian Surface Plywood	180.000 SF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20161213033

Project(s): 6290-05-75

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0670	644.1601.S Temporary Curb Ramp	6.000 EACH	_____.	_____.
0680	646.0106 Pavement Marking Epoxy 4-Inch	25,388.000 LF	_____.	_____.
0690	646.0126 Pavement Marking Epoxy 8-Inch	7,135.000 LF	_____.	_____.
0700	646.0600 Removing Pavement Markings	30,595.000 LF	_____.	_____.
0710	647.0156 Pavement Marking Arrows Epoxy Type 1	6.000 EACH	_____.	_____.
0720	647.0166 Pavement Marking Arrows Epoxy Type 2	77.000 EACH	_____.	_____.
0730	647.0176 Pavement Marking Arrows Epoxy Type 3	1.000 EACH	_____.	_____.
0740	647.0356 Pavement Marking Words Epoxy	42.000 EACH	_____.	_____.
0750	647.0456 Pavement Marking Curb Epoxy	2,409.000 LF	_____.	_____.
0760	647.0566 Pavement Marking Stop Line Epoxy 18-Inch	972.000 LF	_____.	_____.
0770	647.0606 Pavement Marking Island Nose Epoxy	71.000 EACH	_____.	_____.
0780	647.0766 Pavement Marking Crosswalk Epoxy 6-Inch	3,251.000 LF	_____.	_____.
0790	647.0955 Removing Pavement Markings Arrows	84.000 EACH	_____.	_____.
0800	647.0965 Removing Pavement Markings Words	42.000 EACH	_____.	_____.
0810	649.0400 Temporary Pavement Marking Removable Tape 4-Inch	2,940.000 LF	_____.	_____.
0820	650.9910 Construction Staking Supplemental Control (project) 01. 6290-05-75	LS	LUMP SUM	_____.



Proposal Schedule of Items

Proposal ID: 20161213033

Project(s): 6290-05-75

SECTION: 0001 Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0830	652.0225 Conduit Rigid Nonmetallic Schedule 40 2-Inch	16.000 LF	_____	_____
0840	652.0700.S Install Conduit into Existing Item	6.000 EACH	_____	_____
0850	652.0800 Conduit Loop Detector	475.000 LF	_____	_____
0860	653.0900 Adjusting Pull Boxes	6.000 EACH	_____	_____
0870	654.0101 Concrete Bases Type 1	1.000 EACH	_____	_____
0880	655.0700 Loop Detector Lead In Cable	3,282.000 LF	_____	_____
0890	655.0800 Loop Detector Wire	3,670.000 LF	_____	_____
0900	657.0100 Pedestal Bases	1.000 EACH	_____	_____
0910	657.0405 Traffic Signal Standards Aluminum 3.5- FT	1.000 EACH	_____	_____
0920	690.0250 Sawing Concrete	5,014.000 LF	_____	_____
0930	ASP.1T0A On-the-Job Training Apprentice at \$5.00/HR	1,200.000 HRS	5.00000	6,000.00
0940	ASP.1T0G On-the-Job Training Graduate at \$5.00/HR	600.000 HRS	5.00000	3,000.00
0950	SPV.0030 Special 01. Fertilizer For Lawn Type Turf	25.500 CWT	_____	_____
0960	SPV.0045 Special 01. Portable Changeable Message Sign (PCMS) Cellular Communications	329.000 DAY	_____	_____
0970	SPV.0060 Special 01. Grading And Shaping Driveways	4.000 EACH	_____	_____



Proposal Schedule of Items

Proposal ID: 20161213033

Project(s): 6290-05-75

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0980	SPV.0085 Special 01. Concrete Pavement Repair Non-Cementitious	80,641.000 LB	_____.	_____.
0990	SPV.0085 Special 02. Concrete Overlay Deck Patching Non-Cementitious	6,280.000 LB	_____.	_____.
1000	SPV.0090 Special 01. Concrete Curb And Gutter HES 18-Inch Type A	141.000 LF	_____.	_____.
1010	SPV.0090 Special 02. Concrete Curb And Gutter HES 30-Inch Type A	786.000 LF	_____.	_____.
1020	SPV.0090 Special 03. Concrete Curb Pedestrian HES	129.000 LF	_____.	_____.
1030	SPV.0090 Special 04. Reconstruct Concrete Parapet	3.000 LF	_____.	_____.
1040	SPV.0105 Special 01. Remove And Reinstall Railing	LS	LUMP SUM	_____.
1050	SPV.0165 Special 01. Concrete Sidewalk HES 4-Inch	1,426.000 SF	_____.	_____.
1060	SPV.0165 Special 02. Concrete Median Sloped Nose HES	43.000 SF	_____.	_____.
1070	SPV.0180 Special 01. Preparing Topsoil For Lawn Type Turf	400.000 SY	_____.	_____.
1080	SPV.0180 Special 02. Removing Concrete Masonry Overlay	25.000 SY	_____.	_____.
1090	SPV.0180 Special 03. Pigmented Protective Surface Treatment Reseal	650.000 SY	_____.	_____.
1100	SPV.0180 Special 04. Concrete Pavement Repair Overnight	351.000 SY	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20161213033

Project(s): 6290-05-75

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
1110	SPV.0180 Special 05. Concrete Pavement Replacement Overnight	241.000 SY	_____.	_____.
1120	203.0225.S Debris Containment (structure) 01. B-49-24	LS	LUMP SUM	_____.
Section: 0001			Total:	_____.
			Total Bid:	_____.

