

Wisconsin Department of Transportation

November 2, 2017

Division of Transportation Systems Development

Bureau of Project Development
4802 Sheboygan Avenue, Rm 601
P O Box 7916
Madison, WI 53707-7916

Telephone: (608) 266-1631
Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

**Proposal #44: 8010-01-77, WISC 2017 622
Luck – Siren
Polk Street to Bacon Street
STH 35
Polk County**

Letting of November 14, 2017

This is Addendum No. 01, which provides for the following:

Plan Sheets:

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
12	Finished Typical Sections (addition of CTH E turn lane typical section)
56	Miscellaneous Quantities (addition of CTH E earthwork summary, for information only)

Plan Sheets

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal: 12 and 56.


The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman

Proposal Development Specialist
Proposal Management Section

END OF ADDENDUM

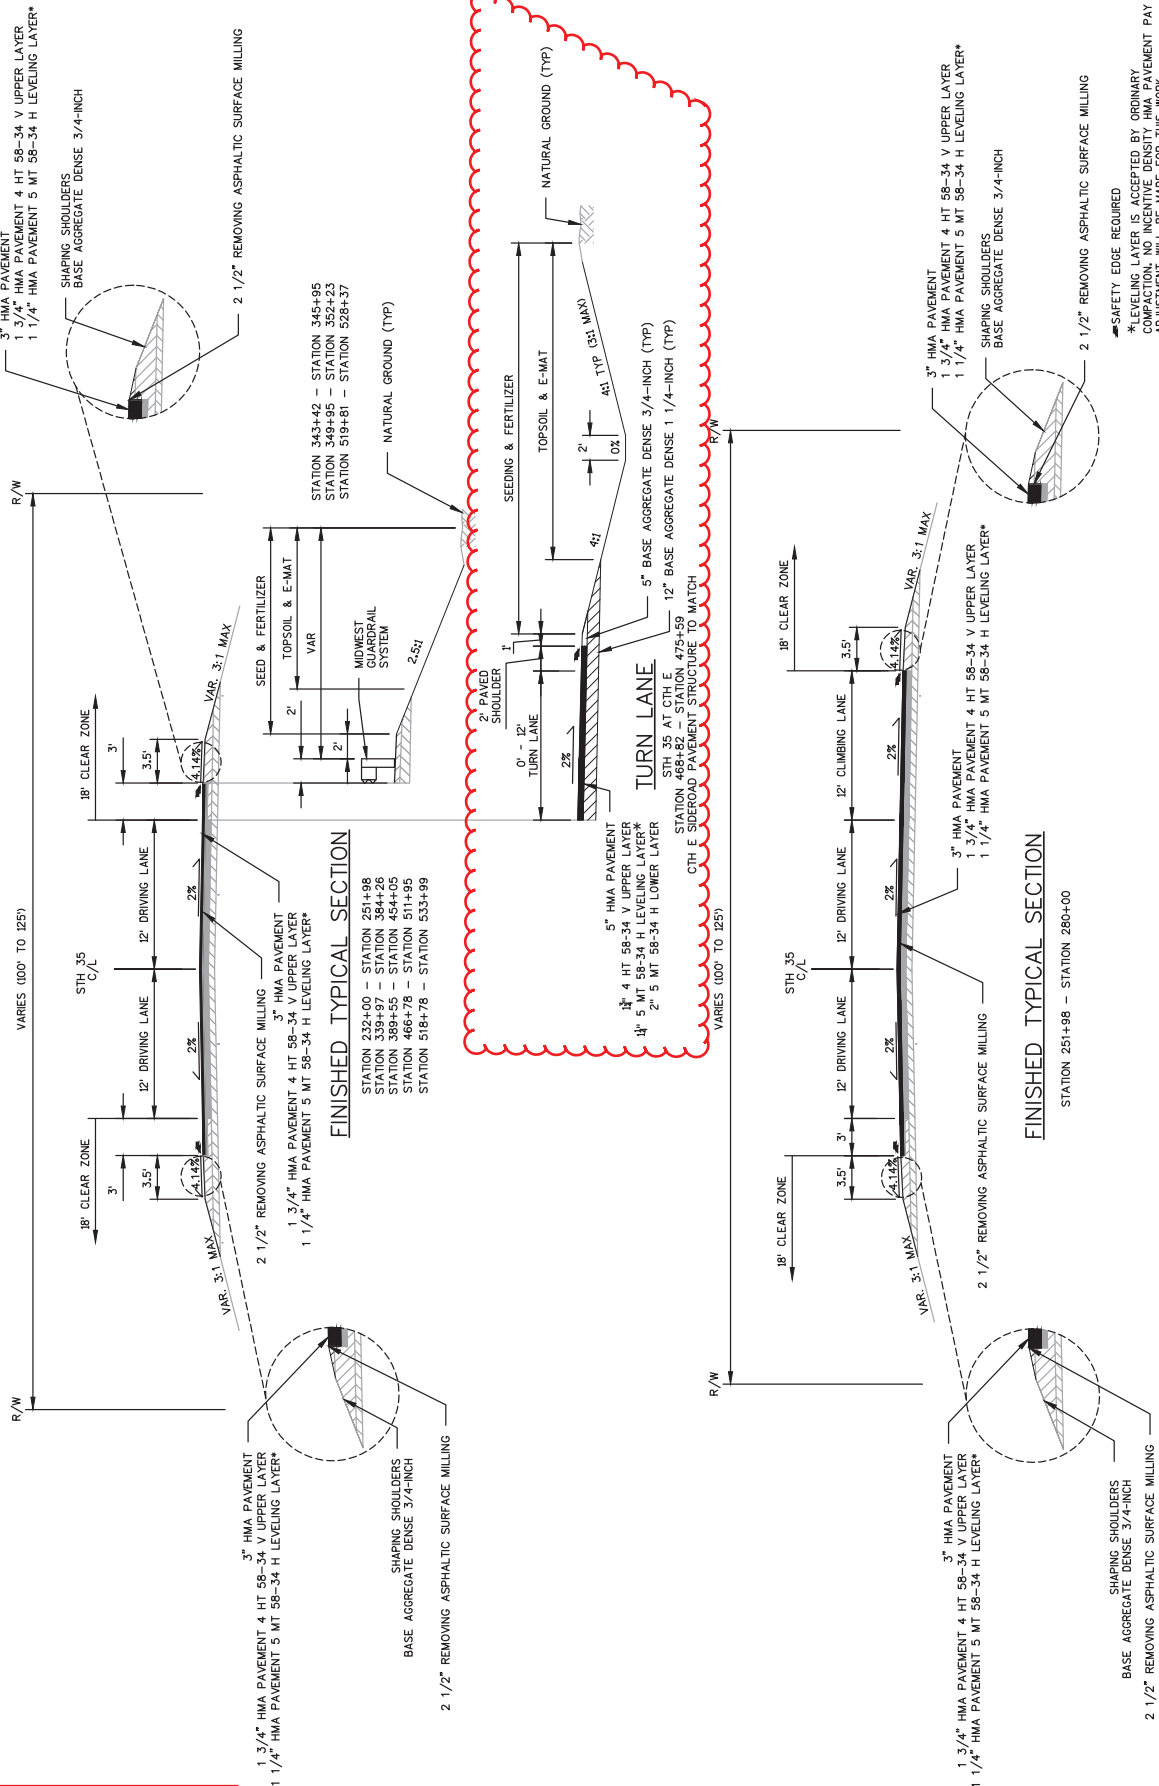

Addendum No. 1
 ID 8010-01-77
 Revised Sheet 12
 November 2, 2017

Addendum No. 1
ID 8010-01-77
Revised Sheet 56
November 2, 2017

REMOVALS & SAWING (CONT'D)

STATION	LOCATION	STATION	LOCATION	SY	LF	COMMENT
699+82	LT 42'	699+98	LT 44'	18	17	PE
702+34	LT 50'	702+61	LT 50'	30	27	CLEAR LAKE ST
703+53	RT 40'	703+68	RT 41'	16	15	PE
708+78	RT 49'	708+94	RT 49'	17	15	PE
710+28	RT 49'	710+48	RT 49'	22	20	CEMETERY RD
711+69	LT 44'	711+83	LT 44'	16	14	PE
713+56	LT 50'	713+78	LT 51'	25	23	RASMUSSEN ST
713+71	RT 49'	713+92	RT 49'	24	22	RASMUSSEN ST
716+83	LT 51'	717+02	LT 51'	22	19	OLSON ST
723+50	RT 44'	723+72	RT 43'	23	21	TOWER RD
724+66	LT 51'	725+00	LT 50'	38	35	CE
726+14	LT 50'	726+50	LT 50'	40	36	CE
730+57	RT 50'	730+80	RT 50'	25	23	CE
733+46	RT 50'	733+70	RT 51'	27	25	CE
733+81	RT 51	733+95	RT 51'	16	15	CE
736+78	LT 39'	736+91	LT 40'	15	13	PE
736+69	RT 52'	737+15	RT 52'	48	43	CAPIES ST
739+92	RT 54'	740+35	RT 53'	48	43	ANDERSON ST
740+05	LT 50'	740+49	LT 50'	48	43	ANDERSON ST
742+77	RT 50'	743+23	RT 50'	48	43	LANOUIST ST
743+93	LT 49'	744+27	LT 49'	38	35	CE
746+47	CL			30	27	TERMINI
SUBTOTALS				634	574	
TOTALS				2,032	2,572	

205.9010 S GRADING AND SHAPING INTERSECTION 01, CTH E
EARTHWORK SUMMARY (FOR INFORMATION ONLY)

STATION	TO	STATION	CY	EBS (3)	CY	EXCAVATION COMMON (1)	SALVAGED/ UNUSABLE PAVEMENT		AVAILABLE MATERIAL		EXPANDED FILL (6)	CY	WASTE CY	COMMENTS:
							(4)	(5)	(5)	(6)				
468+61	-	475+59	1,165	0	123	1,042	179	224	224	818	818	818	818	CTH E TURN LANE AND SIDEROAD
SUBTOTALS			1,165	0	123	1,042	179	224	224	818	818	818	818	

- 1) Excavation Common is the sum of the Cut and EBS Excavation columns. For information only. This work included in other contract items.
- 2) Salvaged/Unusable Pavement Material is included in Cut.
- 3) EBS Excavation to be backfilled with Select Borrow material.
- 4) Salvaged/Unusable Pavement Material
- 5) Available Material = Cut - Salvaged/Unusable Pavement Material
- 6) Expanded Fill: Factor = 1.25
- 7) The Mass Ordinate + or - City calculated for the Division. Plus quantity indicates an excess of material within the Division. Minus indicates a shortage of material within the Division.

ALL ITEMS AND QUANTITIES ON
THIS SHEET ARE CATEGORY 0010
UNLESS OTHERWISE NOTED

