



# Wisconsin Department of Transportation

## Division of Transportation Systems Development

Bureau of Project Development  
4822 Madison Yards Way, 4<sup>th</sup> Floor South  
Madison, WI 53705

February 5, 2019

Telephone: (608) 266-1631  
Facsimile (FAX): (608) 266-8459

### NOTICE TO ALL CONTRACTORS:

**Proposal #01: 1204-08-63, WISC 2018 300  
Mount Horeb - Madison  
Lunde Lane to CTH PB  
USH 18  
Dane County**

### Letting of February 12, 2019

This is Addendum No. 01, which provides for the following:

#### Special Provisions:

Added Special Provisions	
Article No.	Description
15	Topsoil, Item 625.0105

Deleted Special Provisions	
Article No.	Description
12	Select Borrow, Item 208.1100

#### Schedule of Items:

Added Bid Item Quantities					
Bid Item	Item Description	Unit	Old Quantity	Revised Quantity	Proposal Total
208.0100	Borrow	CY	0	4100	4100
608.0318	Storm Sewer Pipe Reinforced Concrete Class III 18-Inch	LF	0	8	8
608.0324	Storm Sewer Pipe Reinforced Concrete Class III 24-Inch	LF	0	8	8

Deleted Bid Item Quantities					
Bid Item	Item Description	Unit	Old Quantity	Revised Quantity	Proposal Total
208.1100	Select Borrow	CY	4,100	-4,100	0
608.3018	Storm Sewer Pipe Class III-A 18-Inch	LF	8	-8	0
608.3024	Storm Sewer Pipe Class III-A 24-Inch	LF	8	-8	0

**Plan Sheets:**

<b>Revised Plan Sheets</b>	
<b>Plan Sheet</b>	<b>Plan Sheet Title (brief description of changes to sheet)</b>
3	Typical Sections (Changed Select Borrow label to Borrow)
12	Storm Sewer Plans (Changed RCCP Class II label to RCCP Class III)
17	Miscellaneous Quantities (Earthwork Summary – revised Select Borrow Item to Borrow)
18	Miscellaneous Quantities (Revised Storm Sewer Pipe Reinforced Concrete Class III-A to Storm Sewer Pipe Reinforced Concrete Class III)

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

*Mike Coleman*

Proposal Development Specialist  
Proposal Management Section

**ADDENDUM NO. 01**

**1204-08-63**

**February 5, 2019**

**Special Provisions**

**12. DELETED.**

**15. Topsoil, Item 625.0105.**

*Add the following to standard spec 625.3.1:*

In areas where topsoil is not being stripped off before placing Topsoil or Salvaged Topsoil, mow areas to a height of approximately 1 inch.

*Add the following to standard spec 625.3.2:*

The contractor may use Salvaged Topsoil in place of Topsoil. If storing topsoil material in the clear zone, the stored material must meet acceptable grades. There is limited room within the median to store material.

*Add the following to standard spec 625.5.1:*

Topsoil storage is incidental to the Topsoil item.


**Schedule of Items**

Attached, dated February 5, 2019, are the revised Schedule of Items Pages 1 - 3.


**Plan Sheets**

The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:  
Revised: 3, 12, 17, and 18.

END OF ADDENDUM

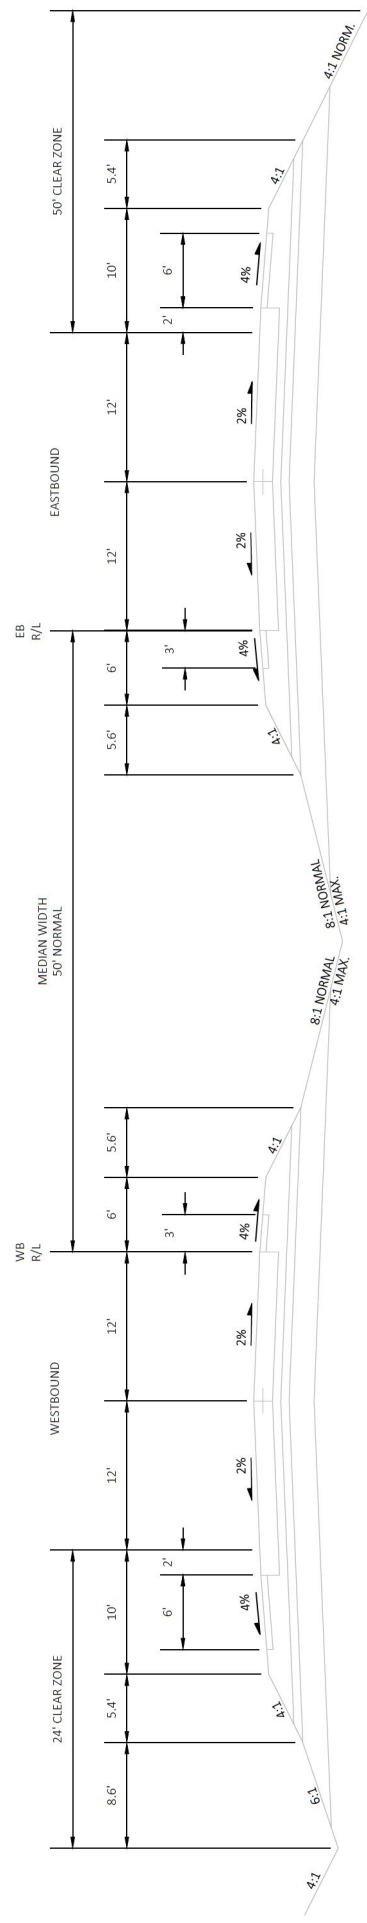



TYPICAL EXISTING SECTION  
USH 18

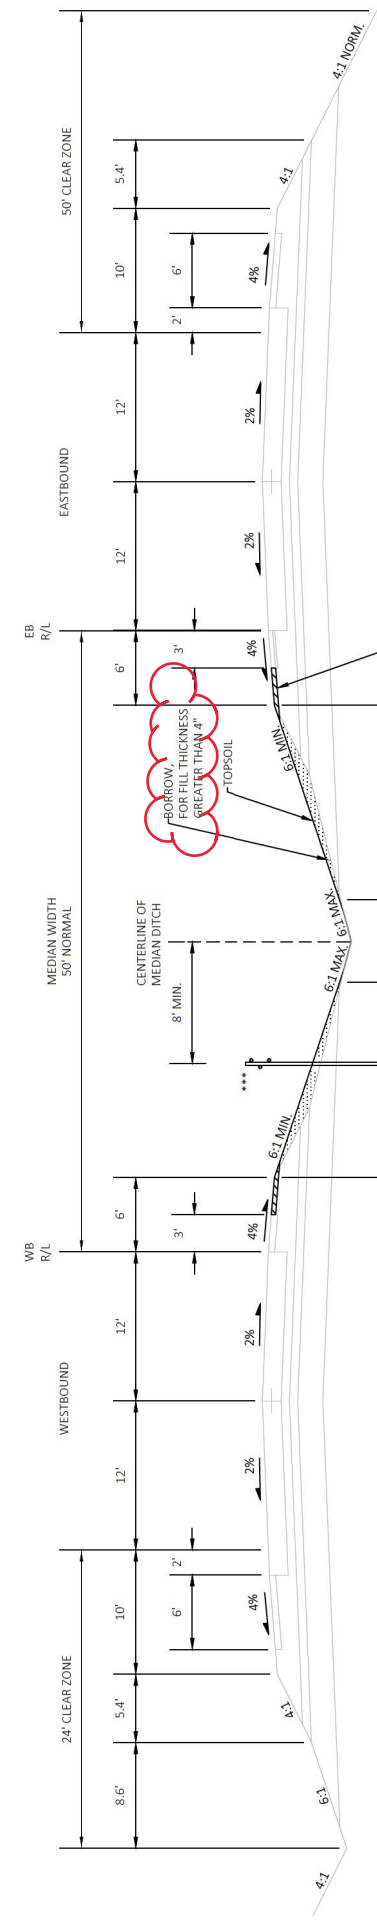

TYPICAL FINISHED SECTION  
USH 18

\*\*\*CABLE BARRIER TYPE 1 REQ'D. SEE MISC. QUANTITIES AND PLAN DETAILS FOR LOCATIONS.  
 \*\*SEE GRADING LIMITS FOR LOCATIONS

Addendum No. 01  
 ID 1204-08-63  
 Revised Sheet 3  
 February 5, 2019

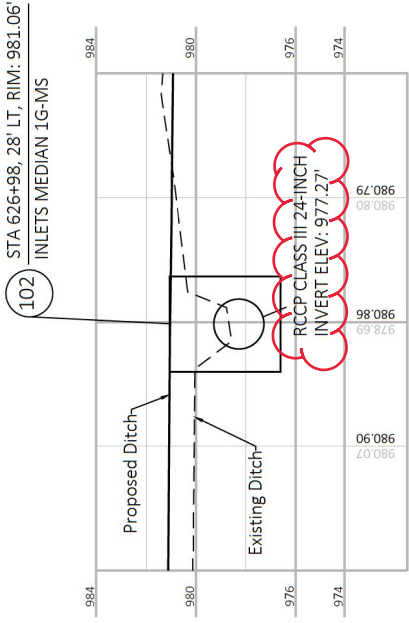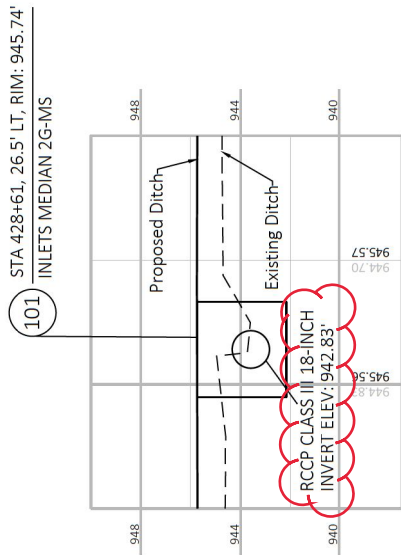

Addendum No. 01  
ID 1204-08-63  
Revised Sheet 12  
February 5, 2019

Addendum No. 01  
ID 1204-08-63  
Revised Sheet 17  
February 5, 2019

Location	From/To Station	205.0100 Common Excavation (1)		Available Material (2)	Unexpanded Fill	Expanded Fill (3)		Mass Ordinate +/- (4)	208.0100 Borrow (CY)	625.0105 Topsoil (CY)
							Factor 1.25			
USH 18 AREA										
1	402+00 - 419+58	0	0	0	958	1,200		-1,200	-	1,200
	423+00 - 428+00	0	0	0	315	400		-400	-	400
2	428+00 - 435+00	0	0	0	708	890		-890	890	294
	435+00 - 438+00	0	0	0	70	90		-90	-	90
3	445+50 - 451+00	0	0	0	315	400		-400	-	400
4	458+00 - 465+00	0	0	0	434	540		-540	-	540
	491+96 - 494+00	0	0	0	133	170		-170	-	170
	494+00 - 500+00	0	0	0	294	370		-370	370	222
5	500+00 - 506+00	50	50	50	217	270		-220	-	220
	506+00 - 543+00	500	500	500	1756	2,200		-1,700	1,700	1,294
	543+00 - 550+00	70	70	70	278	350		-280	-	280
6	550+00 - 561+00	190	190	190	477	600		-410	410	372
	610+00 - 633+00	130	130	130	795	1,000		-870	-	870
7	648+50 - 650+00	20	20	20	51	70		-50	-	50
	650+00 - 665+00	340	340	340	853	1,070		-730	730	494
Grand Total		1300	1,300	1,300	7656	9,620		-8,320	4,100	6,897
	Total Common Exc	1,300								

Notes:

- (1) Common Excavation is the sum of the Cut and EBS Excavation columns. Item number 205.0100
- (2) Available Material = Cut - Salvaged/Unusable Pavement Material
- (3) Expanded Fill Factor = 1.25

Depending on selections:

**Expanded Fill = (Unexpanded Fill - Rock\* Rock Factor - Reduced Marsh - Reduced EBS) \* Fill Factor**

Expanded Fill = (Unexpanded Fill - Rock \* Rock Factor - Reduced EBS) \* Fill Factor

Expanded Fill = (Unexpanded Fill - Rock \* Rock Factor - Reduced Marsh) \* Fill Factor

Expanded Fill = (Unexpanded Fill - Rock \* Rock Factor) \* Fill Factor

- (4) The Mass Ordinate + or - Qty calculated for the Location. Plus quantity indicates an excess of material within the Location. Minus indicates a shortage of material within the Location.
- (5) Item 205.0100 Common Excavation is rounded up to the nearest 10 CY.

BASE AGGREGATE DENSE 3/4-INCH		305.0110	
CATEGORY	LOCATION	TON	
0010	UNDISTRIBUTED	1340	
WATER			
CATEGORY		STATION TO	STATION
		624.0100	
		MGAL	
0010	402+00 - 665+00	570	

CABLE BARRIER TYPE 1		613.1100.S	
CATEGORY	STATION TO	STATION	LF
0010	214+66 - 286+67	7125	
	300+33 - 318+34	1725	
	320+03 - 325+37	460	
	405+00 - 476+31	7055	
	480+38 - 534+09	5295	
	534+84 - 572+84	3725	
	577+04 - 619+71	4190	
	620+50 - 664+60	4335	
TOTAL		33910	

CABLE BARRIER END TERMINAL TYPE 1		613.1200.S	
CATEGORY	STATION	OFFSET	EACH
0010	214+66	35' LT	1
	286+67	35' LT	1
	300+33	15' LT	1
	318+36	15' LT	1
	320+03	15' LT	1
	325+37	15' LT	1
	405+00	35' LT	1
	476+31	35' LT	1
	480+38	35' LT	1
	534+09	35' LT	1
	534+84	15' LT	1
	572+84	15' LT	1
	577+04	15' LT	1
	619+71	15.5' LT	1
	620+50	16' LT	1
	664+60	14' LT	1
TOTAL			16

MGS GUARDRAIL 3		614.2300	
CATEGORY	STATION TO	STATION	LF
0010	475+68 - 477+43	175	
	479+24 - 480+99	175	
TOTAL		350	

MGS GUARDRAIL TERMINAL TYPE 2		614.2620	
CATEGORY	STATION	OFFSET	EACH
0010	475+68	43' LT	1
	480+99	6' LT	1
TOTAL			2

CATEGORY	STATION TO	STATION	REMARKS
0010	475+68 - 477+43	175	SUGAR RIVER BRIDGE WB EXIT
	479+24 - 480+99	175	SUGAR RIVER BRIDGE EB EXIT
TOTAL		350	

STORM SEWER ITEMS

CATEGORY	STATION	LOCATION	TOP OF STRUCTURE ELEVATION	BOTTOM OF STRUCTURE ELEVATION	DEPTH	PIPE INVERT ELEVATION	REMOVING INLETS		INLET COVERS	INLETS		REMOVING STORM SEWER	STORM SEWER PIPE REINFORCED CONCRETE CLASS III
							204.022	611.0642		611.3901	611.3902		
0010	428+61	26.5' LT	945.74	942.62	3.12	942.83	1	2	2	-	1	8	-
	626+98	28' LT	981.06	977.02	4.04	977.27	1	1	1	1	-	8	-
TOTAL							2	3	1	1	8	8	8

Addendum No. 01  
 ID 1204-08-63  
 Revised Sheet 18  
 February 5, 2019



## Proposal Schedule of Items

Proposal ID: 20190212001 Project(s): 1204-08-63

Federal ID(s): WISC 2018300

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0002	204.0220 Removing Inlets	2.000 EACH	_____.	_____.
0004	204.0245 Removing Storm Sewer (size) 01. 18-Inch and 24-Inch	16.000 LF	_____.	_____.
0006	205.0100 Excavation Common	1,300.000 CY	_____.	_____.
0010	213.0100 Finishing Roadway (project) 01. 1204-08-63	1.000 EACH	_____.	_____.
0012	305.0110 Base Aggregate Dense 3/4-Inch	1,340.000 TON	_____.	_____.
0018	611.0642 Inlet Covers Type MS	3.000 EACH	_____.	_____.
0020	611.3901 Inlets Median 1 Grate	1.000 EACH	_____.	_____.
0022	611.3902 Inlets Median 2 Grate	1.000 EACH	_____.	_____.
0024	613.1100.S Cable Barrier Type 1	33,910.000 LF	_____.	_____.
0026	613.1200.S Cable Barrier End Terminal Type 1	16.000 EACH	_____.	_____.
0028	614.2300 MGS Guardrail 3	350.000 LF	_____.	_____.
0030	614.2620 MGS Guardrail Terminal Type 2	2.000 EACH	_____.	_____.
0032	618.0100 Maintenance And Repair of Haul Roads (project) 01. 1204-08-63	1.000 EACH	_____.	_____.
0034	619.1000 Mobilization	1.000 EACH	_____.	_____.
0036	624.0100 Water	570.000 MGAL	_____.	_____.
0038	625.0105 Topsoil	6,897.000 CY	_____.	_____.





Proposal Schedule of Items

Proposal ID: 20190212001 Project(s): 1204-08-63

Federal ID(s): WISC 2018300

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0040	627.0200 Mulching	40,940.000 SY	_____.	_____.
0042	628.1504 Silt Fence	50.000 LF	_____.	_____.
0044	628.1520 Silt Fence Maintenance	10.000 LF	_____.	_____.
0046	628.1905 Mobilizations Erosion Control	1.000 EACH	_____.	_____.
0048	628.1910 Mobilizations Emergency Erosion Control	1.000 EACH	_____.	_____.
0050	628.2004 Erosion Mat Class I Type B	13,550.000 SY	_____.	_____.
0052	628.7005 Inlet Protection Type A	17.000 EACH	_____.	_____.
0054	628.7504 Temporary Ditch Checks	1,312.000 LF	_____.	_____.
0056	629.0210 Fertilizer Type B	36.000 CWT	_____.	_____.
0058	630.0120 Seeding Mixture No. 20	1,504.000 LB	_____.	_____.
0060	634.0614 Posts Wood 4x6-Inch X 14-FT	2.000 EACH	_____.	_____.
0062	634.0618 Posts Wood 4x6-Inch X 18-FT	13.000 EACH	_____.	_____.
0064	638.2102 Moving Signs Type II	15.000 EACH	_____.	_____.
0066	638.2602 Removing Signs Type II	1.000 EACH	_____.	_____.
0068	638.3000 Removing Small Sign Supports	16.000 EACH	_____.	_____.
0070	642.5001 Field Office Type B	1.000 EACH	_____.	_____.
0072	643.0300 Traffic Control Drums	7,867.000 DAY	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20190212001 Project(s): 1204-08-63  
 Federal ID(s): WISC 2018300

SECTION: 0001 Contract Items

Alt Set ID: Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0074	643.0420 Traffic Control Barricades Type III	712.000 DAY	_____.	_____.
0076	643.0705 Traffic Control Warning Lights Type A	1,424.000 DAY	_____.	_____.
0078	643.0715 Traffic Control Warning Lights Type C	1,109.000 DAY	_____.	_____.
0080	643.0800 Traffic Control Arrow Boards	198.000 DAY	_____.	_____.
0082	643.0900 Traffic Control Signs	1,840.000 DAY	_____.	_____.
0084	643.1050 Traffic Control Signs PCMS	98.000 DAY	_____.	_____.
0086	643.5000 Traffic Control	1.000 EACH	_____.	_____.
0088	650.9910 Construction Staking Supplemental Control (project) 01. 1204-08-63	LS	LUMP SUM	_____.
0090	650.9920 Construction Staking Slope Stakes	15,362.000 LF	_____.	_____.
0092	ASP.1T0A On-the-Job Training Apprentice at \$5.00/HR	264.000 HRS	5.00000	1,320.00
0094	ASP.1T0G On-the-Job Training Graduate at \$5.00/HR	200.000 HRS	5.00000	1,000.00
0096	208.0100 Borrow	4,100.000 CY	_____.	_____.
0098	608.0318 Storm Sewer Pipe Reinforced Concrete Class III 18-Inch	8.000 LF	_____.	_____.
0100	608.0324 Storm Sewer Pipe Reinforced Concrete Class III 24-Inch	8.000 LF	_____.	_____.
Section: 0001			Total:	_____.
			Total Bid:	_____.