



Wisconsin Department of Transportation

April 29, 2019

Division of Transportation Systems Development

Bureau of Project Development
 4802 Sheboygan Avenue, Rm 601
 P O Box 7916
 Madison, WI 53707-7916

Telephone: (608) 266-1631
 Facsimile (FAX): (608) 266-8459

NOTICE TO ALL CONTRACTORS:

**Proposal #21: 1009-32-02
 Peshtigo Brook Phase 3
 Wetland Mitigation Site FY2019
 STH 64
 Oconto County**

Letting of May 14, 2019

This is Addendum No. 01, which provides for the following:

Special Provisions

Revised Special Provisions	
Article No.	Description
3	Prosecution and Progress.
8	Information to Bidders, U.S. Army Corps of Engineers Section 404 Permit.

Added Special Provisions	
Article No.	Description
24	Environmental Protection, Invasive Species.

Schedule of Items

Revised Bid Item Quantities					
Bid Item	Item Description	Unit	Old Quantity	Revised Quantity	Proposal Total
606.0200	Riprap Medium	CY	950	344	1,294
630.0120	Seeding Mixture No. 20	LB	4,683	-4,143	540
630.0200	Seeding Temporary	LB	4,661	-4,143	518
645.0120	Geotextile Fabric Type HR	SY	622	1,320	1,942

Plan Sheets

Revised Plan Sheets	
Plan Sheet	Plan Sheet Title (brief description of changes to sheet)
28	Construction Detail: Weir (Phase 3 and 1) – Changed riprap depth shown on sections to 2'. Previously entire depth of section was shown as riprap.
35	Miscellaneous Quantities – Updated riprap medium, seeding mixture no. 20, and seeding temporary quantity tables.
36	Miscellaneous Quantities – Updated geotextile type HR quantity table.

The responsibility for notifying potential subcontractors and suppliers of these changes remains with the prime contractor.

Sincerely,

Mike Coleman

Proposal Development Specialist
Proposal Management Section

ADDENDUM NO. 01

1009-32-02

April 29, 2019

Special Provisions

3. Prosecution and Progress.

Add the following paragraph at the end the section:

Do not begin construction until the Section 404 permit has been approved. The department anticipates approval of this permit by June 30, 2019.

8. Information to Bidders, U.S. Army Corps of Engineers Section 404 Permit.

Replace paragraph one with the following:

The Department is obtaining a U.S. Army Corps of Engineers Section 404 permit. Comply with the requirements of the permit in addition to requirements of the special provisions. A copy of the permit application is available from the regional office by contacting Matt Ternes at (920) 366-3028.

24. Environmental Protection, Invasive Species.

Add the following to standard specification 107.18:

Inspect and clean all equipment to be used in the wetland mitigation site to reduce the risk of introducing invasive species to the wetland mitigation site. Use most effective method that is practical by the following methods: Brush, broom, or other hand tools; high pressure air; steam cleaning; or portable wash station that contains runoff from washing equipment. Do not clean equipment, vehicles or trailers in or near waterways and the mitigation site as it may promote the spread of invasive species downstream.

Schedule of Items


Attached, dated April 29, 2019, are the revised Schedule of Items Pages 1 - 4.

Plan Sheets


The following 8½ x 11-inch sheets are attached and made part of the plans for this proposal:

Revised: 28, 35, 36


END OF ADDENDUM

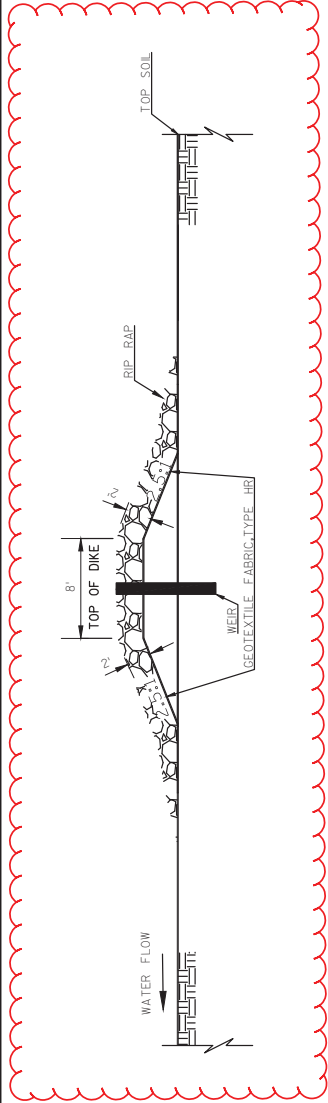


SECTION A-A

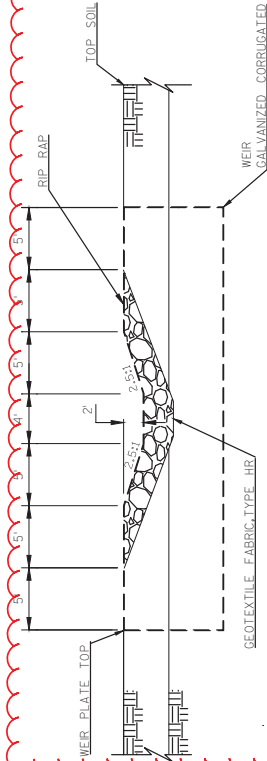

SECTION B-B

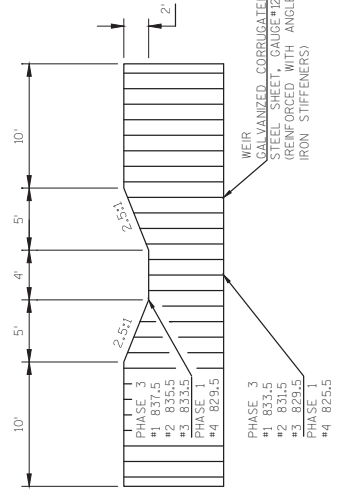

Addendum No. 01
ID 1009-32-02
Revised Sheet 28
April 29, 2019

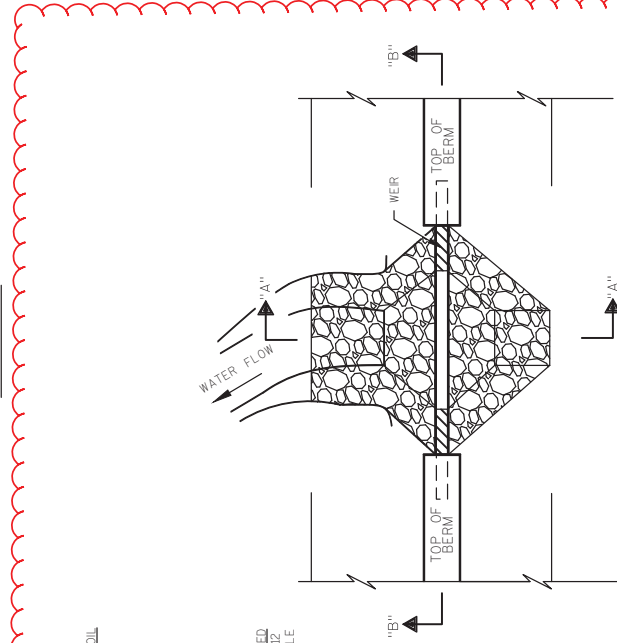

NOTE:
BERM LOCATIONS SHOWN ELSEWHERE

WEIR DETAIL FOR WETLAND MITIGATION SITE

- PHASE 3
- WEIR #1 BERM 1
- WEIR #2 BERM 2
- WEIR #3 (END OF BERM 3)
- PHASE 1
- WEIR #4 BERM 4

<u>RIPRAP MEDIUM</u>			
LOCATION	PHASE	CY	REMARKS
BERM WEIR 1	PHASE 3 SITE	76	East-West Berm
BERM WEIR 2	PHASE 3 SITE	76	East-West Berm
WEIR 3, 69+47, LT	PHASE 3 SITE	76	START AT PROP CROSS DRAIN PIPE
SPILLWAY 1 PIPE	PHASE 3 SITE	27	PIPE AND BERMEND
PH 1-BERM OPENING 1	PHASE 1 SITE	459	CONSTRUCT RIPRAP OPENING
PH 1-BERM OPENING 2	PHASE 1 SITE	504	CONSTRUCT RIPRAP OPENING
PH 1-BERM 2 WEIR 4	PHASE 1 SITE	76	CONSTRUCT BERM AND WEIR
SEE PLAN FOR LOCATION(S)		TOTAL	1294

<u>WATER</u>					
STATION	TO	STATION	LOCATION	624.0100	REMARKS
68+95	-	70+00	STH 64, LT & RT	7	
			TOTAL	7	

<u>SALVAGED TOPSOIL</u>			
STATION	LOCATION	SY	REMARKS
ENHANCE WETLAND GRADING SITE 1	PHASE 3	1300	ADJUSTED
68+39 - 70+75	STH 64, RT	242	CULVERT PIPE
68+95 - 70+00	STH 64, LT	573	CULVERT PIPE
TOTAL		2116	

SEE PLAN FOR SITE 1 LOCATION
SALVAGED TOPSOIL TO BE USED WITHIN PHASE 3 & 1 FILL AREAS

<u>TRACKING PADS</u>			
STATION	LOCATION	628.7560	REMARKS
STH 64, LT	PHASE 3, ENTRY	1	MATERIAL HAUL
STH 64, RT	PHASE 1, EXIT	1	MATERIAL HAUL
TOTAL		2	

<u>EROSION CONTROL SUMMARY</u>											
STATION	TO	STATION	LOCATION	627.0200	628.1504	628.2004	628.7555	629.0210	630.0120	630.0200	REMARKS
				MULCH	SILT FENCE	EROSION MAT CLASS I TYPE B	CULVERT PIPE CHECKS	FERTILIZER TYPE B	SEEDING MIXTURE NO. 20	SEEDING TEMPORARY	
68+39	-	70+75	STH 64, LT	573		573		0.4	15		
68+96	-	70+75	STH 64, RT	242		242		0.2	7		
68+85	-	71+00	STH 64, LT		215						
67+50	-	70+25	STH 64, RT		275						
78+00	-	78+90	STH 64, RT		200						
-	-	95+48	STH 64, LT & RT				4				
-	-	69+49	STH 64, LT & RT				2				
-	-	78+90	STH 64, LT & RT				2				
SALVAGE TOPSOIL STORAGE SITE											
TOTAL				816	690	816	8	1	518	518	

Addendum No. 01
ID 1009-32-02
Revised Sheet 35
April 29, 2019

GEOTEXTILE TYPE HR			
STATION	TO	SY	REMARKS
BERM WEIR 1		114	
BERM WEIR 2		114	
WEIR 3, STH 64 LEFT		114	
SPILLWAY 1 PIPE		41	
BERM OPENING - 1		689	
BERM OPENING - 2		756	
BERM WEIR 4		114	
TOTAL		1942	

GEOTEXTILE TYPE SAS			
STATION	TO	SY	REMARKS
68+25	70+63	377	STAGE, 1 LANE SHIFT
TOTAL		377	

TRAFFIC CONTROL SUMMARY										
SIGN	TOTAL NUMBER IN SERVICE	SIZE W x H	SIGN CODE	TOTAL SERVICE PERIOD DAY	643.5000 TRAFFIC CONTROL EACH	643.0900 TRAFFIC CONTROL SIGNS DAYS	643.0300 TRAFFIC CONTROL DRUMS DAYS	643.0420 TRAFFIC CONTROL BARRICADES TYPE III DAYS	643.1050 TRAFFIC CONTROL SIGNS PCMS DAYS	COMMENTS
STH 64, CROSS DRAIN INSTALLATION	1	-	-	7	1				7	INSTALL PRIOR TO CULVERT WORK
STH 64, WB TRAFFIC, PROJECT LIMITS	1	-	-	7					7	
STH 64, EB TRAFFIC, PROJECT LIMITS	2	48" x 48"	G20-2A	3						
END ROAD WORK	2	48" x 48"	W20-1A	3						
ROAD WORK AHEAD	2	48" x 48"	W20-4A	2						
ONE LANE ROAD AHEAD	2	48" x 48"	W20-7A	2						
FLAGGER SYMBOL	2	48" x 48"	W03-4	2						
BE PREPARED TO STOP	2	48" x 48"	W21-5	2						
WORK WITHIN SHOULDERS	2	48" x 48"	W05-1	1						
ROAD NARROWS	2	48" x 48"	W20-1A	14						
TRUCK ENTERING AND LEAVING SITES	2	48" x 48"	STH64 (68+00 - 73+00)	3						
TYPE III BARRICADES, MITIGATION SITE(S) ENTRY & EXIST	96	-	-	14						
TOTAL	2			1	56	288	28	14		

Addendum No. 01
 ID 1009-32-02
 Revised Sheet 36
 April 29, 2019

CONSTRUCTION STAKING PIPE CULVERTS			
STATION	LOCATION	EACH	REMARKS
69+46	STH 64	1	ONE CULVERT CROSS DRAIN PIPE
SERVICE ROAD	PHASE 3	1	CROSS DRAIN PIPE
TOTAL		2	

MARKING LINE EPOXY 4-INCH			
STATION	TO	LOCATION	REMARKS
69+00	70+00	STH 64	CULVERT CROSS DRAIN PIPE
TOTAL		275	



Proposal Schedule of Items

Page 1 of 4

Proposal ID: 20190514021 Project(s): 1009-32-02

Federal ID(s): N/A

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0002	204.0110 Removing Asphaltic Surface	373.000 SY	_____.	_____.
0004	204.0265 Abandoning Wells	2.000 EACH	_____.	_____.
0006	204.9060.S Removing (item description) 01. Screw Gate	1.000 EACH	_____.	_____.
0008	205.0100 Excavation Common	150,758.000 CY	_____.	_____.
0010	213.0100 Finishing Roadway (project) 01. 1009-32-02	1.000 EACH	_____.	_____.
0012	305.0110 Base Aggregate Dense 3/4-Inch	31.000 TON	_____.	_____.
0014	305.0120 Base Aggregate Dense 1 1/4-Inch	669.000 TON	_____.	_____.
0016	460.2000 Incentive Density HMA Pavement	80.000 DOL	1.00000	80.00
0018	460.5224 HMA Pavement 4 LT 58-28 S	118.000 TON	_____.	_____.
0020	521.1235 Apron Endwalls for Pipe Arch Steel 35x24-Inch	2.000 EACH	_____.	_____.
0022	521.3735 Pipe Arch Corrugated Steel 35x24-Inch	48.000 LF	_____.	_____.
0024	522.0142 Culvert Pipe Reinforced Concrete Class III 42-Inch	129.000 LF	_____.	_____.
0026	522.1042 Apron Endwalls for Culvert Pipe Reinforced Concrete 42-Inch	2.000 EACH	_____.	_____.
0028	524.0112 Culvert Pipe Salvaged 12-Inch	379.000 LF	_____.	_____.
0030	524.0118 Culvert Pipe Salvaged 18-Inch	145.000 LF	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20190514021 Project(s): 1009-32-02

Federal ID(s): N/A

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0032	524.0124 Culvert Pipe Salvaged 24-Inch	156.000 LF	_____.	_____.
0034	524.0136 Culvert Pipe Salvaged 36-Inch	454.000 LF	_____.	_____.
0036	524.0636 Apron Endwalls for Culvert Pipe Salvaged 36-Inch	1.000 EACH	_____.	_____.
0038	606.0200 Riprap Medium	1,294.000 CY	_____.	_____.
0040	618.0100 Maintenance And Repair of Haul Roads (project) 01. 1009-32-02	1.000 EACH	_____.	_____.
0042	619.1000 Mobilization	1.000 EACH	_____.	_____.
0044	624.0100 Water	7.000 MGAL	_____.	_____.
0046	625.0500 Salvaged Topsoil	2,116.000 SY	_____.	_____.
0048	627.0200 Mulching	816.000 SY	_____.	_____.
0050	628.1504 Silt Fence	690.000 LF	_____.	_____.
0052	628.1520 Silt Fence Maintenance	690.000 LF	_____.	_____.
0054	628.1905 Mobilizations Erosion Control	4.000 EACH	_____.	_____.
0056	628.2004 Erosion Mat Class I Type B	816.000 SY	_____.	_____.
0058	628.7555 Culvert Pipe Checks	8.000 EACH	_____.	_____.
0060	628.7560 Tracking Pads	2.000 EACH	_____.	_____.
0062	629.0210 Fertilizer Type B	1.000 CWT	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20190514021 Project(s): 1009-32-02

Federal ID(s): N/A

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0064	630.0120 Seeding Mixture No. 20	540.000 LB	_____.	_____.
0066	630.0200 Seeding Temporary	518.000 LB	_____.	_____.
0068	633.5200 Markers Culvert End	2.000 EACH	_____.	_____.
0070	642.5001 Field Office Type B	1.000 EACH	_____.	_____.
0072	643.0300 Traffic Control Drums	96.000 DAY	_____.	_____.
0074	643.0420 Traffic Control Barricades Type III	28.000 DAY	_____.	_____.
0076	643.0900 Traffic Control Signs	56.000 DAY	_____.	_____.
0078	643.1050 Traffic Control Signs PCMS	14.000 DAY	_____.	_____.
0080	643.5000 Traffic Control	1.000 EACH	_____.	_____.
0082	645.0120 Geotextile Type HR	1,942.000 SY	_____.	_____.
0084	645.0140 Geotextile Type SAS	377.000 SY	_____.	_____.
0086	646.1020 Marking Line Epoxy 4-Inch	275.000 LF	_____.	_____.
0088	650.6000 Construction Staking Pipe Culverts	2.000 EACH	_____.	_____.
0090	650.9910 Construction Staking Supplemental Control (project) 01. 1009-32-02	LS	LUMP SUM	_____.
0092	690.0150 Sawing Asphalt	64.000 LF	_____.	_____.
0094	SPV.0035 Special 01. Salvage and Stockpile Topsoil	25,000.000 CY	_____.	_____.



Proposal Schedule of Items

Proposal ID: 20190514021 Project(s): 1009-32-02

Federal ID(s): N/A

SECTION: 0001

Contract Items

Alt Set ID:

Alt Mbr ID:

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0096	SPV.0085 Special 01. Seeding (Upland Mix)	1,236.000 LB	_____.	_____.
0098	SPV.0085 Special 02. Seeding (Wetland Mix)	2,426.000 LB	_____.	_____.
0100	SPV.0105 Special 01. Tree Tube Removal	LS	LUMP SUM	_____.
0102	SPV.0165 Special 01. Weir Plate	744.000 SF	_____.	_____.
	Section: 0001		Total:	_____.
			Total Bid:	_____.